iJRASET
International Journal For Research in Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 14 **Issue:** IV **Month of publication:** April 2026

DOI: https://doi.org/10.22214/ijraset.2026.80970

www.ijraset.com

Call: 08813907089 | E-mail ID: ijraset@gmail.com

International Journal for Research in Applied Science & Engineering Technology (IJRASET)
ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538
Volume 14 Issue IV Apr 2026- Available at www.ijraset.com
Received Date: 24-042026
Acceptance Date: 26-04-2026
Publish Date: 30-04-2026

Circular Microstrip Monopole Antenna with Radial Stubs for Wearable Applications

Dr. Pragyan Jyoti Gogoi
Department of Physics, Bahona College, Jorhat-785101, Assam, India

Abstract: ***With the rapid increase in the wireless communication, miniaturized, compact and low profile antennas are a urgent need for wearable antenna applications.In this paper a coplanar waveguide (CPW)-fed circular monopole antenna is designed using $Ni_{0.5}Zn_{0.5}Fe_2O_4$–linear low-density polyethylene (LDPE) magneto-dielectric composite substrate. The magneto-dielectric material enables antenna miniaturization and reduces the influence of the human body on antenna performance. The radial stubs enhance the performance of the antenna. The antenna is designed and fabricated to operate in 6 GHz and reflection coefficient (S_{11}) of −24.31 dB at 5.27 GHz and −10 dB bandwidth of 21.44% is observed.***

Keywords: Magneto-dielectric material, miniaturization, circular monopole antenna.

I. INTRODUCTION

Wearable wireless communication systems have rapidly growing and created a demand for compact antennas which establishes a path for developing low profile miniaturized antenna.Conventional antennas with metal backing ground plane reduces the flexibility of the antenna system. Coplanar waveguide fed (CPW) antennas introduces flexibility of the antenna to integrate it to other devices as no backside processing is required [9-18]. Magneto dielectric substrate has ability to reduce the antenna size by miniaturization of the antenna by maintaining the antenna performance [1-8]. Geometrical modificationwith radial stubs also adds to the size reduction of the antenna.CPW-fed circular monopole antenna with radial stubs is design using a $Ni_{0.5}Zn_{0.5}Fe_2O_4$–LLDPE composite substrate in C-band to enhance the miniaturization and overall performance of the antenna.

II. DESIGN AND FABRICATION OF THE ANTENNA

Before fabrication of the antenna, the antenna is simulated using CST microwave studio. The radius of the patch, r_0, and the dimension of the substrate is tabulated in Table 1.Radial stubs are incorporated at the periphery of the circular patc [13, 39-44]. Incorporation of radial stubs at the periphery of the circular radiator enhances low profiling of antenna [30]. The stubs are placed symmetrically 180° apart and transverse to the feed line. Initially, the length of the radial stub, r_1 is taken as $\lambda_g/2$, where λ_g is the guided wavelength and is givenby $\lambda_g = \frac{\lambda_0}{\sqrt{\varepsilon_{eff}\mu_{eff}}}$, λ_0 being the free space wavelength. Length of radial stub, r_1, is optimized using CST microwave studio for further improvement of impedance matching. All the design parameters are tabulated in Table 1. The schematic of designed antenna is shown in Figure 1. The fabricated antenna is shown in Figure 2.

Table 1 Design parameters of CPW fed CMMA with radial stubs on magneto-dielectric substrate

r_0 (mm)	r_1 (mm)	θ (deg)	a (mm)	b (mm)	c (mm)	d (mm)	g (mm)	s (mm)	f (mm)	k (mm)
7.9	20.5	22	23.5	20	30	1	1	1	4.5	5

©IJRASET: All Rights are Reserved

International Journal for Research in Applied Science & Engineering Technology (IJRASET)
ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538
Volume 14 Issue IV Apr 2026- Available at www.ijraset.com
Received Date: 24-042026
Acceptance Date: 26-04-2026
Publish Date: 30-04-2026

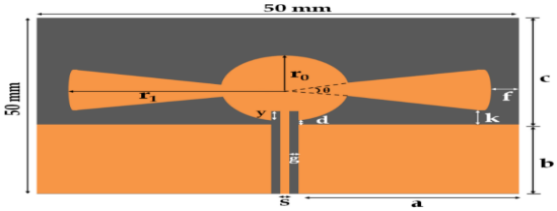


Figure 1 Schematic of CPW fed CMMA with radial stubs



Figure 2 Fabricated CPW fed CMMA with radial stubs on magneto-dielectric substrate

III. PERFORMANCE STUDY OF THE DESIGNED ANTENNA:

The S_{11} plot and E- and H- plane, co- and cross- polar radiation patterns at resonant frequency are shown in Figure 3 (a) and (b), respectively. The performance parameters are tabulated in Table 2.

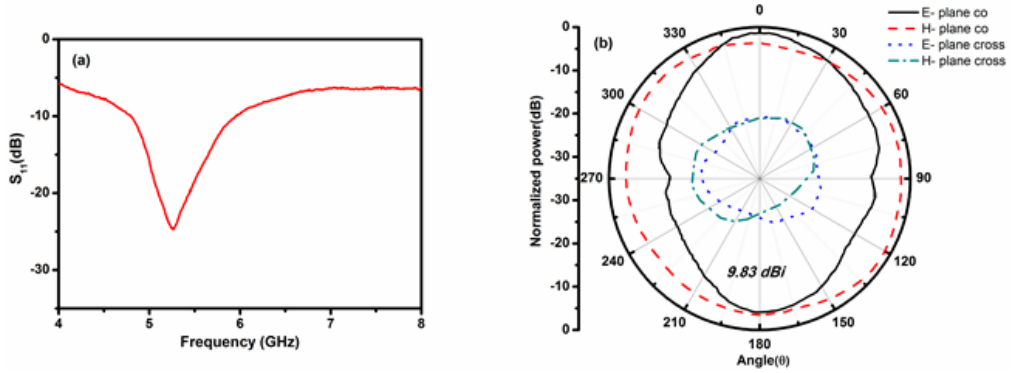


Figure 3 (a) Measured S_{11} plot and (b) E- and H- plane, measured co- and cross-polar radiation patterns of CPW fed CMMA with radial stubs at 5.27 GHz

Table 2 Performance parameters of the CPW fed CMMA with radial stubs on magneto-dielectric substrate

Resonant frequency (GHz)	S_{11} (dB)	Directivity (dBi)	-10 dB bandwidth	
			GHz	%
5.27	-24.31	9.83	1.13	21.44

IV. ANALYSIS OF THE RESULTS

The resonant frequency shifts marginally with introduction of radial stubs to lower side of the resonant frequency. Coupling effect between the patch and the coplanar ground plane and fabrication tolerances could be the reason for shift in the resonant frequency [19-24].

V. CONCLUSION

CPW fed circular monopole antenna with radial stubs is developed and designed on the $Ni_{0.5}Zn_{0.5}Fe_2O_4$–LDPE magneto-dielectric composite substrate for wearable application. Reflection coefficient (S_{11}) of −24.31 dB at 5.27 GHz and −10 dB bandwidth of 21.44% is observed for the designed antenna. Magneto-dielectric composite as substrate miniaturizes the antenna and enhances the overall performance of the antenna.The compact shape enhances the low profile of the antenna and makes it suitable for wearable antenna applications.


©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538
Volume 14 Issue IV Apr 2026- Available at www.ijraset.com
Received Date: 24-042026
Acceptance Date: 26-04-2026
Publish Date: 30-04-2026

REFERENCES

[1] Ikonen, P. M., K. N. Rozanov, A. V. Osipov, P. Alitalo, and S. A. Tretyakov, "Magnetodielectric substrates in antenna miniaturization: Potential and limitations", IEEE Trans. Antennas Propag., Vol. 54, 3391-3399, 2006.
[2] Mosallaei, H., and K. Sarabandi, "Magneto-dielectrics in Electromagnetics: Concept and applications", IEEE Trans. Antennas Propag., Vol.52, 1558-1567, 2004.
[3] Hansen, R. C., and M. Burke, "Antennas with magneto-dielectrics", Microwave Opt. Technol. Lett., Vol.26, 75-78, 2000.
[4] Karilainen, A. O., P. M. Ikonen, C. R. Simovski, S. A. Tretyakov, A. N. Lagarkov, S. A. Maklakov, and S. N. Starostenko, "Experimental studies on antenna miniaturisation using magneto-dielectric and dielectric materials", Microwaves, Antennas & Propagation, IET,Vol. 5, 495-502, 2011.
[5] Swaminathan, M., V. Sundaram, J. Papapolymerou, and P. M. Raj, "Polymers for RF apps", IEEE Microwave Magazine, Vol.12, 62-77, 2011.
[6] Borah, K., and N. S. Bhattacharyya, "Magnetodielectric composite with $NiFe_2O_4$ inclusions as substrates for microstrip antennas", IEEE Trans. Dielectrics and Electrical Insulation, Vol.19, 1825-1832, 2012.
[7] Kong, L. B., Z. W. Li, G. Q. Lin, and Y. B. Gan, "Ni-Zn ferrites composites with almost equal values of permeability and permittivity for low-frequency antenna design", IEEE Trans. Magn.,Vol.43, 6-10, 2007.
[8] Su, H., X. Tang, H. Zhang, Y. Jing, and F. Bai, "Low-loss magneto-dielectric materials: approaches and developments", J. Electronic Mater.,Vol.43, 299-307, 2014.
[9] Kumar, G. and Ray, K. P., Broadband Microstrip Antennas, Artech House, Norwood, MA, 2003.
[10] Jangid, K. G., A. Tiwari, V. Sharma, V. S. Kulhar, V. K. Saxena, and D. Bhatnagar, "Circular Patch Antenna with Defected Ground for UWB Communication with WLAN Band Rejection", Defence Science Journal,Vol. 162-167, 2016.
[11] Qu, X., S. S. Zhong, and W. Wang, "Study of the band-notch function for a UWB circular disc monopole antenna", Microwave and Opt. Technpl. Lett.,Vol.48, 1667-1670, 2006.
[12] Samsuzzaman, M., M. T. Islam, and M. R. I. Faruque, "Circular slotted CPW antenna for WiMAX/C band applications", ARPN Journal of Engineering and Applied Sciences, Vol. 8, 581-585, 2013.
[13] Agrawall, N. P., G. Kumar, and K. P. Ray, "Wide-band planar monopole antennas", IEEE Trans. Antennas Propag.,Vol. 46, 294-295, 1998.
[14] Vanam, S. M., and R. P. Labade, "Circular Microstrip Patch Monopole Antenna for Wireless Communication", International J. Microwave Applications,Vol.5,23-26, 2016.
[15] Sanyal, G., and K. Vyas, "A CPW fed Circular Microstrip Patch Antenna with Defected Ground Structure", International J. Microwave Applications, Vol. 2, 113-116, 2013.
[16] Aksun, M. I., S. L. Chuang, and Y. T. Lo, "Coplanar waveguide-fed microstrip antennas", Microwave Opt. Technol. Lett., Vol. 4, 292-295, 1991.
[17] Sierra-Garcia, S., and J. J. Laurin, "Study of a CPW inductively coupled slot antenna", IEEE Trans. Antennas Propag., Vol. 47, 58-64, 1999.
[18] Subbarao, A., and S. Raghavan, "Compact coplanar waveguide-fed planar antenna for Ultra-wideband and WLAN applications", Wireless personal communications, Vol. 71, 2849-2862, 2013.
[19] Giannini, F., R. Sorrentino, and J. Vrba, "Planar Circuit Analysis of Microstrip Radial Stub", IEEE Trans. Microwave Theory and Techniq., Vol. 32, 1652-1655, 1984.
[20] Sorrentino, R., and L. Roselli, "A new simple and accurate formula for microstrip radial stub", IEEE Microwave and Guided Wave Lett.,Vol. 2, 480-482, 1992.
[21] Gunel, T., and S. Kent, "Numerical modeling of microstrip radial stub", J. microwave power and electromagnetic energy, Vol. 32, 246-250, 1997.
[22] da Costa, K. Q., and V. Dmitriev, "A simple theoretical model for rectangular microstrip resonator with stubs", Microwave Opt. Technol. Lett., Vol. 41, 119-123, 2004.
[23] Bhattacharyya, N. S., and S. Bhattacharyya, "Microstrip stub resonator on ferrite substrate", in IEEE Antennas and Propagation Society International Symposium, Columbus, OH, USA, 512-514, 2003.
[24] Bae, H. R., S. O. So, C. S. Cho, J. W. Lee, and J. Kim, "A crooked U-slot dual-band antenna with radial stub feeding", IEEE Antennas and Wireless Propag. Lett., Vol. 8, 1345-1348, 2009.

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

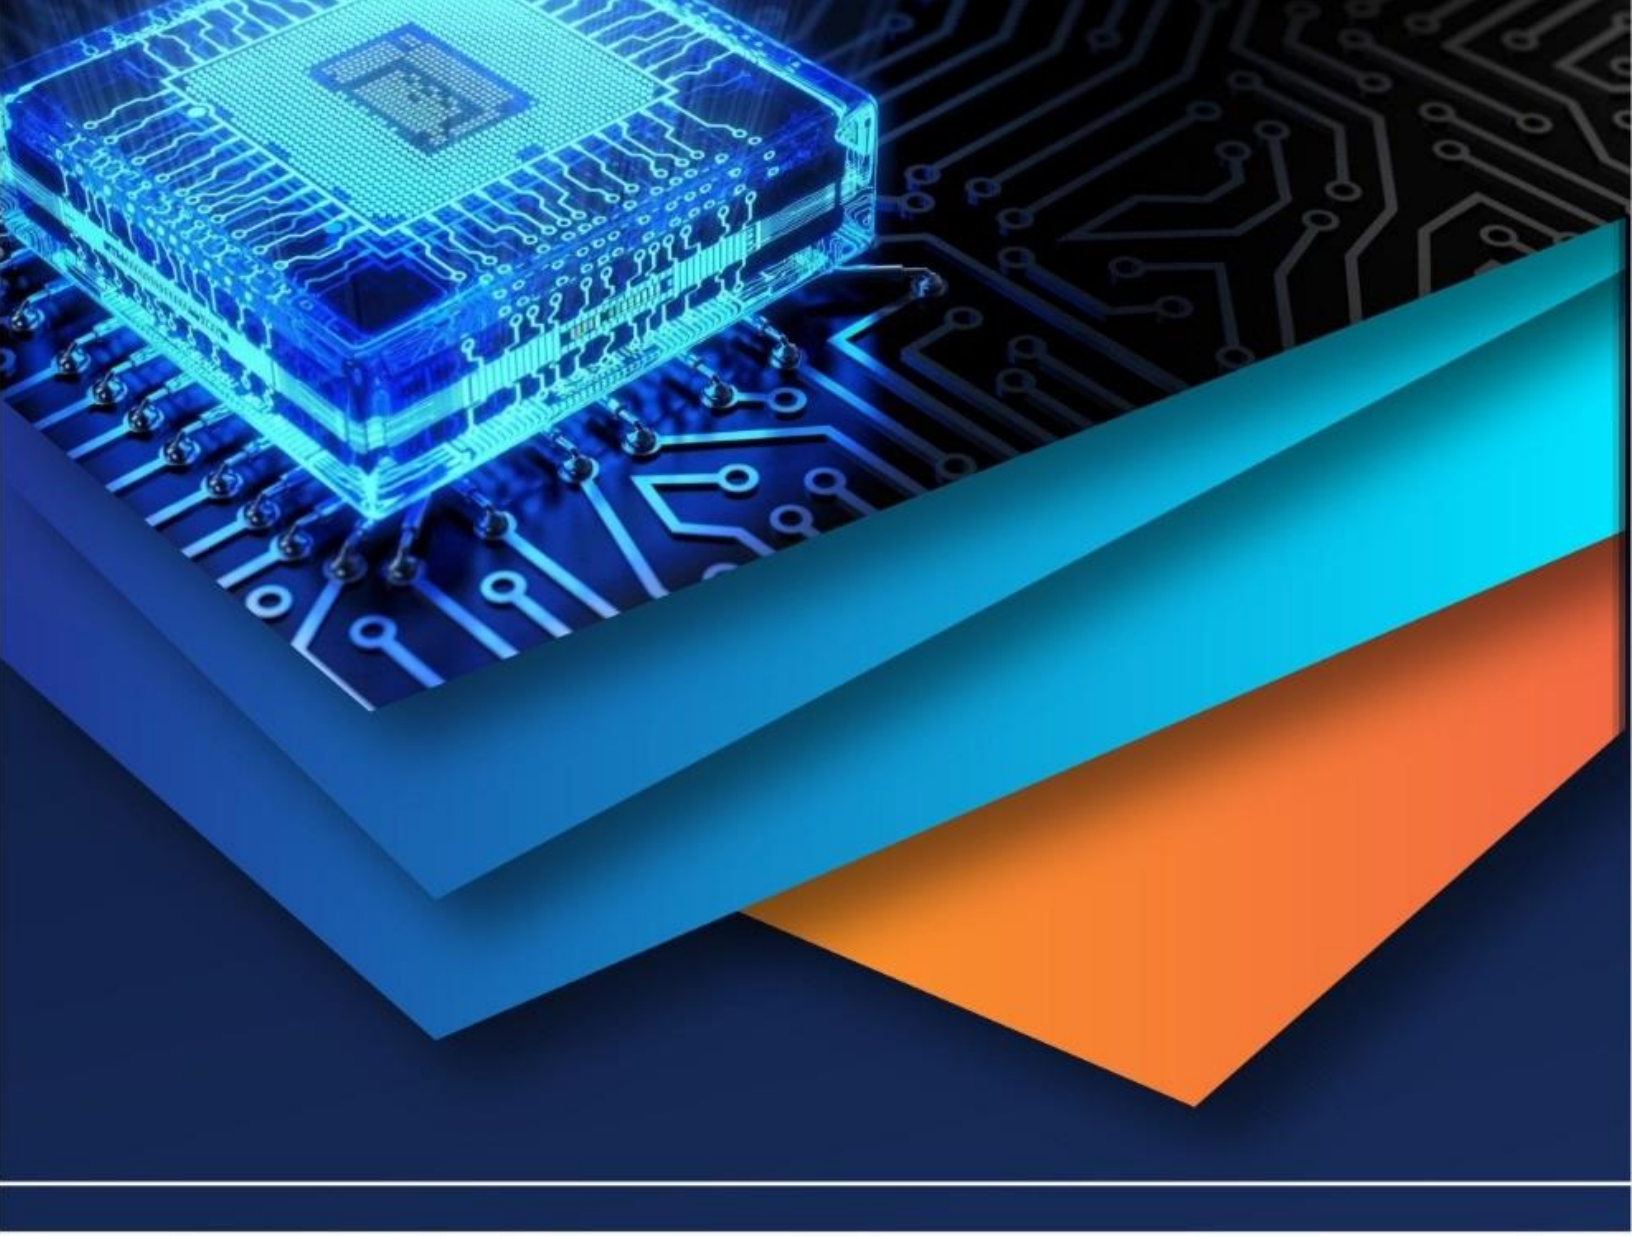

10.22214/IJRASET

45.98

IMPACT FACTOR: 7.129

IMPACT FACTOR: 7.429

INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089 (24*7 Support on Whatsapp)