



# **iJRASET**

International Journal For Research in  
Applied Science and Engineering Technology



---

# **INTERNATIONAL JOURNAL FOR RESEARCH**

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume: 5      Issue: VIII      Month of publication: August 2017**

**DOI: <http://doi.org/10.22214/ijraset.2017.8034>**

**[www.ijraset.com](http://www.ijraset.com)**

**Call: ☎ 08813907089**

**E-mail ID: [ijraset@gmail.com](mailto:ijraset@gmail.com)**

# A Comparative Analysis On Image Denoising Using Different Median Filter Methods

Sandeep Kumar<sup>1</sup>, Munish Kumar<sup>2</sup>, Rashid<sup>3</sup>, Neha Agrawal<sup>4</sup>

<sup>1</sup>Electronics & Communication, Sreyas Institute of Engineering & Technology, India

<sup>2</sup>Electronics & Communication DCRUST Murthal, Sonapat Haryana, India

<sup>3</sup>Electronics & Communication Sreyas Institute of Engineering & Technology Hyderabad, India

<sup>4</sup>Department of R & D Dreamtree Infotech Pvt. Ltd, Gwalior, India

**Abstract:** In denoising, separation of noise from signal is a main issue, but with improved filter elimination of noise becomes easier. In this paper nonlinear median filter is used for multi resolution condition, once in full resolution and afterward with half resolution, denoising turns out to be greater. This method is a nonlinear model and is observed to be helpful in removing Impulse noise, Gaussian and Speckle noise. Further, it is recommended that utilization of a nonlinear adaptive median filter (AMF) delivers more satisfying picture with better denoising. The experimental results are based on the parameters likes Peak Signal Noise Ratio (PSNR) and Structural Similarity Matrix (SSIM). It is demonstrated that the enhanced strategy gives a high level of noise removal while protecting the edges and other data in the picture. This research is based on threshold calculation which enhances the PSNR of the framework when contrasted with combination of Discrete Wavelet Transform & Adaptive Median Filter (DWT-AMF) and other median based methods.

**Keywords—** PSNR; Adaptive Median; Structural Similarity Matrix; Gaussian Noise; Impulse Noise; Speckle Noise; Median Filter; Discrete Wavelet Transform

## I. INTRODUCTION

In computer vision, image processing turned out to be a necessary field in daily life applications such as computer tomography, satellite television, face recognition, license plate recognition (LPR), magnetic resonance imaging (MRI) and geographical information systems etc [1-2]. Denoising during image processing is a great challenge in various applications such as spatial domain that refers to a plane digital image in which manipulation is done directly on image pixels and frequency domain refers to the study of mathematical functions or signals with respect to frequency rather than time [2]. Images are used in various areas such as education and medical but a certain amount of noise always exhibits during image processing which degrades the quality of image. An image gets corrupted by noise during acquisition, transmission or during reproduction. Several reasons by which noise can be produced by storage media device, digital camera, sensor or scanner. Reproduction of image from noisy signal is a great challenging task. Image denoising techniques may used to remove the most of the unwanted information from an image. Image denoising technique is used to improve the quality of the image from the noisy image. Noise may be classified such as impulsive noise, AWGN, and speckle noise etc. Here researchers focuses on AWGN model only Using the denoising techniques, we reduce the noise level as well as most of the edges of image and information much as possible [3].

## II. LITERATURE SURVEY

Syed *et al.* [7] presented an algorithm to reduce noise from grayscale images. It is improved AMF algorithm in which firstly evaluate median value without taking noisy pixels in window processing. After the maximum window processing, if noise free median value not occurs, then replace it with the last processed pixel value. The result of this algorithm performance is better from other nonlinear filters while preserving image quality and information the noise removing level up to 90%.

Jiang *et al.* [8] presented a self-organizing map (SOM) technique to processed MRI imaging. During the formation of images in MRI technique, generally, images are corrupted by Rician noise. Rician noise is highly nonlinear, non-additive signal dependent noise different from common image noise. It is a very difficult to feature to separate noise from the signal. The use of proposed SOM Algorithm is carefully applied to consider Rician noise feature to get accurate MRI image processing, the final result is a novel method for denoising and segmentation.

Zhenzhen *et al.* [9] presented algorithm AMF-PDE to process ultra violet (UV), Intensifier Charge Couple Device (ICCD) image. The performance of proposed AMF-PDE method is better in denoising while preserving edges and also from another classical filter as average and MF. The method is expected to be used in technology after improvements.

Malini.S *et al.* [10] presented a new denoising algorithm for gray and color image. The use of nonlinear median filters in multi resolution environment, one with full resolution and then with half resolution, gives better image denoising and visual quality. This algorithm works simply compared to other, and equally well for gray and color images. It is useful in removing impulse noise as well Gaussian and SN.

Dhanushree *et al.* [11] presented AMF and adaptive wavelet thresholding shrinkage technique for image de-noising. The noisy image is passed through pre-processing MF to remove the noise and two level DWT is applied which is passed through post-processing median filter to remove noise. Finally, Bays thresholding shrinkage is applied to all sub-bands to obtain a de-noised image. The Inverse DWT is applied to reconstruct the image. The Image quality is measured in terms of the PSNR and is observed that the proposed method obtains better PSNR compared to the existing method.

Panetta *et al.* [12] shows picture denoising as trying issue in imaging frameworks, particularly imaging sensors. In spite of different research, the calculation has been to diminish it. This algorithm presented another idea of grouping to-arrangement similitude. This likeness measure is a proficient technique to assess the substance closeness for pictures, particularly for edge data. The approach varies from conventional picture preparing procedures, which depend on pixel and piece similarity.

Xiaofeng *et al.* [13] presented a new method to reduce noise in ultra sound medical images. In this method enhance original median filter by use of directional suit templates instead of the symmetrical template to fit the directions of edges and textures. To determine which directional template should be used, a local direction filter was proposed. The simulation result of proposed work on the synthetic image is better in removing noise from ultra sound images. The PSNR value of proposed is better from other wiener and median filter.

### III. PROBLEM STATEMENT

Before Digital pictures corrupted inferable from camera detecting component, despicable correspondence interface and so on is stick stuffed with driving impulses. This impulse noise devastates the crucial information inside the picture and yield picture turns out as an obscured with unrecognizable edges. The photo would now have the capacity to not be helpful in any approach and it can't be valuable to observe any critical data from it. This drawback may be settled by applying a nonlinear filter (NLF) to the photographs. The main praised NLF is MF. In MF, focus fragment is replaced by the center of its neighboring pixels. This can with advance restore the photo, the issue with MF is that it clouded the photo, however applying MF every single portion paying little mind to whether it's spoiled or not is replaced by standard so it obliterates the sides of the digital picture. So a crisp out of the case new kind of MF indicated to as move MF zone unit made inside which standard is associated solely with the defiled pixels while keeping uncorrupted pixels since it is you. The fundamental objective is to support the standard of the denoised picture using PSNR for various thickness of noise. This research presents a way that utilizations three approach to recover the degraded picture.

- A. Noise Detection
- B. Noise Filtering
- C. Discrete Wavelet Transform

### IV. TYPES OF NOISE

#### A. Additive White Gaussian Noise (AWGN))

The AWGN or amplifier is independent at each pixel and with signal intensity. In gray scale image as

$$I = d + n$$

Where I is the input image function, d is degraded by AWGN n.

#### B. Speckle Noise (SN)

This is also referred as multiplicative noise which is found normally in most imaging applications. In SN, noise issues in between random interference and coherent returns.

$$I = d \times n$$

Where n is multiplicative noise.

### V. FILTERING TECHNIQUE

#### A. Discrete Wavelet Transform (DWT)

Discrete Wavelet Transform allows good spatial localization and has multi resolution facets, which are alike to the social image scheme. In a similar way, this procedure displays robustness to low-pass and center cleaning. The turn out to be is situated on

waves, called wavelets, of varying frequency and confined duration. It supplies each frequency and spatial description of an image. The wavelet change into decomposes the image into three spatial instructional materials, i.e. Vertical, horizontal and diagonal. It decomposes the image into special frequency stages corresponding to the low frequency, middle frequency, and high frequency. The magnitude of DWT coefficients is excessive in the lowest bands (LL) at every stage of decomposition and is least for other high bands [4].

### B. Median Filter (MF)

MF is a nonlinear digital filtering method, generally used to remove noise. In filtering of noise, edges are preserved. The output value of median nonlocal filter is the middle element of sorted pixel array value of the filtering window. Median is calculated by first sorting all pixels values from surrounding neighboring hood into numeric order and then replacing the pixel being considered with the median pixel value. The major issue with median filtering is hard to compute and relatively expensive and slow [5-6].

123	125	126	130	140
122	124	126	127	135
118	120	150	125	134
119	115	119	123	133
111	116	110	120	130

Neighborhood values: 115, 119, 120, 123, 124, 125, 126, 127, 150

Median value: 124

### C. Adaptive Median Filtering (AMF)

The AMF has been presented to evaluate the noisy pixel in an image. The evaluation of pixel as noise is done by comparing every pixel in an image to its surrounding neighbor pixels. The window size of the neighborhood is modifiable, as well as the threshold for the comparison. Those pixels that are different from its neighbors and are not structurally aligned to its surrounding pixel are defined as impulse noise. Such noisy are exchanged with pixels of the neighborhood by the median value of a pixel that clears noise detection test [6].

## VI. RESULT ANALYSIS

- Take any image  $M \times M$  which is represented by  $f: M \times M \rightarrow IM$  where  $IM$  denotes the pixel values of an image.
- Assume  $k \times k$  be filtering window size “W” which is obtained using dividing of an image.
- Denote  $IM(X)$  the intensity value of image  $IM$  at pixel location  $x$ . For 8-bit gray images, the value of  $d_{max} = 0$  and  $d_{min} = 255$ . Impulse noise is as follows:

$$I_{noisy}(x) = \begin{cases} d_x & \text{with } k \\ IM(X) & \text{with } (k-1) \end{cases} \quad (1)$$

Where  $dx$  is uniformly distributed in  $[d_{max}, d_{min}]$  and  $k$  shows the level of impulse noise.

- Let  $I_{noisy}$  represents a noisy image which is obtained by adding AWGN and SN  $k$  to original image  $IM$  then it can be said that:

$$I_{noisy} = IM + k \quad (2)$$

- Apply 1DWT on the input image to split into four sub-bands: LL, LH, HL, HH and apply AMF on each band of DWT.



- F. Let the gray levels of any pixel value, in any window ( $W_x$ ) of size k,  $X_k$  are denoted by  $X_1, X_2, X_3, X_4, \dots, \dots, X_k$  and it becomes  $X_{i1} \geq X_{i2} \geq X_{i3} \geq \dots, \dots, X_{in}$  after arranging in increasing or decreasing manner and k is even or odd:

$$M_x = \text{Median}(W_x) = \begin{cases} X_{i(k+1)/2}, & \text{odd condition} \\ \frac{1}{2} [X_{i(\frac{k}{2})} + X_{i(\frac{k}{2}+1)}], & \text{even condition} \end{cases}$$

(3)

- G. Using Eq. (3), it has a kxk matrix. The gray level at any pixel (i, j) is denoted by X(i, j)

$$W = \begin{bmatrix} X_{1,1} & X_{1,\frac{k+1}{2}} & X_{1,k} \\ X_{\frac{k+1}{2},1} & X_{\frac{k+1}{2},\frac{k+1}{2}} & X_{\frac{k+1}{2},k} \\ X_{k,1} & X_{k,\frac{k+1}{2}} & X_{k,k} \end{bmatrix} \quad (3)$$

- H. In this step, estimate the sum of rows and columns of W are utilized for threshold calculation in this research which prompts proficient noise detection. In each W,  $Y_{\min}$  (minimum) and  $Y_{\max}$  (maximum) are assessed which are utilized to sudden changes distinguish in pixel values. With a specific end goal to estimation threshold, as a matter of first importance, the components midpoints in singular rows and columns are  $A_v(R_k)$  and  $A_v(C_k)$  of W which is computed using this equation.

$$A_v(R_k) = \frac{1}{k} \sum_{j=1}^k X(k, j) \quad (4) \quad A_v(C_k) = \frac{1}{k} \sum_{i=1}^k X(i, k) \quad (5)$$

- I. This "2k", different sum values will be helpful for finding  $Y_{\min}$  and  $Y_{\max}$ . It is given by:

$$Y_{\min} = \min\{A_v(R_1), \dots, A_v(R_k), A_v(C_1), \dots, A_v(C_k)\} \quad (6)$$

$$Y_{\max} = \max\{A_v(R_1), \dots, A_v(R_k), A_v(C_1), \dots, A_v(C_k)\} \quad (7)$$

- J. Now, checked noisy pixels at  $Y_{\text{med}}$  of W using comparing it with  $Y_{\min}$  &  $Y_{\max}$ . If  $Y_{\text{med}}$  value lies among  $Y_{\min}$  and  $Y_{\max}$  then it is denoted by noise free pixel otherwise noisy and it is replaced by median value.

$$Y_{\text{med}} = \begin{cases} Y_{\min} < Y_{\text{med}} < Y_{\max}, & \text{Noise free} \\ \text{Else,} & \text{Noisy} \end{cases} \quad (8)$$

If  $Y_{\text{med}}$  found as noisy, then noise removal method is applied to this pixel, and W is moved to the next pixel location. For noise filtering step, calculate the median of the W which has been helping to alter the gray intensity of the found noisy pixel.

- K. Reconstruct the matrix using inverse DWT after applying AMF.

- L. Mean square error (MSE) - It is used to find the sum of the squares of the "errors", between the input image and output image.

$$MSE = \frac{1}{MN} \sum_i^M \sum_j^N (S_{ij} - D_{ij})^2 \quad (9)$$

Where M, N denoted pixel values in the input image, represent input image pixels, represent denoised image pixels.

- M. Peak Signal to Noise Ratio (PSNR) - It is used to estimate the robustness of denoising w.r.t. the noise. With the presence of noise, the image will be degrading the quality of the image. The image quality of output and input image is estimated. It is given by

$$PSNR = 10 * \log (P^2 / MSE) \quad (10)$$

- N. Where p= maximum value in input image.

- O. Structural Similarity Matrix (SSIM) - It estimates the similarity measure between the input image and output image.

$$SSIM = \frac{(\sigma_{\mu_x \mu_y} - c_1)(\sigma_{xy} - c_2)}{(\mu_x^2 - \mu_y^2 - c_1)(\sigma_x^2 - \sigma_y^2 - c_2)} \quad (11)$$

Where  $\mu_x$  is the sum of x,  $\mu_y$  is the sum of y, sigma is the covariance of x and y,  $c_1 = (K_1 L)^2$ ,  $c_2 = (K_2 L)^2$ ,  $K_1 = 0.01$  and  $K_2 = 0.03$  by default and L is the dynamic range of pixel values.

The experimental results are based on test gray scale image of the cameraman, Barbara, and Lena. This simulation is based on MATLAB software. The density of impulse noise, AWGN and SN are maintained in the image by using standard MATLAB function.

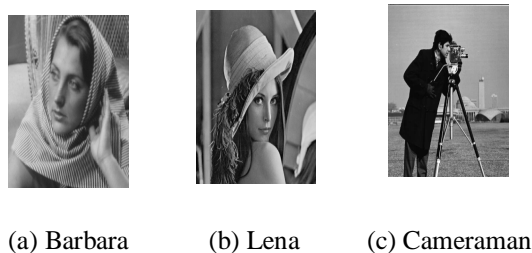


Fig. 1. Original grayscale of 8-bit per pixel.

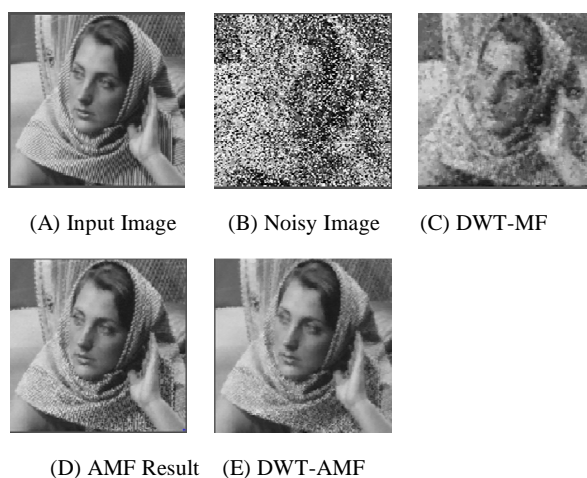


Fig. 2. Image (a) Result on Impulse Noise with 40% noise density

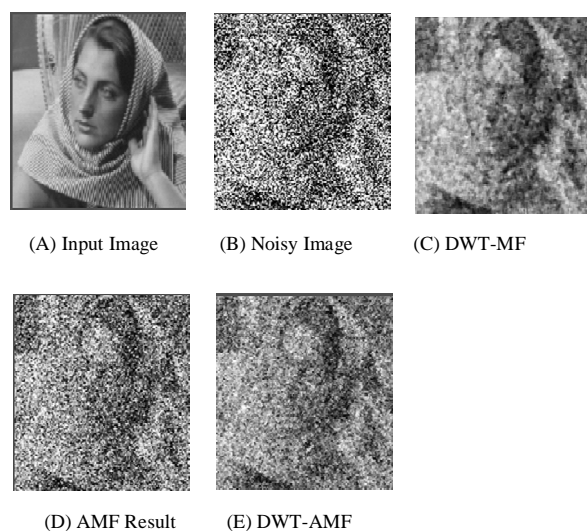


Fig. 3. Image (a) Result on Gaussian Noise with 30% noise density

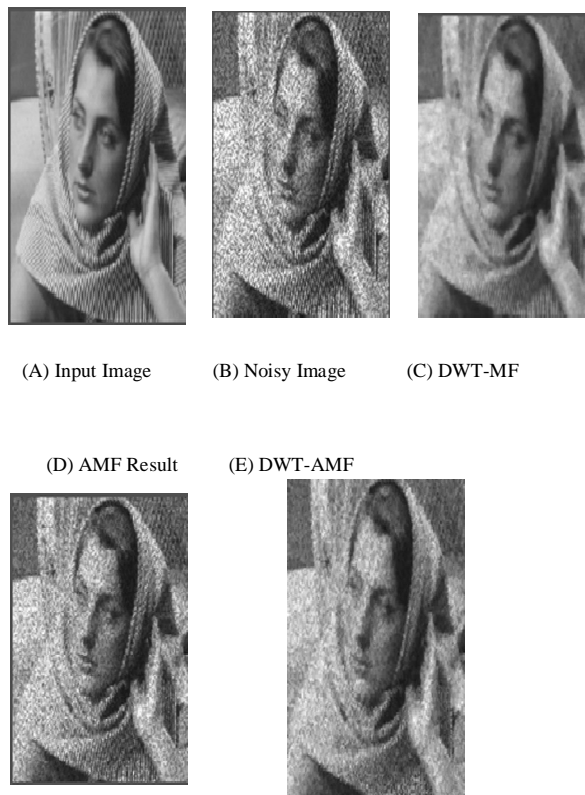


Fig. 4. Image (a) Result on Speckle Noise (standard)

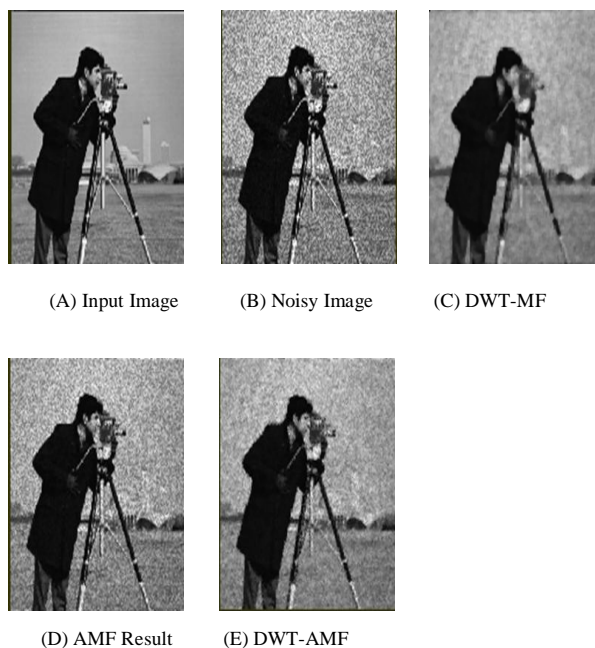


Fig. 5. Image (b) Result on Speckle Noise (standard)

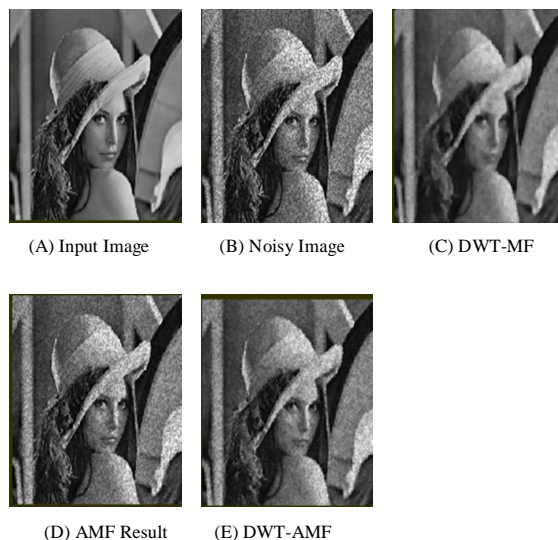


Fig. 6. Image (c) Result on Speckle Noise (standard)

TABLE I. PSNR (DB) VALUES OF DIFFERENT FILTERS FOR BARBARA IMAGE DEGRADED BY DIFFERENT NOISE

Noise	DWT - Median Filter	Adaptive Median Filter	DWT-AMF Method [6]
Impulse [40%]	35.1384	25.7221	45.4676
Gaussian [30%]	30.4546	11.8181	22.9338
Speckle	40.0286	20.9505	40.0263

TABLE II. SSIM VALUES OF DIFFERENT FILTERS FOR BARBARA IMAGE DEGRADED BY DIFFERENT NOISE

Noise	DWT -Median Filter	Adaptive Median Filter	DWT-AMF Method [6]
Impulse [40%]	0.3599	0.8643	0.7679
Gaussian [30%]	0.2063	0.0775	0.1006
Speckle	0.5083	0.4842	0.4707

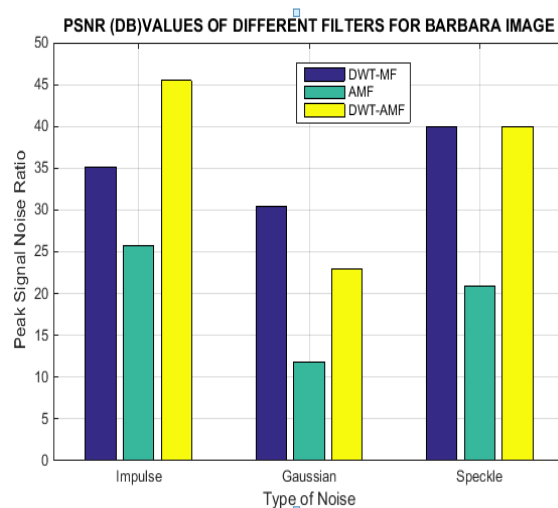


Fig. 7. PSNR values of different filters for barbara image



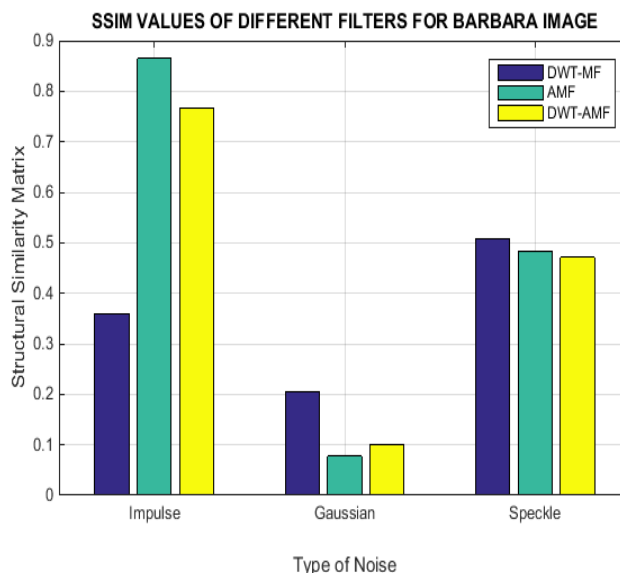


Fig. 8.SSIM values of different filters for barbara image

In this Fig. 7 and Fig. 8 blue bar shows that DWT-MF value, green shows that AMF PSNR value and yellow shows that DWT-AMF PSNR. It performed on Barbara image.

TABLE III. PSNR COMPARISON BETWEEN SEVERAL METHODS FOR CAMERAMAN IMAGE DEGRADED BY DIFFERENT NOISE

Noise	DWT - Median Filter	Adaptive Median Filter	DWT-AMF Method [6]
Impulse [40%]	38.2221	25.626	49.874
Gaussian [30%]	32.93	11.725	25.471
Speckle	43.3482	21.3744	45.245

TABLE IV. SSIM VALUES OF DIFFERENT FILTERS FOR CAMERAMAN IMAGE DEGRADED BY DIFFERENT NOISE.

Noise	DWT- Median Filter	Adaptive Median Filter	DWT-AMF Method [6]
Impulse [40%]	0.3943	0.9105	0.8545
Gaussian [30%]	0.206	0.0778	0.0967
Speckle	0.5971	0.4597	0.4832

## VII. CONCLUSION

There are two main processes: first is Noise Detection and second is Noise Removal. In noise detection stage, the concept of DWT with AMF is used which offers high noise detection ability and efficiency. In DWT process, apply AMF on each band of DWT. It improves vastly the de-noised image DWT-AMF filter quality from 45.4676% for impulse noise on 40% noise density, but it degraded for 22.9338% for Gaussian Noise on 30% noise density and 40.0263% for SN. In the further analysis, we will apply DWT with Adaptive Dual threshold median filter for improving the noise detection stage.

## REFERENCES

- [1] Jadhav P. B., Dr. Sangale. S. M., "Image Denoising Techniques", IJARCSSE, 2015.
- [2] Sandeep Kumar, Sukhwinder Singh, and Jagdish Kumar, "A Study on Face Recognition Techniques with Age and Gender Classification", In IEEE International Conference on Computing, Communication and Automation (ICCCA), 5th-6th May 2017.
- [3] Parmar, Jignasa M., and S. A. Patil. "Performance evaluation and comparison of modified denoising method and the local adaptive wavelet image denoising method." The IEEE International Conference on Intelligent Systems and Signal Processing (ISSP), pp. 101-105, 2013.
- [4] Agrawal, K., and Rajesh Singh. "A Survey: Digital Watermarking with its Applications Using Different Methods." International Journal of Digital Contents and Applications, Vol. 2, No. 1, pp. 17-24, 2015.
- [5] Vijayalakshmi, A., C. Titus, and H. Lilly Beaulah. "Image Denoising for different noise models by various filters: A Brief Survey." International Journal of Emerging Trends & Technology in Computer Science (IJETTCS), Vol 3, No. 6, 2014.
- [6] Sandeep Kumar, Sukhwinder Singh & Jagdish Kumar, "Automatic Face Detection Using Genetic Algorithm for Various Challenges", International Journal of Scientific Research and Modern Education, Volume 2, Issue 1, Page Number 197-203, 2017.
- [7] Jubair, Md Imrul, Md Mizanur Rahman, Syed Ashfaqueuddin, and Imtiaz Masud Ziko. "An enhanced decision based adaptive median filtering technique to remove Salt and Pepper noise in digital images." The IEEE 14th International Conference on Computer and Information Technology (ICCIT), pp. 428-433, 2011.
- [8] Jiang, Danchi. "A SOM algorithm based procedure for MRI image processing under significant Rician noise." The IEEE 3<sup>rd</sup> Australian Control Conference (AUCC), pp. 14-19, 2013.
- [9] Lu, Zhenzhen, Weiyu Liu, Dahai Han, and Min Zhang. "A PDE-based Adaptive Median Filter to process UV detection image generated by ICCD." The IEEE International Conference on Audio, Language and Image Processing (ICALIP), pp. 543-546, 2014.
- [10] Malini, S., and R. S. Moni. "Image Denoising Using Multiresolution Analysis and Nonlinear Filtering." The IEEE Fifth International Conference on Advances in Computing and Communications (ICACC), pp. 387-390, 2015.
- [11] Dhanushree, V., and M. G. Srinivasa. "Image de-noising using median filter and DWT adaptive wavelet threshold." IOSR Journal of VLSI and Signal Processing, Vol. 5, 2015.
- [12] Panetta, Karen, Long Bao, and Sos Agaian. "Sequence-to-Sequence Similarity-Based Filter for Image Denoising." IEEE Sensors Journal, Vol 16, No. 11, pp. 4380-4388, 2016.
- [13] Xiaofeng Zhang; Shi Cheng; Hong Ding, Huiqun Wu, Nianmei Gong and Rengui Cheng "Ultrasound Medical Image Denoising Based on Multi-direction Median Filter" 8th International Conference on Information Technology in Medicine and Education, IEEE, 2016.



10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)