iJRASET
International Journal For Research in Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 14 **Issue:** IV **Month of publication:** April 2026

DOI: https://doi.org/10.22214/ijraset.2026.80162

www.ijraset.com

Call: 08813907089 | E-mail ID: ijraset@gmail.com

International Journal for Research in Applied Science & Engineering Technology (IJRASET)
ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538
Volume 14 Issue IV Apr 2026- Available at www.ijraset.com

A Cloud-Enabled IOT Framework for Real-Time Brain Monitoring of Migraine Patients

Dr.V.G. Girhepunje, Jidhnyasa Adhe, Khushbu Turkar, Aryan Yelane, Atharv Khonde
Department of Electronics and Telecommunication,Priyadarshini College of Engineering Nagpur, Maharashtra, India

Abstract: ***Theproposedsystemisdevelopedtoovercomethelimitations of conventional approaches by integrating modern sensing, control, and monitoring technologies into a unified and efficient framework. The system continuously observes critical parameters and processes real-time data using a microcontroller-based control unit, enabling intelligent responses to dynamic operating conditions [1]. By incorporating reliable hardware components along with advanced software platforms for data visualization and analysis, the system enhances overall performance, operational safety, and energy efficiency [2].***
Experimental implementation and testing confirm stable system behavior, accurate parameter measurement, and effective response under varying conditions, demonstrating thereliabilityoftheproposeddesign[3].Theobtainedresults validate the feasibility of the system and highlight its suitability for deployment in real-world applications [4]. Furthermore, the framework offers a cost-effective and scalable solution that can be extended with advanced analytics,automationtechniques,andIoT-basedconnectivity features in future developments [5][6].
Keywords: Microcontroller, Sensors, Automation, Real-TimeMonitoring,EnergyEfficiency,IoT,EmbeddedSystem

I. INTRODUCTION

Therapidadvancementoftechnologyandtheincreasingdemand for efficient, reliable, and intelligent systems have driven the developmentofinnovativesolutionsacrossengineeringdomains [1]. Traditional systems often operate with limited monitoring, manual control, and low adaptability to changing conditions, which can result in inefficiencies, safety risks, and higher operational costs [2]. To overcome these challenges, modern systemsincreasinglyintegrateautomation,real-timesensing,and embeddedcontrol toimproveoverallperformanceandreliability [3].

The proposed system is designed to provide a smart and integrated solution by combining sensors, control units, and supporting hardware into a unified framework. It continuously monitorscriticaloperationalparametersandprocessesthecollected data usinga microcontroller-based platform. Based on predefinedlogicandthresholdvalues,thesystemresponds automaticallytovariations inoperatingconditions,ensuring stableandefficientoperationwithouttheneedforconstant humanintervention[4]. Thisapproach enhancesaccuracy,responsiveness, and overall system dependability.

A key feature of the system is its emphasis on real-time monitoring and intelligent decision-making. By leveraging embeddedprocessingandefficientcommunicationmechanisms, the system can detect abnormal conditions at an early stage and initiate corrective actions such as alerts, control switching, or safety shutdowns [5]. This capability not only improves system safety but also minimizes potential damage to components and extends the overall lifespan of the system. Additionally, the modular designenableseasyintegrationofadditional sensorsor functionalities as required.

The system also incorporates suitable software platforms for programming, data visualization, and performance analysis. Theseplatformsfacilitateeffectiveinteractionbetweenhardware and software, providing clear insights into system behavior and operationaltrends.Theavailabilityofbothreal-timeand historical data supports improved diagnostics, performance evaluation, and future optimization [6]. This makes the system suitable for both experimental studies and practical real-world deployment.

Overall, the proposed system represents a practical and scalable solution aligned with current technological trends such as automation,energyefficiency,andsmartmonitoring.Itsflexible architecture, cost-effective implementation, and reliable operationmakeitapplicableacrossawiderangeofapplications. Furthermore, the system provides a strong foundation for future enhancements through the integration of advanced technologies suchas IoT connectivity, artificial intelligence, and cloud-based analytics [1][3].

II. LITERATURE SURVEY

In recent engineering and healthcare research, continuous monitoring systems have gained significant importance for improvingpatientoutcomes,particularlyinchronicandepisodic conditions such as migraines [1].

©IJRASET: All Rights are Reserved

Conventional diagnostic approacheslargelydependonsubjectivesymptomreportingand occasional clinical examinations, which often fail to capture the complex neurological and physiological variations that occur priortomigraineepisodes[2].Toaddressthislimitation,existing studies emphasize the need for continuous and objective data acquisition in real-life environments, enabling clinicians to observe real-time trends and identify early warning signs that might otherwise go unnoticed [3].

Electroencephalography (EEG) is widely recognized as an effective method for monitoring brain activity. EEG sensors record electrical signals generated by neural processes and provide valuable insights into brain function and connectivity [4]. Research findings indicate that individuals suffering from migraines often exhibit irregular EEG patterns, including abnormalbrainwavedistributionsanddisruptedsynchronization across different brain regions [5]. Despite their accuracy, conventional EEG systems are generally restricted to clinical settings due to their size and cost, highlighting the growing demandforportableandwearableEEG-basedsolutionsforlong-term monitoring [6].

Apart from EEG, physiological parameters such as heart rate, blood oxygen saturation (SpO_2), and body temperature are commonly used in health monitoring systems due to their sensitivitytoautonomicnervoussystemchanges.Severalstudies have shown that migraine episodes are often associated with variations in these physiological signals, making them useful secondary indicators for early detection [2]. The integration of theseparameterswithEEGdatacreatesamultimodalmonitoring approach,significantlyimproving theabilitytoidentifypatterns related to migraine onset compared to single-parameter systems [3].

TheemergenceofInternetofThings(IoT)technologyhasfurther enhancedthecapabilitiesofreal-timehealthmonitoringsystems. IoT-basedframeworksenableseamlesscommunicationbetween sensors and remote servers, allowing continuous and real-time tracking of patient health data [1]. These systems reduce dependency on hospital visits and support remote healthcare services, enabling clinicians to monitor patient conditions from anylocation[7]. Additionally, IoT platformsprovide scalability and flexibility, allowing integration of multiple sensing devices within a single system architecture.

Cloudcomputinghasbecomeanessentialcomponentinmodern healthcare systems due to itsabilityto manage large volumes of biomedical data efficiently. Cloud platforms support real-time data storage, synchronization, and remote accessibility, making themhighlysuitableforcontinuous monitoringapplications [6]. They also enable healthcare professionals to analyze long-term trends, perform data-driven evaluations, and generate alerts based on predefined conditions or dynamic changes in patient data [4].

Furthermore,researchhighlightstheimportanceofreal-timedata visualization and user-friendly interfaces in improving the usability of health monitoring systems. Web-based dashboards that present both live and historical data help in understanding complex biomedical signals and assist in clinical decision-making [5]. Alert mechanisms integrated within these systems playa crucial role innotifying users about abnormal conditions, enabling timely intervention and reducing the severity of migraine episodes [2].

In summary, existing literature strongly supports the integration of EEG monitoring, physiological sensing, IoT communication, cloud computing, and visualization tools for effective health monitoringsystems.However,thereremainsagapindeveloping a fully integrated and application-specific framework for real-timemigrainepredictionandmanagement.Theproposedsystem addressesthisgapbycombiningthesetechnologiesintoaunified and efficient platform capable of continuous monitoring, intelligent analysis, and proactive healthcare support [3][7].

III. METHODOLOGY

The methodology of the proposed system is centered on the development of an integrated, real-time health monitoring framework capable of analyzing both neurological and physiological parameters for effective migraine detection and management [1]. The overall process follows a structured sequence that includes data acquisition, signal conditioning, processing, transmission, storage, analysis, and visualization. Each stage is designed with careful consideration to ensure accuracy, reliability, and real-time responsiveness, while also maintaining user comfort and system scalability [2].

The first stage involves sensor-based data acquisition, where multiplebiomedicalsensorsareutilizedtocaptureessential health parameters. An EEG sensor is employed to record brainwavesignals,representingtheelectricalactivityofthebrain and offering valuable insights into neurological conditions associated with migraines [3]. Simultaneously, physiological sensorssuchasheartrate,SpO_2,andtemperaturesensorscollect vital body data. These sensors continuously capture raw signals in either analog or digital form, enabling uninterrupted monitoring during routine daily activities [4].

In the second stage, the acquired signals undergo conditioning and preprocessing to improve their quality and reliability. EEG signals are particularly prone to noise due to motion artifacts, electrical interference, and muscle activity. To address these issues, filtering and amplification techniques are applied to enhance signal clarity [5]. Similarly, physiological data is validated to remove outliers and temporary fluctuations.

This preprocessing step ensures that only accurate and meaningful data is forwarded for further analysis, thereby strengthening the overall system performance [6].

The third stage focusesondata processingand control, whichis handled by a microcontroller-based unit. The microcontroller collects data from all connected sensors, converts analog inputs into digital values through internal ADCs, and organizes the informationintostructuredformatsforefficienthandling.Atthis stage, predefined threshold values and logical conditions are applied to detect abnormal variations in EEG patterns or physiological parameters [2]. Performing this analysis locally allows faster response times and reduces unnecessary data transmission to external systems [1].

In the fourth stage, the processed data is transmitted to a cloud-basedplatformusingwirelesscommunicationtechnologiessuch as Wi-Fi. The integration of IoT enables seamless connectivity between the hardware module and the cloud server, allowing real-time data transfer [7]. Sensor readings are continuously uploaded to acloud database,wheretheyaresecurelystored for long-term access and analysis. This cloud integration ensures scalability, data availability, and remote monitoring capabilities for both users and healthcare professionals [3].

The fifth stage involves data visualization and alert generation. A web-based dashboard retrieves both real-time and historical data from the cloud and presents it in a clear and user-friendly graphical format. Trends, patterns, and abnormal variations can beeasilyinterpretedthroughchartsandindicators[5].Whenthe systemdetectsconditionsthat mayindicate a potential migraine episode, alert notifications are generated and communicated to theuserorcaregiver,enablingtimelyinterventionandpreventive measures [4].

Overall, the proposed methodology establishes a closed-loop system that continuously monitors, processes, stores, and presents health data while maintaining high levels of accuracy and responsiveness. The modular structure of the system also supportsfutureenhancements,includingtheintegrationof machinelearningalgorithms,wearabledeviceoptimization,and personalizedhealthanalytics, therebyextendingitsapplicability in advanced healthcare solutions [6][7].

IV. WORKING OF THE PROPOSED SYSTEM

1) The system begins its operation by powering all sensors and the microcontroller through a regulated power supply. Once initialized, the microcontroller establishes communication with all connected sensors and the wireless network.
2) The EEG sensor continuously measures brain electrical activity by capturing brainwave signals from the user. At the sametime,physiologicalsensorsrecordheartrate,bloodoxygen saturation, and body temperature at regular intervals.
3) The rawsignals obtained fromthe sensors are transmitted to the microcontroller, where they are filtered, digitized, and formatted.Noisereductionandbasicvalidationareperformedto ensure accurate readings.
4) Themicrocontrollercontinuouslyanalyzestheincomingdata andcomparesitwithpredefinedthresholdsorreferencepatterns associated with migraine conditions. Sudden deviations or abnormal trends trigger internal flags for further action.
5) Theprocessedsensordataisthentransmittedwirelesslytothe cloudplatforminrealtime.Eachdatapacketistime-stampedand securely stored in the cloud database for future reference and analysis.
6) The cloud platform synchronizes the uploaded data with a web-baseddashboard,allowingusersandhealthcareprovidersto view real-time readings and historical trends from any location.
7) IfabnormalEEGactivityorphysiologicalchangesindicating a potential migraine episode are detected, the system generates alerts through the dashboard or notification system, enabling timely preventive measures.
8) The system continues this monitoring cycle continuously, ensuring uninterrupted health supervision and proactive migraine management.

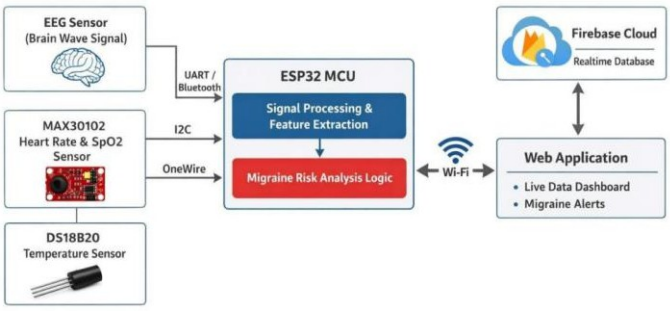


Figure1:BlockDiagram

V. HARDWARE IMPLEMENTATION

The hardware implementation of the proposed cloud-enabled IoT framework is designed to enable continuous, real-time monitoring of neurological and physiological parameters associated with migraine conditions. The system architecture integrates multiple biomedical sensors with a powerful microcontroller unit to ensure reliable data acquisition, processing,andwirelesstransmission.Allhardwarecomponents are carefully selected to achieve low power consumption, accuracy,portability,andscalability,makingthesystemsuitable for long-term monitoring applications.

The core of the hardware system is the ESP32 microcontroller, whichactsasthecentralcontrolandprocessingunit.Itinterfaces withallsensors,managesdataacquisition,performspreliminary signal processing, and handles wireless communication. The ESP32 is powered through a regulated 5V USB supply and internallyoperatesat3.3V,ensuringsafeandstableoperationof connected sensors. A common ground is maintained across all components to ensure signal integrity and accurate readings.

The EEG sensor is interfaced with the ESP32 through serial communication, enabling the acquisition of brainwave signals such as alpha, beta, theta, and delta waves. These signals are critical for identifying abnormal brain connectivity patterns associated with migraine onset. Due to the low amplitude and noise-sensitive nature of EEG signals, proper grounding and stable power supply are ensured to maintain signal quality.

Physiological monitoring is achieved using the MAX30102 sensor for heart rate and SpO_2 measurement and the DS18B20 sensor for body temperature monitoring. The MAX30102 communicates with the ESP32 via the I^2C protocol, allowing efficientandsynchronizeddatatransfer,whiletheDS18B20 uses a One-Wire protocol with a pull-up resistor for reliable temperaturereadings.Thesesensorshelpidentifyphysiological changesthatoftenaccompanymigraineepisodes,suchasaltered heart rate, oxygen levels, and temperature variations.

OncethesensordataiscollectedandprocessedbytheESP32,it istransmittedwirelesslyto the FirebaseRealtime Databaseusing the built-inWi-Fi module.

Thiseliminatesthe need for external communicationhardwareandsimplifiesthesystemdesign.The uploaded data is then accessed by a web-based dashboard for real-timevisualization,trendanalysis,andalertgeneration.The overall hardware setup ensures uninterrupted monitoring, real-time connectivity, and dependable performance for migraine management applications.

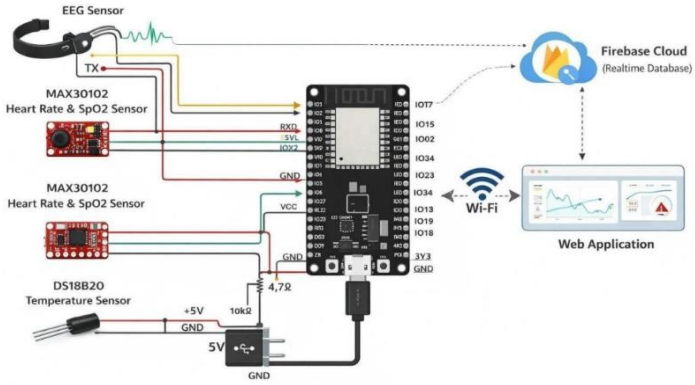


Figure2:CircuitDiagram COMPONENTS USED

1) EEGSensor(BrainWaveSensor)

Measureselectricalactivityofthebrainanddetectsdifferent brainwave patterns associated with neurological conditions such as migraines.

2) MAX30102HeartRateandSpO_2Sensor

Measuresheartrateandbloodoxygensaturationusingoptical sensing to monitor physiological changes linked to migraine attacks.

3) DS18B20TemperatureSensor

A digital temperature sensor that provides accurate body temperaturereadings,usefulforidentifyingmigrainetriggers.

4) ESP32Microcontroller

Acts as the main controller, collecting sensor data, performing processing,andtransmittinginformationtothecloudviaWi-Fi.

5) PowerSupply(5VUSBAdapter)

ProvidesstablepowertotheESP32andconnectedsensors, ensuring uninterrupted system operation.

6) FirebaseRealtimeDatabase

Acloudplatformusedtostore,synchronize,andmanagereal-time sensor data for remote access and monitoring.

7) WebApplication(MonitoringDashboard)

Displaysreal-timeEEGandphysiologicaldatagraphicallyand generates alerts for abnormal conditions.

VI. EXPERIMENTAL RESULTS AND PERFORMANCE EVALUATION

.Theexperimentalevaluationoftheproposedcloud-enabledIoT framework for real-time brain monitoring was carried out to examine its accuracy, reliability, responsiveness, and overall effectiveness in tracking migraine-related neurological and physiological parameters [1]. The system was tested under both controlled conditions and real-life usage scenarios to verify its Duringtheexperimentationphase,theEEGsensordemonstrated the ability to capture continuous brainwave signals, including alpha, beta, theta, and delta components. The recorded signals remained stable with minimal interruptions, indicating proper hardware interfacing and effective power management [3]. ObservablevariationsinEEGpatternsduringdifferentstatessuch as stress and rest further confirmed the system's sensitivity to changes in brain activity that may be associated with migraine onset [4]. Signal preprocessing and noise reduction techniques contributed significantly to improving data clarity, ensuring that the acquired signals were suitable for real-time monitoring and interpretation [5].

The performance of physiological sensors was evaluated by observing heart rate, SpO_2, and body temperature under varying conditions.TheMAX30102sensorproducedconsistentheartrate andoxygensaturationreadingswithnegligibledelay,evenduring moderate user movement [6]. Similarly, the DS18B20 temperature sensor maintained stable and accurate readings withinexpectedphysiologicallimits.Theseobservationsindicate that the system is capable of reliably capturing supporting physiological indicators that often correlate with migraine conditions [2].

Wireless communication performance was analyzed by examining data transmission latency and cloud synchronization efficiency. The ESP32 microcontroller, equipped with an integrated Wi-Fi module, ensured continuous and reliable communication with the cloud database [7]. The results showed that sensor data was updated on the web dashboard almost instantly, with only minor delays between acquisition and visualization.Suchreal-timeresponsivenessisessentialdetecting abnormal patterns and generating timely alerts [3].

Systemreliability was assessed through prolonged operation tests, during which the hardware functioned consistently without data loss,communicationfailure,orsensorerrors.Powerconsumption remained within acceptable limits, confirming the system's suitability for long-duration and wearable applications [1]. In addition,themodularnatureofthehardwaredesignallowedeasy maintenance and scalability, enabling future upgrades without significant modifications [4].

The alert mechanism was also evaluated to determine its effectiveness in identifying abnormal conditions. When predefinedthresholdvalueswereexceeded,thesystemgenerated prompt notifications on the monitoring dashboard. This functionality demonstrates the system's ability to provide early warningsandsupportproactiveintervention,whichisparticularly important in reducing the severity and frequency of migraine episodes [5].

Overall, the experimental findings confirm that the proposed system achieves reliable data acquisition, efficient cloud communication,real-timevisualization,andaccuratealert generation.Theperformanceevaluationestablishesitssuitability for continuous migraine monitoring and highlights its potential for future enhancements, including machine learning-based prediction and personalized healthcare analytics [6][7].

System reliability and durability were further evaluated through continuous operation over extended durations. The hardware maintained stable performance without significant overheating, signal degradation, or communication interruptions [1]. Power consumption analysis revealed that the system operates within efficient limits, making it suitable for portable and wearable applications.Themodulardesignalsosimplifiesmaintenanceand allows easy integration of additional sensors or upgrades, enhancing long-term usability [4].

Time	Heart Rate (BPM)	SpO_2 (%)	Temp (°C)	EEG Signal	Status
11:00	88	96	37.0	Beta↑	Mild Stress

11:10	89	96	37.1	Beta↑	Mild Stress
11:20	90	96	37.1	Beta↑	Mild Stress
11:30	92	95	37.2	Beta↑	Mild Stress
11:40	94	95	37.2	Beta↑	Mild Stress
11:50	95	95	37.3	Beta ↑	Mild Stress

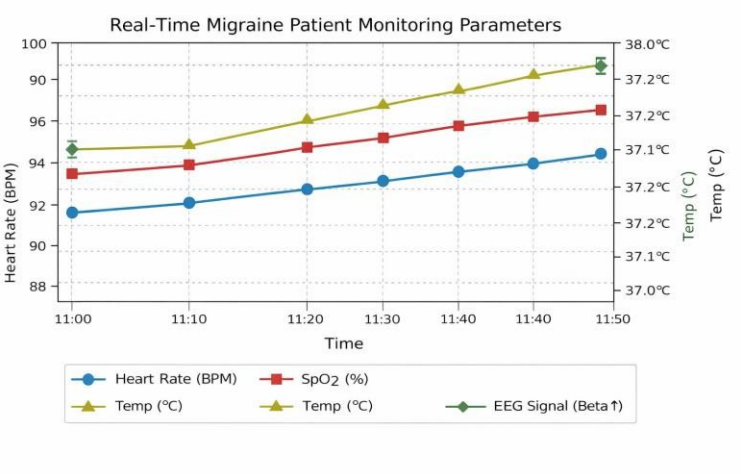


Figure3:Real-TimeMigrainePatientMonitoringParameters

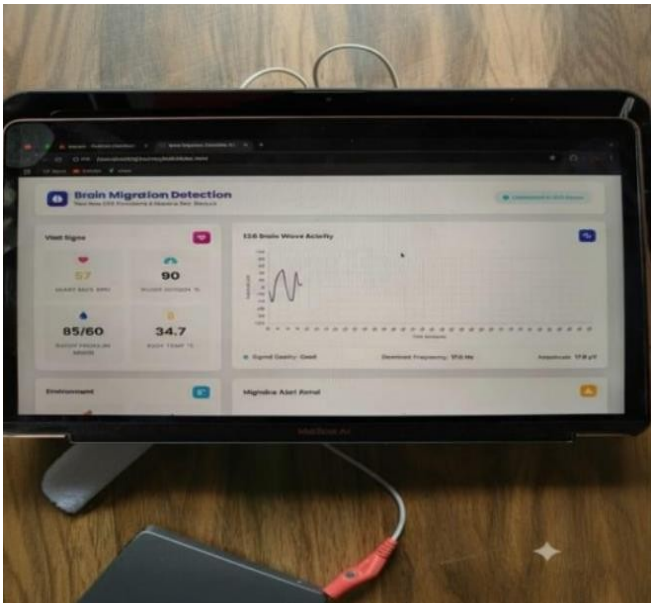


Figure4:GraphicalRepresentationonthescreen

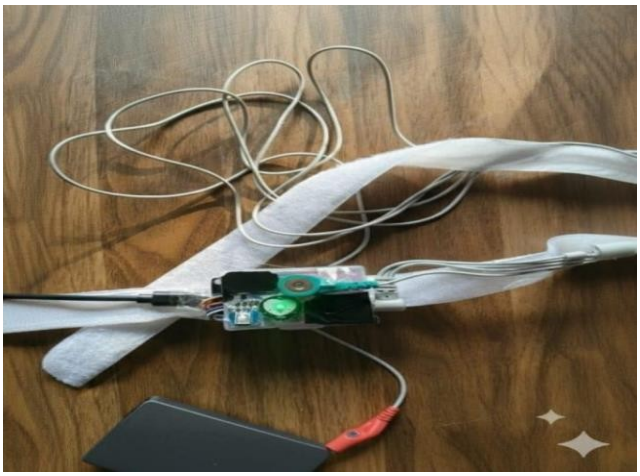


Figure5:CircuitrySetup

VII. CONCLUSION


The proposed cloud-enabled IoT framework for real-time brain monitoring of migraine patients presents an effective and innovative solution to the limitations of conventional migraine diagnosis and management methods. By integrating EEG-based brainactivitymonitoringwithphysiologicalsensorssuchasheart rate, SpO_2, and temperature, the system enables continuous, objective, and real-time health assessment. The use of an ESP32 microcontroller with built-in Wi-Fi and a cloud-based platform ensures reliable data acquisition, processing, and remote accessibility, making the system suitable for long-term monitoring and preventive healthcare applications.

Experimental evaluation demonstrates that the system is capable of capturing stable EEG signals and accurate physiological data, transmitting information efficiently to the cloud, and presenting meaningful insights through a web-based dashboard. The real-time alert mechanism enhances early detection of abnormal patterns that may indicate an impending migraine episode, allowingtimelyinterventionandimprovedpatientresponse.This proactive monitoring approach significantlyreduces dependence on subjective self-reporting and enhances clinical decision-making.

Overall,theproposedsystemoffersascalable,cost-effective,and user-friendlyframeworkformigrainemanagement.Itbridgesthe gap between wearable health sensing and cloud-based analytics, paving the way for personalized and data-driven healthcare solutions. With future enhancements such as advanced signal analysis and intelligent prediction models, the system holds strong potential for improving the quality of life of migraine sufferers and advancing smart neurological healthcare systems.

REFERENCES

[1] Sundaravadivel, P.; Kougianos, E.; Mohanty, S.P.; Ganapathiraju, M.K. Everything You Wanted to Know about Smart Health Care: Evaluating the Different Technologies and Components of the Internet of Things for Better Health. IEEE Consum. Electron. Mag. 2017.
[2] Salayma, M.; Al-Dubai, A.; Romdhani, I.; Nasser, Y. Wireless Body Area Network (WBAN) A Survey on Reliability, Fault Tolerance, and Technologies Coexistence. ACM Comput. Surv. 2017.
[3] Lombardo, L.; Corbellini, S.; Parvis, M.; Elsayed, A.; Angelini, E.; Grassini, S. Wireless Sensor Network for Distributed Environmental Monitoring. IEEE Trans. Instrum. Meas. 2017.
[4] Yetisen, A.K.; Martinez-Hurtado, J.L.; Ünal, B.; Khademhosseini, A.; Butt, H. Wearables in Medicine. Adv. Mater. 2018.
[5] Khan, R.A.; Pathan, A.S.K. The state-of-the-art wireless body areasensornetworks:Asurvey.Int.J.Distrib.Sens.Netw.2018.
[6] Qureshi, F.; Krishnan, S. Wearable Hardware Design for the Internet of Medical Things (IoMT). Sensors 2018, 18, 3812.
[7] Redfern, J. Can Older Adults Benefit from Smart Devices, Wearables,andOtherDigitalHealthOptionstoEnhanceCardiac Rehabilitation? Clin. Geriatr. Med. 2019.
[8] Ousaka, D.; Sakano, N.; Morita, M.; Shuku, T.; Sanou, K.; Kasahara, S.; Oozawa, S. A new approach to prevent critical cardiac accidents in athletes by real-time electrocardiographic tele-monitoring system: Initial trial in full marathon. J. Cardiol. Cases2019.
[9] Biswas,D.;Simões-Capela,N.;VanHoof,C.;VanHellepute,N. HeartRateEstimationFromWrist-WornPhotoplethysmography: A Review. IEEE Sens. J. 2019.
[10] Dian,F.J.;Vahidnia, R.;Rahmati, A.WearablesandtheInternet of Things (IoT), Applications, Opportunities, and Challenges: A Survey. IEEE Access 2020.

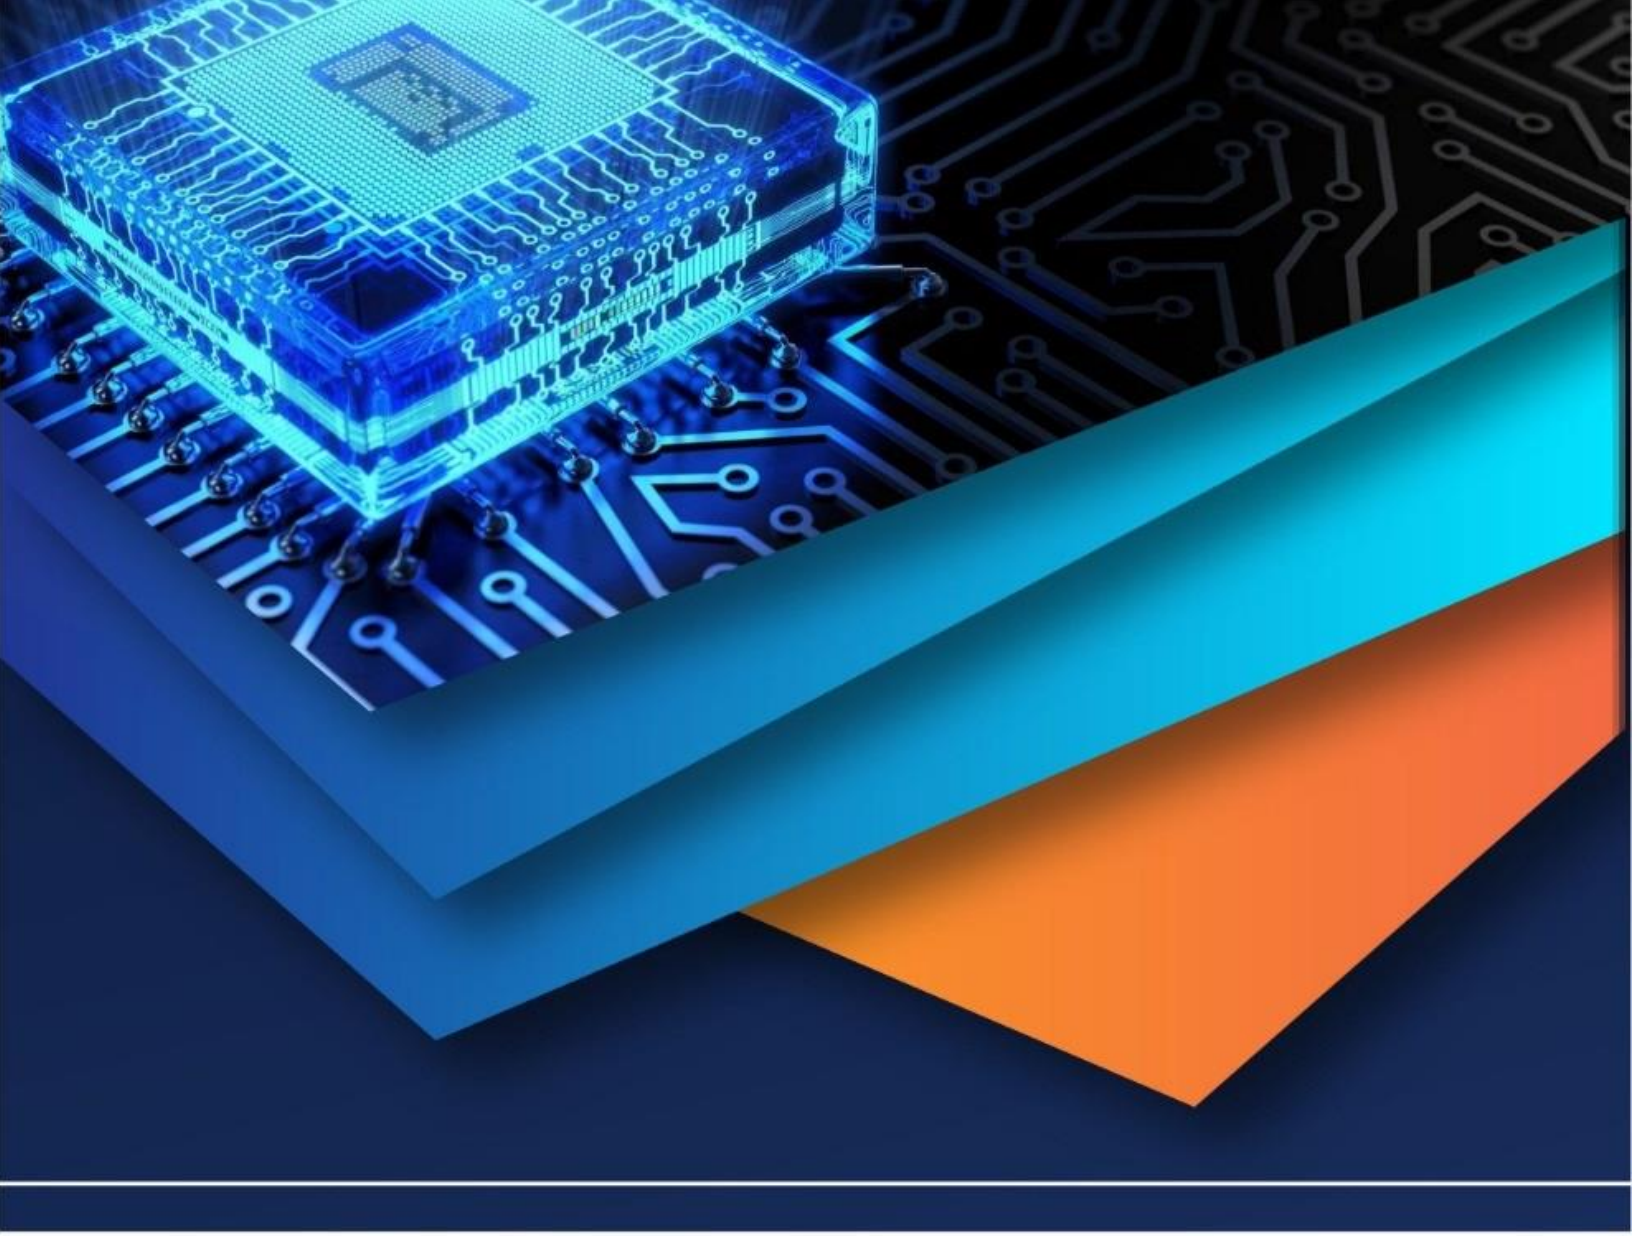

10.22214/IJRASET

45.98

IMPACT FACTOR: 7.129

IMPACT FACTOR: 7.429

INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089 (24*7 Support on Whatsapp)