



# **iJRASET**

International Journal For Research in  
Applied Science and Engineering Technology



---

# **INTERNATIONAL JOURNAL FOR RESEARCH**

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume: 5**

**Issue: IX**

**Month of publication: September 2017**

**DOI:**

**[www.ijraset.com](http://www.ijraset.com)**

**Call: ☎ 08813907089**

**E-mail ID: [ijraset@gmail.com](mailto:ijraset@gmail.com)**

# Defected Ground Multi-Band Antenna for Surface Movement Radars

Ankit kumar Patel<sup>1</sup>, Akhilesh Kumar Pandey<sup>2</sup>, Shekhar Yadav<sup>3</sup>, Komal Jaiswal<sup>4</sup>, Rajeev Singh<sup>5</sup>

<sup>1, 2, 3, 4, 5</sup> Department of Electronics and Communication, University of Allahabad, Allahabad, India.

**Abstract:** This paper presents a compact multiband micro strip patch antenna with defected ground structure (DGS). The patch and ground are made on top and back side of the FR-4 substrate. The designed antenna has multiple resonating bands because of a loaded slot on ground plane. Designed antenna operates in the frequency bands of 16.9–21.1 GHz, 23.4–25.1 GHz and 28.65–37.56 GHz with centre frequencies of 20, 24, and 32 GHz respectively. The fractional bandwidth of designed antenna is 21%, 7%, and 27.8% at centre frequencies orderly. These resonating bands are applicable in surface movement radars (SARs) and satellite communications. The group delay of the proposed antenna is in the range of -0.5 n-sec to 0.5 n-sec for all bands. It is shown that the designed antenna has appropriate gain and good radiation efficiency over operating bands. The frequency ratio of antenna for proposed dimension is above 1.2 and VSWR is below 2 for all bands.

**Keywords:** DGS, multiband antenna, SAR antenna, HFSS.


## I INTRODUCTION

Microstrip antennas are unduly renounced antennas for transmitting and receiving electromagnetic waves. These antennas have ability to integrate with printed and active devices [1]. These antennas find applicability in military applications like missile, fighter planes and rockets as well as commercial applications like global positioning system (GPS), remote sensing and direct broadcasting [2]. These days, the avail of micro strip antennas are not only bounded in single band operations but also scaled for multiband operations[3-4]. Defected ground structure (DGS) is prominently used in high frequencies antenna design to reduce the antenna size and to enhance the bandwidth [5]. The slots and notches in the ground plane disturb the current distribution in the ground plane and increase the effective inductance and capacitance of input impedance that results to enhancement in bandwidth [6]. In former decennary several multiband antennas for radars and satellite communications are introduced. A multi-band array antennas operating at either Ku- band or Ka-band with the need of switching for air- platforms has been reported[7]. A microstrip patch antenna operated at two distinct resonating frequencies around 20 GHz has been reported for K-band applications [8]. A stacked CPW-fed antenna operated in Ku, K, and Ka-bands has been presented for satellite applications [9].


In this paper a defected ground multi-band operated in the frequency range of 15 - 40 GHz has been presented. The rectangular defect in the ground plane is responsible for multi-band behavior of designed antenna. The designed antenna is simulated using HFSS simulation software and has good antenna characteristics.

## II ANTENNA DESIGN

Designed antenna structure shown in fig.1 Feed patch is made on FR-4 substrate with dielectric constant of 4.4 and loss tangent of 0.02 [cf. fig. 1]. A rectangular DGS is loaded on the ground plane of substrate. The geometrical parameters of the proposed antenna are mentioned in Table 1.

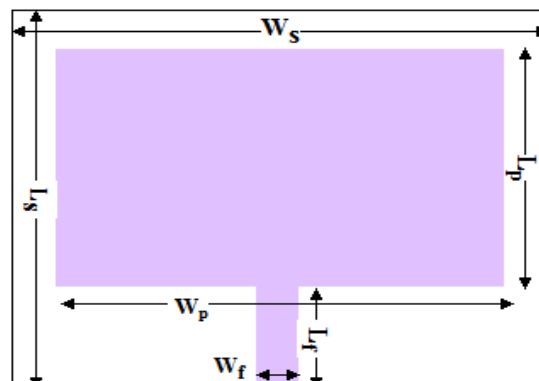

(a)

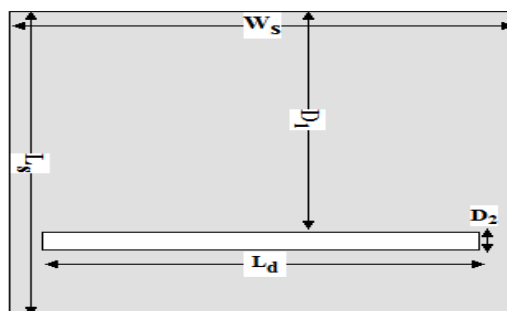

(b)

Fig. 1: Geometry of proposed antenna. (a) Top view of proposed antenna, (b)Bottom view of proposed antenna

TABLE 1 :Geometrical Parameters of proposed antenna

Antenna Parameters	Value
Length of substrate ( $L_s$ )	20mm
Width of substrate ( $W_s$ )	20mm
Length of patch ( $L_p$ )	14mm
Width of patch ( $W_p$ )	18mm
Length of feed line ( $L_f$ )	5mm
Width of feed line ( $W_f$ )	2mm
Length of slot in ground plane( $L_d$ )	18mm
Width of slot in ground plane ( $W_d$ )	1mm
$D_1$	14.5mm
$D_2$	1mm

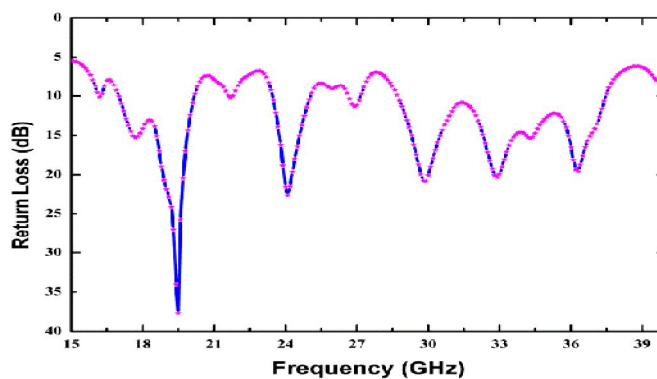


Fig. 2: Return loss vs frequency plot.

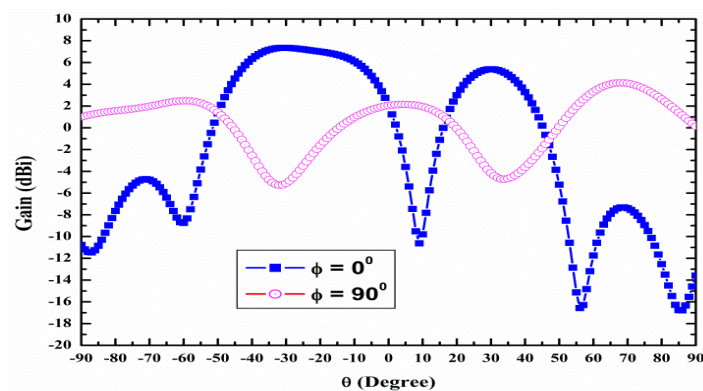


Fig. 3: Gain vs Theta plot for 20 GHz resonance frequency



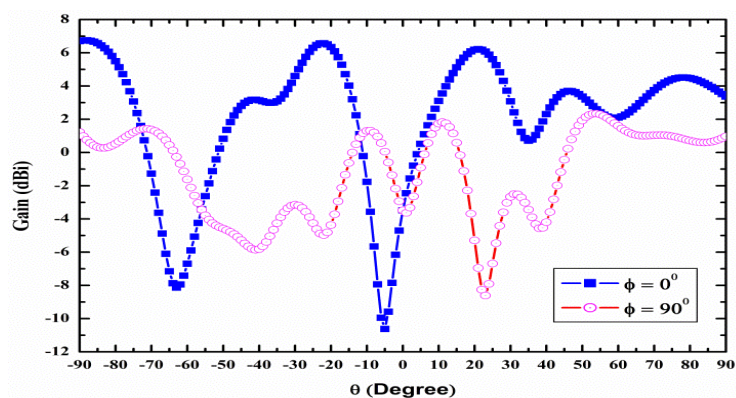


Fig. 4: Gain vs Theta plot for 24 GHz resonance frequency

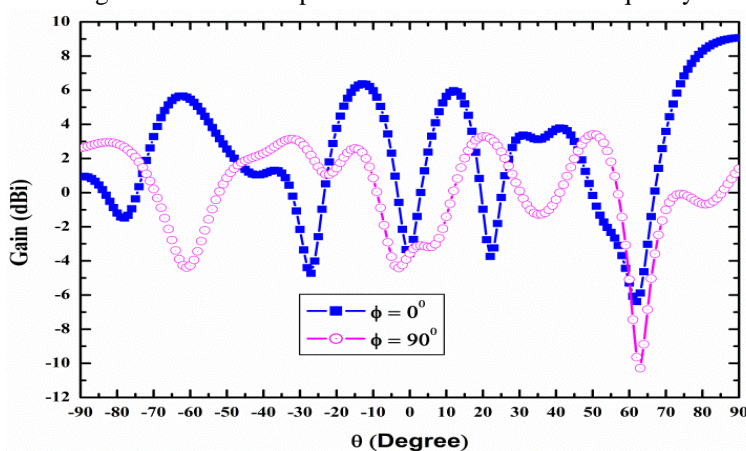


Fig. 5: Gain vs Theta plot for 32 GHz resonance frequency

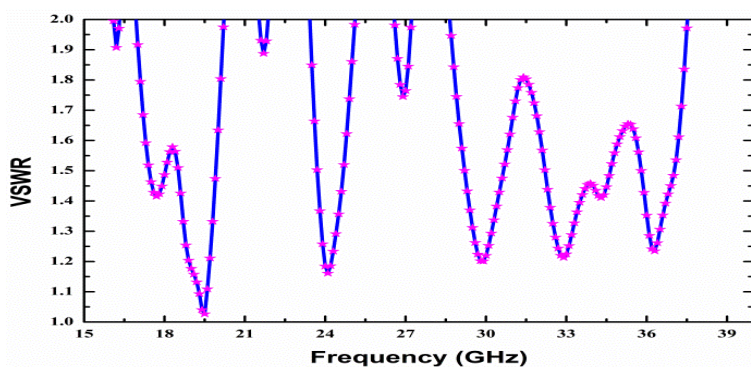


Fig. 6: VSWR vs frequency plot

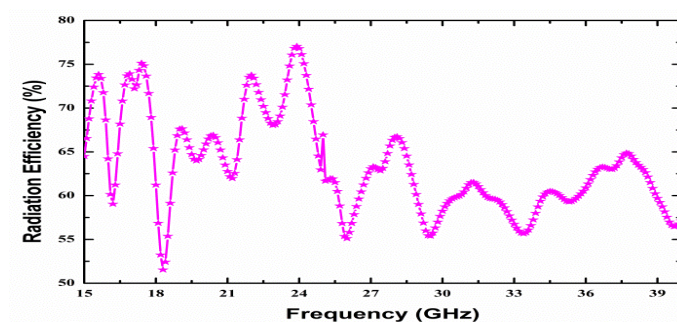


Fig. 7: Radiation efficiency vs frequency plot.

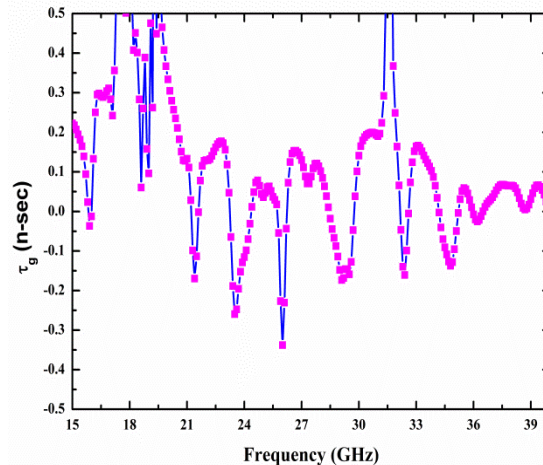


Fig. 8: Group delay vs frequency plot

### III RESULT ANALYSIS

The proposed antenna is designed and simulated using HFSS.v13 software for high frequency application at range of 17 GHz to 37 GHz frequency. From the simulation of proposed antenna, three resonating bands are obtained at resonance frequency of 20 GHz, 24 GHz and 32 GHz with impedance bandwidth of 21%, 7% and 27.8% respectively shown in figure 2. From the figure it is seen that the first and third band is obtained wide band by using a rectangular defected ground structure.

Figure 3, figure 4 and figure 5 show the gain vs theta plot for 20GHz, 24 GHz and 32GHz resonant frequency respectively. The peak gain is obtained at  $\phi=0^\circ$  for all three band. For 20GHz, the peak gain is obtained 7dBi at  $\theta = -40^\circ$ , and for 24 GHz the peak gain is obtained 7dBi at  $\theta = -25^\circ$  and  $+25^\circ$  shown in figure 3 and 4 respectively. For 32 GHz the peak gain is obtained 9dBi at  $\theta = 90^\circ$  shown in figure 5.

The mag. of VSWR at 20 GHz, 24 GHz and 32GHz resonating band is obtained less than 1.5 Shown in figure 6. The radiation efficiency and group delay plot are shown in figure 7 and figure 8 respectively. Figure 7 shows that the average radiation efficiency is obtained 75% at lower frequency range (15 – 25 GHz) and for higher frequency range (25-39 GHz) the average radiation efficiency is obtained up to 65%.

The group delay plot of the proposed antenna is shown in figure 8 and from the figure it is seen that the group delay is vary between -0.4 to 0.5 nsec.

### IV CONCLUSION

In this paper, a simple patch antenna with defected ground structure is presented. The proposed antenna obtained multi and wide band with high gain due to its DGS structure at higher frequency for surface movement radar applications.

### REFERENCES

- [1] R. Garg, P. Bhartia, I. Bahl, A. Ittipiboon: Microstrip Antenna Design Handbook. Artech House, Norwood (2001).
- [2] K.S. Beenamol: Microstrip Antenna Designs for Radar Applications. DRDO Science Spectrum (March 2009), 84-86 (2009).
- [3] A. A. Deshmukh, K. P. Ray: Compact broadband slotted rectangular microstrip antenna. IEEE Antennas and Wireless Propagation Letters. 8, 1410-1413 (2009).
- [4] Lee, Y. C., Sun, J. S.: A new printed antenna for multiband wireless applications. IEEE Antennas and Wireless Propagation Letters. 8, 402-404 (2009)
- [5] R. S. Tahim, J. Foshee: Multi-band Phased Array Antennas for Air-platforms. IEEE International Symposium (2002) 4, 204-207 (2002)
- [6] L. H. Weng, Y.-C. Guo, X.-W. Shi, and X.-Q. Chen: An overview on defected ground structure. Progress in Electromagnetics Research. 7, 173-189 (2008).
- [7] S. Saththamkul, S. Puntheeranurak, C. Benjankaprasert, N. Anantrasirichai, and T. Wakabayashi: Improvement microstrip patch antenna for ultra-wideband by C-shaped wide slot. IEEE International Conference on Control Automation and Systems (ICCAS), 2214-2217 (2010).
- [8] Benjamin Rohrdantz, Chinh Luong, Arne F. Jacob: A frequency and polarization reconfigurable patch antenna at K-band. IEEE Microwave Conference (44th European), 49 - 52 (2014)
- [9] A. Naghar, A. V. Alejos, M. Garcia Sanchez, Otman Aghzout: Stacked CPW-fed antenna for satellite applications with gain enhancement. IEEE International Symposium on Antennas and Propagation, 2421 - 2422 (2015).

### AUTHOR



Ankit Kumar Patel was born on February 20, 1987, in Varanasi, U.P., India. He received the B.Tech degree in Electronics & Communication Engineering from V.B.S. Purvanchal University Jaunpur, U.P., India in 2008, and M.Tech degree in Electronics Engineering (Communication Technology) from University of Allahabad, Allahabad,

U.P., India in 2012. He is currently working toward the D. Phil degree in Electronics and Communication Engineering from University of Allahabad, Allahabad, U.P., India. His current research interests include microwave filters and microstrip patch antenna.



AKHILESH KUMAR PANDEY was born in Allahabad district of U.P. in 1983. He obtained his B.Sc. in Physics and Mathematics in 2004 from University of Allahabad. B.Tech. degree in Electronics & Communication Engineering in 2007 and M.Tech. degree in Electronics Engineering in 2011 both from the Department of Electronics and Communication, University of Allahabad, Allahabad (U.P)-India. Currently he is pursuing D.Phil. degree from University of Allahabad. His research interests include antenna, simulation of RF devices and circuits and its applications.



ShekharYadav was born on December 30, 1992, in Allahabad, U.P., India. He received the B.Tech degree in Electronics & Communication Engineering from U.P.TechnicalUniversityLucknow, U.P., India in 2011, and M.Tech degree in Electronics Engineering (Communication Technology) from University of Allahabad, Allahabad, U.P., India in 2013. He is currently working toward the D.Phil degree in Electronics and Communication Engineering from University of Allahabad, Allahabad,U.P., India. His current research interests include Study And Investigation Of Microstrip Patch Antennas For Wide-Band Applications.



RAJEEV SINGH was born in Azamgarh district of U.P. in 1968. He received B.Sc. degree in 1989, B.Tech. in Electronics & Telecommunications in 1992, M.Tech. in Electronics Engineering in 1994 all from University of Allahabad. He obtained his D.Phil. degree in 2008 from University of Allahabad. He joined as Lecturer in the Department of Electronics and Communication, University of Allahabad, Allahabad (U.P)-India in 1996, became Sr. Lecturer in 2002, Reader in 2007 and Associate Professor in 2010. He has received German Academic Exchange Service Fellowship (DAAD) in the year 2003. He has worked for his D.Phil. research work during DAAD fellowship in the University of Potsdam, Germany from June 2003 to December 2004. He again visited University of Potsdam in the year 2008 under re-invitation program of DAAD. His area of research is charge storing polymers, polymer

electronics, photo-stimulated charge profile measurements, thermal diffusivity of polymers, Microwave and RF device and circuit simulation and its applications.





10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)