



# **iJRASET**

International Journal For Research in  
Applied Science and Engineering Technology



---

# **INTERNATIONAL JOURNAL FOR RESEARCH**

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume: 5      Issue: X      Month of publication: October 2017**

**DOI: <http://doi.org/10.22214/ijraset.2017.10271>**

**[www.ijraset.com](http://www.ijraset.com)**

**Call: ☎ 08813907089**

**E-mail ID: [ijraset@gmail.com](mailto:ijraset@gmail.com)**

# Compact Multiband Rectangular Microstrip Patch Antenna for S, C, And X Band

Anjali<sup>1</sup>, Neha Garg<sup>2</sup>

<sup>1,2</sup> Department of Electronics and Communication, Ajay Kumar Garg Engineering College, Ghaziabad

**Abstract:** This paper introduces the novel depiction of rectangular microstrip patch antenna on an affordable FR4 substrate of dielectric constant 4.4 and loss tangent 0.02. It has dimension of 40mm X 40 mm X 1.6 mm. The proposed multiband microstrip patch antenna can resonate at 2.55 GHz, 3.96 GHz, 5.38 GHz, 6.37 GHz, 7.78 GHz, 9.34 GHz, 10.89 GHz, 11.60 GHz, 12.17 GHz and 14.43 GHz. To achieve multiband frequency, three rectangular slots have been cut on the patch. The procured bandwidth is satisfactory and voltage standing wave ratio (VSWR) is less than 1.5. The execution of multiband antenna is simulated and attested by estimation. On the contrary, the proficiency of proposed multiband patch antenna has been justified through surface current distribution and efficiency of measured result.

**Keywords:** microstrip patch antenna, multiband, gain, U-Slot patch, bandwidth

## I. INTRODUCTION

Recent advancement in wireless communication have proliferated the requirement of antenna with compact size and low cost, that can work at various frequencies with enough bandwidth. Microstrip patch antenna has benefit of low profile, light weight, and affordable cost. There are numerous and well known methods to increase the bandwidth of antennas, including increase of thickness, the use of low dielectric substrate, slotted patch antenna, the use of various impedance matching and feeding techniques, and the use of multiple resonators[1]. The design of multi-band antennas was the subject of several research studies [2],[3]. The technology insertion slots is used [4],[5],[6]. In [7], a dual band antenna for GSM1800/1900/ UMTS/ LTE/UWB. In [8], a triple band single slotted microstrip patch antenna is presented for WLAN and WiMAX application. In [9], the authors propose a microstrip patch antenna for LTE. In [10] design of planar monopole antenna is designed using L and U shaped slot for WLAN/WiMAX Applications. Microstrip patch antenna had been designed for S and X band [11], [12]. This paper presents microstrip patch antenna with three slots on patch and two symmetrical U-shaped slots for multiband at 1 GHz. The design employs 50  $\Omega$  microstrip line feeding and simulated using High Frequency Structure Simulator (HFSS). The proposed design can achieve the reflected power is less than -16 dB for all resonant frequencies. The VSWR is lies between 1 and 2 and very good gain is obtained.

## II. ANTENNA DESIGN

The structure of proposed multiband microstrip patch antenna is shown in Fig. 1 (a) and (b), which is designed on FR4 with dielectric constant of 4.4 and loss tangent of 0.02. The total volume of the proposed antenna is about 40×40×1.6 mm<sup>3</sup> and it resonates for 2.55 GHz, 3.96 GHz, 5.38 GHz, 6.37 GHz, 7.78 GHz, 9.34 GHz, 10.89 GHz, 11.60 GHz, 12.17 GHz, and 14.43 GHz. The dimension of the proposed microstrip patch antenna top view is displayed in Table I and back side view is shown in Table II. The top and back side view of proposed design is shown in Fig. 2(a) and (b), respectively.

Several methods are available in the literature to feed the signal source, in which insert fed technique is easier for fabrication. To achieve the multiband operation, a slot can be inserted in a ground plane with a dimension of 40×30.5 mm<sup>2</sup>. In order to obtain the lower return losses

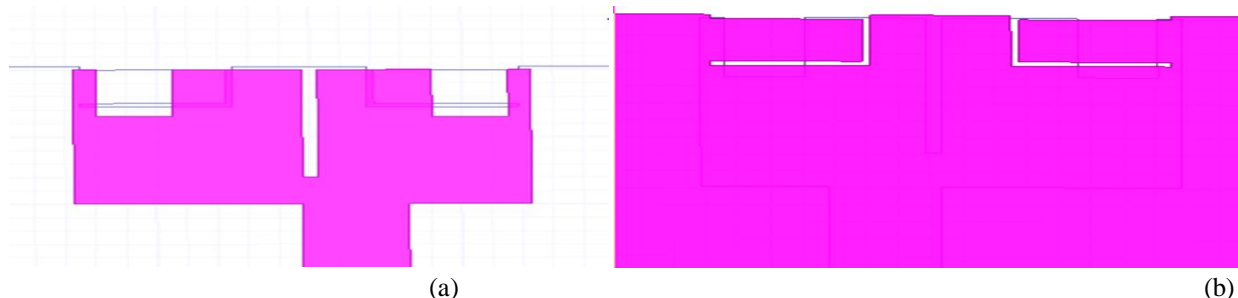


Fig 1 Design of proposed microstrip patch antenna: (a) top side view (b) back side view

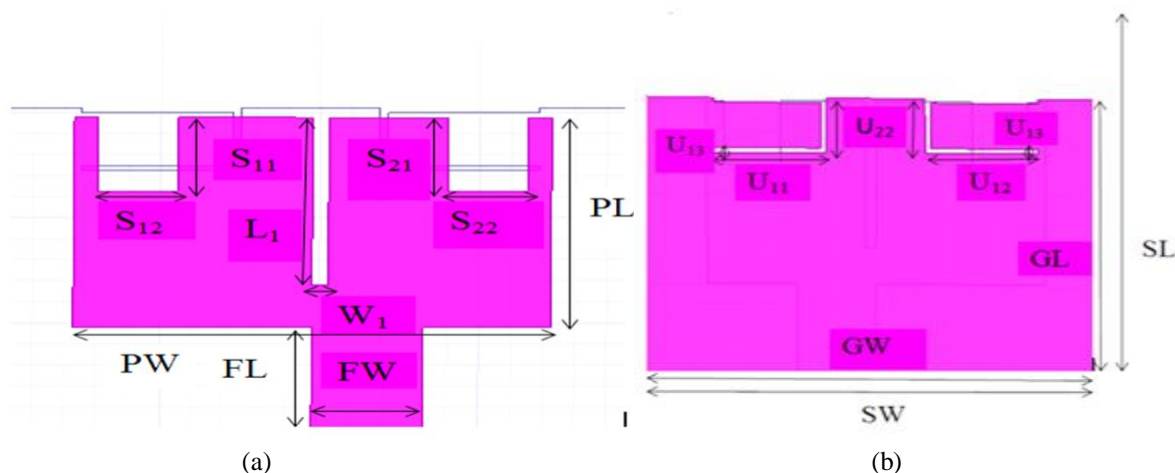


Fig 2 Dimension of proposed microstrip patch antenna: (a) top side view (b) back side view.

Table I Parameter of top side view of antenna

| PARAMETERS             | VALUES(mm) |
|------------------------|------------|
| Patch length(PL)       | 20         |
| Patch Width(PW)        | 30         |
| Feed Length(FL)        | 10         |
| Feed Width(FW)         | 7          |
| Slot(S <sub>11</sub> ) | 7          |
| Slot(S <sub>12</sub> ) | 5          |
| Slot(S <sub>21</sub> ) | 7          |
| Slot(S <sub>22</sub> ) | 5          |
| Slot(L <sub>1</sub> )  | 16         |
| Slot(W <sub>1</sub> )  | 1          |

Table II Parameter of Back view

| Parameter            | VALUE |
|----------------------|-------|
| Ground Length(GL)    | 30.5  |
| Ground Width(GW)     | 40    |
| Substrate Length(SL) | 40    |
| Substrate Width(SW)  | 40    |
| U <sub>11</sub>      | 10    |
| U <sub>12</sub>      | 10    |
| U <sub>13</sub>      | 0.5   |
| U <sub>22</sub>      | 5     |

### III. SIMULATION RESULT

The simulation results are carried out to test the performance of proposed microstrip patch antenna. The simulation results of reflected power and VSWR of the proposed microstrip patch antenna are shown in Fig. 3. This microstrip patch antenna simultaneously resonates for the frequency 2.55 GHz, 3.96 GHz, 5.38 GHz, 6.37 GHz, 7.78 GHz. It can be seen from Fig. 3, a very low return loss of -31.96 can be achieved at the frequency of 11.60 GHz. The outcome of simulated results of return loss confirms the good performance for proposed design of multiband patch antenna.

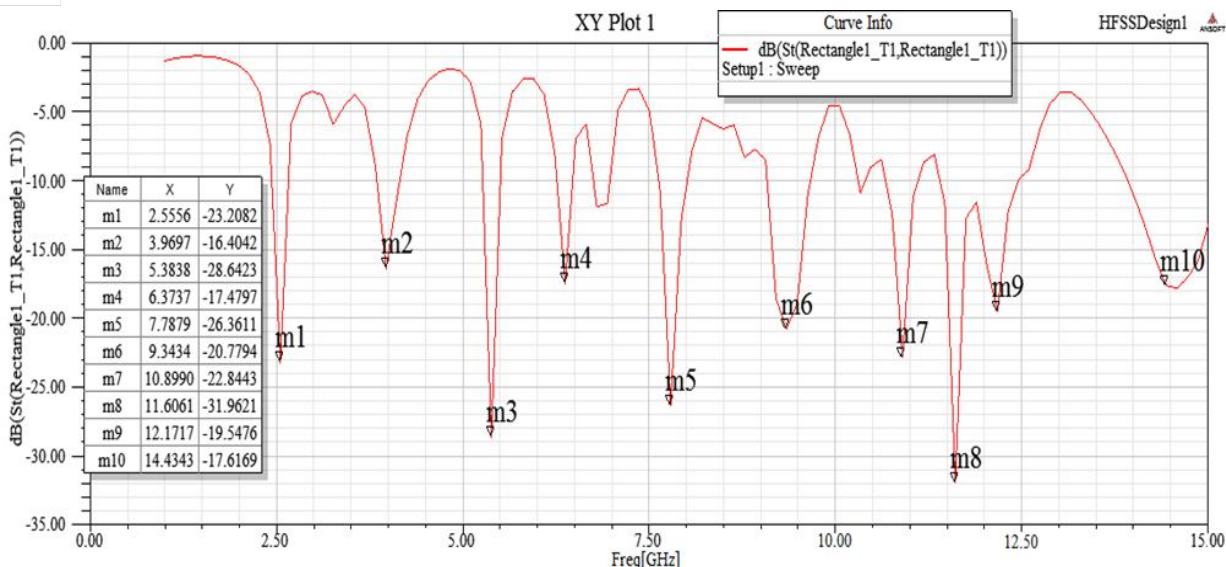


Fig. 3 Simulated results of proposed patch antenna for Return loss

Fig. 4 shows the gain for various frequencies. It can be seen from Fig. 4, 8.3 dB is the maximum gain obtained at 12.1 GHz.

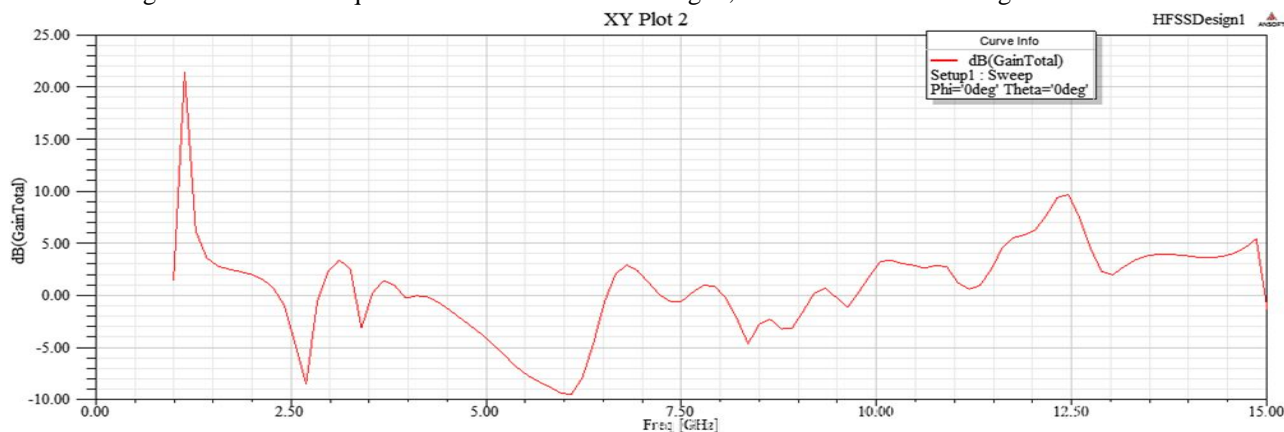


Fig 4 Simulated result of proposed patch antenna for Gain

Under various resonant frequencies, the performances of return loss and gain displayed in Table III.

Table III Return loss and Gain at various frequency

| Resonance Frequency | Return Loss | Gain    |
|---------------------|-------------|---------|
| 2.55                | -23.20      | Below 0 |
| 3.96                | -16.40      | 0.30    |
| 5.38                | -28.64      | Below 0 |
| 6.37                | -17.47      | Below 0 |
| 7.78                | -26.36      | 1.3     |
| 9.34                | -20.77      | 0.81    |
| 10.89               | -22.84      | 3.1     |
| 11.60               | -31.96      | 5.07    |
| 12.17               | -19.54      | 8.3     |
| 14.43               | -17.61      | 3.7     |

The performance of VSWR for the proposed microstrip patch antenna is shown in Fig. 5, which lies between 1 and 2 for all resonant frequency with minimum reflected power of less than -16 dB. Table IV shows VSWR at various frequency.

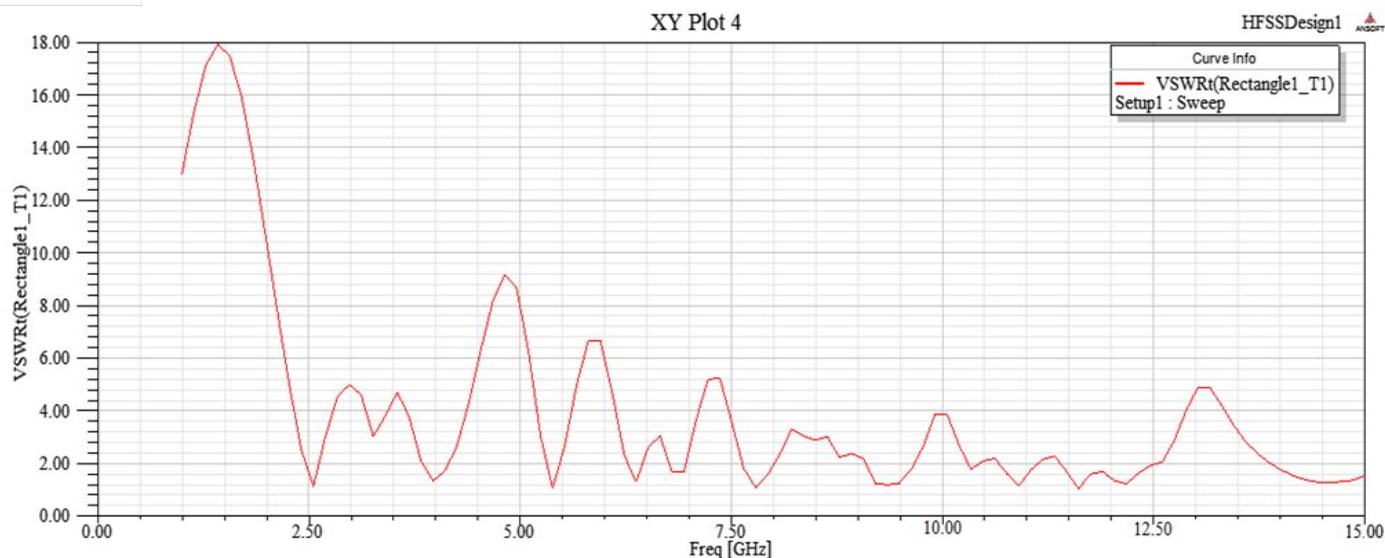
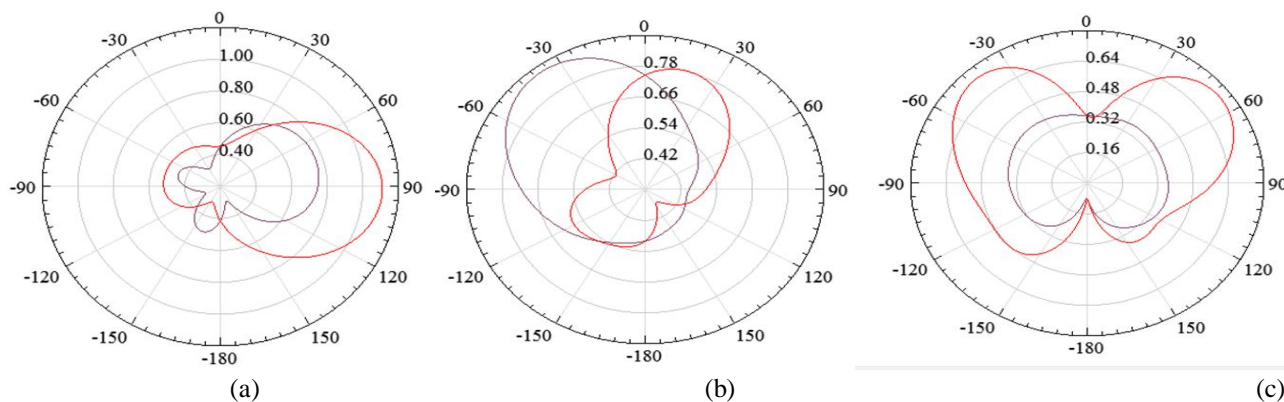


Fig 5 Simulated VSWR of proposed antenna

Table IV VSWR at various frequency.

| Resonance Frequency | VSWR |
|---------------------|------|
| 2.55                | 1.31 |
| 3.96                | 1.41 |
| 5.38                | 1.11 |
| 6.37                | 1.36 |
| 7.78                | 1.11 |
| 9.34                | 1.16 |
| 10.89               | 1.16 |
| 11.60               | 1.15 |
| 12.17               | 1.26 |
| 14.43               | 1.41 |

Fig. 6 shows the radiation pattern for the microstrip patch antenna, (a).2.55 GHz, (b).3.96 GHz, (c). 5.38 GHz, (d). 6.37 GHz, (e). 7.78 GHz, (f). 9.34 GHz, (g). 10.89 GHz, (h) 11.60 GHz, (i) 12.17 GHz, and (j) 14.43 GHz. Omni directional radiation pattern is obtained for 11.60 GHz, 12.17 GHz and 14.43 GHz resonant frequencies. Bi-directional radiation pattern is obtained for 5.38 GHz, 6.37 GHz and 9.34 GHz resonant frequencies. Directional radiation pattern is obtained for 2.55 GHz, 3.96 GHz, 7.78 GHz and 10.89 GHz resonant frequencies.



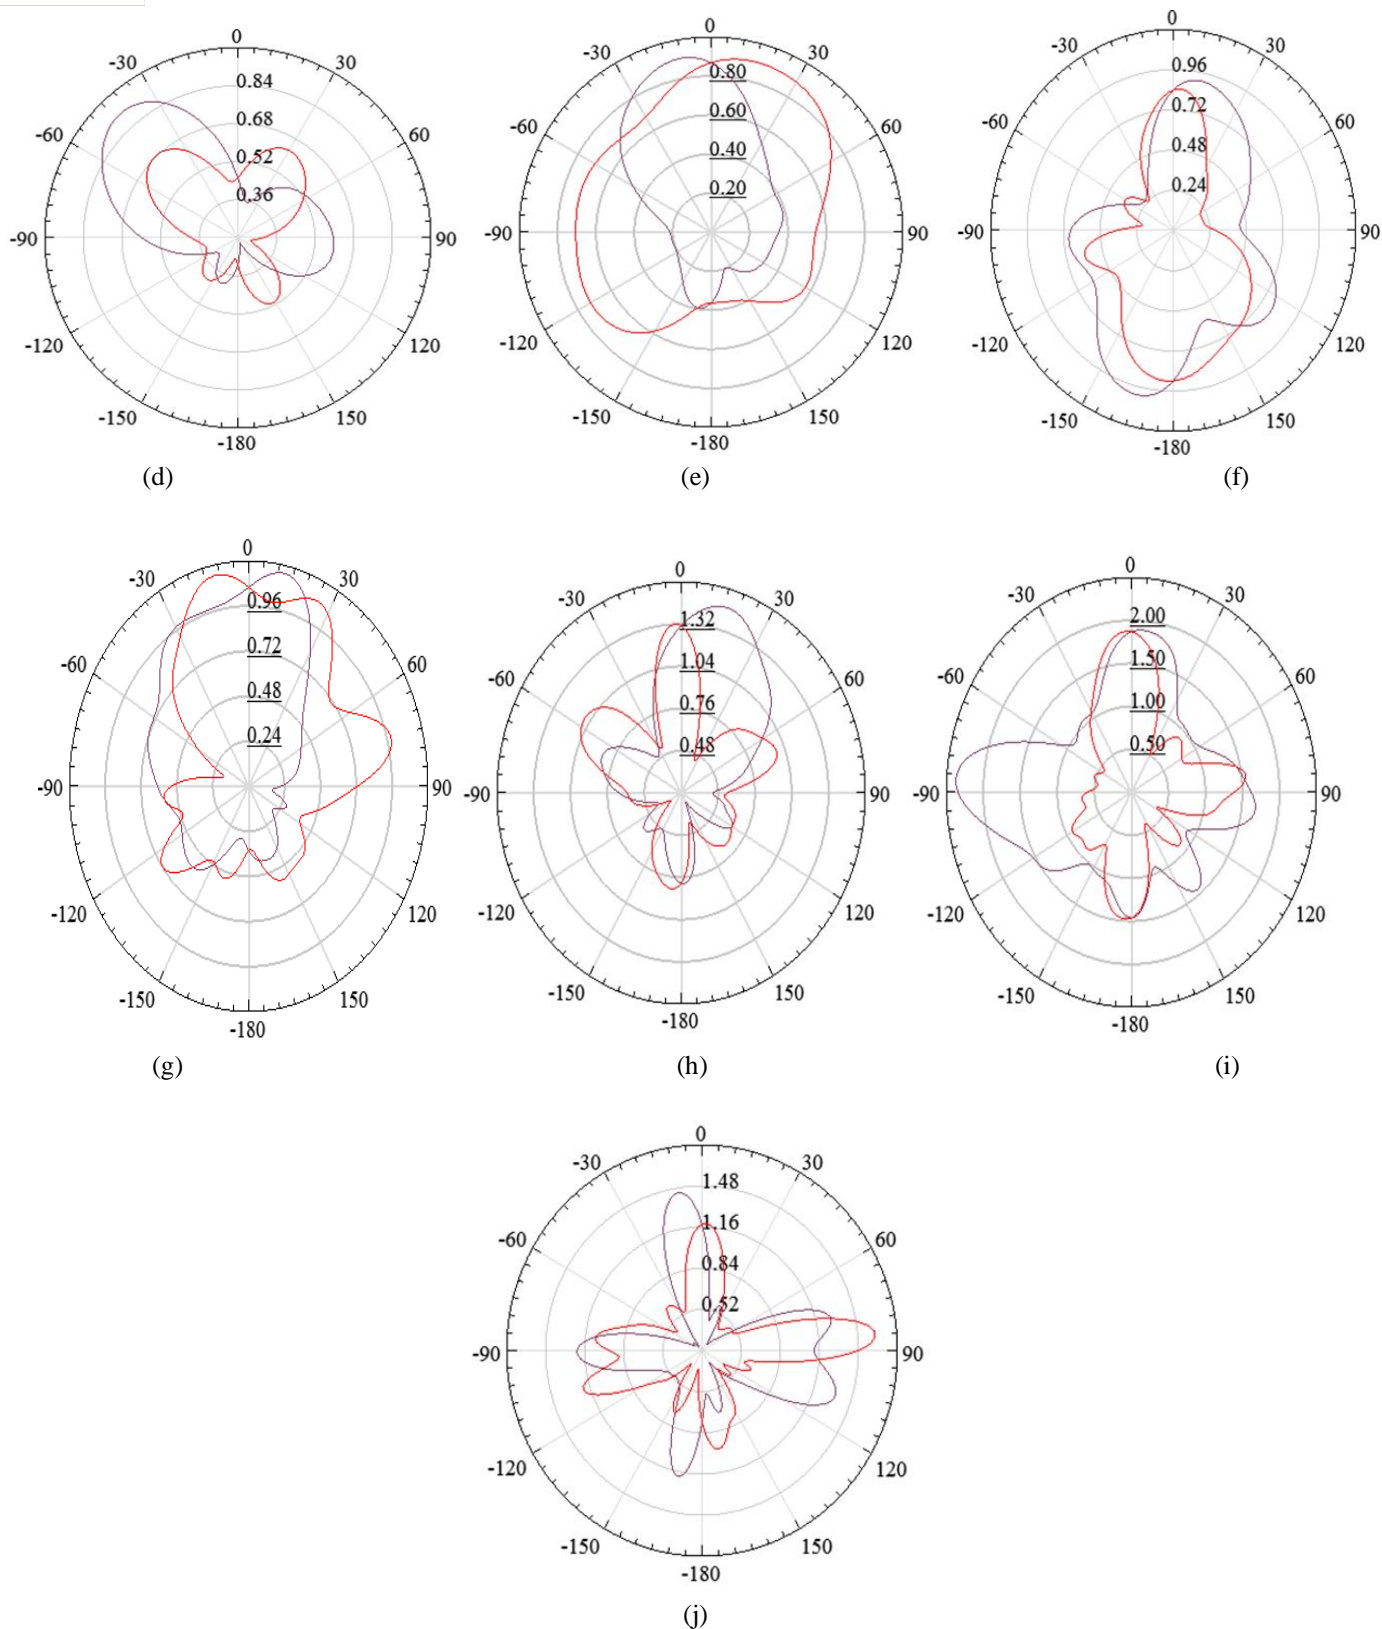


Fig. 6 Radiation pattern for the microstrip patch antenna (a).2.55 GHz, (b).3.96 GHz, (c). 5.38 GHz, (d). 6.37 GHz, (e). 7.78 GHz, (f). 9.34 GHz, (g). 10.89 GHz, (h) 11.60 GHz, (i) 12.17 GHz, and (j) 14.43 GHz

Fig. 7 shows the surface current distribution on the microstrip patch antenna is, 11.60 GHz, 5.38 GHz, and 7.78 GHz.

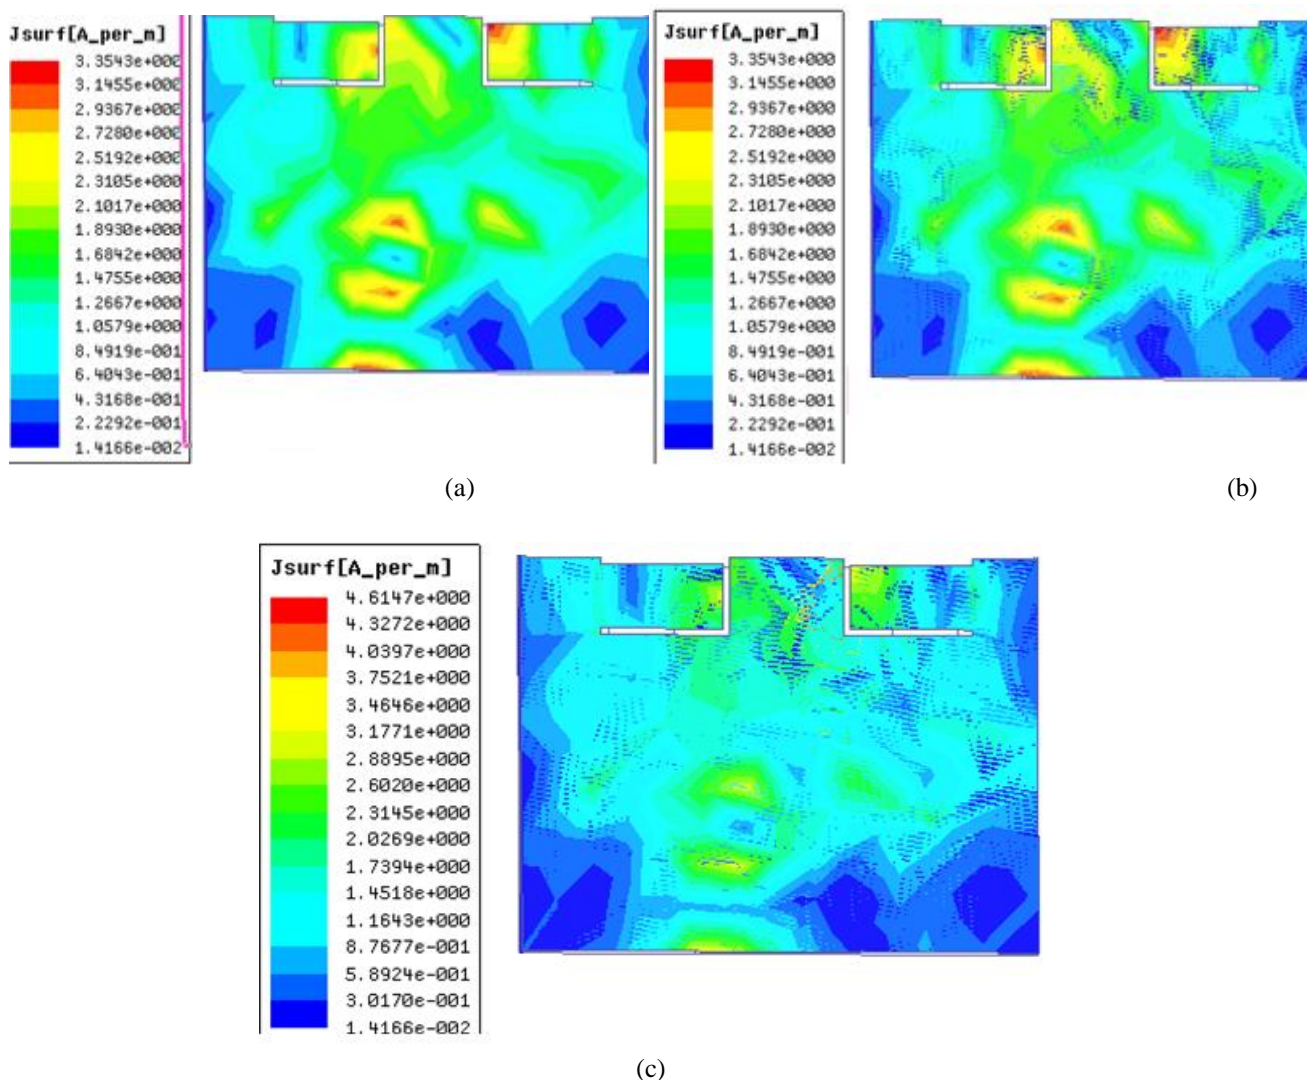


Fig 7 Surface current distribution on the microstrip patch antenna, (a) 11.60 GHz, (b) 5.38 GHz, (c) 7.78 GHz.

#### IV. CONCLUSION

In this paper, a design of multiband microstrip patch antenna is proposed, which covers the frequency range between 2 GHz and 14 GHz. The return loss for all resonant frequency is less than  $-16$  dB and also the proposed design achieves Omni directional and bi-directional radiation pattern. The obtained peak gain is greater than 5 dB and the simulation results of proposed antenna provide the better outcome for S, C and X band frequency applications.

#### REFERENCES

- [1] K. He, S. Gong, and F. Gao, 2015 "Low-profile wideband unidirectional patch antenna with improved feed structure," Electron. Lett, pp 317-319.
- [2] Z.H. Li, Y.L. Xue, Z.Q. Deng, (2009) "Study on optical switching effect of photonic crystals with negative effective index of refraction," Optik pp. 605-609.
- [3] Zhao Wanga, Eng Gee Lima, and Xiaodong Chenb, 2011 "Study the Ground Plane Effect of a Multiband Antenna for Multiple Wireless Communication System," Advanced in Control Engineering and Information Science, pp.2521-2526.
- [4] Nivedita Girase, Rahul Tiwari, Archana Sharma, and Hema Singh, 2014 "Design and Simulation of Slotted Rectangular Microstrip Patch Antenna," International Journal of Computer Applications, vol. 103, no. 17, pp. 19-23.
- [5] J.W. Kim, T.H. Jung, H.K. Ryu, J.M. Woo, C.S. Eun, and D.K. Lee, 2013 "Compact multiband microstrip antenna using inverted-L- and T-Shaped parasitic elements," IEEE Antennas Wirel. Propag. Lett.
- [6] Meriem Ben Abdallah, and Jamal Bel Hadj Tahar, 2015 "Dual Band Slotted Antenna For Radar And Automotive Applications," The International Conference on Advanced Wireless, Information, and Communication Technologies, pp. 187-192.



- [7] Aravind S, Saira Joseph, Mridula S, Binu Paul, and P Mohan, 2015 "Compact Dual Band Antenna for GSM1800/1900/ UMTS/ LTE/UWB," International Conference on Information and Communication Technologies, pp. 1349-1356.
- [8] Gehan Sami, Mahmoud Mohanna, and Mohamed L. Rabeh, 2013 "Tri-band microstrip antenna design for wireless communication applications," National Research Institute of Astronomy and Geophysics, pp. 39-44.
- [9] Mayuri. M. Dekate, 2013 "Design Simulation and Fabrication of Microstrip Patch Antenna," Advance in Electronic and Electric Engineering, vol. 3, no 3, pp. 347-354.
- [10] Mahdi Moosazadeh and Sergey Kharkovsky, 2014 "Compact and Small Planar Monopole Antenna With Symmetrical L- and U-Shaped Slots for WLAN/WiMAX Applications," IEEE Antennas And Wireless Propagation Letters, vol. 13, pp. 388-391.
- [11] P. A. Ambresh, P. M. Hadalgi and P. V. Hunagun, 2011 "Compact omnidirectional patch antenna for s band frequency spectre," International Journal of Advances in Engineering & Technology, vol. 1, issue 4, pp. 155-159.
- [12] Fang-Yao Kuo., and Ruey-Bing Hwang, 2014 "High-Isolation X-Band Marine Radar Antenna Design," IEEE Transactions On Antennas And Propagation, vol. 62, no. 5, pp. 2331-2336.



10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)