iJRASET
International Journal For Research in Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 13 **Issue:** I **Month of publication:** January 2025

DOI: https://doi.org/10.22214/ijraset.2025.66703

www.ijraset.com

Call: 08813907089 | E-mail ID: ijraset@gmail.com

International Journal for Research in Applied Science & Engineering Technology (IJRASET)
ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538
Volume 13 Issue I Jan 2025- Available at www.ijraset.com

A Review on Evaporator Modification in VCR System for Performance Enhancement

Purusothaman M[1], Suvendhu Chandra Gope[2], Avaaru Susheel Kumar[3]
Department of Mechanical Engineering, Sathyabama Institute of Science and Technology, Chennai-600119, Tamil Nadu, India

Abstract: ***This Review focuses on the design and fabrication of an evaporator with multiple isolated chambers for a refrigerator. The aim is to enhance the efficiency and performance of the refrigeration system by employing an innovative evaporator design. The literature review includes studies on various refrigerants, refrigeration systems, and the integration of advanced technologies like phase change materials (PCM), thermoelectric generators (TEG), and thermal energy storage (TES). These studies highlight the importance of optimizing refrigerant selection, improving heat transfer mechanisms, and addressing environmental concerns related to global warming potential (GWP) and ozone depletion potential (ODP). The project seeks to develop an evaporator with multiple isolated chambers, which can potentially offer better temperature control, increased heat transfer efficiency, and reduced energy consumption. By combining insights from previous research with practical fabrication techniques, this review aims to contribute to the advancement of refrigeration technology, ensuring both energy efficiency and environmental sustainability.***

Keywords: Evaporator Design, Multiple Isolated Chambers, Refrigeration System, Energy Efficiency.4

I. INTRODUCTION

The design and fabrication of an evaporator with multiple isolated chambers for a refrigerator is a significant advancement in refrigeration technology, aimed at enhancing energy efficiency, thermal management, and environmental sustainability. Traditional refrigeration systems typically employ a single evaporator, which limits their ability to efficiently manage temperature and energy use across different compartments. By integrating multiple isolated chambers within the evaporator, this project seeks to optimize heat transfer, reduce energy consumption, and improve the overall performance of the refrigeration system.

A. Evaporator Design and Thermal Management

The primary function of an evaporator in a refrigeration system is to absorb heat from the interior space and transfer it to the refrigerant, which then carries the heat away. In a conventional design, a single evaporator is responsible for cooling the entire compartment.

However, this approach often leads to inefficiencies, especially when different compartments require different temperatures, such as in a refrigerator with separate freezer and fresh food sections. By incorporating multiple isolated chambers, each with its own evaporator section, the system can independently control the temperature in each compartment. This design enhances the thermal management of the refrigerator, ensuring that each section is maintained at its optimal temperature without overcooling or energy wastage. The use of Phase Change Materials (PCMs) within these chambers further improves the efficiency by storing and releasing thermal energy as needed, thus stabilizing the internal temperature during compressor off-cycles.

B. Energy Efficiency and Environmental Sustainability

Energy efficiency plays a crucial role in contemporary refrigeration systems, driven by the goals of lowering operating expenses and reducing environmental impact. Employing multiple evaporators enhances the precision of cooling control, leading to decreased energy usage. Additionally, incorporating advanced cooling technologies such as Thermoelectric Generators (TEGs) can convert excess heat into electrical energy, boosting the system's energy efficiency. Environmental sustainability is another vital aspect of this project. Traditional refrigerants in vapor-compression systems often have high Global Warming Potential (GWP) and contribute to ozone depletion. By optimizing refrigerant flow and minimizing the refrigerant charge through multiple evaporators, the system's environmental footprint can be substantially reduced. Furthermore, the integration of Phase Change Materials (PCMs) and other thermal energy storage solutions helps in cutting down the carbon footprint by decreasing the need for constant compressor operation.

©IJRASET: All Rights are Reserved

C. Global Implications and Future Prospects

The creation of an evaporator with multiple isolated chambers has significant global ramifications for both residential and commercial refrigeration. With energy efficiency regulations becoming increasingly rigorous around the world, there is a rising need for refrigeration systems that fulfil these standards while maintaining high performance. This innovative design not only tackles existing energy efficiency issues but also paves the way for future developments in refrigeration technology. Incorporating Phase Change Materials (PCMs) and Thermoelectric Generators (TEGs) into the evaporator design introduces new opportunities for harnessing renewable energy sources and decreasing reliance on traditional power grids. As ongoing research advances in this area, these technologies are anticipated to become more affordable and widely embraced, leading to even greater strides in refrigeration efficiency and environmental sustainability. To sum up, the effort aimed at designing and building a refrigerator evaporator featuring several separate chambers is a noteworthy advancement in refrigeration technology. Some of the most important issues facing contemporary refrigeration systems are addressed by this design, which also improves thermal management, energy efficiency, and environmental impact. Technology has the ability to completely change how we handle refrigeration as it develops, making it more effective, sustainable, and flexible to changing needs.

II. COEFFICIENT OF PERFORMANCE (COP) IN REFRIGERATION SYSTEMS

The Coefficient of Performance (COP) is a crucial metric used to evaluate the efficiency of refrigeration systems. It represents the ratio of the useful cooling effect produced by the system to the energy input required to achieve that cooling effect. Mathematically, COP is expressed as:

COP = Refrigerating Effect (N) / Energy Input (W)

A. Theoretical and Actual COP

The Theoretical COP is derived from thermodynamic principles applied to the refrigeration cycle, assuming ideal conditions. It serves as a benchmark for evaluating the performance of refrigeration systems under theoretical scenarios. Conversely, the Actual COP is calculated based on empirical measurements of refrigerating effect (N) and energy input (W) during real-world operation. The ratio of Actual COP to Theoretical COP is termed Relative COP, which provides insight into the system's performance compared to ideal conditions:

Relative COP = Actual COP / Theoretical COP

Both the refrigerating effect and energy input must be in consistent units to ensure that COP remains a dimensionless quantity.

B. Advancements and Considerations

Recent studies have highlighted various advancements and considerations that impact the COP of refrigeration systems:

1) Refrigerant Selection

Josep Cirera et al. (2024) emphasize that the choice of refrigerant significantly affects the COP of domestic refrigerators. They advocate for environmentally friendly refrigerants, such as R600a (isobutene), over traditional options like R134a. This shift not only enhances energy efficiency but also reduces environmental impact. Similarly, Samira Benhadid-Dib and Ahmed Benzaoui (2024) discuss the environmental implications of refrigerants, recommending natural alternatives like ammonia, hydrocarbons, and carbon dioxide, despite challenges such as toxicity, flammability, and high pressures.

2) Design Innovations

The implementation of microchannel heat exchangers has been noted for its benefits in improving COP. These exchangers offer a larger surface area for heat transfer and reduce the refrigerant charge, thereby enhancing overall system efficiency (Cirera et al., 2024). Additionally, variable speed compressors, which adjust their operation based on cooling demand, can lead to substantial energy savings compared to fixed-speed compressors.

3) Historical Evolution and Classification

Sumit Kumar Bandey (2024) provides an overview of the historical development and classification of refrigerants. The transition from early natural refrigerants to synthetic options like CFCs and HCFCs, and finally to HFCs and HFOs, reflects the evolving focus on minimizing environmental impact. The study highlights the importance of selecting refrigerants with favourable thermodynamic, chemical, and environmental properties.

4) Energy Efficiency Strategies

To effectively improve the Coefficient of Performance (COP), it is essential to optimize refrigeration system designs and adopt advanced technologies. Integrating Phase Change Materials (PCMs) and Thermoelectric Generators (TEGs) can significantly enhance system performance by improving heat absorption and reducing overall energy consumption (Yogesh N. Nandanwar et al., 2024).

5) Regulatory and Environmental Impacts

Shifting to refrigerants with lower Global Warming Potential (GWP) and Ozone Depletion Potential (ODP) is vital for complying with environmental regulations and achieving sustainability goals (Benhadid-Dib and Benzaoui, 2024; Cirera et al., 2024). New and advanced systems should be designed to meet both high performance and stringent environmental standards.

III. BACKGROUND ON REFRIGERATION SYSTEMS

Refrigeration systems are fundamental to modern climate control and preservation technologies, operating on the principle of transferring heat from a lower temperature region to a higher temperature one using mechanical work. The core principle of refrigeration involves the phase change of a refrigerant: it absorbs heat during its evaporation phase and releases heat during its condensation phase. This cyclical process is facilitated by a refrigeration cycle, typically consisting of a compressor, condenser, expansion valve, and evaporator.An essential part of this cycle is the evaporator, which is where the refrigerant turns from a liquid to a vapor by absorbing heat from its surroundings. This phase shift is what gives refrigeration its required cooling effect. The area or object being cooled loses heat when the refrigerant vaporizes inside the evaporator, lowering the temperature. After being vaporized, the refrigerant is transferred to the compressor, where it is compressed, and finally to the condenser, which releases the heat that has been absorbed into the surrounding air.

A. Need For Improved Evaporator Designs

Conventional evaporator designs, while effective in many applications, exhibit several limitations that can impact their efficiency, space utilization, and temperature control. One major drawback of traditional evaporators is their inherent inefficiency in heat transfer. Standard designs often struggle with uneven temperature distribution and suboptimal heat exchange, leading to higher energy consumption and reduced overall performance. This inefficiency is particularly pronounced in systems where consistent cooling is critical, such as in precision refrigeration applications or large-scale industrial processes. Space constraints also pose a significant challenge for conventional evaporators. In many applications, especially in compact or residential systems, the physical footprint of traditional evaporators can limit design flexibility and restrict integration with other system components. This limitation can lead to increased complexity in system layout and potential compromises in performance. Another problem with older evaporator designs is temperature control. The temperature fluctuations and difficulties in maintaining exact temperature settings in conventional systems can have a negative impact on the quality of goods stored or the effectiveness of the cooling operation. This is especially problematic in settings like food preservation or pharmaceutical storage where consistent, stable cooling is needed.

To address these limitations, there is a growing need for innovative evaporator designs that can enhance performance, energy efficiency, and reliability. Advanced designs, such as multi-chamber evaporators or those incorporating new materials and technologies, offer promising solutions. These innovations aim to improve heat transfer efficiency, optimize space utilization, and provide better temperature control, ultimately leading to more efficient and reliable refrigeration systems. Embracing such advancements is crucial for meeting the increasing demands for energy-efficient and high-performance refrigeration solutions across various applications.

B. Introduction To Multi-Chamber Evaporators

Multi-chamber evaporators represent an advanced design in refrigeration technology, diverging significantly from traditional single-chamber evaporators. The core concept of a multi-chamber evaporator involves the division of the evaporator unit into several distinct, isolated chambers, each operating independently. This structural modification enables the system to cater to different temperature requirements and cooling needs within a single unit. Unlike single-chamber evaporators, where a single cooling process regulates the temperature throughout the entire chamber, multi-chamber systems allow for targeted cooling. Each chamber can be optimized to maintain specific temperature ranges, leading to improved overall temperature control and efficiency. A key advantage of multi-chamber evaporators is their improved heat transfer efficiency. By isolating different sections, these systems minimize heat exchange between compartments, enabling more precise temperature control and reducing energy losses.

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

This isolation enhances thermal management, as each chamber can be optimized independently of the thermal conditions in adjacent chambers. Furthermore, multi-chamber evaporators boost energy efficiency by reducing the burden on the cooling system. Each chamber operates autonomously, allowing for more effective refrigerant use and lower energy consumption. In summary, multi-chamber evaporators offer consistent temperature regulation, enhanced energy utilization, and greater flexibility in refrigeration applications

C. Design Issues And Difficulties

Designing multi-chamber evaporators involves several crucial considerations to ensure optimal performance and compatibility with existing refrigeration systems. Effective thermal management is vital to maximize heat transfer efficiency across the multiple chambers, necessitating careful design of heat exchanger surfaces and flow paths. Fluid dynamics are also critical; optimizing the distribution and movement of refrigerants within the chambers is essential to avoid inefficiencies and achieve uniform cooling. Material selection plays a significant role, with choices guided by thermal conductivity, corrosion resistance, and mechanical strength to ensure both durability and performance. Integrating multi-chamber designs with existing systems can present challenges, such as ensuring compatibility with current components and managing the increased complexity in system controls and maintenance. Balancing performance improvements with potential increases in complexity or cost is essential for practical implementation. Addressing these considerations and challenges is fundamental to developing effective and reliable multi-chamber evaporators.

D. Applications And Benefits

Multi-chamber evaporators provide significant benefits across various refrigeration applications, including residential, commercial, and industrial systems. In residential refrigerators, multi-chamber designs can greatly enhance cooling efficiency by enabling precise temperature control in different compartments, which improves food and beverage preservation. This not only optimizes refrigerant use but also leads to energy savings by minimizing the need for frequent temperature adjustments. In commercial settings, such as supermarkets and food service establishments, multi-chamber evaporators improve performance through better heat transfer and reduced energy consumption. This result in lower operational costs and more effective management of perishable goods. For industrial applications, these evaporators offer enhanced performance by delivering targeted cooling for diverse processes, from chemical storage to ice production. The use of environmentally friendly refrigerants and advanced components, such as microchannel heat exchangers, further boosts efficiency and reduces environmental impact, as highlighted by Josep Cirera et al. (2024). Moreover, the flexibility of multi-chamber systems supports variable temperature settings tailored to specific needs, aligning with the trend towards more sustainable and energy-efficient refrigeration solutions, as noted by Samira Benhadid-Dib and Ahmed Benzaoui (2024).

E. Current Research And Developments

Recent advancements in multi-chamber evaporators have been driven by significant research aimed at enhancing refrigeration efficiency and environmental sustainability. Josep Cirera et al. (2024) emphasize the role of innovative design features, such as microchannel heat exchangers, which are crucial for improving heat transfer and reducing refrigerant charge in multi-chamber systems. This approach not only boosts energy efficiency but also aligns with environmental regulations. Similarly, the exploration of alternative refrigerants, as discussed by Samira Benhadid-Dib and Ahmed Benzaoui (2024), highlights the shift towards natural refrigerants like hydrocarbons and carbon dioxide, which promise to reduce the environmental impact of multi-chamber evaporators. Additionally, advancements in material selection and fabrication techniques have been noted by Sumit Kumar Bandey (2024), who provides insights into the historical development and classification of refrigerants, emphasizing the importance of materials with desirable thermodynamic and chemical properties. These developments underscore the ongoing efforts to refine multi-chamber evaporator designs, integrating cutting-edge technologies to enhance performance and sustainability in modern refrigeration systems.

F. Objective Of The Review

This review paper's goal is to present a thorough examination of multi-chamber evaporators with an emphasis on their functionality, uses, and design in contemporary refrigeration systems. In order to clarify the possible advantages and areas for development of multi-chamber evaporators, this review will examine the developments and difficulties related to them. It will do so by utilizing knowledge from current studies.

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

Important subjects cover the basic ideas of refrigeration and evaporator operation, the drawbacks of conventional evaporator designs, and the creative solutions provided by multi-chamber systems. In addition to discussing the design issues and difficulties—such as fluid dynamics, temperature management, and material selection—the review will also emphasize the real-world uses for these systems in commercial, industrial, and residential settings. The review's scope includes a thorough analysis of recent advancements and research in multi-chamber evaporators. To provide a comprehensive understanding of the state-of-the-art in this field, notable studies will be integrated. These studies include those by Josep Cirera et al. on the role of advanced heat exchanger designs (Cirera et al., 2024), Samira Benhadid-Dib and Ahmed Benzaoui on the environmental impact of refrigerants (Benhadid-Dib & Benzaoui, 2024), and Sumit Kumar Bandey on the evolution of refrigerant technology (Bandey, 2024). The significance of these developments for raising cooling efficiency, cutting energy use, and raising total system performance will also be covered in the review.

G. Refrigerants And Refrigeration System

In multi-chamber evaporator systems, the choice of refrigerants plays a crucial role in addressing the limitations of existing designs and enhancing performance. Traditional refrigerants like R134a, commonly used in single-chamber evaporators, have faced scrutiny due to their environmental impact and efficiency limitations. Recent advancements suggest shifting towards refrigerants with better environmental profiles and performance characteristics. For example, Josep Cirera et al. (2024) highlight that refrigerants like R600a (isobutene) offer superior energy efficiency and lower environmental impact compared to R134a. These refrigerants enhance the Coefficient of Performance (COP) and reduce the overall energy consumption of refrigeration systems (Cirera et al., 2024).

In contrast, Samira Benhadid-Dib and Ahmed Benzaoui (2024) emphasize the potential of natural refrigerants such as ammonia, hydrocarbons, and carbon dioxide, despite their challenges. Ammonia, for instance, has excellent thermodynamic properties but requires careful handling due to its toxicity. Hydrocarbons, while flammable, offer improved efficiency and lower global warming potential (GWP) compared to synthetic refrigerants. Carbon dioxide, with its high pressures, presents another viable option for multi-chamber systems, particularly when integrated with advanced designs that can accommodate its operational demands (Benhadid-Dib and Benzaoui, 2024). Newly improved designs in multi-chamber evaporators aim to leverage these advanced refrigerants by incorporating technologies like microchannel heat exchangers and variable speed compressors. These innovations not only address the inefficiencies of traditional designs but also enhance the refrigerant’s effectiveness. For instance, the use of microchannel heat exchangers increases the heat transfer area and reduces the refrigerant charge, thus improving the overall efficiency of the refrigeration cycle. Variable speed compressors adjust their operation based on cooling demand, leading to substantial energy savings and better temperature control (Cirera et al., 2024).

Overall, adopting advanced refrigerants and integrating them with improved evaporator designs is essential for overcoming the flaws of existing systems. By addressing issues such as efficiency, environmental impact, and performance, these enhancements promise to deliver more sustainable and effective refrigeration solutions.


IV. CONCLUSION

This review paper has explored the advancements and current state of multi-chamber evaporators in refrigeration systems, emphasizing their potential for improving performance, energy efficiency, and environmental impact. The review highlighted the evolution from traditional single-chamber designs to more sophisticated multi-chamber configurations, which offer enhanced temperature control, reduced energy consumption, and better heat transfer. The advantages of using multiple isolated chambers, including improved cooling efficiency and reduced refrigerant charge, were discussed based on the latest literature. Despite these advancements, several flaws remain in existing multi-chamber evaporator designs. Issues such as inefficiencies in heat transfer, difficulties in maintaining consistent temperatures across chambers, and challenges in material selection and fabrication persist. For instance, while multi-chamber systems have demonstrated better temperature control and energy efficiency, integrating these systems into existing refrigeration frameworks and addressing the complexities of fluid dynamics and thermal management remain significant challenges. Future improvements in multi-chamber evaporator designs are essential for addressing existing limitations. Efforts should focus on developing advanced materials with enhanced thermal insulation properties, optimizing fluid dynamics to achieve more uniform heat transfer, and refining fabrication techniques to boost overall system reliability. Additionally, integrating innovative refrigerants that are both environmentally friendly and efficient will be crucial. Research into alternative refrigerants, as emphasized by Josep Cirera et al. and Samira Benhadid-Dib and Ahmed Benzaoui, is vital for reducing environmental impact while enhancing system performance. By addressing these areas, future advancements in multi-chamber evaporators can overcome current shortcomings and lead to more effective and sustainable refrigeration solutions.

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

REFERENCES

[1] H. Krabch, A. Belhamid, and A. Brima, "Design, realization and comparison of three passive solar dryers," International Journal of Renewable Energy Research, vol. 7, no. 2, pp. 695-704, 2017.
[2] A. Cascini, M. Gamberi, C. Mora, M. Rosano, M. Bortolini, Comparative carbon footprint assessment of commercial walk-in refrigeration systems under different use configurations, J. Clean. Prod. 112 (2016) 3998–4011, https://doi.org/ 10.1016/j.jclepro.2015.08.075.
[3] M. Calati, K. Hooman, S. Mancin, Thermal storage based on phase change materials (PCMs) for refrigerated transport and distribution applications along the cold chain: a review, Int. J. Thermofluids. 16 (2022), 100224, https://doi.org/10.1016/ j.ijft.2022.100224.
[4] S. Kalaiselvam, R. Parameshwaran, Thermal energy storage technologies for sustainability: systems design, Assessment and App. (2014), https://doi.org/ 10.1016/C2013-0-09744-7.
[5] D. Dandotiya, N.D. Banker, Performance enhancement of a refrigerator using phase change material-based condenser: an experimental investigation, Int. J. Air-Conditioning Refrig. 25 (2017) 1–9, https://doi.org/10.1142/ S2010132517500328.
[6] Bolaji BO, Huan Z. Ozone depletion and global warming: case for the use of natural refrigerant – a review. Renew Sustain Energy Rev 2013; 18:49–54. http://dx.doi. org/10.1016/j.rser.2012.10.008.
[7] Sapienza, Alessio, VincenzaBrancato, Yuri Aristov, and Salvatore Vasta. 2021. "Plastic heat exchangers for adsorption cooling: Thermodynamic and dynamic performance." Applied Thermal Engineering 188: 116622.
[8] M. L. Ruz, J. Garrido, F. V´azquez, and F. Morilla, "A hybrid model ing approach for steady-state optimal operation of vapor compression refrigeration cycles," Appl. Therm. Eng., vol. 120, pp. 74– 87, 2017.
[9] G. Bejarano, J. A. Alfaya, M. G. Ortega, and F. R. Rubio, "Design, automation and control of a two-stage, two-load-demand experimental refrigeration plant," in 23rd Mediterr. Conf. on Control and Autom.,Torremolinos (Spain), 2015, pp. 537–544.
[10] Sunada, E. et al. "A Two-Phase Mechanically Pumped Fluid Loop for Thermal Control of Deep Space Science Missions," 46th International Conference on Environmental Systems 10-14 July 2016, Vienna, Austria 43rd.
[11] Chen, W., Fogg, D. W., Izenson, M. G. and Kurwitz, C., "A Highly Stable Two-Phase Thermal Management System for Aircraft," SAE 2012 Power Systems, Phoenix, AZ, Oct 2012.
[12] Allard, J., Heinzen, R., 1988. Adaptive defrost - Industry Applications, IEEE Transactions on 24, 39–42.
[13] Meas. Confed. 92, 391–399. https://doi.org/10.1016/j.measurement.2016.05.096 Howell RH, Rosario L, Riiska D, B.M., 1999. Potentials savings in display case energy with reduced supermarket relative humidity. 20th Int. Conf. Regrigeration. Sydney IIR/IIF.
[14] Byun, J.S., Jeon, C.D., Jung, J.H., Lee, J., 2006. The application of photo-coupler for frost detecting in an air-source heat pump. Int. J. Refrig. 29, 191–198. https://doi.org/10.1016/j.ijrefrig.2005.06.008.
[15] Ersoy HK, Yalcin S, Yapici R, Ozgoren M. Performance of a solar ejector cooling system in the southern region of Turkey. Applied Energy 2007; 84:971-983.
[16] He Y, Sun Y, Zhang S, Lyu Y, Chen G. Initial ratio optimization for the ejector cooling system with thermal pumping effect (ECSTPE). Energy Conservation and Management 2016; 113:281-289.
[17] Zhao L., Cai W., Ding X., Chang W., Model-based optimization for vapor compression refrigeration cycle, Energy. (2013). https://doi.org/10.1016/j.energy.2013.02.071
[18] Zhang S, Huang P, Sun Y. A multi-criterion renewable energy system design optimization for net zero energy buildings under uncertainties. Energy 2016; 94:654-665.
[19] T.T. Hoang, J. Ku, Multiple-Evaporator Loop Heat Pipe, in: 53rd AIAA Aerospace Sciences Meeting, American Institute of Aeronautics and Astronautics, Kissimmee, Florida, 2015.
[20] D. Bugby, T. Miller, J. Baker, Multi-Evaporator Two-phase Loop Cooling System, in 4th International Energy Conversion Engineering Conference, San Diego, California, 2006.
[21] H. Nagano, J. Ku, Capillary Limit of a Multiple-Evaporator and Multiple-Condenser Miniature Loop Heat Pipe, Journal of Thermophysics and Heat Transfer, 21(4) (2007) 694-701.
[22] S. Storring, Design and Manufacturing Of Loop Heat Pipes for Electronics Cooling, Master dissertation in Aerospace Engineering, Carleton University, 2006.
[23] Hillenbrand J.B., Westerberg A.W., 1988, The synthesis of multiple-effect evaporator systems using minimum utility insights—I. A cascaded heat representation, Computers & Chemical Engineering, 12, 611-624.
[24] Sharan P., Bandyopadhyay S., 2016a, Energy Integration of Multiple Effect Evaporators with Background Process and Appropriate Temperature Selection, Industrial & Engineering Chemistry Research, 55, 1630 1641.
[25] Sharan P., Bandyopadhyay S., 2016b, Integration of thermo-vapor compressor with multiple-effect evaporator, Applied Energy, 184, 560-573.
[26] S.Poberžnik, D. Goricanec, J. Krope(2007) "Economic Analysis of Geothermal Heat Source for Residential Area Project", International Journal of Energy, Issue 1, Volume 1, 2007, Pg 28-32
[27] Abdelaziz, E.; Saidur, R.; Mekhilef, S. A review on energy saving strategies in industrial sector. Renew. Sustain. Energy Rev. 2011, 15, 150–168. [CrossRef]
[28] Antonakakis, N.; Chatziantoniou, I.; Filis, G. Energy consumption, CO 2 emissions, and economic growth: Anethical dilemma. Renew. Sustain. Energy Rev. 2017, 68, 808–824. [CrossRef]
[29] J. R. Sand, A. N. Vineyard and R. H. Bohman, "Improving the Energy Efficiency of Refrigerators in India", Report, U.S. Department of Energy (DOE) and Asian Environment Partnership Program (ADEPT), Pp.1-26
[30] Gaffar G.Momin, Tupe, S.B., Parate, S.A., (2016). COP enhancement of domestic refrigerator by sub cooling and superheating using shell &tube type heat exchanger. International Journal of Engineering Research and Advanced Technology (IJERAT), 2(5): 1-10.

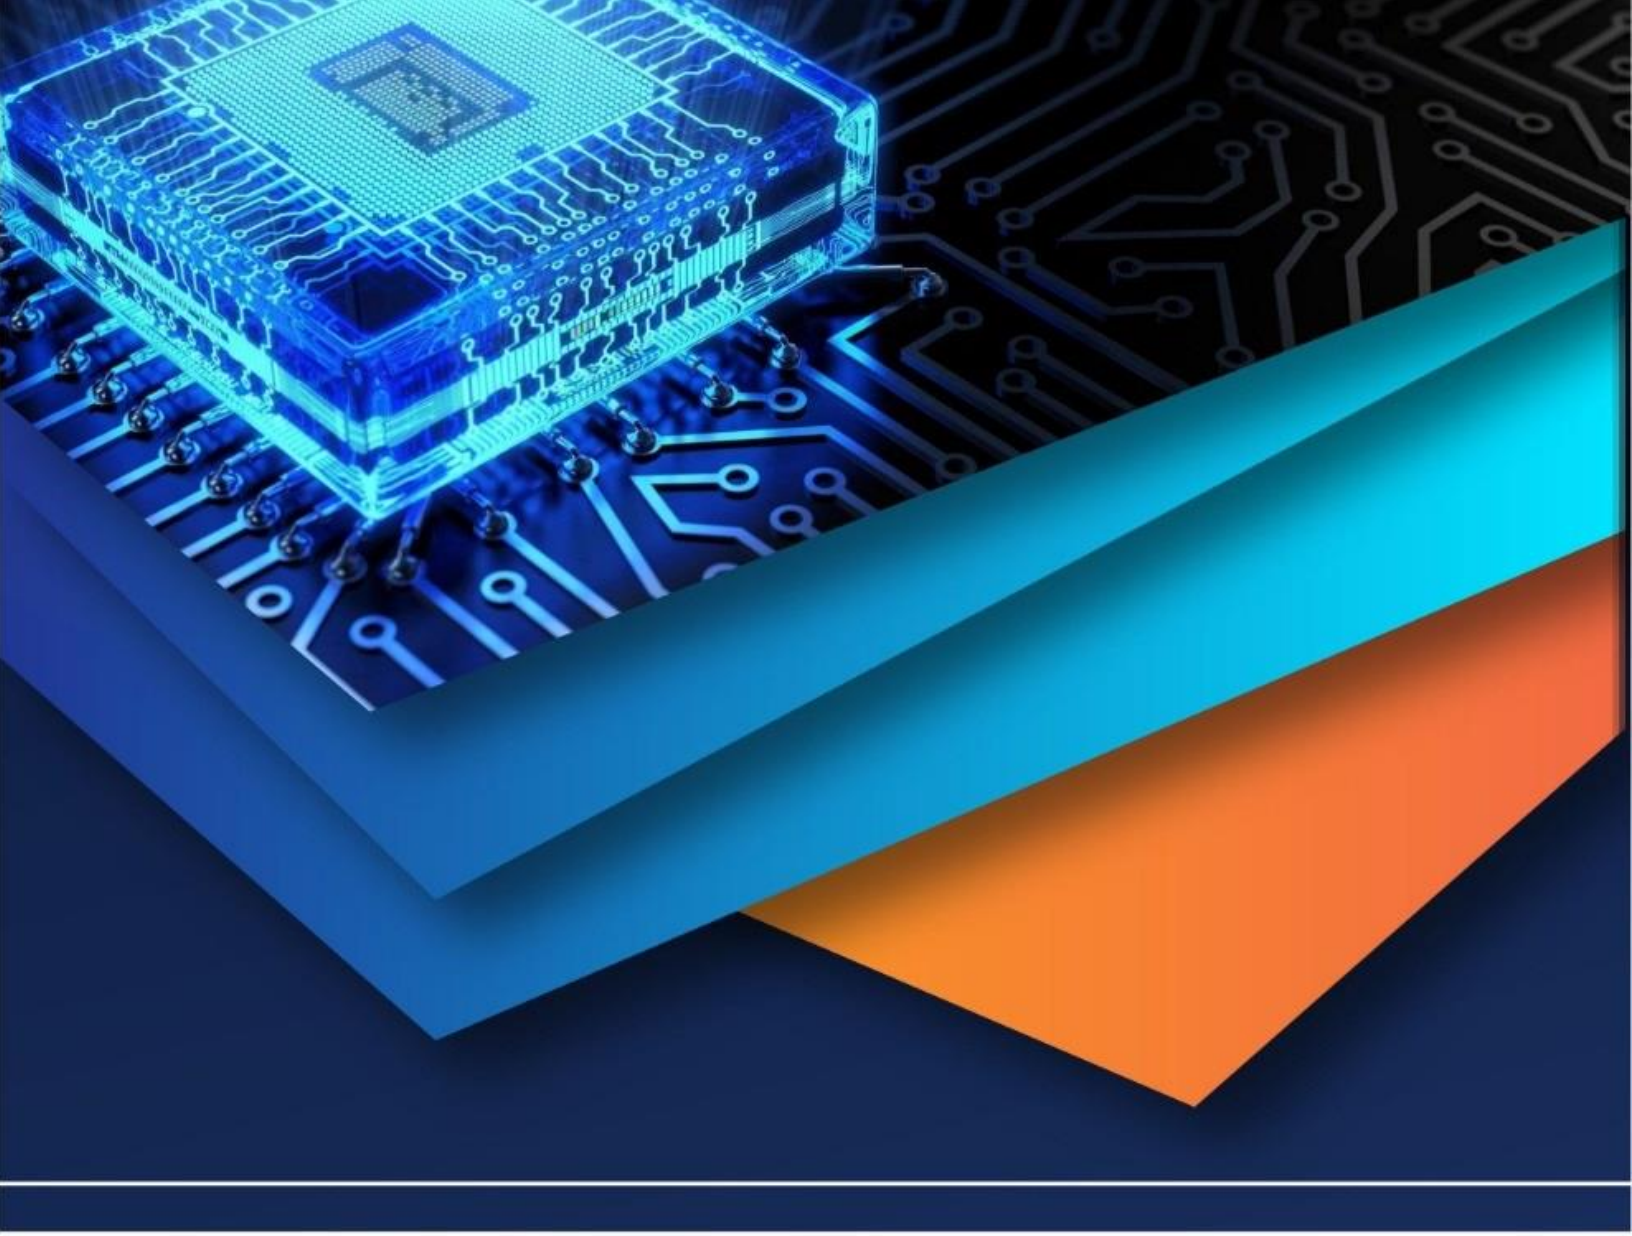

10.22214/IJRASET

45.98

IMPACT FACTOR: 7.129

IMPACT FACTOR: 7.429

INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089 (24*7 Support on Whatsapp)