



iJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 3

Issue: III

Month of publication: March 2015

DOI:

www.ijraset.com

Call: ☎ 08813907089

E-mail ID: ijraset@gmail.com

Simulation and Analysis of Microstrip Patch Antenna Using AN-SOF Professional


Puthanial.M^{#1}, Shubhashini.R^{*2}, Pavithra.K^{*3}, Priyanka Raghu^{*4}, Dr. P.C.Kishore Raja^{*5}
Saveetha School of Engineering, Saveetha University

Abstract: In this modern era, the development in wireless technology has caused a drastic change in size and weight of antenna used for communication. This paper shows the simulation of Microstrip patch antenna using AN-SOF PROFESSIONAL VERSION 3.5 software. After the simulation process, by analyzing the performance, the simulation results show that the antenna has provided a considerable gain of 5.61d Bi with better efficiency at a frequency 2.4GHZ that can be used for wireless communication.

Key Words- Microstrip Patch antenna, AN-SOF Professional, Gain, Wireless Communication

I. INTRODUCTION

While considering the antenna design there is always a great need to design and fabricate compact antennas that meets with the needs of wireless communication. By analyzing various antennas, microstrip antennas are small in size with low cost and ease of fabrication. This antenna is used widely on base stations. Microstrip antenna is greatly involved in the current topic of what is the most active field in design of an antenna because of its wide configurations. The microstrip antenna when used in real time applications requires only materials of low cost and less expensive fabrication methods. Patch antenna is a wafer like directional antenna capable of covering small floor, small office, small stores and other inter locations. Microstrip antenna produces a hemispherical coverage spreading from the mount point at a width of 30-180 degree. Patch antenna also known as planar, slap planar or micro strip antennas. They are formed by overlying two metallic plates, one larger than the other, with dielectric sheet in the middle. This type of antenna is usually encased in black plastic or white plastic, not only to protect the antenna but also to make it easy to mount because they are flat, thin and light weight, patch antenna are often hung on walls of ceilings where they virtually cursive and blend easily into the background. The patch conducting in micro strip antenna may have planar or non-planar geometry.

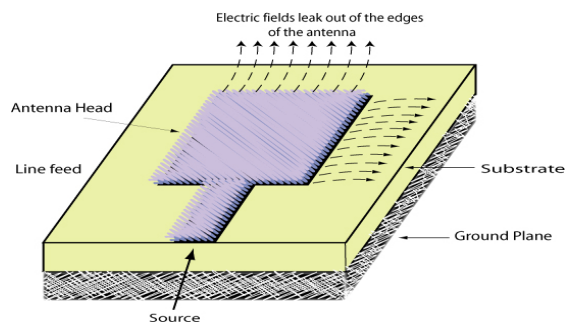

II. SIMULATION TOOL

A. AN-SOF PROFESSIONAL 3.5

- 1) AN-SOF is a comprehensive software tool for the modelling and simulation of antenna systems and general radiating structures.
- 2) To describe the geometry of the antenna
- 3) To choose construction materials
- 4) To describe the environment and ground conditions
- 5) To describe the antenna height above ground
- 6) To analyze the radiation pattern and front-to-back ratio
- 7) To plot directivity and gain

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

- 8) To analyze impedance and SWR (Standing Wave Ratio)
- 9) To predict bandwidth

III. ANTENNA DESIGN

In the design of a Microstrip antenna, the dielectric substrate used in it plays a major role. In this design process, RT DUROID 5870 is used as a dielectric material. RT DUROID is a Glass Microfibre Reinforced PTFE (polytetrafluoroethylene) composite, this substrate has low loss tangent and it produce good resistance to chemical, solvent and reagents. It has a dielectric constant 2.2, it is low and gives a better performance than that of a substrate which has a high dielectric constant and it's loss tangent is 0.0004. The following estimations have to be made when the antenna is designed.

- Effective dielectric constant (ϵ_{eff})
- Height of dielectric substrate (H)
- Width of the radiating patch (W)
- Length of the radiating patch (L)

The method of analysis used here is the cavity model which gives more accurate results. The below calculations were also done while designing the Microstrip patch antenna using An-sof professional software. The feeding method used here is the edge feed. The number of facets used for patch is 11x11.

- Line feed length > 25mm
- Line feed width < 1mm

SINGLE FREQUENCY	2.4 GHZ
Substrate dimension along 'X'	80-82 mm
Substrate dimension along 'Y'	150-151mm
Patch dimension along 'X'	11.057mm
Patch dimension along 'Y'	-4.4355mm

IV. SIMULATION RESULTS

The An-sof Professional sotware runs Far-Field pattern, Far- Field spectrum, Near E-Field Pattern, Near E-Field spectrum, Near H-Field Pattern, Near H- Field spectrum of the antenna designed in it. These can be viewed in 2D polar plot and 2D rectangular plot. The radiation pattern, Far- Field Pattern, and the current distribution of Microstrip antenna designed at 2.4GHZ is given below:

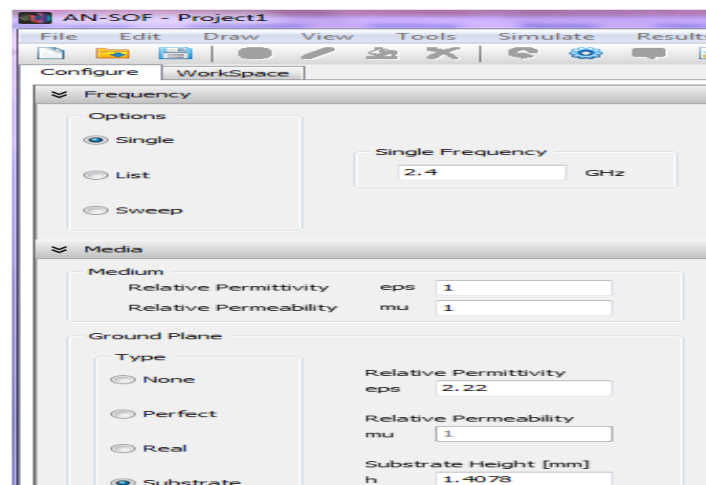


Fig 1: Description Screen

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

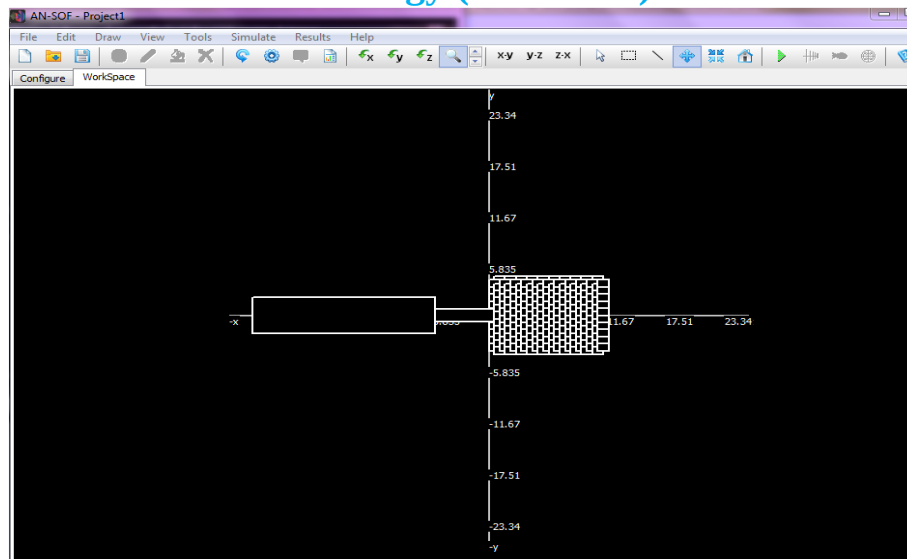


Fig 2: Patch antenna designed in An-sof Professional V3.5

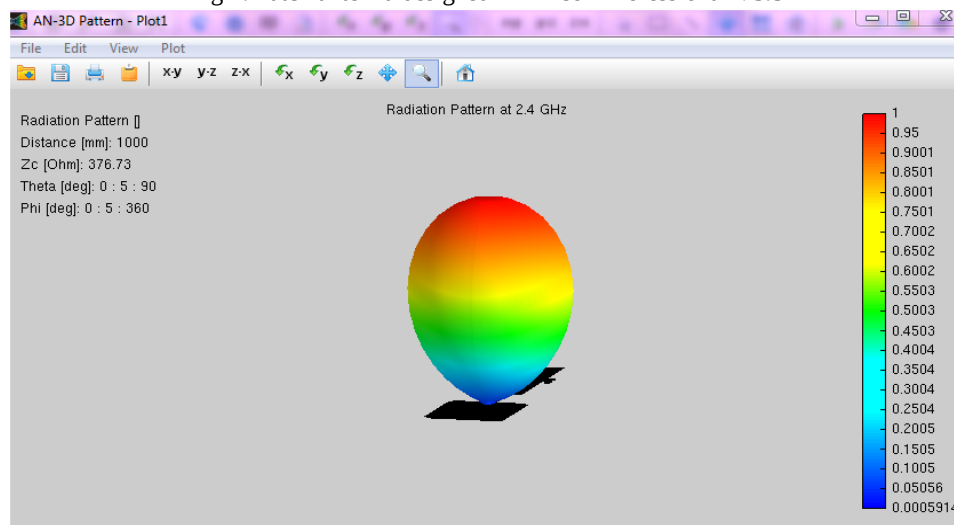


Fig 3: 3D Radiation Pattern

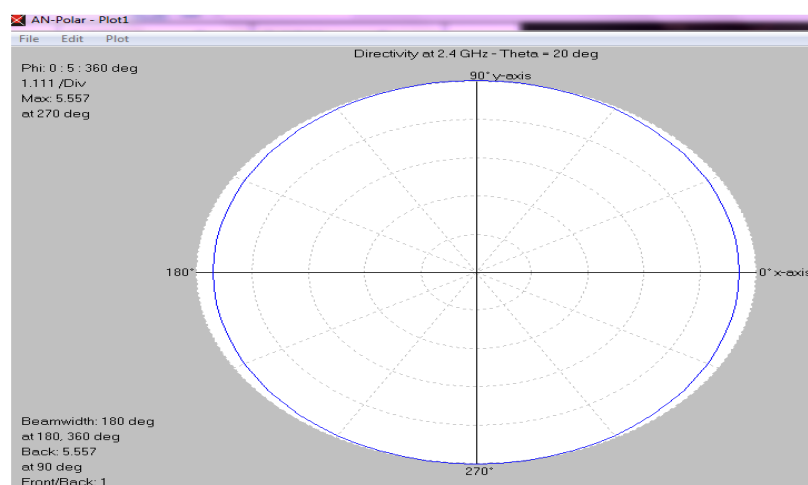


Fig 4: Directivity graph of Microstrip patch antenna in polar plot

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

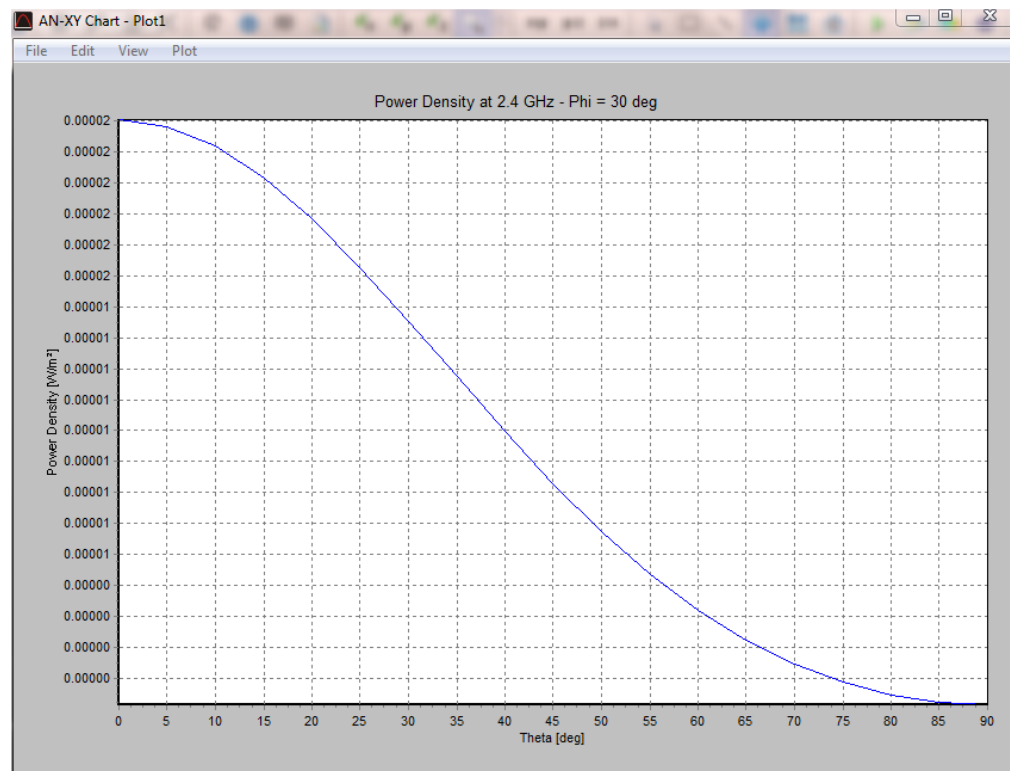


Fig 5: Far Field Pattern (2D rectangular plot)

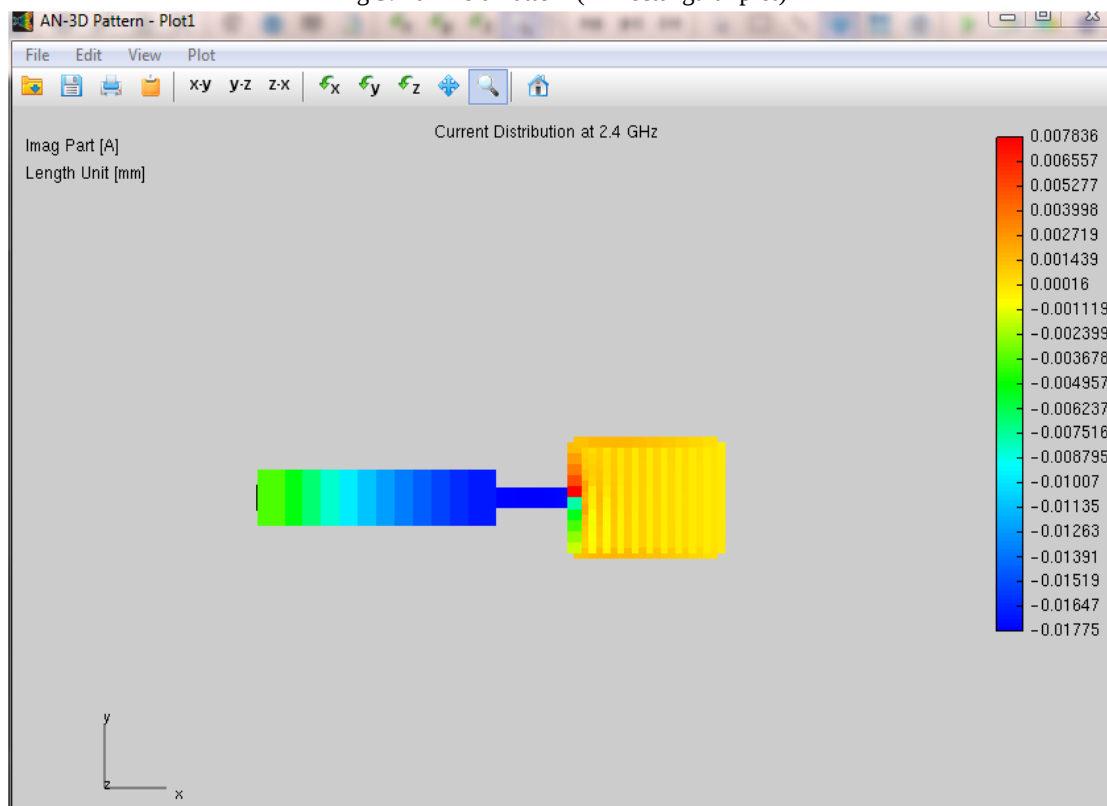


Fig 6: Current Distribution (Imaginary part)

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

V. CONCLUSION

The Microstrip Patch antenna is simulated using An-sof Professional version 3.5. It has achieved a gain of 5.61d Bi at a resonance frequency 2.4GHZ. The directivity of the antenna is also found to be 5.55 d Bi. The main aim of this paper is to simulate a Microstrip patch antenna and to analyze it's 3D radiation pattern, gain, directivity, power density. The simulated antenna can be fabricated and can be used to capture electromagnetic energy from the RF signals that is radiated by wireless communication systems around 2.4GHZ.

VI. SUMMARY

Dr. P.C Kishore Raja, Professor and Head, Electronics and Communication Engineering Department, Saveetha School of Engineering, Saveetha University, Chennai

Puthanial. M is pursuing her PhD in Wireless communication related work in the area of smart antennas under the guidance of Dr.P. C. Kishore Raja.

Shubhashini.R, Pavithra.K and Priyanka Raghu, Undergraduate students from Electronics and Communication Engineering Department worked closely on the paper and currently working on their projects using softwares- EZNEC, ADS and HFSS.

REFERENCES

- [1] R. E. Sorace, V. S. Reinhardt, and S. A. Vaughn, "High-speed digital-to-RF converter," U.S. Patent 5 668 842, Sept. 16, 1997.
- [2] (2002) The IEEE website. [Online]. Available: <http://www.ieee.org/>
- [3] M. Shell. (2002) IEEEtran homepage on CTAN. [Online]. Available: <http://www.ctan.org/tex-archive/macros/latex/contrib/supported/IEEEtran/>
- [4] *FLEXChip Signal Processor (MC68175/D)*, Motorola, 1996.
- [5] "PDCA12-70 data sheet," Opto Speed SA, Mezzovico, Switzerland.
- [6] A. Karnik, "Performance of TCP congestion control with rate feedback: TCP/ABR and rate adaptive TCP/IP," M. Eng. thesis, Indian Institute of Science, Bangalore, India, Jan. 1999.
- [7] J. Padhye, V. Firoiu, and D. Towsley, "A stochastic model of TCP Reno congestion avoidance and control," Univ. of Massachusetts, Amherst, MA, CMPSCI Tech. Rep. 99-02, 1999.
- [8] *Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specification*, IEEE Std. 802.11, 1997.
- [9] J. D. Kraus, *Antennas*, 2nd ed., Mc Graw Hill International, 1988.
- [10] M. Bouhorma, A. Benahmed, F. Elouaai, A. Astito, and A. Mamouni, "Study of EM interaction between human head and mobile cellular phone," in Proc. Information and Communication Technologies International Symposium, Tetuan, Morocco, 3-6 June 2005.
- [11] M. Bouhorma, M. Benahmed, F. Elouaai, H. Drissi, and A. Mamouni, "Evaluation of the SAR distribution in the human head for cellular phones," in Proc. IWWCUCA, Val-d'OrQuebec, Canada, June, 6th and 7th 2005.
- [12] D. Manteuffel, A. Bahr, D. Heberling, and I. Wolff, "Design considerations for integrated mobile phone antennas," in Proc. 11th Int. Conf. Antennas Propagat., Apr. 17-20, 2001, pp.252-256.
- [13] S. Khalatbari, D. Sardari, A. A. Mirzaee, and H. A. Sadafi, "Calculating SAR in two models of the human head exposed to mobile phones radiations at 900 and 1800 MHz," in Proc. Progress In Electromagnetic Research Symposium, Cambridge, USA, vol. 2, no. 1, March 26-29 2006, pp. 104-109.
- [14] M. B. Ahemad, M. Bouhorma, F. Elouaai, and A. Mouni, "Design of new multi standard patch antenna GSM/PCS/UMTS/HIPERLAN for mobile cellular phones," European Journal of Scientific Research, vol. 32, no. 2, pp. 151-157, 2009.
- [15] H. K. Gupta, P. K. Singhal, P. K. Sharma, and V. S. Jadun, "Slotted circular microstrip patch antenna designs for multiband application in wireless communication," International Journal of Engineering & Technology, Science Publishing Corperation, vol. 3, no. 1, pp. 158-167, 2012
- [16] H. K. Gupta and P. K. Singhal, "Patch antennas designs with different shaped defect ground structure pattern in efficient rectenna design for wireless power transmission," IJECCT, vol. 3, no. 1.
- [17] C. Balnines, "Antenna theory," Wiley, 2nd addition ch. 14, 1997.
- [18] (2012). CST Computer Simulation Technology. [Online]. Available: <http://www.cst.com/content/products/mws/overview.aspx>



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)