iJRASET
International Journal For Research in Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 13 **Issue:** VI **Month of publication:** June 2025

DOI: https://doi.org/10.22214/ijraset.2025.72690

www.ijraset.com

Call: 08813907089 | E-mail ID: ijraset@gmail.com

International Journal for Research in Applied Science & Engineering Technology (IJRASET)
ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538
Volume 13 Issue VI June 2025- Available at www.ijraset.com

A Study on the Design, Working, and Applications of Ion Thrusters for Space Propulsion

Bikash Banerjee[1], Subhadip Das[2], Bhaskar Bag[3], Sourav Samanta[4], Pritam Pan[5], Sanjib Hansda[6], Ankita Mondal[7]
Department of Mechanical Engineering, Abacus Institute of Engineering and Management, West Bengal, India

Abstract: ***Ion thrusters represent a significant advancement in space propulsion technology due to their ability to provide high specific impulse and prolonged operation with minimal propellant consumption. This paper discusses the fundamental principles behind ion propulsion, elaborates on the structure and components of a laboratory ion thruster prototype, and explores practical applications and challenges. A small-scale experimental model has been developed to study the functionality of ion propulsion, simulating the acceleration of ionized particles through electrostatic forces. The paper concludes with insights into the future of ion thrusters in deep space missions and satellite station-keeping.***

Keywords: Ion Thrusters; Space Propulsion; Electric Propulsion Systems; Thruster Design; Aerospace Engineering Applications

I. INTRODUCTION

Conventional chemical rockets have been the cornerstone of space propulsion for decades, primarily because they produce massive amounts of thrust necessary to overcome Earth's gravity and achieve orbit. These rockets work by combusting fuel and oxidizer in a high-pressure chamber, producing hot gases that are expelled at high speed through a nozzle, propelling the spacecraft forward according to Newton's third law. While effective for launch and rapid maneuvering, chemical rockets are inherently inefficient for long-duration or deep-space missions. Their high thrust-to-weight ratio comes at the expense of fuel efficiency, as they consume enormous amounts of propellant in a relatively short time. Once in space, carrying this large amount of propellant becomes impractical due to mass constraints and the exponential relationship between fuel and payload described by the Tsiolkovsky rocket equation. Consequently, engineers and scientists have turned their attention to alternative propulsion methods that can provide sustained thrust over long periods with significantly reduced fuel requirements. One of the most promising technologies in this domain is ion propulsion. Ion thrusters function by ionizing a noble gas, typically xenon, and using electric fields to accelerate the resulting positively charged ions to extremely high velocities, creating a form of thrust known as electric propulsion. Unlike chemical rockets, which achieve specific impulses on the order of 250 to 450 seconds, ion thrusters can attain specific impulses exceeding 3,000 seconds, depending on the system design. This remarkable efficiency makes ion propulsion particularly suitable for satellite station-keeping, deep-space exploration, and interplanetary missions, where mission durations span months or even years and fuel conservation is paramount. The fundamental operating principle behind ion propulsion involves the manipulation of electric and magnetic fields to accelerate ions. First, a propellant gas such as xenon is introduced into a discharge chamber, where it is subjected to an electron bombardment using a cathode or hollow cathode that emits high-energy electrons. These electrons collide with the xenon atoms, stripping them of electrons and converting them into positively charged ions. Once ionized, these ions are directed toward a pair of electrodes—namely, a positively charged anode and a negatively charged cathode, or more commonly, a grid system in electrostatic ion thrusters. The electric field generated between these grids accelerates the ions to velocities up to 40,000 meters per second. The ions are expelled out of the rear of the thruster, and a separate electron source, known as a neutralizer, emits electrons into the ion beam to maintain charge neutrality in space, preventing the spacecraft from building up a net electric charge. The resulting continuous, low-thrust force gradually changes the spacecraft's velocity over time. Although the thrust levels produced by ion engines are minuscule—typically ranging from a few millinewtons to about one newton—their ability to operate continuously for thousands of hours enables spacecraft to reach very high terminal velocities, making them ideal for long-range missions. Ion propulsion has transitioned from theoretical research to practical application over several decades. Its development began in earnest in the mid-20th century, with initial laboratory tests conducted by scientists like Harold Kaufman at NASA's Lewis Research Center. One of the first successful demonstrations of an ion propulsion system in space occurred during NASA's Space Electric Rocket Test (SERT) missions in the 1960s. However, it was not until NASA's Deep Space 1 mission in 1998 that ion propulsion was employed as the primary propulsion system for a space mission.

©IJRASET: All Rights are Reserved

Deep Space 1 utilized a NASA Solar Technology Application Readiness (NSTAR) ion engine to test new technologies while conducting a flyby of asteroid 9969 Braille and comet Borrelly. The mission was a resounding success, showcasing the viability of ion propulsion in an operational context. Building upon this legacy, NASA's Dawn mission, launched in 2007, further validated ion propulsion by successfully orbiting two celestial bodies—Vesta and Ceres—in the asteroid belt, a feat previously unattainable with chemical propulsion due to the prohibitive fuel requirements. Dawn's ion thrusters allowed it to enter and exit orbits around both bodies, demonstrating unprecedented navigational flexibility in space. The advantages of ion propulsion systems are manifold. Chief among them is their extremely high specific impulse, which directly translates into better fuel efficiency. This allows spacecraft designers to either reduce the amount of onboard propellant—lowering launch mass and cost—or extend mission lifespans and enable more ambitious objectives. Furthermore, because ion thrusters operate continuously, they provide fine-grained control over spacecraft trajectories, enabling precise orbital adjustments for satellite positioning or scientific observation missions. Ion thrusters are also relatively safe, as they do not rely on volatile chemical propellants, reducing the risk of combustion-related failures. Their modular and scalable design makes them adaptable to various mission profiles, from small CubeSats performing Earth observation to large spacecraft traversing the solar system. In the commercial space sector, ion thrusters are now widely used for station-keeping on geostationary communication satellites and for orbit-raising maneuvers, replacing or supplementing traditional chemical propulsion systems. This trend is evident in modern satellites launched by companies like Boeing and Airbus, which often incorporate electric propulsion units to improve operational lifespan and reduce launch costs. Despite these benefits, ion propulsion systems also come with limitations that constrain their broader adoption in certain mission scenarios. The most notable limitation is their low thrust output, which makes them unsuitable for launch from Earth's surface or for missions requiring rapid changes in velocity, such as planetary landing or ascent. In this research paper, ion propulsion represents a transformative technology in the field of astronautics, offering a pathway toward sustainable and efficient space travel. While it cannot yet replace chemical propulsion for all applications, its superior fuel efficiency, operational precision, and suitability for deep-space missions make it an indispensable component of the modern and future spaceflight toolkit. The successful deployment of ion thrusters in missions like Deep Space 1 and Dawn has established a solid foundation for continued innovation and application. As power generation and materials technology advance, the capabilities of ion propulsion systems will expand, unlocking new frontiers in scientific exploration, planetary defense, resource utilization, and eventually, human settlement beyond Earth.

II. WORKING PRINCIPLE OF ION THRUSTERS

The working principle of ion thrusters is rooted in the physics of charged particle dynamics and the interaction of electric and magnetic fields with ionized gases. Unlike traditional chemical propulsion systems that rely on explosive combustion reactions to produce thrust, ion thrusters utilize electrostatic forces to accelerate ions to extremely high velocities, offering a much higher efficiency in terms of fuel usage. In a typical electrostatic ion thruster, a neutral gas—most commonly xenon due to its high atomic mass and inert characteristics—is introduced into a discharge chamber. Inside this chamber, electrons emitted from a cathode collide with xenon atoms, ionizing them through energetic impacts. This process strips electrons from the neutral atoms, producing positively charged xenon ions (Xe^+). These ions are then guided toward a set of gridded electrodes, often referred to as the accelerator and screen grids, which are maintained at high voltage differences. The electric field generated between these grids propels the ions to velocities typically in the range of 20–50 km/s, which is substantially higher than the exhaust velocities achieved in chemical rockets. Once the ions are ejected from the thruster, they form a high-speed ion beam. However, to maintain electrical neutrality of the spacecraft and to avoid negative effects from space-charge buildup, a neutralizer cathode located near the exit of the thruster emits electrons into the ion beam. These free electrons combine with the positive ions to form a neutral plasma plume, ensuring the spacecraft does not accumulate excessive electrical charge. The net result is a continuous, low-thrust but highly efficient propulsion system capable of operating for extended periods, making ion thrusters ideal for deep-space missions and satellite station-keeping. The amount of thrust (F) produced by an ion thruster is given by the equation F=m˙·veF = \dot{m} \cdot v_eF=m˙·ve, where m˙\dot{m}m˙ represents the mass flow rate of ions, and vev_eve denotes their exhaust velocity. Despite the fact that ion thrusters generate only a small amount of force—typically in the millinewton range—their specific impulse (Isp), a measure of propulsion efficiency, can exceed 3000 seconds, which is significantly higher than that of conventional chemical rockets that typically achieve around 450 seconds. This means that ion thrusters can produce much more momentum per unit mass of propellant, making them far more fuel-efficient.

This high efficiency comes at the cost of low thrust, which makes ion thrusters unsuitable for launch or rapid maneuvers but extremely valuable for long-duration missions where fuel mass and propulsion efficiency are critical.

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

Their ability to operate continuously for thousands of hours allows spacecraft to gradually build up velocity over time, eventually reaching high speeds with minimal fuel consumption. Thus, the working principle of ion thrusters not only showcases advanced application of electromagnetic theory but also represents a paradigm shift in how we approach propulsion for interplanetary exploration and satellite operations in the modern era of spaceflight.

III. EXPERIMENTAL SETUP AND COMPONENTS

To better understand the behavior of ion thrusters, a prototype was constructed using accessible components. The setup includes:

- High Voltage Generator (up to 60 kV) to create strong electric fields.
- Copper and Aluminium Sheets to serve as electrodes and structural base.
- Thin Copper Wire (emitter wire) for initial ionization.
- Crocodile Clamps and Switches for secure, controllable electrical connections.
- Battery (9V) for auxiliary systems.
- Holding Stand to stabilize the setup during operation.

The system simulates ion wind and plasma discharge phenomena in a controlled environment.

To better understand the behavior of ion thrusters, a prototype was constructed using readily available and cost-effective components. This experimental setup serves as a simplified yet effective representation of how ion propulsion operates in real-world aerospace applications. The primary component of the system is a high-voltage generator capable of producing up to 60 kilovolts, which is critical for generating the strong electric fields required for ion acceleration. This high voltage simulates the electric potential difference necessary to ionize air molecules and propel ions from the emitter to the collector, producing thrust through the phenomenon known as ion wind or electrohydrodynamic thrust. To provide the structural framework and conductive surfaces needed for the formation of an electric field, copper and aluminium sheets are employed. These materials act as electrodes—copper often used for its superior conductivity and aluminium for its lightweight properties. The core ionizing element in the setup is a thin copper wire, which functions as the emitter. Due to its fine diameter, the wire generates a highly concentrated electric field at its tip when high voltage is applied. This leads to corona discharge and ionization of surrounding air molecules. The resulting positively charged ions are accelerated towards the negatively charged collector electrode, creating a directional flow of air known as ion wind. Supporting components such as crocodile clamps and switches are integrated into the design to ensure secure and adjustable electrical connections, enabling safe experimentation and better control of the power supply. A 9V battery powers any auxiliary systems, such as low-voltage control circuits or indicators, helping isolate them from the high-voltage environment and ensuring operational safety. The holding stand plays a vital role in maintaining the physical stability and spatial configuration of all components. It ensures that the electrodes remain aligned properly during operation, which is essential for consistent ion discharge and accurate observation of thrust generation. This entire system effectively simulates the principles of plasma discharge and ion wind propulsion in a controlled laboratory setting, offering valuable insights into how ions can be generated, accelerated, and manipulated to produce propulsion without the need for moving mechanical parts. Such a setup is ideal for demonstrating the electrostatic propulsion mechanism that forms the foundation of space ion thrusters, where similar concepts are applied on a much larger and more sophisticated scale. Additionally, the system allows observation of related phenomena such as corona glow, ozone generation, and the behavior of ionized particles under varying electrode configurations and voltage levels. These observations help in optimizing electrode geometry, material selection, and system stability—factors that critically influence ion thruster performance. Overall, the prototype serves as a practical educational model, bridging the gap between theoretical electrostatic propulsion and its tangible effects, while highlighting the advantages of silent, efficient, and propellant-free thrust mechanisms suitable for long-duration space missions.

IV. RESULTS AND DISCUSSION

The developed prototype, though not capable of generating measurable thrust sufficient for any practical propulsion application, effectively serves as a functional proof-of-concept for demonstrating key principles of electrostatic ion propulsion. This prototype illustrates the basic phenomena involved in ion thruster operation—most notably, the successful ionization of air molecules and visible corona discharge at high voltages, which are fundamental to any ion-based propulsion system. These phenomena, achieved under controlled experimental conditions, confirm that charged particles can indeed be accelerated in an electric field to produce motion, laying the groundwork for more sophisticated implementations. One of the most compelling outcomes observed was the formation of ionic wind—a flow of air caused by the movement of charged ions.

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

This was visibly evident through the deflection of lightweight indicators such as paper strips, suggesting that while actual thrust might be negligible in magnitude, a directional force is being produced as a result of ion movement. Additionally, the experiment validated the basic working behavior of electrostatic ion propulsion, wherein ions are generated and then propelled away from the emitter electrode under the influence of a high-voltage electric field. This emulates the operational principle behind spaceborne ion thrusters used in satellites and deep space probes. However, several inherent limitations were observed during the prototype's operation, underscoring the technological challenges involved in scaling up such systems. Chief among them is the extremely low thrust output, which is far below what is necessary for terrestrial or atmospheric applications, where significant force is needed to overcome gravitational and aerodynamic drag. This constraint confirms that such propulsion systems are best suited for the vacuum of space, where minimal force is required to maintain or alter momentum over long durations. Another technical challenge identified was material erosion at high-voltage contact points. The consistent exposure of electrodes to high electric fields, particularly under prolonged operation, results in degradation of conductive materials, compromising efficiency and lifespan. This is a critical factor in designing durable ion propulsion systems, where electrode longevity directly influences mission reliability. Lastly, the power demands of the prototype were non-trivial, requiring substantial energy input to sustain ionization and ion acceleration. On Earth, such power could be provided through conventional electrical means; however, for space applications, energy sources like solar panels or compact nuclear reactors would be necessary to ensure a continuous and reliable power supply. This raises additional engineering considerations regarding energy storage, conversion efficiency, and system mass. Despite these challenges, the prototype holds educational and experimental value, offering insights into the complex interplay of electrostatics, fluid dynamics, and material science in a propulsion context. It marks an essential step toward understanding and developing viable ion propulsion technologies for space exploration. With continued research into high-efficiency ion sources, erosion-resistant materials, and lightweight, high-voltage power systems, such technologies may eventually play a pivotal role in future low-thrust, long-duration space missions.

V. CONCLUSION

Ion thrusters represent a transformative advancement in spacecraft propulsion, offering exceptional efficiency and long-term operational capabilities that far surpass traditional chemical rockets in the vacuum of space. While their inherently low thrust levels render them unsuitable for terrestrial launch, their high specific impulse and ability to provide continuous acceleration make them ideal for missions requiring long-duration, low-thrust propulsion—such as orbital transfers, deep-space exploration, and satellite station-keeping. Recent advancements in lightweight materials, compact and robust power systems, and precise control electronics have significantly improved the reliability and performance of ion propulsion systems. These innovations enable spacecraft to travel farther using less propellant, enhancing mission flexibility and reducing launch costs. As space agencies and private industries increasingly prioritize sustainable and cost-effective solutions, ion thrusters are emerging as a critical component of future mission architectures. Their scalability allows for integration into both small satellites and large interplanetary probes, making them a versatile option across a wide range of applications. As humanity ventures deeper into the solar system—and eventually beyond—ion propulsion stands out as a cornerstone technology capable of supporting the next generation of space exploration, from Mars missions to asteroid mining and beyond. Future research should focus on enhancing thrust levels without compromising efficiency to enable broader mission applicability. Integration with nuclear or solar electric power systems can further extend mission range and duration. Advancements in autonomous navigation and fault-tolerant control will be vital for long-duration deep-space operations.


REFERENCES

[1] Goebel, D. M., & Katz, I. (2008). Fundamentals of Electric Propulsion: Ion and Hall Thrusters. Jet Propulsion Laboratory / Wiley.
[2] Polk, J. E., et al. (1999). In-Flight Performance of the NSTAR Ion Propulsion System on the Deep Space One Mission. AIAA-1999-2274.
[3] Choueiri, E. Y. (2009). A Critical History of Electric Propulsion: The First 50 Years (1906–1956). Journal of Propulsion and Power, 20(2), 193–203.
[4] Hofer, R. R., & Gallimore, A. D. (2001). High-Specific Impulse Hall Thrusters, Part 1: Influence of Current Density and Magnetic Field. AIAA-2001-3500.
[5] Sovey, J. S., Rawlin, V. K., & Patterson, M. J. (1999). Ion Propulsion Development Projects in the United States: Space Electric Rocket Test I to Deep Space 1. Journal of Propulsion and Power, 17(3), 517–526.
[6] Fearn, D. G. (2001). Electric Propulsion: Where Next? Journal of the British Interplanetary Society, 54, 263–272.
[7] Patterson, M. J., et al. (2008). NEXT Ion Propulsion System Development Status and Preliminary Performance Results. AIAA-2008-5187.
[8] Keidar, M., & Boyd, I. D. (2007). Effect of a Magnetic Field on the Performance of a Micro Hall Thruster. Applied Physics Letters, 91(9), 091501.
[9] Lozano, P. C., & Martinez-Sanchez, M. (2005). Ionic Liquid Ion Sources for Space Propulsion. Journal of Colloid and Interface Science, 282(2), 415–421.
[10] Jahn, R. G., & Choueiri, E. Y. (2002). Electric Propulsion. In Encyclopedia of Physical Science and Technology (3rd ed.), Academic Press.
[11] NASA Glenn Research Center. (2020). Evolution of Electric Propulsion Systems at NASA. NASA Fact Sheet.

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

[12] ESA (European Space Agency). (2021). Electric Propulsion for Satellites and Deep Space Missions. ESA Publications.
[13] Brophy, J. R. (2010). Advanced Ion Propulsion for Space Exploration. NASA Technical Memorandum TM–2010-216396.
[14] NASA. (2016). Hall Effect Thruster Systems for Science Missions. NASA Science Mission Directorate.
[15] Busek Co. Inc. (2023). Electric Propulsion Technologies for CubeSats and SmallSats. Technical Brief.

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

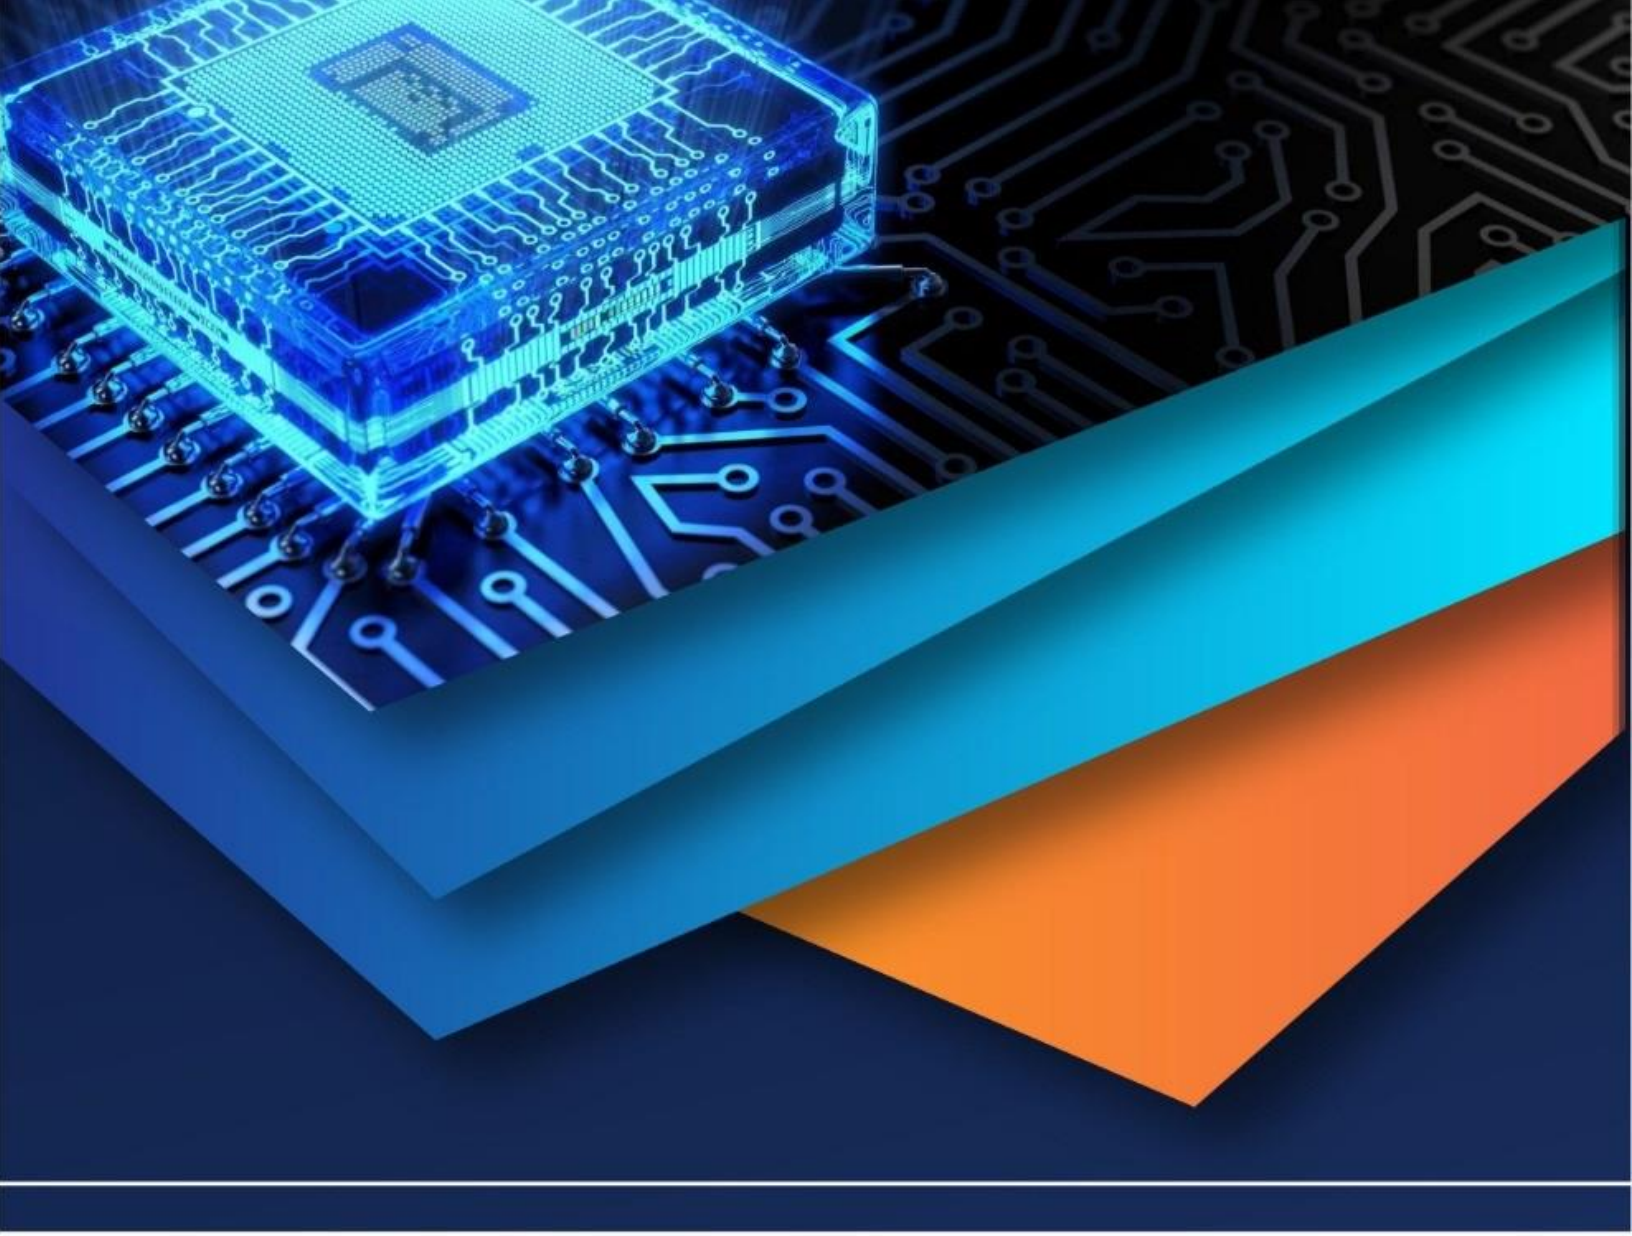

10.22214/IJRASET

45.98

IMPACT FACTOR: 7.129

IMPACT FACTOR: 7.429

INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089 (24*7 Support on Whatsapp)