iJRASET
International Journal For Research in Applied Science and Engineering Technology

INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 7 **Issue:** VIII **Month of publication:** August 2019

DOI: http://doi.org/10.22214/ijraset.2019.8088

www.ijraset.com

Call: 08813907089 | E-mail ID: ijraset@gmail.com

International Journal for Research in Applied Science & Engineering Technology (IJRASET)
ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.177
Volume 7 Issue VIII, Aug 2019- Available at www.ijraset.com

A Rectangular Ring Slot Microstrip Patch Antenna for Multiband Applications

Ravi Teja Gali[1], Akhila John Davuluri[2],
[1, 2]*ECE Department, Acharya Nagarjuna University*

Abstract: ***A Rectangular Microstrip patch antenna (MPA) for multiband applications is designed using slotting technique. The proposed antenna supports different range of frequencies, the antenna can be operated at four different bands i.e., X, S, Ku, and C band. The antenna is designed using FR-4 epoxy substrate with dielectric constant of 4.4 and loss tangent of 0.02 The dimensions of the substrate are 36.27 X 30.03 X 1.5748 mm^3 designed antenna resonates at the following frequencies 3.2, 5.3, 6.6, 8.7, 9.4, 10.2, 10.8, 11.4, 12.4, 13.1, and 14.5 GHz with a gain of 11.11, 7.094, 4.40, 1.19, 6.65, 4.47, 2.69, 4.23, 3.24, 8.25, and 5.89dB respectively. The performance of the antenna is analyzed by various parameters like Return loss, Gain and VSWR etc. The design of antenna carried out using HFSS 13.0 version.***

Keywords: MPA, Gain, VSWR, HFSS, Return loss, multi bands, slots

I. INTRODUCTION

In present days it is required that the antenna which will be operated at various frequencies for various applications. There are many advantages of using multiband antennas. One of them is prevents additional usage of bandwidth. There are many techniques for obtaining multiband antennas. Defected ground structure can be opted to obtain two and more bands with circular polarization abilities [1]. There are various other multiband antenna techniques. A rectangular micro strip antenna is used for various applications because of their attractive properties of light in weight, simple to fabrication, compact in size, economic in cost [2]. For these reasons patch antenna is used in this design. Micro strip line feeding technique is used in this design. In this paper rectangular slot is used on the patch to achieve multiband antenna characteristics. The resonating frequencies useful for wireless applications, military and satellite applications, and remote sensing applications.

There are various designs of Micro strip patch antenna with are proposed with diferrent slots for different wireless applications [7]. Performance of the antenna system can be improved using different sized slots in the antenna design [6]. Then structure of the antenna and shape of the patch can also influence the performance dramatically [8]. In this paper the length and width of the designed antenna was calculated by considering the following design procedure [2] employing the rectangular ring slot in the patch antenna to achieve multiple bands. The designed antenna covers 3.2 GHz to 14.5 GHz bands.

II. ANTENNA DESIGN CONSIDERATIONS

Rectangular microtrip patch antenna is modeled by using the following considerations. The simple rectangular patch antenna structure is given below in Fig 1. And the proposed design is shown in Fig 2.

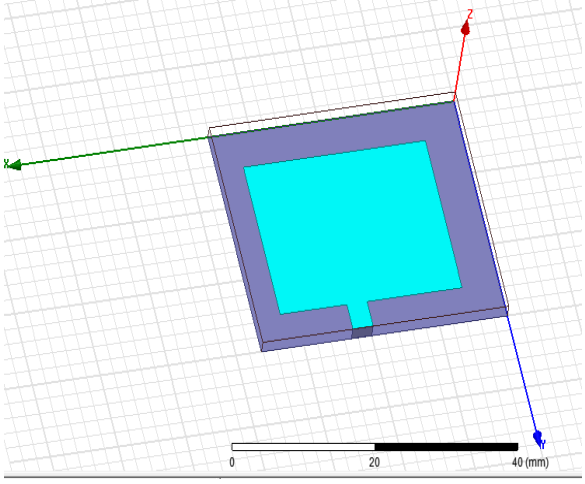

Fig. 1 Simple Rectangluar Patch Antenna

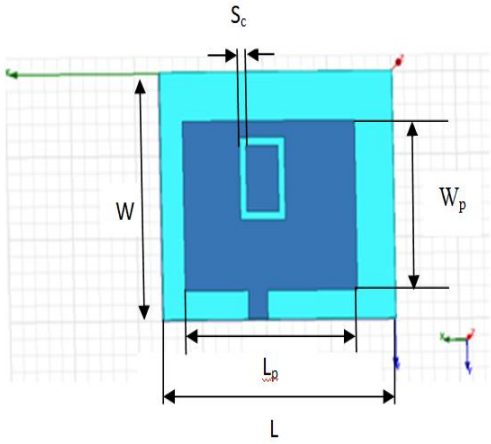

Fig. 2 Proposed Patch Antenna design

©IJRASET: All Rights are Reserved

A. Design Procedure

1) First choose the frequency of resonant f_r substrate thickness (h) and dielectric constant $\in_r$.

2) The width and length of patch is calculated as follows:

3) Patch width is taken as

$$W = \frac{c}{2 f_r}\sqrt{\frac{2}{\in_r + 1}} \quad \text{..... (1)}$$

Where c=3x10^8 m/s

4) The patch length is taken as

$$L = L_{eff} - 2\Delta L \quad \text{..... (2)}$$

$$L_{eff} = \frac{c}{2 f_r \sqrt{\in_{reff}}} \quad \text{..... (3)}$$

Where effective dielectric constant is

$$\in_{reff} = \frac{\in_r + 1}{2} + \frac{\in_r - 1}{2}[1+12\frac{h}{w}]^{-1/2} \quad \text{..... (4)}$$

Where Normalized extension length is

$$\Delta L = 0.412h\frac{(\in_{reff} + 0.3)(\frac{w}{h} + 0.264)}{(\in_{reff} - 0.258)(\frac{w}{h} + 0.8)} \quad \text{..... (5)}$$

5) The length of the substrate is taken as $L_s = L + 6h$ and the width of the patch is taken as $Ws = W + 6h$

TABLE I Antenna Design Parameters

S.No	Parameter	Notation	Value
1.	Relative Permittivity	ε_r	4.4
2.	Operating Frequency(GHz)	f_r	3.4
3.	Height of Substrate(mm)	H	1.5748
4.	Substrate width(mm)	W	36.27
5.	Length of Substrate(mm)	L	30.03
6.	feed line width(mm)	w_{feed}	3
7.	Length of feed line(mm)	l_{feed}	12
8.	Length of the patch(mm)	L_p	20.59
9.	Width of the patch(mm)	W_p	26.83
10.	Ring slot width (mm)	S_c	1
11.	Length of the slot(mm)	L_{slot}	7

Where

c is free space velocity.

$\in_r$ is dielectric constant

L is patch length.

W is patch width.

h is thickness of the substrate

L_s is substrate length.

W_s is substrate width

©IJRASET: All Rights are Reserved

III. SIMULATION RESULTS

1) *Return loss:* The phenomenon of propagation of signal reflected back when impedance mismatch occurs. The return loss is calculated as $RL = -20\log_{10}^{|\Gamma|}(dB)$ .....(6)

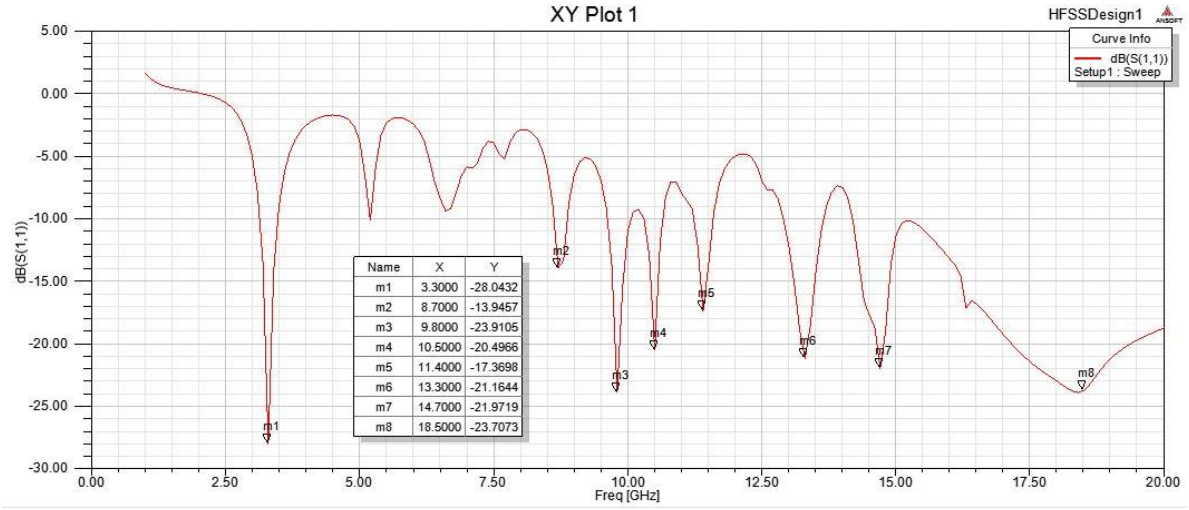

Fig. 3 Return loss plot for simple MPA

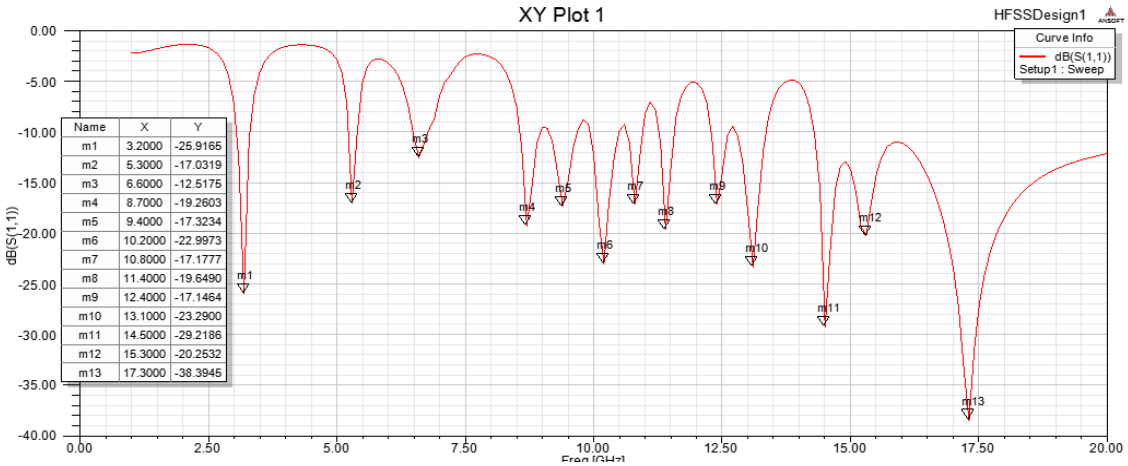

Fig. 4 Return loss for Slotted MPA

2) *VSWR: It shows how much power is reflected back from the antenna. It is Expressed as*

$$VSWR = \frac{1+\Gamma}{1-\Gamma} \quad \text{..... (7)}$$

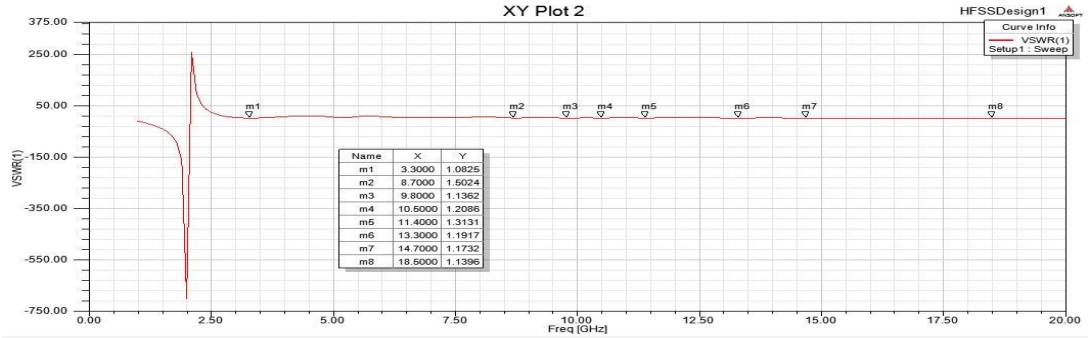

Fig. 5 VSWR plot for Simple MPA

©IJRASET: All Rights are Reserved

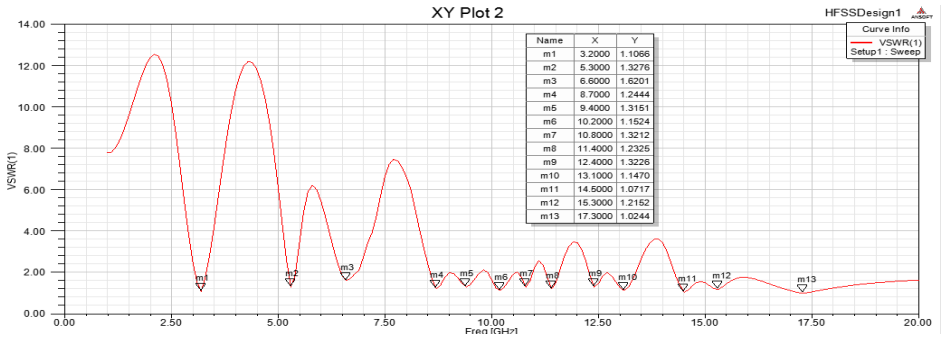

Fig. 6 VSWR plot for Slotted MPA

3) Gain: It is the amount of power transferred in that direction.

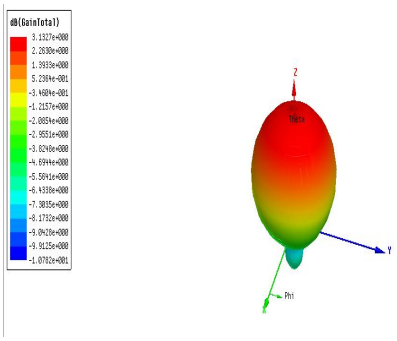

Fig. 7 Total gain of the Simple MPA

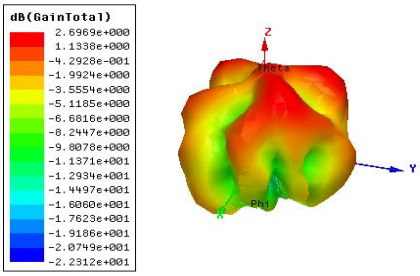

Fig. 8 Total gain of the Slotted MPA

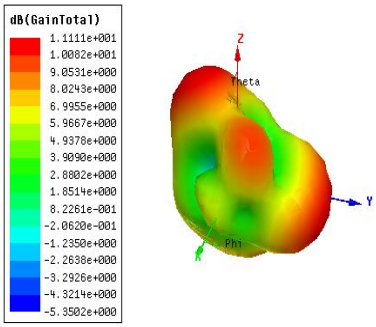

Fig. 9 Gain at 3.2 GHz

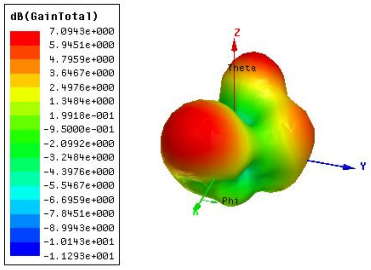

Fig. 10 Gain at 5.3 GHz

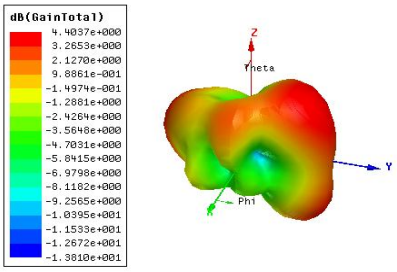

Fig. 11 Gain at 6.6 GHz

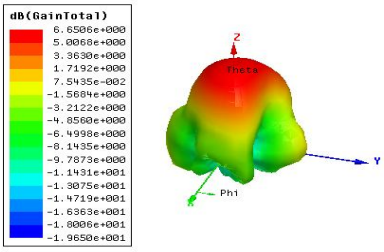

Fig. 12 Gain at 9.4 GHz

©IJRASET: All Rights are Reserved

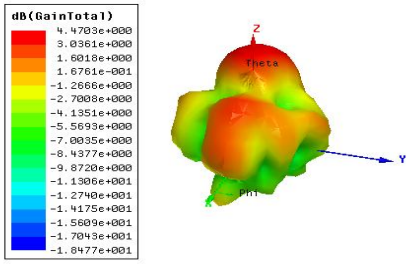

Fig. 13 Gain at 10.2 GHz

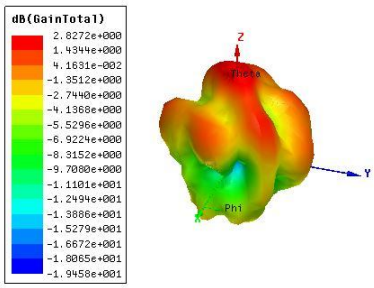

Fig. 14 Gain at 10.8 GHz



Fig. 15 Gain at 11.4 GHz

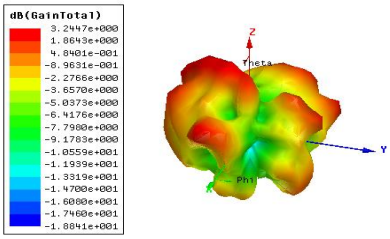

Fig. 16 12.4 GHz gain

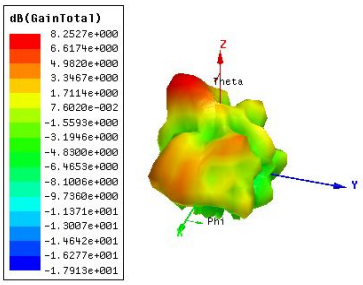

Fig. 17 Gain at 13.1 GHz

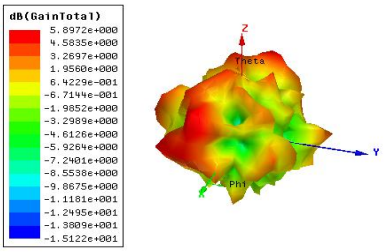

Fig. 18 Gain at 14.5 GHz

4) Current distribution: Slotted MPA current distribution at E-field and at H-field are bellow in following figures.

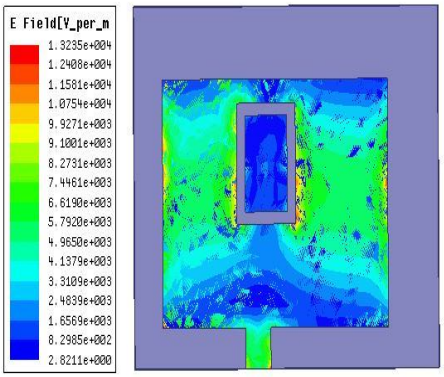

Fig. 19 Current distributuion at 3.4 GHz (E-plane)

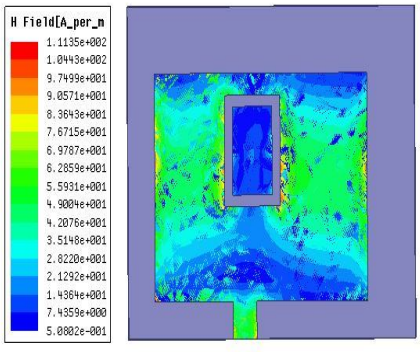

Fig. 20 Current distributuion at 3.4 GHz (H-plane)

©IJRASET: All Rights are Reserved

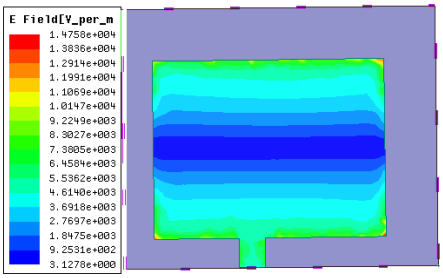

Fig. 21 E plane Current distributuion at 3.4 GHz

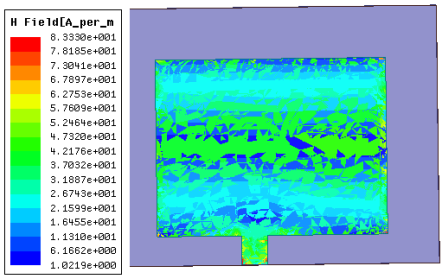

Fig. 22 Current distributuion at 3.4 GHz (H-plane)

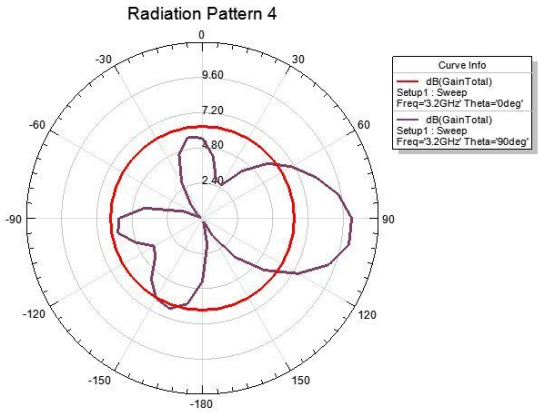

Fig. 23 H plane radiation pattern at 3.2 GHz

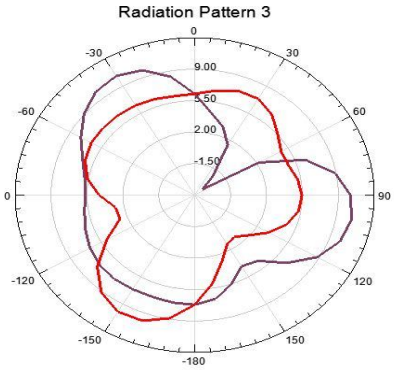

Fig.24 E plane radiation pattern at 3.2 GHz

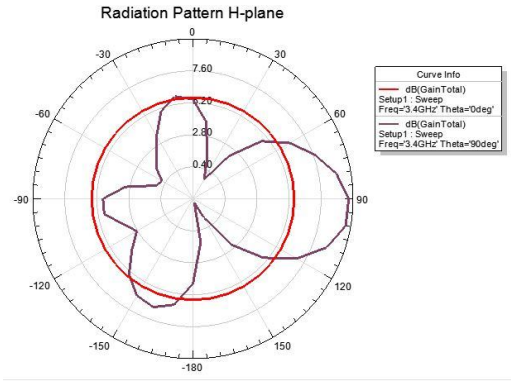

Fig. 25 Radiation pattern at 3.4 GHz (H-plane)



Fig. 26 Radiation pattern at 3.4 GHz (E-palne)

TABLE III
SIMULATED RESULTS OF SIMPLE ANTENNA

S.No	Frequency (GHz)	S11 (dB)	VSWR	Gain (dB)	Band width (MHz)
1.	3.3	-28.04	1.08	3.87	---
2.	8.7	-13.94	1.50	1.62	240
3.	9.8	-23.91	1.13	8.8	430
4.	10.5	-20.49	1.20	2.82	430
5.	11.4	-17.16	1.31	3.41	350
6.	13.3	-21.16	1.19	4.56	740

©IJRASET: All Rights are Reserved

TABLE IIII

SIMULATED RESULTS OF SLOTTED MPA

S.No	Frequency (GHz)	S11 (dB)	VSWR	Gain (dB)	Band width (MHz)
1.	3.2	-25.91	1.10	11.11	270
2.	5.3	-17.03	1.32	7.09	170
3.	6.6	-12.51	1.62	4.4	300
4.	8.7	-19.26	1.24	1.19	210
5.	9.4	-17.32	1.43	6.65	430
6.	10.2	-22.99	1.15	4.47	500
7.	10.8	-17.17	1.32	2.69	500
8.	11.4	-19.64	1.23	4.23	310
9.	12.4	-17.14	1.32	3.24	310
10.	13.1	-23.29	1.14	8.25	350
11.	14.5	-29.21	1.03	5.89	580

The designed slotted antenna compared with the simple rectangle patch antenna design the over all the designed antenna gain is increased to 11.11 dB and the number of resonating frequencies also increased from 6 to 11 . The design antenna supports high gain applications.

IV. CONCLUSIONS

The proposed multi Band antenna is resonating at eleven frequencies and has better gain and return loss. These are in the operating range of X band, S band, Ku band C band. The antenna proposed particularly radiates at 3.2, 5.3, 6.6, 8.7, 9.4, 10.2, 10.8, 11.4, 12.4, 13.1, and 14.5 GHz with gains of 11.11, 7.09, 4.4, 1.19, 6.65, 4.47, 2.69, 4.23, 3.24, 8.25, and 5.89 dB respectively. It is observed that antenna has high gain of 11.11 dB at 3.2 GHz. The proposed antenna is mostly preferred for wireless, military and satellite and remote sensing applications etc. The designed micro strip patch antenna is analyzed and simulated using HFFS 13.0 version software.

V. ACKNOWLEDGMENT

I would like to thanks to Dr P. Siddaiah, Principal, Professor of ECE, University College of Engineering Technology, Acharya Nagarjuna University, for providing the opportunity to work in Satellite data analytical centre for this project.

REFERENCES

[1] Praveen Chaurasia, Binod kumar kanaujia, metamaterial based circularly polarized hexa band patch antenna with small frequency ratios for multiple wireless applications.
[2] C.A Balanis Antenna theory analysis and design. 3rd ed. Hoboken (NJ): John Wiley; 2005; 816-856.
[3] Stutzman WL,thiele GA. Antenna theory and design.2nd edition New York:Wiley India pvt Ltd:1998.
[4] Chen CH,Yung EKN. Dual band circularly polarized CPW- Fed slot antenna with small frequency ratio and band widths. IEEE Tran Antennas propagation 2011;59:1379-1384
[5] H.Wong, K.Luk,C.H.Chan small antennas in wireless communications, proceedings of the IEEE.vol.100,no. 7,pp.2109-2121, july 2012.
[6] P. Khanna, K. Shingal and arun kumar, "Multiband annular ring microstrip antenna with defectd ground structure for wireless communication", International Journal of Computer applications, Vol.135, No.2, pp.19-25, 2016.
[7] Xiaoang Li, Chao Li, "Design of High gain Multiple U-slot Micro strip patch antenna for wireless system", ICCP 2010 Proceedings.
[8] Multiband microtripe patch antenna for wireless applications using metameterial.international journal of advanced research in electronics and communication engineering(IJARECE).4(6).p.1497-1503.
[9] Huiqing Zhai, Zhihui Ma, YuHan ,A compact printed antennas for triple band WLAN/WiMAX Applications,IEEE Antennas and wireless propagation letters,vol.12,pp.65-68,January 2013
[10] H.-w Hsieh,Y.-c Lee, K.-K.Tiong,Design of multiband antenna for mobile handset applications, IEEE Antennas and wireless propagation letters,vol. 8,pp. 200-203, 2009.
[11] Chandrasekharan Nataraj, Assia Ali Ismael,Compact "Multiband Microstrip Patch antenna with slot-rings for wire less applications", IEEE 15th student conference on Research and development.

©IJRASET: All Rights are Reserved

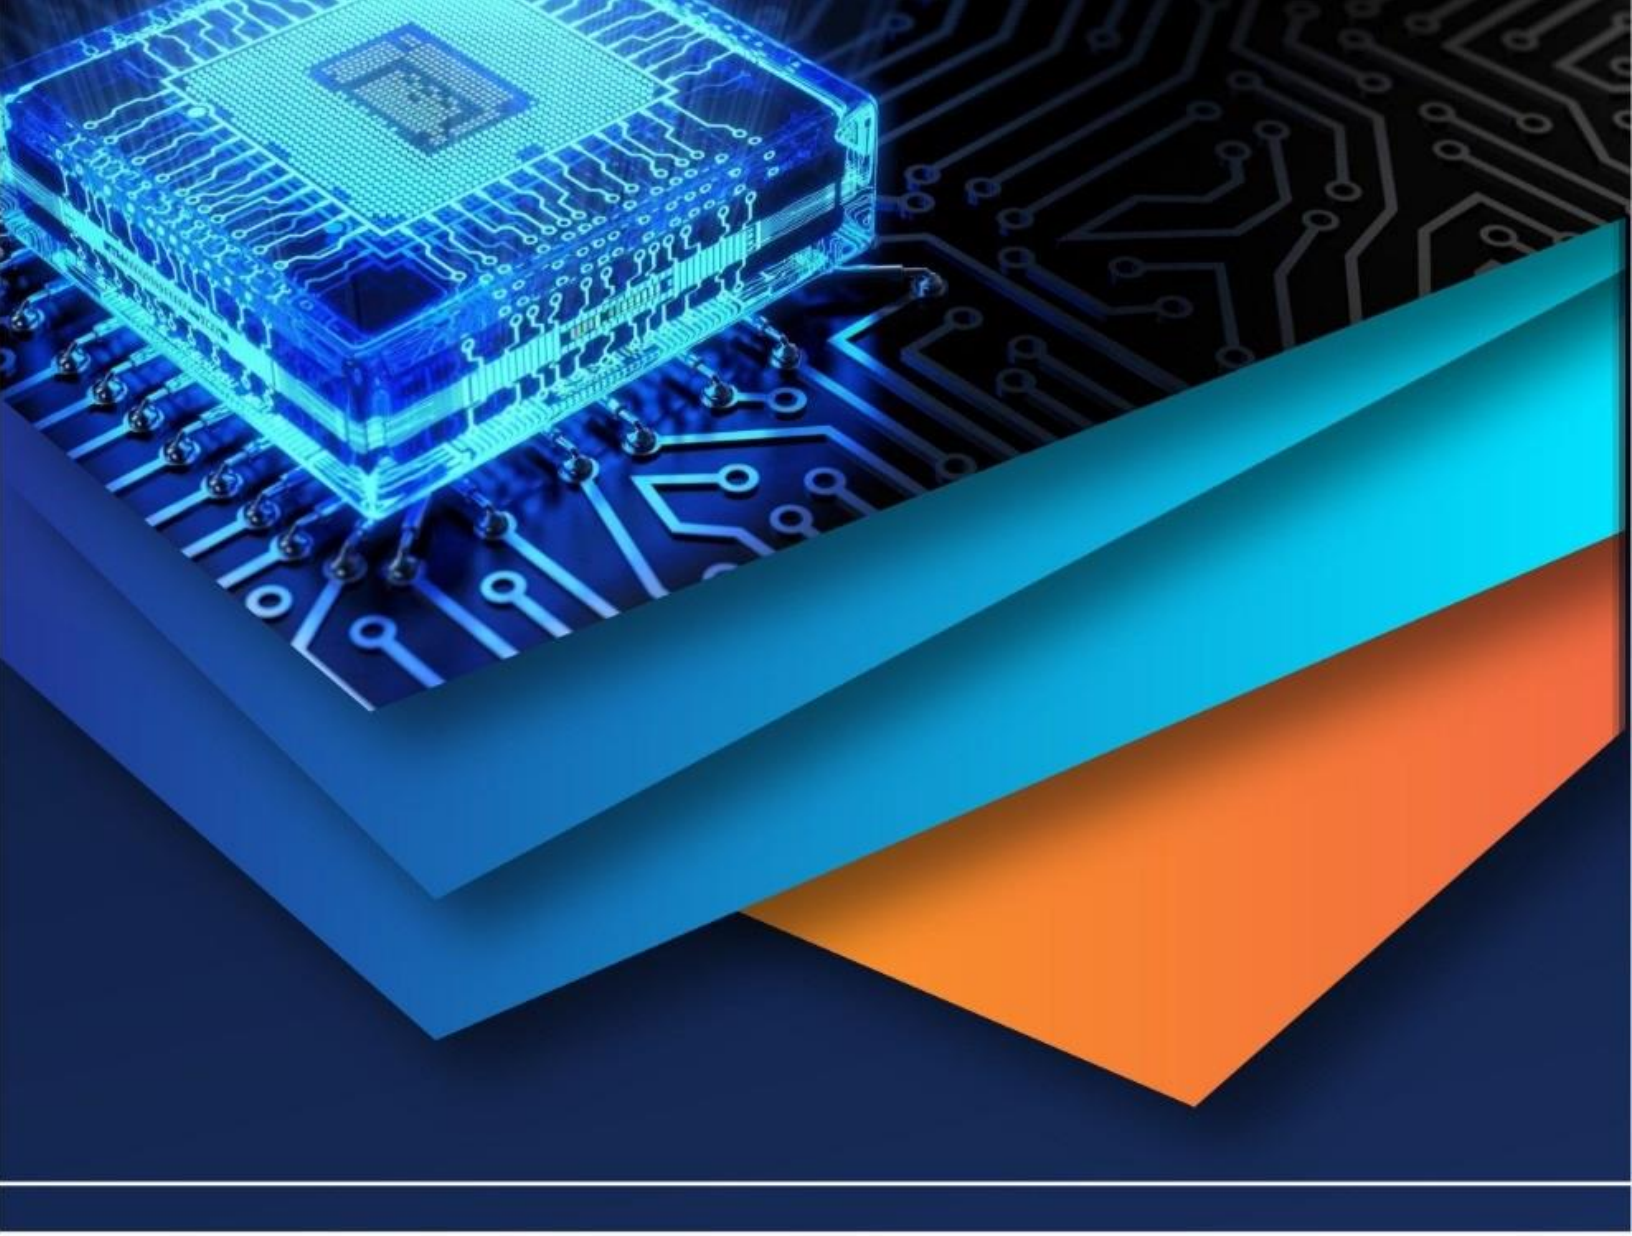

10.22214/IJRASET

45.98

IMPACT FACTOR: 7.129

IMPACT FACTOR: 7.429

INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089 (24*7 Support on Whatsapp)