



# **iJRASET**

International Journal For Research in  
Applied Science and Engineering Technology



---

# **INTERNATIONAL JOURNAL FOR RESEARCH**

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume:** 13    **Issue:** III    **Month of publication:** March 2025

**DOI:** <https://doi.org/10.22214/ijraset.2025.67597>

**[www.ijraset.com](http://www.ijraset.com)**

**Call:** ☎ 08813907089

**E-mail ID:** [ijraset@gmail.com](mailto:ijraset@gmail.com)

# Addressing Water Pressure Variability in Large-Scale Drip Systems and Providing Solution

R. Rohith<sup>1</sup>, K. Santhosh<sup>2</sup>, P. Saravanakumar<sup>3</sup>, Dr. P. Dineshkumar<sup>4</sup>,

<sup>1, 2, 3</sup>UG Students, Department of Agriculture Engineering, Kongunadu College of Engineering and Technology, Trichy

<sup>4</sup>Assistant Professor, Department of Agriculture Engineering, Kongunadu College of Engineering and Technology, Trichy

**Abstract:** Large-scale drip irrigation systems frequently experience water pressure variability, which affects the effectiveness and consistency of water supply. Higher running expenses, unequal agricultural irrigation, and increased water waste could result from this. Numerous causes, such as pipeline wear and tear, emitter blockages, shifts in system demand, and uneven topography, can result in pressure variances. These problems would reduce the system's overall effectiveness, potentially resulting in either too much water being applied to some regions or insufficient irrigation in others. To guarantee sustainable farming methods, save resources, and maximize water use, these issues must be resolved. supplying a diffuser dripline to increase crop yields. In large-scale drip irrigation systems, water pressure variability frequently results from a confluence of factors that impede effective water distribution. These include changes in system demand brought on by shifting crop needs or system maintenance, which can change pressure across the network; emitter blockages from debris or mineral buildup, which can result in uneven water application; pipeline wear and tear, which can cause leaks and pressure drops; and uneven topography, which can affect water flow. These problems lead to uneven irrigation, which eventually affects crop yields and water efficiency by giving some areas too much water while depriving others of it.

**Keywords:** Optimal water application, Irrigation effectiveness, Diffuser driplines, Topography impact, Irrigation system performance.

## I. INTRODUCTION

Variability in water pressure is a serious problem for large-scale drip irrigation systems, reducing their efficacy and efficiency. The ability of drip irrigation to precisely provide moisture to plant roots while conserving water has led to its widespread use. However, the system is susceptible to pressure variations, which can occur for a number of reasons, because it depends on constant water pressure for even distribution. Uneven water distribution brought on by pressure variation can affect crop health, yield, and resource management as a whole. Resolving this issue is essential to guaranteeing the effective use of water resources and the ability of agricultural operations to maintain peak performance under a variety of environmental circumstances. Drip irrigation systems frequently experience pressure variability due to pipeline wear and tear, emitter obstructions, variations in system demand, and uneven field terrain. Pipelines are more likely to leak and crack as they get older, which makes it harder to keep the system's pressure constant. These problems can be made worse by emitter blockages caused by dirt, minerals, or organic matter, which can interfere with the consistent flow of water. Furthermore, fluctuating water demands brought on by crop development or seasonal variations may result in pressure imbalances, which could cause some areas of the field to get either too much or too little irrigation. Additionally, uneven terrain may contribute to pressure differences by altering the way water flows across different land elevations. Innovative technologies like diffuser driplines have showed potential in addressing these issues and enhancing water delivery. By reducing pressure variations, diffuser driplines may more uniformly control water flow throughout the irrigation system, guaranteeing crops have constant moisture levels. Additionally, system monitoring, routine maintenance plans, and improvements in pipeline materials can all aid in spotting wear early and avoiding clogs. Farmers may maximize irrigation efficiency, minimize water loss, and encourage sustainable agricultural practices by tackling these pressure variability challenges. This will increase crop yields and water management for long-term success.

## II. COMPARATIVE ANALYSIS OF EXISTING SYSTEMS

TABLE I

Aspect	Flood Irrigation	Drip Irrigation
Water Application	The field is flooded with water that is applied to the entire soil surface. Emitters are used to provide water	Emitters carry water straight to the roots of the plants.

	straight to the roots of plants.	
Efficiency	Less effective because of deep percolation, significant evaporation, and runoff.	Extremely effective, supplying water to plant roots with little waste.
Water Usage	Usually utilizes a lot of water, which results in water waste.	Because it applies water in exact amounts, it uses less water.
Soil Erosion	Increased chance of soil erosion as a result of surface water dispersal.	Since water is supplied gradually and directly to the soil, there is less chance of soil erosion.
Crop Suitability	Ideal for crops like rice that can withstand flooding.	Ideal for a broad range of crops, particularly those that are susceptible to excessive watering.
Labor Requirements	High leveling and water flow management labor costs.	Minimal labor needs after the system is automated and set up.
Initial Cost	Little infrastructure requirements, therefore a low initial investment.	Higher starting expenses because emitters, pumps, and pipes are required.
Maintenance	Needs a lot of upkeep to control water flow and guarantee appropriate distribution.	Less labor-intensive but still needs routine maintenance, such as cleaning emitters and filters.
Fertility Management	The flow of surface water may cause fertilizers to wash away.	Fertigation is an efficient way to provide fertilizers straight to the plants.
Suitability in Arid Regions	Less appropriate because it uses a lot of water.	Its ability to conserve water makes it perfect for areas with limited water supplies.
System Complexity	Basic infrastructure makes it simple and easy to install.	More intricate, requiring tubing, emitters, and pumps to be designed, installed, and managed.
Environmental Impact	Can result in decreased soil health, salinization, and waterlogging.	Promotes sustainable farming by lowering water waste and environmental deterioration.
Flexibility	Limited adaptability; field flooding necessitates substantial infrastructure.	Adaptable to various crop varieties, irrigation schedules, and field sizes.
Water Distribution	Uneven distribution as a result of different water flow and field terrain.	Uniform distribution of water, guaranteeing steady soil moisture.

### III.MATERIALS AND METHODOLOGY

The performance of a drip irrigation system can be greatly impacted by uneven terrain topography and unpredictable pressure. Pipeline deterioration, emitter obstructions, and variations in system demand are some of the common causes of pressure inconsistencies. Uneven water distribution, when some places receive too much water while others receive too little, can be caused by these pressure changes. Because topographical features like hills and valleys alter the normal flow of water, this becomes more problematic when the terrain is uneven. Higher elevations may result in less effective water delivery to the plants because of decreased pressure, which could cause under-irrigation. On the other hand, too much water may fall on lower-lying regions, leading to over-irrigation and possible water logging. Therefore, to achieve uniform irrigation and maximize water utilization, it is crucial to maintain a constant pressure level and modify the system to fit the contours of the landscape.

Drip irrigation systems have major difficulties because to the combination of uneven land topography and irregular pressure, especially in vast agricultural areas. Inconsistent pressure interferes with the system's ability to distribute water evenly. This issue is exacerbated on uneven ground since water circulation is impacted by the terrain's natural slope. Gravity may make water move more slowly in higher elevations, leaving dry patches where crops don't get enough rainfall. Conversely, water pooling may cause lower regions to become oversaturated, which could result in ineffective irrigation and possible crop damage. In order to guarantee that every area of the field receives the proper amount of water, encouraging healthy crop growth and minimizing water waste, it is imperative to manage pressure variability and take land contours into consideration.


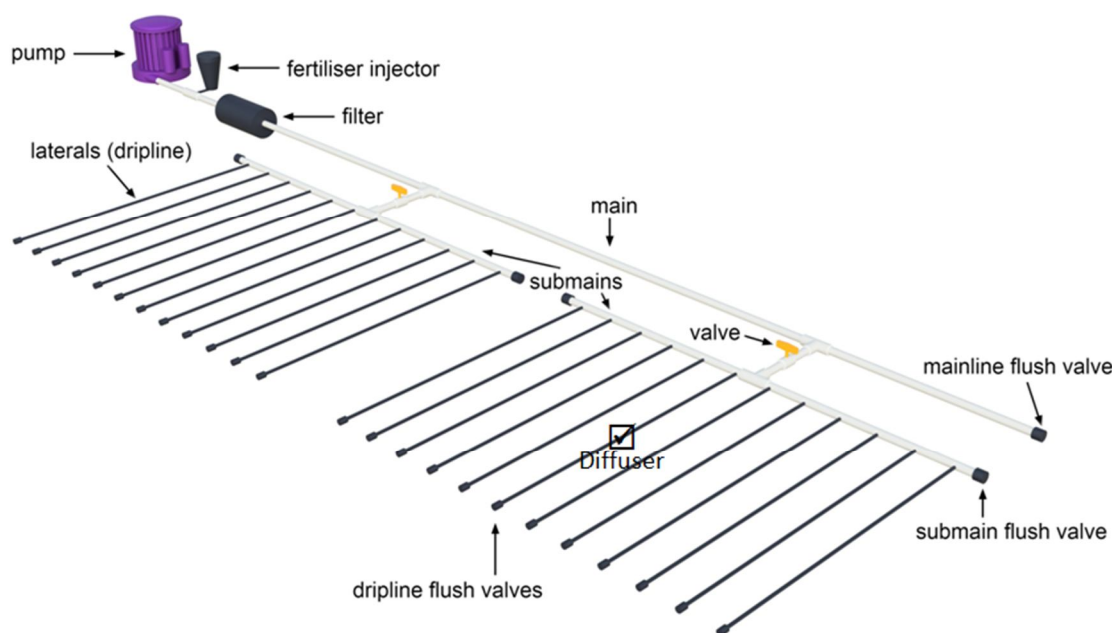


Fig:1 layout of proposed system

#### IV.RESULT AND DISCUSSION

Because of variables including pipe length, diameter, and friction losses, the pressure levels in the lateral line of a drip irrigation system might differ greatly between the beginning and terminating emitters. Water loses pressure as it passes through the lateral, which causes the flow rate at the emitters that are farther away from the water source to drop. Uneven irrigation results from this pressure mismatch, giving plants nearer the lateral's start more water than those farther down. Uneven soil moisture levels can result from such variations in water delivery, which can eventually affect crop development, production, and general plant health. The effectiveness of the system might be further decreased by inconsistent watering, which can also result in water waste in some places. A pressure-regulating diffuser can be added to the drip irrigation system to address this issue. By keeping the pressure level constant throughout the lateral line, the diffuser makes sure that every emitter, no matter where it is in the system, distributes water at the same pace. The diffuser aids in removing the pressure drop that causes uneven watering by stabilizing the pressure. This guarantees

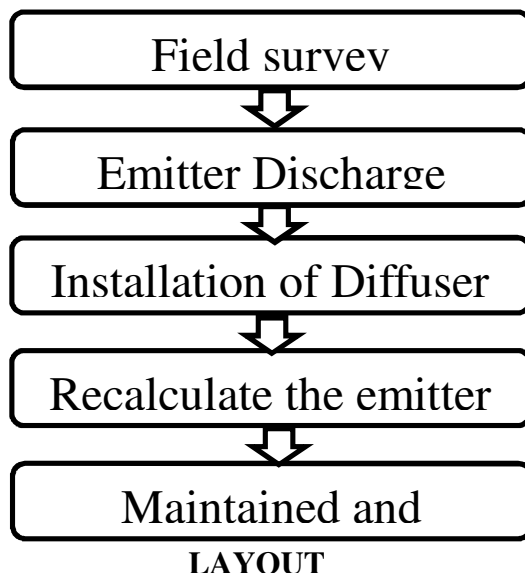

that crops receive the right amount of water at the right time during their growth stages and also improves the irrigation system's efficiency. A more sustainable and economical farming operation, healthier plants, and improved crop growth are all supported by this increase in irrigation consistency.

#### A. Pressure Variation Along the Lateral Line

Friction creates a pressure drop when the water passes through the lateral line. Higher pressure is applied to the emitter at the beginning of the line, and lower pressure is applied to the emitter at the conclusion. As a result, water is distributed unevenly, giving some plants too much or too little.

#### B. Emitter Clogging

If the system is not properly filtered or maintained, pressure variations may also result in emitter clogging. In certain emitter types, higher initial pressures may raise the chance of clogging.

#### C. Inconsistent Crop Development

Patches of the field receive varying quantities of water due to unequal water distribution, which causes uneven crop development and lower yields. Overwatering may affect plants at the start of the lateral, while underwatering may cause drought stress in plants toward the end.

#### D. Upkeep of the System

To guarantee that pressure is continuously controlled and to look for any obstructions in the system, the system needs to be regularly inspected and maintained. Inadequate pressure control may result in more frequent system failures or expensive repairs.

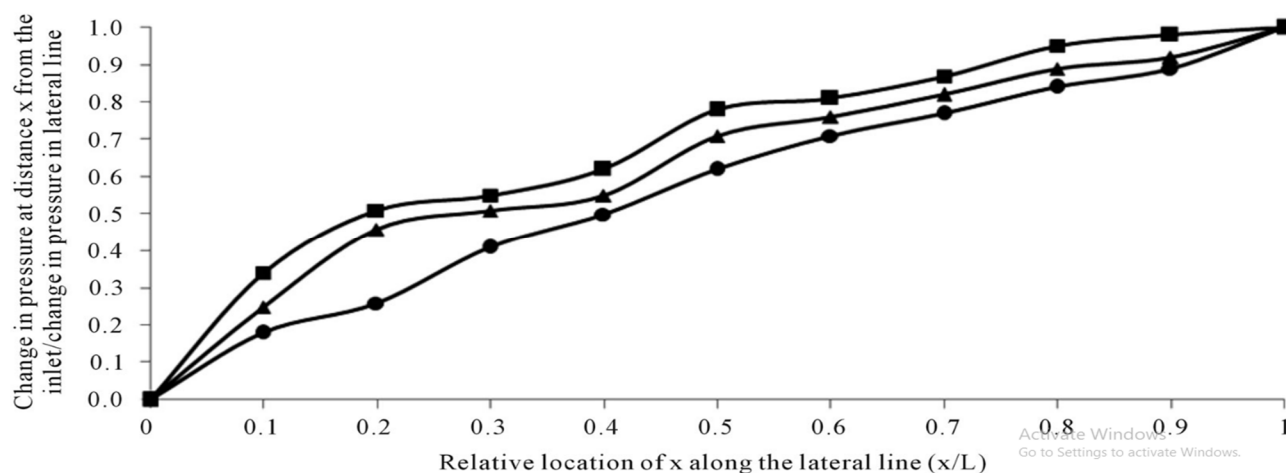


Fig. 2 A sample line graph using the comparative analysis of existing systems

The graph illustrates how pressure varies with increasing relative location ( $x/L$ ) by comparing pressure variations along a lateral line for three distinct systems. The y-axis shows the change in pressure at a specific spot, normalized by the total pressure change, while the x-axis shows the relative position along

The system that is depicted by squares exhibits the greatest pressure drop out of the three, suggesting a substantial loss along the lateral line. Triangles represent a system that shows significant variance but has a little lower pressure loss. A more even distribution of pressure along the lateral line is ensured by the system symbolized by circles, which maintains the least amount of pressure variation. The increasing trend in all three graphs indicates that pressure loss increases as fluid passes from the intake ( $x/L = 0$ ) to the output ( $x/L = 1$ ).

In practical applications, such as irrigation, where consistent water delivery is essential for effective crop development, high-pressure loss can result in unequal resource distribution, which is undesirable. Excessive pressure drop can lead to inefficiencies in fluid transport systems, necessitating the use of extra energy to maintain proper flow. The most effective system for preserving consistent fluid distribution and lowering energy expenses is the one with the least amount of pressure variation, or circles.

## V. CONCLUSION

In conclusion, To guarantee uniform water distribution and ideal crop growth, a drip irrigation system needs to keep the pressure constant throughout the lateral line. Plant health and yield may be impacted by uneven watering caused by pressure differences between the inlet and exit emitters. Diffusers and pressure-regulating devices are utilized to reduce these differences and make sure that each emitter is operating within its ideal range. In order to avoid pressure changes and obstructions that could reduce irrigation effectiveness, proper system design, routine maintenance, and ongoing monitoring are crucial. Over-irrigation in certain places and under-irrigation in others might result from clogged emitters that interfere with water distribution. Farmers may obtain consistent water delivery, which encourages healthy root development and optimizes crop output, by putting in place efficient pressure control systems and upholding system integrity. By tackling these issues, a consistent supply of water is guaranteed, water waste is decreased, and overall agricultural productivity is increased. A drip irrigation system that is kept up to date eventually promotes sustainable farming by increasing crop yields and resource efficiency.

## REFERENCES

- [1] Abadia, R., C. Rocamora, A. Ruiz and H. Puerto. 2008. Energy efficiency in irrigation distribution networks I: theory. *Biosyst. Eng.* 101(1): 21-27. <https://doi.org/10.1016/j.biosystemseng.2008.05.013>
- [2] Burt, C.M. 2004. Rapid field evaluation of drip and microspray distribution uniformity. *Irrig. Drain. Sys.* 18(4): 275-297. <https://doi.org/10.1007/s10795-004-2751-x>
- [3] Camp, C.R., F.R. Lamm, R.G. Evans and C.J. Phene. 2000. Subsurface drip irrigation—Past, present and future. In *Proc. Fourth Decennial Nat'l Irrig. Symp.*, Nov. pp. 14-16.
- [4] Gil, M., L. Rodríguez-Sinobas, L. Juana, R. Sanchez and A. Losada. 2008. Emitter discharge variability of subsurface drip irrigation in uniform soils: effect on water-application uniformity. *Irrig. Sci.* 26(6): 451-458. <https://doi.org/10.1007/s00271-008-0116-1>.
- [5] Camp, C.R., E.J. Sadler and W.J. Busscher. 1997. A comparison of uniformity measures for drip irrigation systems. *Trans. ASAE* 40(4): 1013-1020. <https://doi.org/10.13031/2013.21353>
- [6] Hezarjaribi, A., A.A. Dehghani, M.M. Helghi and A. Kiani. 2008. Hydraulic performances of various trickle irrigation emitters. *J. Agron.* 7(3): 265-271. <https://doi.org/10.3923/ja.2008.265.271>
- [7] Iqbal, M.A. and A. Iqbal. 2015. A study on dwindling agricultural water availability in irrigated plains of Pakistan and drip irrigation as a future life line. *American-Eurasian J. Agric. Environ. Sci.* 15(2): 184-190.
- [8] ISO, 2004. Agricultural irrigation equipment-Emitters and emitting pipe-Specification and test methods. Report No. ISO 9261:2004.



10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)