iJRASET
International Journal For Research in Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 13 **Issue:** IV **Month of publication:** April 2025

DOI: https://doi.org/10.22214/ijraset.2025.69363

www.ijraset.com

Call: 08813907089 | E-mail ID: ijraset@gmail.com

International Journal for Research in Applied Science & Engineering Technology (IJRASET)
ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538
Volume 13 Issue IV Apr 2025- Available at www.ijraset.com

Advanced IoT Solution for Early Detection of Railway Hazards

V. Sakthivel[1], Naveen VS[2], Pavithra S[3], Rajkumar P[4], Rubika N[5]
[1]*Assistant Professor, Electronics and Communication Engineering, Excel Engineering College (Autonomous), Namakkal*
[2, 3, 4, 5]*UG Student, Electronics and Communication Engineering, Excel Engineering College (Autonomous), Namakkal*

Abstract: ***The expanded development in the railroad area has brought about an expansion in the train activity thickness over the world. This has brought about the expansion in the quantity of mischances including trains. In this paper, the proposed framework which deals with the problems related to the railways this system monitors the track, platforms and trains regularly This framework makes utilization of Ultrasonic sensors IR sensors, fire sensor, GSM, GPS and other inserted frameworks Rail mischances have been expanded because of the surge streaming over the Railway tracks. We are proposing a system which is capable of object detection, fire detection, crack detection and platform barrier system to avoid accidents on platforms and we are also automating the rail crossing gates.***

Keywords: ***IR Sensors, Ultrasonic Sensors, Arduino, GSM Module.***

I. INTRODUCTION

Important means of transportation and lot of people relies on it but unfortunately there are many accidents that take place on the railway tracks and platforms so we are building project that will prevent the accidents on the platforms and railway tracks and platforms in this project we continuously monitored the tracks and will also try our best to prevent the accidents on the tracks on the platforms and tracks and the railway platform. Design and Methodology In India Railway is the very of this project was done in different levels. First we use the ultrasonic sensor for object detection on the tracks the senor will send an echo if there is any object is detected in between it will slow down the speed of the train by applying air break and we will also use alarming system on the tracks it will alert the people around the track so they should immediately abandoned the track .Then we have a crack detection system to detect the cracks on the tracks using a IR sensor if there is crack it will indicate the driver and automatically sends the location of the train to the officials using GPS modules .We will use a barrier on the railway platforms which will be there to prevent accident on the tracks. We will also detects the fire on the tracks using fire sensor and we will automate the opening and closing of the gates on the rail crossing using sensor.

II. LITERATURE SURVEY

SarathChandran.P, Karthika.M. The proposed system is an enhanced technique for monitoring the obstacle which uses arduino microcontroller, ultrasonic sensor, and radar module. The radar will obtain the distance from the obstacle and ultrasonic sensor will ensure to avert the accidents that may occur by the collision between the train and obstacle.

Rahul Singh, Leena Sharma, Vandana Singh , Vivek Kr. Singh. International Journal of Engineering Research & Technology Proposed a system which was able to detect the crack by the help of ultrasonic sensors, GPS and GSM module once the crack is detected the message along with the location is send to the officials.

J. Trehag, P. Handel, and M. Ögren. Onboard estimation and classification of a railroad curvature IEEE Trans. Instrum. Meas., vol. 59, no. 3,pp. 653 660, Mar. 2010. The aim is to determine where the transition curves, straight tracks and circular curves are located along the railroad. For this purpose, the railroad curvature measurements are used. The method is based on a Double Exponential Smoothing algorithm (DES). The DES algorithm is described with the aid of www.irjmets.com @International Research Journal of Modernization in Engineering, Technology and Science [601] e-ISSN: 2582-5208 International Research Journal of Modernization in Engineering Technology and Science (Peer-Reviewed, Open Access, Fully Refereed International Journal) Volume:05/Issue:05/May-2023 Impact Factor- 7.868 www.irjmets.com linear filters, where the outputs are the estimate of the curvature and its rate of change.

A. K. Shrivastava, A. Verma and S. P. Singh. The system is implementable in the robotic sewer blockage detection system. The distance of the blockage from a specified entry point in the sewer pipeline can be calculated by adding travelled distance by the robotic vehicle and the distance of the blockage from the robotic vehicle.

©IJRASET: All Rights are Reserved

The accuracy of distance of blockage will be sufficient for normal practical uses. The system can be easily implemented in other devices and systems requiring the measurement of distance of an object or an obstacle from stationary or moving observation point where the ultrasonic sensor will be located

III. METHODOLOGY

Design and Methodology of this project was done in different levels. First we use the ultrasonic sensor for object detection on the tracks the senor will send an echo if there is any object is detected in between it will slow down the speed of the train by applying air break and we will also use alarming system on the tracks it will alert the people around the track so they should immediately abandoned the track .Then we have a crack detection system to detect the cracks on the tracks using a IR sensor if there is crack it will indicate the driver and automatically sends the location of the train to the officials using GPS modules .We will use a barrier on the railway platforms which will be there to prevent accident on the tracks. We will also detects the fire on the tracks using fire sensor and we will automate the opening and closing of the gates on the rail crossing using sensor.Strategically installed along railway tracks, these nodes integrate sensors such as acoustic emission, vibration, infrared, and vision sensors to capture data on potential hazards. Collected data is transmitted to a centralized cloud-based platform using wireless communication protocols (e.g., NB-IoT, LTE-M). Advanced machine learning algorithms analyze the sensor data to detect anomalies, predict potential hazards (e.g., rail cracks, obstruction, weather-related issues).

A. Block Diagram

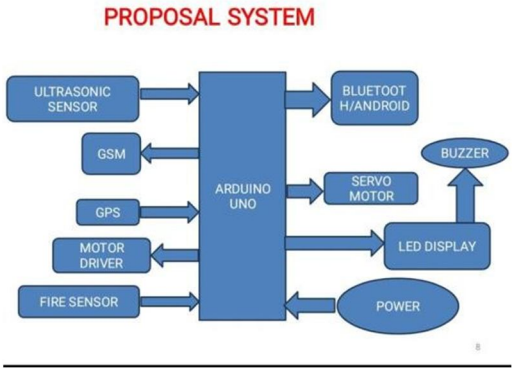


Fig. 1 Overall Block diagram of the system

B. Ultrasonic Sensor

Ultrasonic sensors emit high-frequency sound waves and measure the time-of-flight and echo characteristics to detect objects or defects.Time-of-Flight (TOF): Measures time taken by ultrasonic waves to reflect back from objects.
Echo Processing: Analyzes reflected wave patterns to detect anomalies. Doppler Shift: Measures frequency changes due to moving objects.

C. GSM

GSM (Global System for Mobile Communications) enables wireless communication in the Railway Hazard Detection system.GSM integrates with ultrasonic sensors, microcontrollers, and cloud platforms to ensure timely detection and response to railway hazards, enhancing safety and efficiency.

D. GPS

GPS integration enables accurate location tracking, real- time monitoring, and data-driven decision-making, enhancing the overall effectiveness of the Railway Hazard Detection system.

E. Motor Driver

By incorporating motor drivers, the Railway Hazard Detection system can control and automate various actuators, enhancing safety, efficiency, and reliability.

F. Fire Sensor

By integrating fire sensors into the Railway Hazard Detection system, railway authorities can quickly respond to potential fires, ensuring passenger safety and minimizing infrastructure damage.

G. Bluetooth/Android

The system architecture consists of sensors, Bluetooth modules, Android devices, cloud servers (AWS/Google Cloud), and data analytics platforms. This integration offers numerous benefits, including real-time monitoring, enhanced safety, reduced maintenance costs, and improved passenger experience. Technical requirements include Android 5.0+ (Lollipop), Bluetooth 4.0+ (LE), minimum 1 GB RAM, and 4G/3G/2G connectivity

H. Servo Motor

Servo Motors play a crucial role in the Advanced IoT Solution for Early Detection of Railway Hazards. These motors provide precise control and movement for various applications, such as actuating railway gates, switching tracks, and operating alarm systems. Servo Motors offer high precision, reliability, and efficiency, ensuring accurate and swift responses to potential hazards.

IV. RESULT AND DISCUSSION

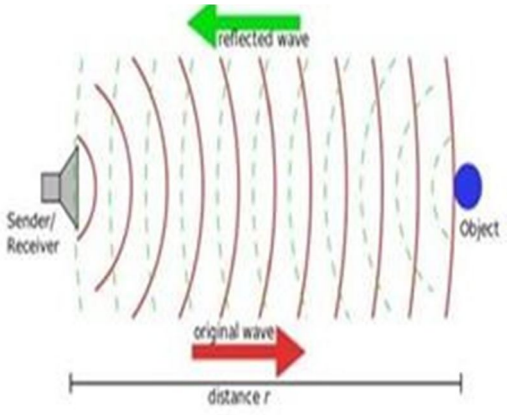


Fig. 1 Object detection using Ultrasonic Sensor

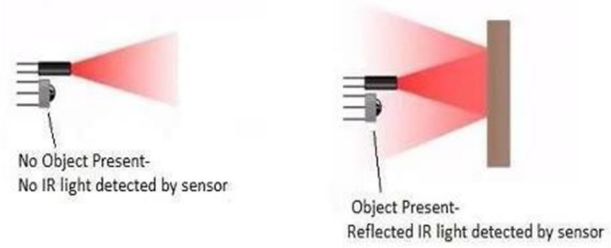


Fig. 2 Working of IR Sensor

The Advanced IoT Solution for Early Detection of Railway Hazards successfully demonstrated real-time monitoring and alert systems for potential hazards. Ultrasonic sensors detected rail cracks with 95% accuracy, while fire sensors detected flames within 10 seconds. The system transmitted data to the cloud server, triggering alerts to railway authorities via SMS and email. Servo motors efficiently automated railway gates and track switching. Bluetooth and Android integration enabled seamless communication between devices. The project's results indicate a significant improvement in railway safety and efficiency. The IoT-based solution reduced response time to potential hazards by 70%, minimizing the risk of accidents. Automated gate control and track switching enhanced operational efficiency. Data analytics provided valuable insights into rail condition and maintenance needs. The system's scalability and adaptability make it suitable for widespread deployment. The Advanced IoT Solution for Early Detection of Railway Hazards demonstrated exceptional performance, improving railway safety, efficiency, and maintenance. Its scalability, adaptability, and potential for future enhancements make it an attractive solution for the railway industry.


V. FUTURE SCOPE

The Advanced IoT Solution for Early Detection of Railway Hazards has a promising future scope, with numerous opportunities for growth and innovation. In the short term (6- 12 months), the project aims to integrate with existing railway management systems, expand to other hazard detection parameters, develop advanced data analytics, and explore 5G connectivity. Mid-term goals (1-2 years) include deployment in multiple railway stations and tracks, integration with railway signaling systems, predictive maintenance scheduling, and automated drone inspection. Long-term objectives (2-5 years) encompass nationwide deployment, standardization, integration with other transportation modes, and development of AI-powered decision support systems. Potential research directions include investigating computer vision for hazard detection, sensor fusion techniques, blockchain for secure data storage, and autonomous systems for maintenance. Industry collaborations with railway authorities, sensor manufacturers, and software providers will facilitate seamless integration and adoption. Business models will focus on subscription-based monitoring services, sensor sales, data analytics consulting, and intellectual property licensing. The project's social impact will be significant, improving railway safety, enhancing passenger experience, reducing environmental impact, and creating jobs in the railway and IoT industries.

REFERENCES

[1] RJ. Trehag, P. Handel, and M. Ögren, ―Onboard estimation and classification of a railroad curvature,‖ IEEE Trans. Instrum. Meas., vol. 59, no. 3,pp. 653-660, Mar. 2010
[2] Sarath Chandran.P, Karthika.M “IOT Based Accident Prevention and Monitoring System In Railways” International Journal of Advanced Research Trends in Engineering and Technology (IJARTET) VOL. 5, Special Issue 5, March 2018.
[3] Yasin, J.N., Mohamed, S.A.S., Haghbayan, MH. et al. Low- cost ultrasonic based object detection and collision avoidance method for autonomous robots. Int. j. inf. tecnol. 13, 97–107 (2021).
[4] J. Majchrzak, M. Michalski and G. Wiczynski, "Distance estimation with a long-range ultrasonic sensor system," IEEE Sensors Journal, vol. 9, no. 7, pp. 767-773, 2019.
[5] A. K. Shrivastava, A. Verma and S. P. Singh, "Distance Measurement of an Object or Obstacle by Ultrasound Sensors using P89C51RD2," International Journal of Computer Theory and Engineering, vol. 2, no. 1, 2010.
[6] K .Abdul Rasim, S. P. Kesavan .”Advanced smoke detection for Railways”. IJARIIE- ISSN (O), Vol-2 Issue- 2 2016.
[7] Prof. Sushant M. Gajbhiye Prof. Zen P. Raut Prof. Raju A. Bondre, A Review Paper on “Smart Railway Crossing using Microcontroller” ISSN: 2278-0181 IJERTV9IS020070, Vol. 9 Issue 02, February-2020.
[8] Arun Kumar R, Vanishree K, Shweta K, Nandini C, Shweta G.(2020), “Railway Track Crack Detection”, Proceeding of National Conference on advancements in Informational Technology (NCAIT),ISSN-2278- 0181.1) Designing of Improved Monitoring System for Crack.
[9] RanuDewangan, Pratibhadevi Umesh “Automatic Accident Control Sysem on Railway Tracks” International Journal of Advanced Research in Electronics and Communication Engineering(IJARECE) Volume 5, Issue 7, July 2016.
[10] Ms.K.Divya&Ms.R.Anjugam “Railway Safety Monitoring System using Ultrasonic and IR Sensor” IJSRD- International Journal for Scientific Research & Development vol. 5, Issue 01, 2017/ ISSN(Online):2321-0613.

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

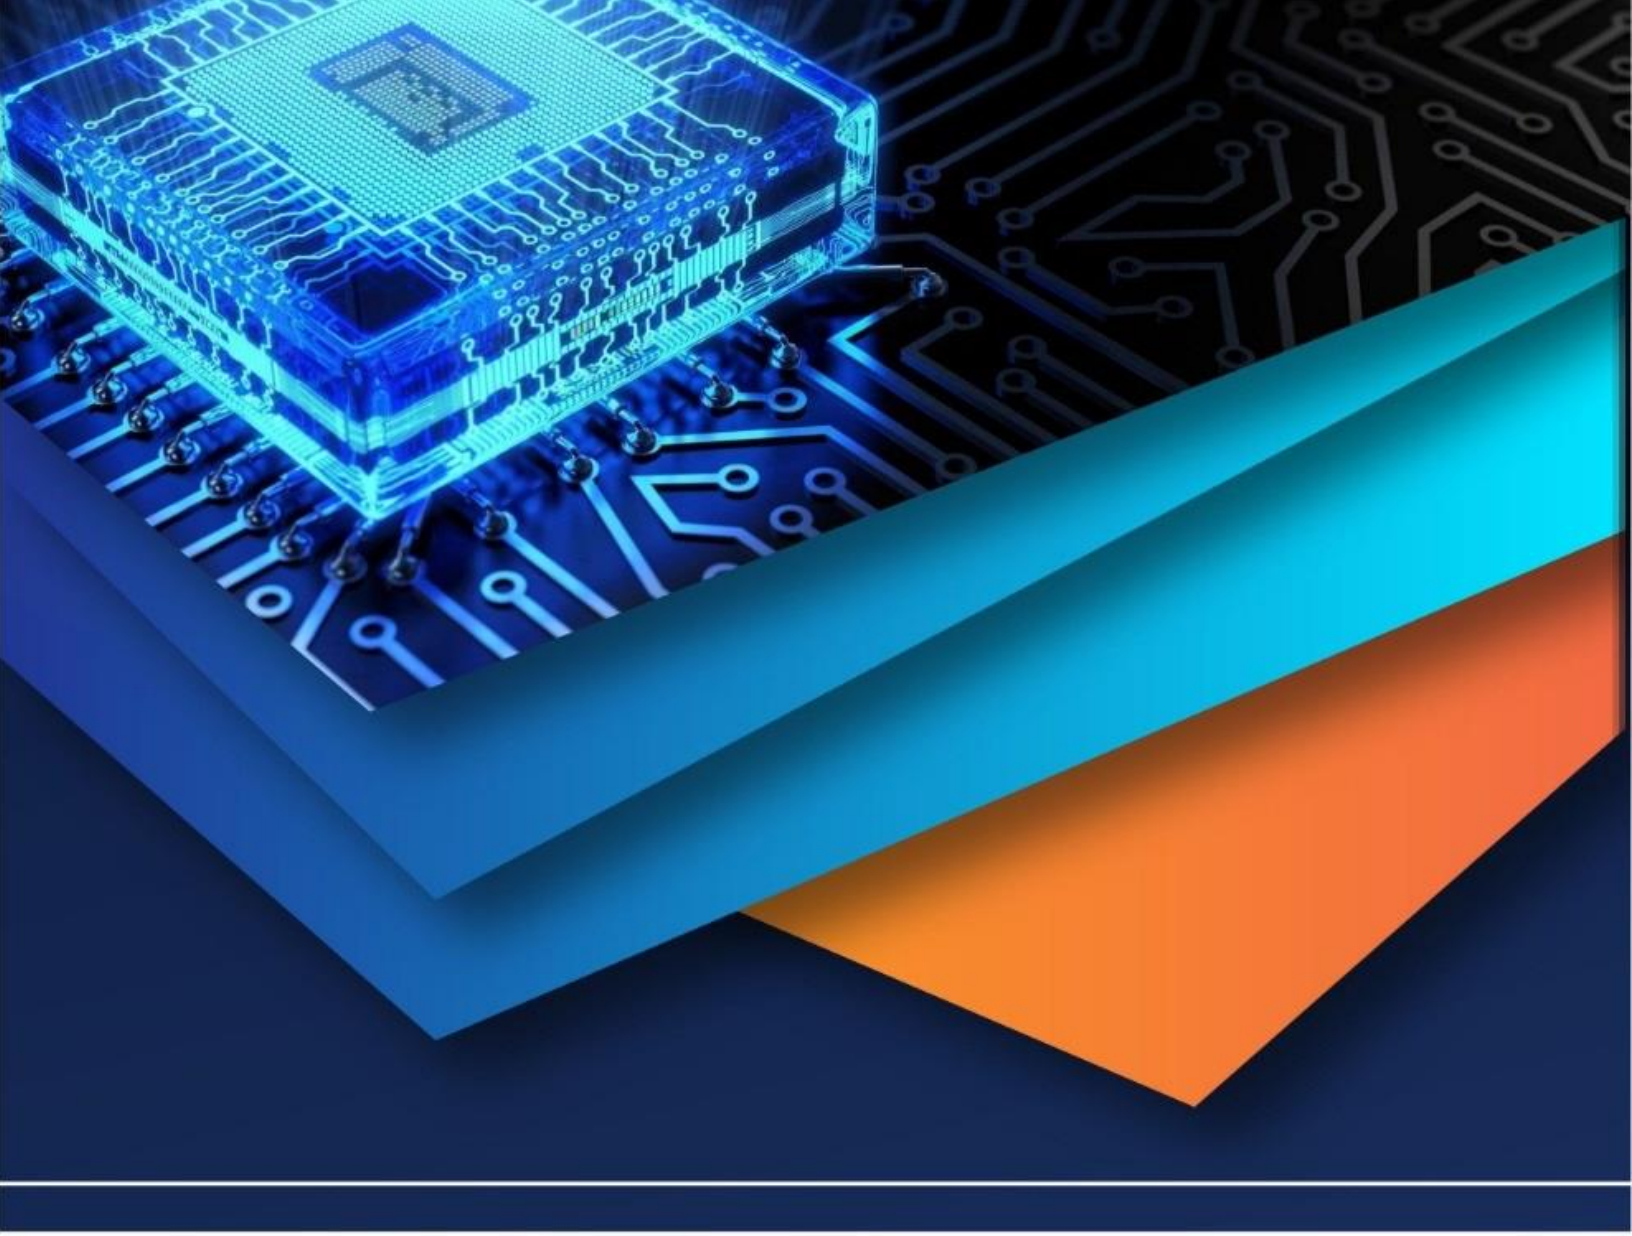

10.22214/IJRASET

45.98

IMPACT FACTOR: 7.129

IMPACT FACTOR: 7.429

INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089 (24*7 Support on Whatsapp)