



IJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 13 **Issue:** V **Month of publication:** May 2025

DOI: <https://doi.org/10.22214/ijraset.2025.70884>

www.ijraset.com

Call:  08813907089

E-mail ID: ijraset@gmail.com

Agricultural Drone for Plant Health Analysis

Srihari Prasaath V¹, Pramod Saran S², Sachin James P. V³

PSG Polytechnic College, Coimbatore

Abstract: *This project presents a drone-based system for plant health monitoring in precision agriculture. A custom UAV equipped with a high-resolution camera, GPS, and flight controller captures geo-tagged images of crops. AI-driven image processing and vegetation indices detect early signs of plant stress, disease, and nutrient deficiencies. The system enhances data accuracy, reduces manual labor, and provides actionable insights, helping farmers and researchers optimize crop management across large-scale agricultural fields.*

This project focuses on the development of a drone-based system designed for plant health monitoring in precision agriculture. The system employs a custom-built Unmanned Aerial Vehicle (UAV) integrated with a high-resolution camera, GPS module, and flight controller to survey agricultural fields. The drone captures geo-tagged aerial images, which are essential for assessing crop health. By leveraging AI-based image processing techniques and vegetation indices, the system detects early signs of plant stress, diseases, and nutrient deficiencies, allowing for timely interventions.

The system's design combines data acquisition, advanced image processing, and communication technologies to deliver actionable insights. These insights are intended to assist farmers and agricultural researchers in making informed decisions that optimize crop management. The drone's ability to navigate the fields ensures consistent and accurate data collection, significantly reducing human labor and potential errors during manual surveys. This capability is crucial for large-scale agricultural operations where precise monitoring is essential.

Field testing of the UAV demonstrated its reliability in capturing high-quality data and generating health maps, offering an effective means of identifying plant health issues at an early stage. The successful integration of hardware and software components in this system underscores the potential of UAV technology in transforming crop monitoring practices. The project highlights how drone systems can enhance the accuracy and efficiency of agricultural operations, paving the way for scalable, intelligent monitoring solutions that benefit both small-scale and large-scale farming.

Keywords: *Precision Agriculture, UAV (Unmanned Aerial Vehicle), Plant Health Monitoring, Vegetation Indices.*

I. INTRODUCTION

A. Introduction

Precision Agriculture (PA), also known as precision farming, is a modern farming management concept that uses technology and data to optimize crop production and improve farm efficiency. It integrates various tools, including sensors, GPS, IoT devices, drones, and data analytics, to monitor and manage the health and growth of crops with high accuracy.

The main goals of precision agriculture are to:

- 1) **Increase Crop Yields:** By using detailed data, farmers can monitor plant growth, soil conditions, and environmental factors, ensuring optimal conditions for each part of the field.
- 2) **Minimize Resource Use:** Precision farming allows for more efficient use of resources like water, fertilizers, pesticides, and herbicides by applying them only where and when needed, reducing waste and environmental impact.
- 3) **Improve Sustainability:** By reducing excess chemical use and minimizing water wastage, PA helps make farming practices more environmentally friendly.
- 4) **Reduce Costs:** By increasing efficiency and targeting inputs to areas that need them, PA can significantly reduce operational costs.
- 5) **Enhance Decision Making:** Data allows farmers to make informed decisions based on actual conditions in their fields, rather than relying on guesswork or generalized practices.
- 6) **Technologies commonly used in precision agriculture include:**
- 7) **GPS and GIS (Geographic Information Systems):** Help with mapping fields, tracking equipment, and guiding machinery with high accuracy.
- 8) **Drones and Satellites:** Provide aerial images and data on crop health, soil moisture, and field variability.
- 9) **Data Analytics:** Analyse vast amounts of data to forecast trends, predict outcomes, and suggest optimal farming practices.

Using drones to monitor plant health is a key application of precision agriculture. Drones are equipped with various cameras that can capture high-resolution images and data across large areas of farmland. These drones provide farmers with the ability to assess plant health more efficiently than traditional methods.

Benefits of Using Drones for Plant Health Monitoring:

- **Efficiency:** Drones can cover large areas quickly, allowing for regular monitoring and faster detection of issues.
- **Cost-Effective:** Rather than using expensive satellite imagery or ground-based sensors, drones offer a more affordable and accessible solution.
- **Early Detection:** Drones help identify plant health problems at an early stage, often before they become visible to the human eye, allowing farmers to take action sooner and reduce crop loss.
- **Data-Driven Decisions:** With detailed data on plant health, farmers can make informed decisions about irrigation, fertilization, and pest control, leading to optimized crop production and resource use.

B. Objectives

The primary objective of this project is to integrate drone technology with the Visible Atmospherically Resistant Index (VARI) algorithm for plant health monitoring in agriculture. The project focuses on developing an efficient system that utilizes drones equipped with GPS and cameras to capture aerial images and videos of farmland. These images are then processed using the VARI algorithm to analyze vegetation health, detect crop stress, and optimize resource management.

- 1) Deploy a quad copter drone equipped with a GPS module and a camera to autonomously capture high-resolution images and videos of agricultural fields.
- 2) Use GPS coordinates for precise navigation and mapping of crop areas.
- 3) Process the captured images and videos using image processing techniques to enhance vegetation visibility.
- 4) Apply the VARI algorithm to extract valuable insights about crop health, such as identifying areas affected by disease, nutrient deficiencies, or water stress.
- 5) Optimize the use of fertilizers, pesticides, and water resources based on the analyzed data.
- 6) Reduce operational costs and labour efforts by replacing traditional manual crop monitoring with automated drone surveillance.
- 7) Improve yield prediction and overall farm productivity through smart agricultural practices.

C. Block Diagram

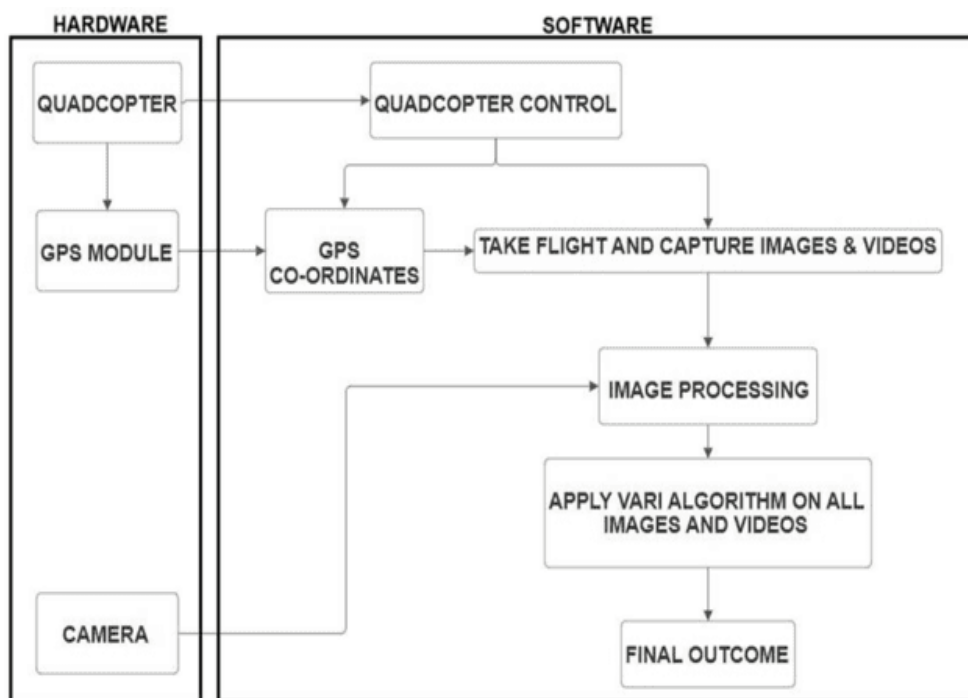


Fig 1.1 Block Diagram

D. Working Principle

The project works by utilizing a drone equipped with a GPS module and a camera to capture aerial images and videos of agricultural fields. The GPS module helps in navigating the drone to specific coordinates, ensuring systematic and accurate data collection.

As the drone flies over the farmland, it records high-resolution images using an RGB camera, which are later processed to analyze plant health. The captured images undergo image processing techniques, where the Visible Atmospherically Resistant Index (VARI) algorithm is applied to assess vegetation health. The VARI formula,

$$\text{VARI} = (\text{Green} - \text{Red}) / (\text{Green} + \text{Red} - \text{Blue})$$

Enhances the visibility of green vegetation while minimizing atmospheric interference. This allows the system to detect crop stress, nutrient deficiencies, and water scarcity by analysing colour variations in the vegetation. Once processed, the output provides a visual representation of plant health, enabling farmers to make data-driven decisions regarding irrigation, fertilization, and pest control. This integration of drone technology with the vari algorithm offers a cost-effective and efficient solution for precision agriculture, improving crop monitoring and overall yield management

II. DESIGN OF SYSTEM ELEMENTS

A. Introduction

System design is a critical phase in the development of the Plant Health Analysis using the VARI Algorithm. It involves selecting the right components, structuring the system architecture, and ensuring that all elements work together seamlessly. The drone-based plant health monitoring system integrates hardware components (drone, camera, GPS module, transmitter, flight controller, etc.) And software components (image processing algorithms, data transmission protocols, and user interfaces).

The design process ensures that the system meets the project's objectives, including data acquisition, accurate plant health assessment, and user-friendly interface deployment. The following sections outline the system's components, their functions, and the overall architecture.

B. List Of Components

The system consists of various components categorized into hardware and software elements.

1) Hardware Components

- A2212/13T 1000KV Brushless DC (BLDC) Motor:

The A2212/13T 1000KV is a high-speed, outrunner brushless DC motor commonly used in drones, RC planes, and other aerial applications. This motor provides a balance of power, efficiency, and durability, making it ideal for multi-rotor drones like the one used in your project.

Unlike traditional brushed DC motors, BLDC motors do not use brushes for commutation. Instead, they rely on electronic controllers to switch current between different windings, ensuring smooth and efficient operation.

The 1000KV rating means the motor rotates 1000 RPM per volt applied. If powered by a 3S (11.1V) LiPo battery, the theoretical speed would be:

$$1000\text{KV} \times 11.1\text{V} = 11,100 \text{ RPM}$$



Fig 2.1 BLDC A2212/13T Motor

An excellent higher-powered replacement for geared Speed 400-480 motors in slow-flying or 3D planes that require a larger 10" propeller. Use on sailplanes up to 28 oz, trainers up to 25 oz, aerobatic aircraft up to 18 oz and 3D airplanes up to 15 oz. Recommended prop is 10 x 5 on 3 li-poly cells. The motor features a 3.2mm hardened steel shaft, dual ball bearings, and has 3.5mm gold spring male connectors already attached and includes 3 female connectors for your speed control.

Now includes collet type prop adapter and radial motor mount. Mounting holes have 16mm and 19mm spacing on centers and are tapped for 3mm (M3) screws. Similar to Welgard A2212-13, AXI Gold A2212/26, Welgard C2830-12, E-Flite Park 400. Great replacement motor for a 1/2A Texaco engine.



Fig 2.2 Wire Identification

- Frame with Integrated PCB:

The frame with an integrated PCB is the structural component that houses the drone's motors, flight controller, and other electronics. The integrated PCB (Printed Circuit Board) simplifies wiring by providing built-in power distribution, reducing the need for additional power modules. The frame provides mechanical support, ensuring stability and strength during flight. The integrated PCB allows direct soldering of power lines from the battery to the motors and ESCs, improving connectivity and reducing clutter.



Fig 2.3 Frame with Mount

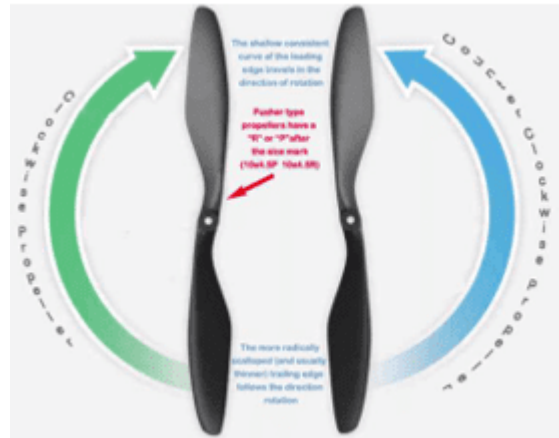


Fig 2.4 Propellers

- ArduPilot Mega Flight Controller APM 2.8:

The APM 2.8 (ArduPilot Mega) is an open-source flight controller widely used in drones for autonomous navigation, stabilization, and telemetry-based control. It is a fully programmable controller that supports GPS-based navigation, mission planning, and real-time sensor integration. The APM 2.8 flight controller processes data from gyroscopes, accelerometers, GPS, and barometers to control the drone's movement. It receives input from the remote controller (transmitter) and adjusts the speed of each motor via the Electronic Speed Controllers (ESCs). It can autonomously control flight based on pre-programmed waypoints, making it ideal for agricultural surveys.

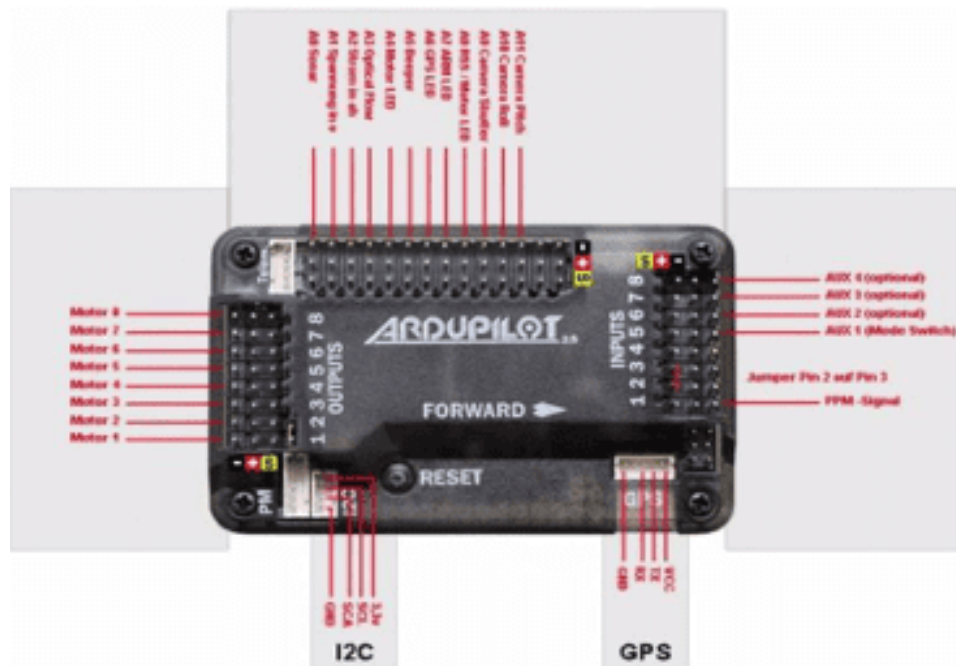


Fig 3.5 Controller Pinout

- SIMONK 30A Electronic Speed Controller (ESC):

The SIMONK 30A ESC is a high-performance Electronic Speed Controller designed for Brushless DC motors (BLDC) like the A2212/13T 1000KV. It regulates power to the motors, ensuring smooth and precise speed control. The ESC receives PWM (Pulse Width Modulation) signals from the flight controller (APM 2.8) and adjusts the motor speed accordingly. Uses Simonk firmware, optimized for fast response times and high efficiency. Converts DC power from the battery into a variable three-phase AC supply to drive the BLDC motors.

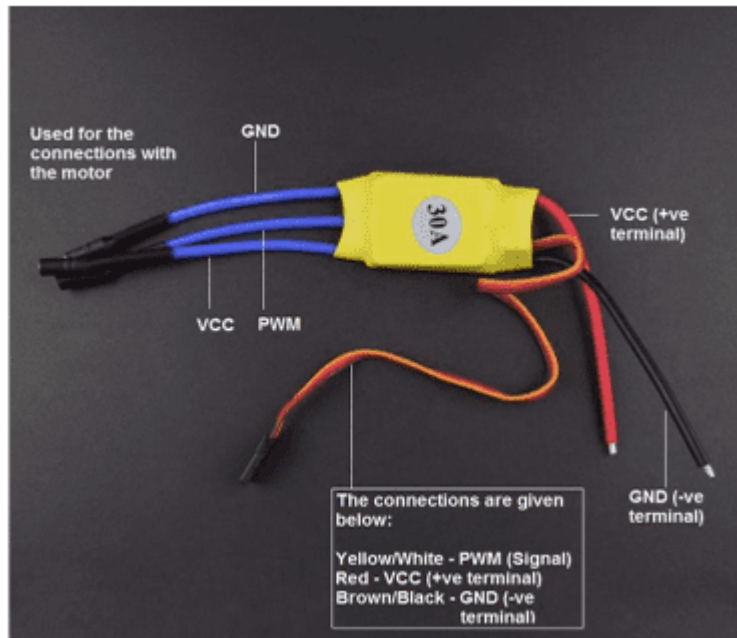


Fig 3.6 ESC Wire Description

- Action Camera:

The Action Camera is used for capturing high-resolution aerial images of the farmland. The captured images are then processed using the VARI Algorithm to assess plant health. The camera records HD video or high-resolution still images. It is mounted on a gimbal stabilizer to reduce vibrations. The recorded images are transferred to a ground station for analysis.

- FlySky FS-i6 Remote Control And FS-IA6B Receiver:

The FlySky FS-i6 is a 2.4 GHz radio transmitter, used to manually control the drone. The FS-IA6B receiver receives signals and sends them to the APM 2.8 flight controller. The FlySky FS-i6 transmitter sends control signals (throttle, yaw, pitch, roll) to the FS-IA6B receiver.

The receiver forwards signals to the flight controller (APM 2.8) for execution. Uses AFHDS 2A protocol, ensuring interference-free communication with low latency.

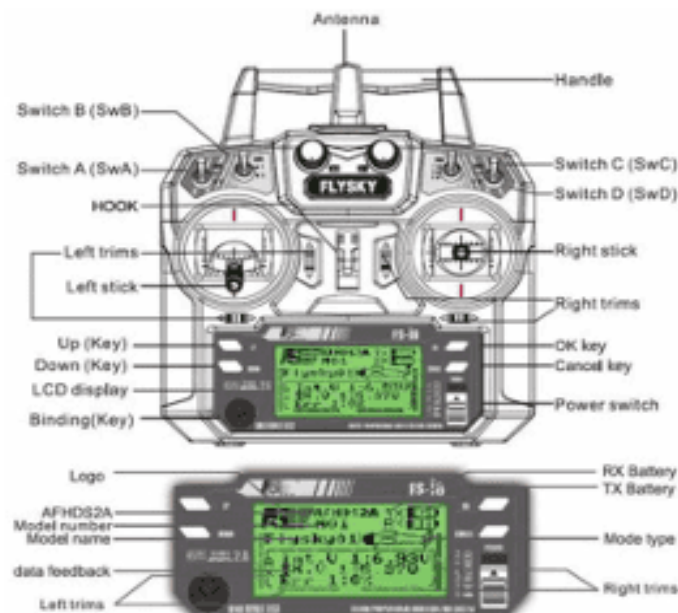


Fig 3.7 Transmitter Description

- **LiPo Battery (Lithium Polymer Battery):**

The LiPo (Lithium Polymer) battery is the primary power source for the drone. It provides high energy density, lightweight design, and high discharge rates, making it ideal for drone applications. The battery powers the BLDC motors, ESCs, flight controller, GPS module, and other onboard electronics. A LiPo battery consists of multiple cells, each with a nominal voltage of 3.7V. The total voltage is determined by the number of cells in series (S):

$$2S \text{ LiPo} = 7.4V (2 \times 3.7V)$$

$$3S \text{ LiPo} = 11.1V (3 \times 3.7V)$$

$$4S \text{ LiPo} = 14.8V (4 \times 3.7V)$$

The battery's capacity (measured in mAh or Ah) determines how long the drone can operate before needing a recharge.

- **Ublox NEO-7M GPS:**

The Ublox NEO-7M GPS module was essential for accurate navigation in the drone project. It provided real-time positioning and waypoint tracking, enabling the drone to cover farmland systematically. With good sensitivity and fast satellite acquisition, it ensured reliable flight paths and geo-tagged data collection. Its integration improved flight autonomy and contributed to precise plant health monitoring.



Fig 3.8 GPS

2) *Software System*

- **OpenCV (Open Source Computer Vision Library):**

OpenCV is an open-source computer vision and image processing library used to analyze drone-captured images. It provides functions for image enhancement, filtering, segmentation, and feature extraction, making it ideal for plant health monitoring. OpenCV processes the raw RGB images captured by the camera mounted on the drone.

The software applies image enhancement techniques, such as noise reduction, contrast adjustment, and edge detection, to improve the quality of images. The VARI (Visible Atmospherically Resistant Index) algorithm is implemented using OpenCV to analyze plant health.

Processes raw drone images before applying VARI analysis.

Enhances vegetation details by improving contrast and removing noise.

Enables image segmentation, making it easier to distinguish between healthy and unhealthy plants.




Fig 3.9 OpenCV

- Python (with NumPy, Pandas, and Matplotlib):

Python is the main programming language used to implement the VARI algorithm, perform data analysis, and visualize results. Several libraries such as NumPy, Pandas, and Matplotlib are used for processing the extracted data.

Python reads the image data and converts it into a numerical matrix for analysis.

The VARI formula is applied to each pixel of the image to calculate vegetation health:

$$\text{VARI} = (G-R) / (G+R-B)$$

Where:

G (Green band) represents plant health.

R (Red band) highlights plant stress.

B (Blue band) accounts for atmospheric interference.

Matplotlib visualizes the processed data as a color-coded heatmap.

Implements the VARI algorithm to detect plant stress.

Uses NumPy and Pandas for efficient image data handling.

Visualizes plant health using heatmaps and color gradients.



Fig 3.10 Python



Fig 3.11 Pandas, NumPy and Matplotlib

- Visual Studio Code (VS Code):

VS Code is the Integrated Development Environment (IDE) used for writing and testing Python scripts related to drone control, data processing, and UI development.

Working Principle:

Python scripts for VARI calculation, OpenCV processing, and data visualization are developed in VS Code. The software enables real-time debugging of the image analysis process. Extensions such as Jupyter Notebook are used for step-by-step algorithm testing.



Fig 3.12 Visual Studio Code

- StreamLit (User Interface Development):

StreamLit is a Python-based framework for building web applications. It is used to create a user-friendly dashboard where farmers and researchers can upload images, analyze plant health, and visualize the results.

Working Principle:

The user uploads an image of the farmland.

The backend (using OpenCV and Python) applies the VARI algorithm.

The processed output is displayed as a color-coded health map.

The user can adjust thresholds and settings to refine the analysis.

Provides an intuitive interface for farmers to analyze plant health data.

Displays heatmaps and graphs based on VARI output.

Enables data interaction, allowing users to fine-tune analysis parameters.



Fig 3.13 StreamLit

The software components form the core processing unit of your project. They enable image analysis, plant health monitoring, and drone automation. Together, they make the Plant Health Analysis using VARI Algorithm a powerful tool for precision agriculture and crop monitoring.

The Plant Health Analysis using the VARI Algorithm project integrates hardware and software components to create a precise, scalable, and autonomous plant health monitoring system. The combination of a custom-built drone, high-resolution imaging, GPS navigation, and computer vision algorithms allows for an efficient, cost-effective, and data assessment of crop health.

III. DEVELOPMENT OF CONTROL SYSTEM

A. Introduction

The control system is the core functional unit of the drone, responsible for stabilizing flight, adjusting motor speed, processing sensor data, and ensuring precise navigation. The effectiveness of the control system directly influences the drone's ability to conduct aerial surveys and capture high-resolution images for plant health analysis using the VARI algorithm. The control system integrates several key components, including the ArduCopter APM 2.8 flight controller, Electronic Speed Controllers (ESCs), FlySky FS-i6 remote controller, GPS module, and Mission Planner software. These components work together to allow both manual and autonomous control, ensuring that the drone can follow predefined waypoints, collect image data, and return to the base station safely.

The control system of the drone is structured into multiple layers to optimize performance and ensure seamless operation. At the foundation, the low-level control layer consists of essential hardware components such as Electronic Speed Controllers (ESCs), motors that execute control commands. Above this, the mid-level control layer is managed by the flight controller, which processes data to determine the appropriate motor speeds required for stable flight. The high-level control layer is responsible for handling autonomous navigation and manual input processing, ensuring that the drone can operate effectively under human control using GPS-based navigation and decision-making algorithms.

B. Hardware Components Of The Control System

The control system relies on several key hardware components that work in synchronization to achieve stable flight. The flight controller serves as the brain of the drone, running specialized firmware such as ArduPilot, which governs flight stability and maneuverability. Electronic Speed Controllers (ESCs) regulate the speed of the brushless DC motors, which generate the necessary thrust for flight. An Inertial Measurement Unit (IMU), comprising an accelerometer, gyroscope, and magnetometer, is essential for detecting orientation and motion changes. The GPS module is incorporated to enable accurate positioning and waypoint-based navigation.

To facilitate manual control, a radio transmitter and receiver are used, allowing the operator to send real-time commands. Additionally, the power distribution system, consisting of the battery and power distribution board, ensures a consistent power supply to all components.

1) Remote Control System – FlySky FS-I6 & FS-IA6B Receiver

The FlySky FS-i6 remote controller enables manual control of the drone by transmitting flight commands to the FS-IA6B receiver, which is connected to the APM 2.8 flight controller. This system allows the pilot to adjust throttle (altitude), yaw (rotation), pitch (forward/backward movement), and roll (sideways movement). The 2.4 GHz frequency band ensures long-range, interference-free communication with a control range of approximately 500 meters.

To establish communication, the transmitter and receiver must be bound together, ensuring a stable connection. The controller sensitivity is adjusted to provide smooth and responsive flight control, preventing sudden jerks or instability. Additionally, failsafe settings are enabled to automatically land the drone in case of signal loss. This is a crucial safety feature that prevents the drone from crashing due to unexpected disconnections. The FlySky FS-i6 remote system plays a vital role in both manual operation and emergency control, providing redundancy in case the autonomous system fails.

2) Motor Speed Control – Electronic Speed Controllers (ESCs)

The Electronic Speed Controllers (ESCs) are responsible for regulating the speed of the A2212 1000KV BLDC motors, ensuring controlled and stable flight. The SimonK 30A ESCs convert direct current (DC) from the LiPo battery into a three-phase alternating current (AC) required by the brushless motors. Each ESC receives Pulse Width Modulation (PWM) signals from the flight controller and adjusts the motor speed accordingly, allowing the drone to ascend, descend, and maneuver in different directions.

To optimize performance, the ESCs must be calibrated to ensure uniform power distribution across all motors. This is done through Mission Planner, where the throttle range is adjusted so that all motors respond evenly to speed changes.

Overheating is a common issue in ESCs, which is mitigated by heat dissipation mechanisms and current limiting settings. The use of Simon K firmware improves the responsiveness and efficiency of motor control, ensuring smoother flight transitions. Proper ESC tuning is essential for minimizing power loss, extending battery life, and enhancing drone stability during agricultural surveys.

3) GPS Navigation

The Global Positioning System (GPS) is a critical component of the drone's control system, enabling precise navigation, position tracking, and autonomous flight capabilities. GPS technology allows the drone to determine its exact location in real-time by receiving signals from multiple satellites orbiting the Earth. This positioning data is essential for maintaining stability, following pre-programmed flight paths, and ensuring the drone can return to its starting position if needed.

The GPS module installed on the drone continuously communicates with at least four satellites to calculate its latitude, longitude, and altitude. This data is then processed by the flight controller, which integrates it with information from other sensors such as the Inertial Measurement Unit (IMU) to improve positioning accuracy. The GPS system is particularly useful in autonomous missions, where the drone needs to follow a series of waypoints or execute tasks like area mapping and plant health monitoring without manual intervention.

4) Flight Controller – ArduPilot Mega APM 2.8

The ArduPilot Mega APM 2.8 flight controller is the central processing unit of the drone, responsible for executing flight commands, maintaining stability, and ensuring smooth navigation. It receives multiple inputs including a gyroscope, accelerometer, barometer, and GPS module, and uses this data to control motor speed and maintain flight balance. The flight controller operates in different modes such as Stabilize Mode, which helps the drone self-balance, Altitude Hold Mode, which keeps the drone at a fixed height using the barometer, and Auto Mode, which allows autonomous navigation based on GPS waypoints. To ensure accurate flight control, the APM 2.8 is configured using Mission Planner software, where essential settings such as sensor calibration.

The gyroscope and accelerometer are calibrated to ensure the drone responds correctly to tilt and orientation changes. The compass calibration aligns the drone's navigation system with the Earth's magnetic field, preventing incorrect flight path deviations. The APM 2.8 flight controller plays a crucial role in ensuring precise, safe, and stable drone operations for plant health monitoring.

C. Software Components Of The Control System

The software components of the control system play a vital role in ensuring the drone operates efficiently, autonomously, and safely. These components work in coordination with the hardware elements, processing sensor data, stabilizing the drone, managing communication between various modules, and providing an interface for flight planning and monitoring. The software enables manual and autonomous control, ensuring smooth execution of aerial surveys for plant health monitoring using the VARI algorithm. The primary software components used in the control system include:

- Mission Planner – The primary software for flight planning, monitoring, and telemetry analysis.
- ArduPilot Firmware – The embedded software running on the APM 2.8 flight controller for stabilization and navigation.
- OpenCV and Python – Image processing libraries used for analyzing drone-captured images.
- StreamLit – A user interface tool for displaying analyzed plant health data.

Each of these components contributes to the stability, efficiency, and usability of the drone in the context of plant health analysis. The following sections detail the installation, configuration, and functionality of these software components.

1) StreamLit – User Interface for Plant Health Visualization

To make the plant health analysis user-friendly, StreamLit is used to develop a graphical interface where users can:

- Upload drone-captured images.
- Apply the VARI algorithm for data analysis.
- View health maps in an interactive dashboard.
- This simplifies data interpretation, allowing farmers to take corrective action based on plant health reports.

2) OpenCV and Python – Image Processing for Plant Health Analysis

Once the drone captures images, they need to be processed and analyzed to detect plant health variations. OpenCV and Python are used to:

- Enhance image clarity by reducing noise and improving contrast.
- Apply the VARI algorithm to identify vegetation stress.
- Generate color-coded health maps to visualize plant conditions.

The VARI formula is applied using Python as follows:

$$VARI = \frac{(G - R)}{(G + R - B)}$$

Where:

- G (Green band) represents healthy vegetation.
- R (Red band) highlights plant stress.
- B (Blue band) accounts for atmospheric interference.

3) ArduPilot Firmware – Embedded Drone Control System

The ArduPilot firmware is the software running on the APM 2.8 flight controller. It provides the algorithms and logic required to: Maintain stable flight using sensor feedback from the IMU (Inertial Measurement Unit).

Adjust motor speeds for balancing and maneuvering the drone.

Execute autonomous GPS-based navigation.

Handle failsafe mechanisms in case of system failure.

- Features of ArduPilot Firmware:

Stabilization Control: Uses PID tuning to ensure smooth flight.

Altitude and Position Hold: Maintains a fixed altitude using the barometer and GPS.

Waypoint Navigation: Follows pre-programmed GPS coordinates for fully autonomous flights.

Failsafe Responses: Triggers auto-landing or return-to-home in case of signal loss or low battery.

- Installing and Configuring ArduPilot Firmware:

The firmware is installed on the APM 2.8 flight controller using Mission Planner.

The flight modes (Stabilize, Loiter, Alt Hold, Auto) are configured based on mission requirements.

PID tuning is performed to optimize flight stability and responsiveness.

Failsafe settings are activated to prevent crashes due to signal loss.

D. Control System Workflow

The control system workflow outlines the sequence of operations performed by the drone, from pre-flight setup to post-flight data analysis. Each step involves interactions between the hardware and software components, ensuring an efficient and reliable plant health monitoring system.

Step 1- Pre-Flight Setup:

- Battery is charged and connected to power the drone.
- The flight controller is initialized and sensors are calibrated.
- GPS lock is obtained to ensure accurate navigation.

Step 2- Flight Planning and Takeoff:

- The flight path is programmed in Mission Planner, defining altitude, speed, and waypoints.
- The drone is switched to Auto Mode and begins its predefined flight path.
- Telemetry data is monitored to track altitude, battery level, and GPS location.

Step 3- Data Collection and Image Capture:

- At each waypoint, the GoPro camera captures high-resolution images.
- GPS coordinates are recorded to map plant health data.

Step 4- Autonomous Return and Landing:

- Upon completing the mission, the drone automatically returns to the home location.
- It descends slowly and lands, ensuring safe recovery.

Step 5- Image Processing and Analysis:

- Captured images are processed using OpenCV and Python.
- The VARI algorithm is applied, generating health maps.
- Results are displayed in StreamLit, providing actionable insights.

Despite the effectiveness of the control system, several challenges were encountered during development. GPS inaccuracies due to environmental interference affected waypoint precision, which was mitigated by optimizing the satellite lock time before takeoff. ESC overheating and power management were addressed by adjusting PWM frequency and adding heat dissipation mechanisms. Additionally, strong winds impacted flight stability, which was resolved by fine-tuning PID values in the APM 2.8. These challenges highlight the importance of careful system calibration and continuous improvement.

The software components and control system workflow ensure the drone operates with maximum efficiency and accuracy. The combination of Mission Planner, ArduPilot firmware, OpenCV, and StreamLit allows for autonomous data collection, image analysis, and intuitive visualization of plant health conditions. This workflow reduces manual labor, enhances precision agriculture, and provides farmers with timely insights to optimize crop management. Future improvements can integrate AI-based disease detection, real-time cloud processing, and automated drone recharging stations, making the system even more efficient and scalable for large-scale agricultural applications.

The development of the control system ensures that the drone can operate autonomously and efficiently, collecting plant health data with minimal human intervention. The APM 2.8 flight controller, ESCs, remote control system, GPS module, and Mission Planner software work together to enable stable, precise, and reliable drone operations. Future improvements may include AI-based obstacle avoidance, real-time video streaming, and RTK GPS for enhanced precision. By refining the control system, this project demonstrates the potential of drone-assisted plant health monitoring to revolutionize precision agriculture and sustainable farming practices.

IV. SYSTEM INTEGRATION

A. Introduction

System integration is the process of combining all the hardware, software, and communication components of the drone-based plant health monitoring system into a unified, fully functional system. This phase is critical as it ensures that all individual modules—such as the flight controller, GPS system, camera, electronic speed controllers (ESCs), motors, and power supply—work seamlessly together. The efficiency of a drone in an agricultural setting depends on its ability to fly autonomously, capture high-quality images, process data, and communicate results to the user in real time.

A well-integrated system allows for smooth interaction between the hardware and software components, ensuring stable flight, accurate data collection, and effective monitoring. Proper system integration eliminates potential malfunctions that could arise due to misalignment, faulty connections, or software errors. It also enables efficient power management, ensuring that the drone can operate for extended periods without power failures.



Fig 4.1 Data Acquisition

The integration process involves multiple testing and debugging phases to fine-tune the drone's performance. Any inconsistencies in sensor readings, flight stability, or data processing need to be identified and resolved to optimize efficiency.

Additionally, ensuring seamless communication between the drone and the ground control station (GCS) is essential for remote monitoring and control.

A key challenge in system integration is achieving synchronization between autonomous operation and manual control. The drone should be able to execute pre-programmed flight paths autonomously while also allowing human intervention when necessary. To accomplish this, a combination of advanced control algorithms, real-time feedback mechanisms, and fail-safe features must be integrated into the system.

Ultimately, successful system integration transforms the drone from a collection of individual components into a robust and intelligent agricultural monitoring tool. By ensuring all elements function in harmony, the drone can deliver accurate plant health data, optimize farm management, and contribute to precision agriculture.



Fig 4.2 Dataset

B. Hardware Integration

The hardware integration process involves assembling and connecting multiple mechanical, electrical, and electronic components to construct the drone. The main structural framework includes a lightweight yet durable frame, which houses the motors, electronic speed controllers (ESCs), and power supply. The BLDC motors, controlled by ESCs, provide thrust and stability, ensuring smooth and controlled flight.

At the core of the hardware system is the flight controller, which serves as the drone's brain.

It processes real-time input from multiple sensors, including gyroscopes, accelerometers, barometers, and GPS modules, to maintain flight stability and adjust the drone's movement accordingly. The integration of these sensors ensures precise altitude, orientation, and position control, which is crucial for capturing accurate aerial images.

The GPS module is a fundamental part of the hardware integration, enabling autonomous navigation and waypoint-based flight planning. By combining GPS data with onboard sensors, the drone can fly predetermined paths, monitor specific areas, and return to home (RTH) in case of signal loss or low battery. This module ensures geospatial accuracy, allowing for efficient mapping of agricultural fields and systematic data collection.

Another critical component is the camera system, which is responsible for capturing high-resolution aerial images. In this project, a GoPro camera is mounted on the drone, providing high-definition imaging capabilities. The camera is securely attached to minimize vibrations and ensure stable footage. The captured images play a crucial role in plant health analysis, as they are later processed using image processing algorithms to detect variations in crop conditions.

Power distribution is a key aspect of hardware integration. The LiPo battery provides energy to all components, and an efficient power management system ensures optimal usage without excessive drainage. Voltage regulators and power distribution boards are integrated to prevent power fluctuations, ensuring stable performance. A well-balanced power system extends flight time and enhances the overall functionality of the drone.

C. Software Integration

Software integration is equally critical as hardware integration, as it enables the drone to autonomously operate, process collected data, and communicate with the user. The flight control software plays a pivotal role in ensuring that the drone maintains stability, follows designated flight paths, and responds to real-time sensor inputs.

One of the core components of software integration is the autopilot system, which governs the drone's navigation and flight stability.

Using pre-programmed waypoints, the drone can autonomously fly over a designated area, capturing images without manual intervention. The autopilot software also includes fail-safe mechanisms, such as automatic return-to-home (RTH) in case of signal loss or critical battery levels.

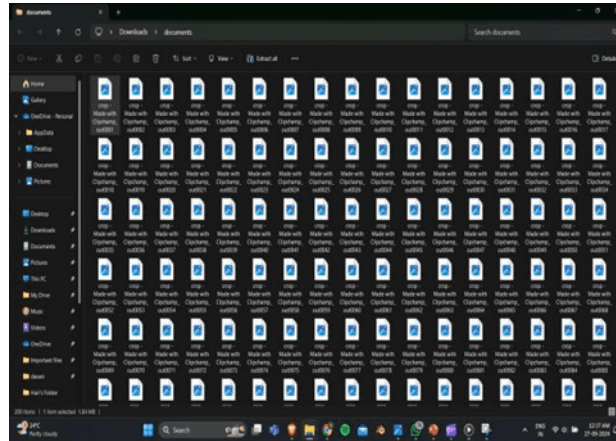


Fig 4.3 Conversion of Video to Frames

For data collection, image processing software is integrated into the system. This software extracts key vegetation indices, such as NDVI (Normalized Difference Vegetation Index) and thermal imaging, which provide insights into plant health. The software processes captured images, detecting anomalies such as pest infestations, nutrient deficiencies, or water stress in crops. Advanced algorithms enhance the accuracy of these analyses, making the drone a powerful tool for precision farming.

Communication software is another essential aspect of integration. The drone transmits data to the ground control station (GCS) via WiFi, Bluetooth, or RF communication modules. The GCS software receives real-time flight telemetry, displays GPS coordinates, and allows remote control of the drone’s movements. IoT-based cloud platforms can also be integrated, enabling data storage and remote access from any location.

To ensure smooth operation, the software is optimized to handle various environmental conditions and real-world challenges. Error-handling mechanisms are implemented to detect and correct issues related to sensor drift, GPS interference, and unstable communication signals. These optimizations enhance the drone’s reliability and efficiency in agricultural monitoring.

D. Communication And Networking

Efficient communication and networking are essential for real-time drone operation and data transmission. The integration of reliable communication modules ensures that the drone can operate autonomously while maintaining a stable link with the user for monitoring and control.

The GPS module enables real-time location tracking, allowing the drone to precisely follow predefined flight paths. This integration ensures that the drone can navigate large agricultural fields efficiently, covering vast areas while maintaining high accuracy in data collection.

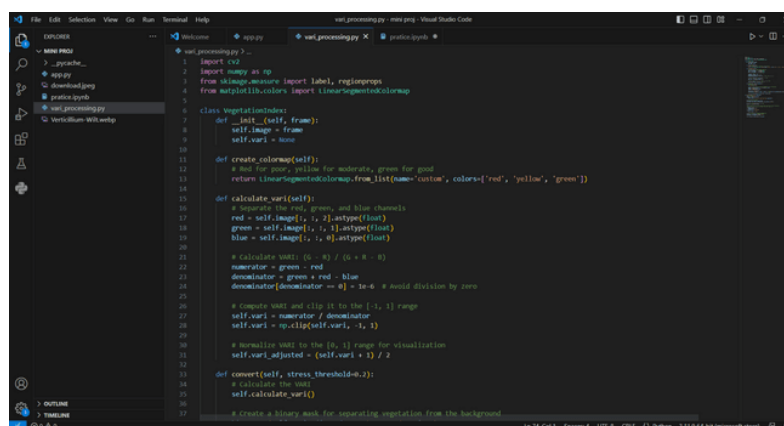


Fig 4.4 VARI Algorithm Code in VS Code

For remote operation, radio frequency (RF) communication modules or WiFi-based systems are used to establish a connection between the drone and the ground control station (GCS). The communication system allows for real-time telemetry updates, where the drone continuously transmits altitude, battery status, GPS location, and captured images to the user.

To improve the efficiency of data handling, the drone can be integrated with a cloud-based system, enabling farmers to access agricultural data remotely. This system ensures that large datasets, including high-resolution images, can be stored and analyzed later for better decision-making. IoT-based integration enhances connectivity, allowing real-time updates through mobile applications or web platforms.

Security is a major concern in drone communication systems. Data encryption techniques are employed to prevent unauthorized access or hacking attempts. Secure communication protocols ensure that flight commands and collected data remain protected from external threats.

By integrating efficient communication and networking capabilities, the drone can provide real-time monitoring, remote access, and seamless data transmission, making it a highly effective tool for precision agriculture.

E. Testing And Optimization

Once the hardware, software, and communication systems are integrated, rigorous testing and optimization are conducted to ensure that the drone functions efficiently under real-world conditions. The first phase of testing involves flight stability analysis, where the drone's ability to maintain stable flight under varying wind conditions is evaluated.



Fig 4.5 Comparison of Output Using Single Frame

Sensor calibration tests are performed to ensure accurate readings from the gyroscope, accelerometer, and GPS module. Any discrepancies in sensor data are corrected using software adjustments to improve flight precision. The camera system is also tested to verify image clarity and stability, ensuring high-quality data capture.

Optimization techniques, such as PID (Proportional-Integral-Derivative) tuning, are applied to fine-tune flight control parameters. These adjustments improve drone stability and maneuverability, reducing the chances of erratic flight behavior. Power efficiency tests are conducted to optimize battery usage, ensuring extended flight time for large-area surveys.

Field tests are carried out in agricultural environments to validate the drone's ability to capture plant health data accurately. Performance metrics, such as data transmission speed, GPS accuracy, and obstacle avoidance efficiency, are analyzed to identify areas for improvement.

Through continuous testing and refinement, the drone is optimized to deliver reliable, accurate, and efficient performance, making it an invaluable asset for modern agricultural monitoring.

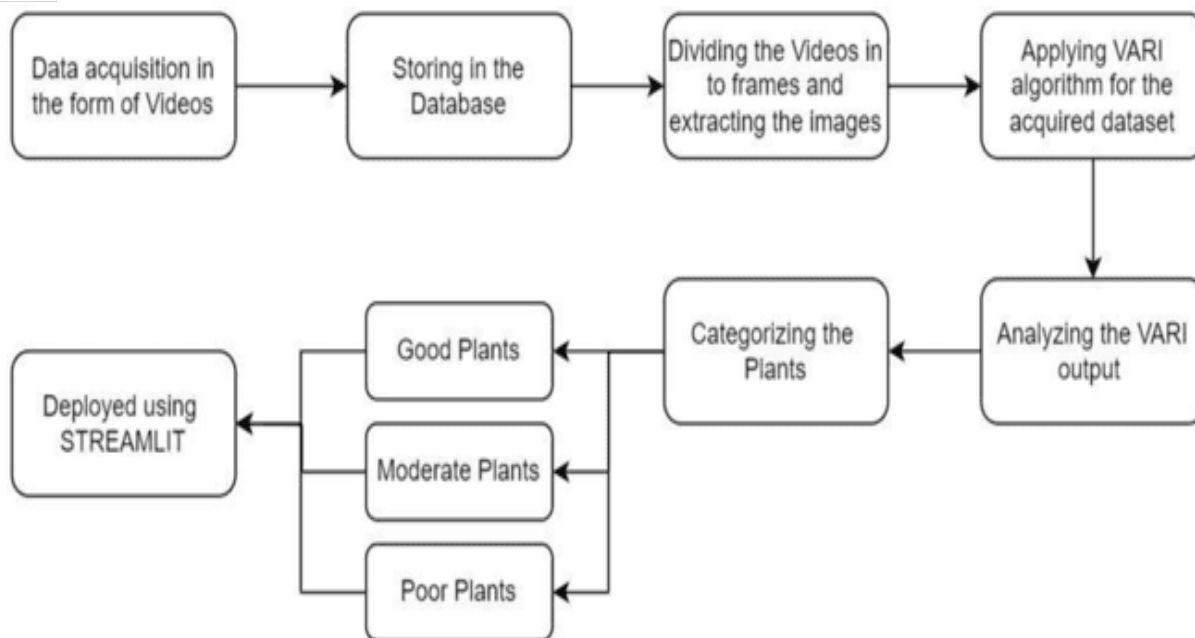


Fig 4.6 Process Flow Chart

V. TESTING OF SYSTEM

A. Introduction

Testing is an essential phase in the development of any technological system, ensuring that all components function correctly and that the system performs as expected under real-world conditions. For the drone-based plant health monitoring system, testing involved evaluating the hardware, software, communication system, and data acquisition process. The primary objective was to verify that each module operated within its design specifications and to identify any flaws that could affect performance. By conducting systematic testing, the reliability and accuracy of the system were ensured before deployment in agricultural environments.

The testing phase was divided into several stages, including unit testing, integration testing, and field testing. Unit testing was performed on individual components such as motors, sensors, and the flight controller to validate their standalone functionality. Integration testing ensured that these components worked seamlessly together to achieve stable flight and accurate data collection. Finally, field testing involved deploying the drone in actual agricultural settings to assess its effectiveness in monitoring plant health.

The methodology used in testing involved both manual and automated approaches. In manual testing, the drone was piloted in different environmental conditions to observe its response and detect any performance issues. Automated testing included simulations and pre-programmed flight paths to evaluate the drone's behavior under predefined scenarios. Various test cases were developed to assess the accuracy, efficiency, and durability of the system in varying conditions.

Challenges encountered during testing included GPS inaccuracies, communication delays, and unexpected flight instabilities. These issues were analyzed and addressed through firmware updates, hardware recalibrations, and modifications in the drone's navigation algorithms. The collected data was compared against reference values to determine the accuracy of the plant health analysis and improve the system's reliability.

In summary, the testing phase played a crucial role in refining the drone system by identifying weaknesses and implementing necessary improvements.

Through extensive trials, the system was optimized to ensure it met the requirements of precision agriculture. The following sections provide a detailed analysis of the different testing aspects, including hardware testing, software validation, communication assessment, flight trials, and field performance evaluation.

```

37 # Create a binary mask for separating vegetation from the background
38 binary = (self.vari_adjusted > 0.1).astype(np.uint8)
39 labeled = label(binary)
40 regions = regionprops(labeled)
41
42 total_crops = len(regions)
43 stressed_crops = sum(1 for region in regions if np.mean(self.vari_adjusted[region.coords[:, 0], region.coords[:, 1]]) < stress_th
44
45 return self.vari_adjusted, total_crops, stressed_crops
46
47 def process_image_with_vari(image_path):
48 # Load the image
49 frame = cv2.imread(image_path)
50 if frame is None:
51     raise ValueError("Could not read image from {image_path}")
52
53 # Initialize VARI processor
54 vari_processor = VegetationIndex(frame)
55 vari_frame, total_crops, stressed_crops = vari_processor.convert()
56
57 # Calculate the average VARI for the image
58 avg_vari = np.mean(vari_frame)
59
60 # Define thresholds for classification based on healthy vs stressed vegetation:
61 # Good: VARI > 0.6, Moderate: 0.3 < VARI < 0.6, Poor: VARI < 0.3
62 if avg_vari < 0.45:
63     health_status = "Poor"
64 elif avg_vari < 0.6:
65     health_status = "Moderate"
66 else:
67     health_status = "Good"
68
69 # Create a colormap to visualize the VARI output
70 colormap = vari_processor.create_colormap()
71 vari_output = colormap(vari_frame)
72
73 return avg_vari, health_status, vari_output
    
```

Fig 5.1 Applying the VARI Algorithm Code in VS CODE

B. Hardware Testing

Hardware testing focused on ensuring that the drone's physical components, including the frame, motors, sensors, and battery, were functioning as expected. The first step involved structural integrity testing, where the drone's frame was examined for strength and durability. Simulated impact tests were conducted to evaluate how well the frame could withstand minor crashes or external forces. Additionally, the weight distribution of the drone was analyzed to ensure balance, reducing the risk of tilting or unstable flight.

The propulsion system, consisting of BLDC motors, ESCs, and propellers, was tested to validate thrust efficiency and energy consumption. The motor speeds were adjusted, and different propeller sizes were tested to find the optimal configuration for stable and efficient flight. Heat dissipation of the motors and ESCs was also monitored during prolonged flight operations to prevent overheating and component failure.

The battery performance and power management system were evaluated by running the drone at different load conditions. Tests were conducted to measure the flight time under varying payloads, ensuring that the battery could sustain the necessary power for extended monitoring missions. Voltage drop and power efficiency were recorded to determine the best power optimization strategies for maximizing flight duration.

Sensors such as GPS, altimeter, and IMU (Inertial Measurement Unit) were calibrated and tested to ensure accurate readings. The GPS module was assessed in different locations to evaluate signal strength, positioning accuracy, and potential interference. The IMU was tested for stability and response time to detect movement and orientation changes effectively.

After multiple rounds of testing, minor hardware modifications were made to improve system efficiency. The frame was reinforced with lightweight yet sturdy materials, the motor settings were optimized for better thrust control, and battery management was refined to enhance power conservation. These improvements contributed to a more stable and reliable drone system suitable for plant health monitoring applications.


C. Software Testing

Software testing was carried out to ensure that the flight control algorithms, data processing functions, and communication protocols worked seamlessly. The software system was tested in both simulated and real-world environments to detect potential errors and optimize performance. Flight simulations were conducted using Webots, where the drone's movement, stability, and response to control commands were evaluated before physical testing.

One of the major aspects of software testing was validating the flight control system. The flight controller firmware was tested to check how well it maintained stability, responded to user inputs, and executed autonomous navigation commands. PID (Proportional-Integral-Derivative) tuning was performed to refine the drone's motion and eliminate oscillations or delays in response.

The data acquisition and processing system was tested by capturing images of crops and analyzing them using AI algorithms for plant health assessment.

Sample datasets were fed into the system to measure the accuracy of disease classification and vegetation index calculations. The image processing functions were optimized to enhance clarity and reduce noise, ensuring reliable plant health predictions. Error detection and handling mechanisms were integrated into the software and tested for robustness. Simulated failures, such as GPS signal loss and battery depletion, were introduced to observe the system's ability to recover. The software was refined to implement safety measures such as automatic return-to-home and low-power emergency landing to prevent crashes. The final stage of software testing involved real-time performance evaluation, where the drone was flown under different weather conditions to test its adaptability. The responsiveness of the communication link, data updates, and execution of control commands were assessed to ensure seamless operation in actual deployment scenarios.

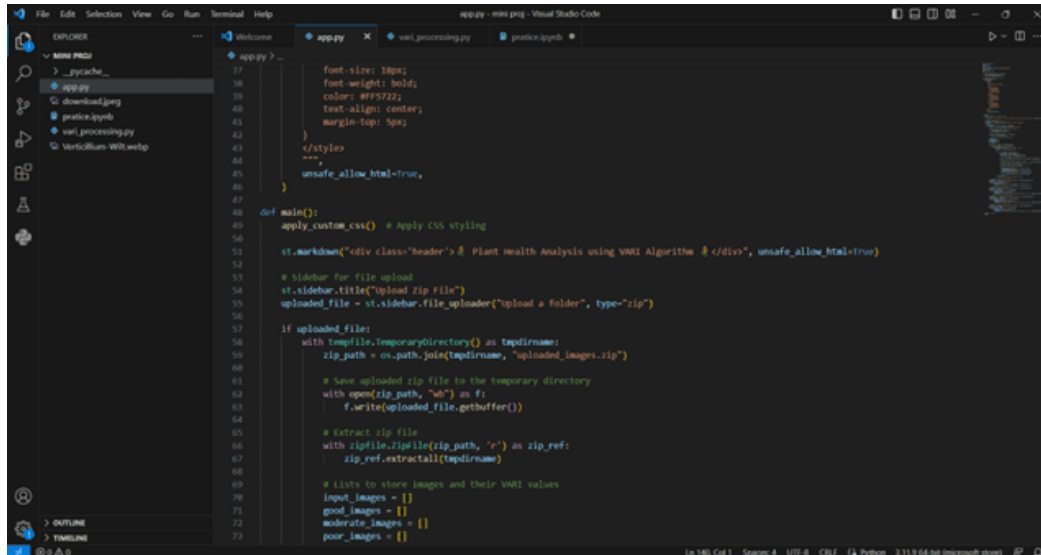

```

17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73

```

Fig 5.2 Applying Code to Deploy User Interface

D. Communication And Data Transmission Testing

The effectiveness of the communication system is crucial for real-time monitoring and control.

The radio transmitter and receiver were tested for signal strength, range, and interference resistance. Various frequency bands were evaluated to determine the most stable connection with minimal disruptions. The tests also analyzed latency in command transmission and response times to ensure smooth drone operation.

The GPS communication was assessed by monitoring how quickly the drone acquired and updated its location. Tests were performed in both open areas and obstacle-dense environments to evaluate signal consistency. The accuracy of GPS-based navigation was cross-verified using ground-based measurements to ensure that the drone followed its designated flight paths correctly.



Fig 5.3 User Interface

For WiFi-based data transmission, the drone's ability to send images and plant health data to a cloud server was tested. The efficiency of image compression and transfer rates was measured to minimize delays in data availability.

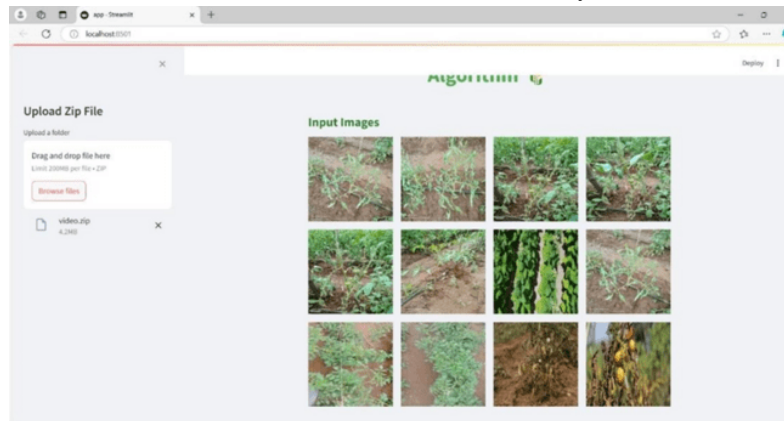


Fig 5.4 User Interface Input Phase

The IoT integration was evaluated by testing remote access features, where users could view drone data from a web interface. The response time for fetching sensor data and updating plant health analytics was optimized to provide near-instant updates for better decision-making in agricultural applications.

Further testing ensured that communication remained reliable under different weather conditions, including high humidity and temperature fluctuations. Signal amplifiers and alternative frequency bands were explored to improve transmission strength in challenging environments, ensuring uninterrupted connectivity.

E. Field Testing And Performance Validation

Once all individual and integrated system components were validated, the drone was deployed for real-world agricultural testing. It was flown over different types of crop fields to assess its ability to capture accurate plant health data. The GoPro camera and GPS module were synchronized to collect and geotag images, ensuring that the data corresponded to the correct locations.

Environmental factors such as wind speed, temperature, and lighting conditions were studied to understand their impact on flight stability and data accuracy. The drone was tested under varying wind intensities to ensure it could maintain steady flight without excessive drift. Nighttime operations were also evaluated, with infrared imaging capabilities tested for low-light conditions.

Vegetation indices, such as NDVI (Normalized Difference Vegetation Index), were calculated and compared against ground-truth measurements taken manually. This helped verify the accuracy of the drone's plant health assessments and fine-tune its classification algorithms for better prediction results.

Overall, the field tests confirmed that the drone successfully performed precise data collection, efficient data processing, and accurate plant health monitoring. Any remaining issues, such as minor flight deviations and slight delays in data transmission, were addressed through final firmware adjustments.





Fig 5.5 User Interface Output Phases

The testing phase of the drone-based plant health monitoring system was crucial in evaluating the functionality, reliability, and accuracy of its hardware and software components. A systematic approach was followed, beginning with individual hardware tests, followed by software validation, communication system assessments, flight performance checks, and real-world field testing. Each stage of testing played a vital role in refining the system, ensuring that it operates efficiently under various environmental and operational conditions.

The hardware testing phase confirmed that the structural integrity of the drone, propulsion system, GPS module, and camera functioned as expected. Power management assessments helped optimize energy consumption, improving flight endurance. The software testing phase ensured that flight control algorithms, AI-based plant health analysis, and communication protocols operated with minimal errors. Data transmission was verified for accuracy, confirming the system's ability to process and store plant health data effectively.

Field testing provided valuable insights into the system's real-world performance, validating the accuracy of plant health monitoring and vegetation analysis. The drone successfully navigated through pre-set waypoints and collected high-resolution imagery, which was processed to detect variations in crop health. The impact of environmental factors such as wind speed, temperature, and signal interference was also evaluated, leading to refinements in control mechanisms and data processing techniques.

Despite several challenges, including GPS inconsistencies, communication delays, and external disturbances, iterative improvements helped enhance system reliability. The implementation of error correction techniques, calibration adjustments, and battery optimizations significantly improved overall performance. The system demonstrated the capability to provide actionable insights for precision agriculture by delivering accurate and timely plant health data.

In conclusion, the testing phase confirmed that the drone-based plant health monitoring system is ready for practical deployment. The successful validation of its components ensures that the system can be effectively used in real-world agricultural applications. Future improvements may focus on enhancing automation, integrating more advanced sensors, and refining AI-based plant health analysis techniques to further improve performance and usability.

VI. COST OF THE SYSTEM

A. List Of Components And Its Cost

Table 7.1 shows the components used in this project and their costs:

S.No	Component	Quantity	Cost
1	Drone Frame (F450) with PCB	1	1100
2	Electronic Speed Controller	4	1880
3	Telemetry and Transmitter	1	4470

4	Propeller Pair	4	240
5	LiPo Battery	1	1500
6	APM 2.8 Flight Controller	1	4350
7	Anti-Vibration Absorber	1	200
8	BLDC Motors 1000KV	4	1800
9	NEO 7M GPS Module	1	1700
10	4K Action Camera	1	1600
	Total Cost		18840/-

Table 6.1 Components With Cost

VII. CONCLUSION

The drone-based plant health monitoring system developed in this project has effectively demonstrated the practical application of UAV technology in modern agriculture. By integrating a GoPro camera, GPS navigation, a stable flight control system, and wireless communication, the drone is capable of autonomously collecting and analyzing aerial data to assess plant health. The system utilizes AI-driven image processing to detect early signs of disease, nutrient deficiency, and environmental stress, allowing for timely intervention. Through both controlled testing and real-world field trials, the system has proven to be a reliable, scalable, and efficient solution for large-scale crop monitoring with minimal human effort.

Throughout the project, several technical milestones were achieved. The drone’s autonomous flight and GPS-based navigation were fine-tuned for precision, while high-resolution imaging and machine learning techniques enabled accurate health assessments. Key challenges—such as GPS interference, unstable flight in varying weather conditions, and communication delays—were addressed through hardware upgrades, optimized PID control, and robust data transmission protocols. Additionally, filtering algorithms and AI-enhanced correction methods improved image quality and processing accuracy. These enhancements resulted in a functional prototype that offers remote monitoring, data accessibility, and extended operational efficiency.

Looking ahead, the system offers wide potential for enhancement and broader application. Future improvements could include multispectral and thermal imaging, the concept can also evolve into a swarm drone system for faster, large-scale data collection. While developed for agriculture, the same platform can be adapted for forest conservation, urban landscaping, and environmental monitoring. Overall, this project lays a strong foundation for future innovations in precision agriculture, combining UAV capabilities with intelligent software to promote sustainable farming and land management practices.

VIII. FUTURE SCOPE

The current drone-based plant health monitoring system has demonstrated its effectiveness in capturing aerial imagery, analyzing vegetation health, and providing actionable insights for precision agriculture. However, there remains significant scope for future enhancement and expansion. One promising area is the integration of multispectral and thermal imaging sensors, which would allow deeper analysis of plant health, detecting stress factors not visible in standard RGB imagery. These advanced sensors can help identify water stress, chlorophyll content, and canopy temperature variations, improving the diagnostic capability of the system.

Future versions of the drone can also incorporate full automation features, including autonomous takeoff, landing, and real-time obstacle avoidance using LiDAR or ultrasonic sensors. This would reduce the need for manual operation and enhance operational safety and efficiency. Additionally, the incorporation of AI-driven predictive analytics could allow the system to forecast potential crop health trends based on historical data, enabling preventive action rather than reactive solutions. Integrating cloud-based platforms for data storage and collaborative analysis will further enhance accessibility for farmers, agronomists, and researchers across different locations.

Another major direction for development is the implementation of swarm drone technology, where multiple drones work together to cover large farmlands more efficiently.


This would significantly reduce monitoring time and allow simultaneous data collection across multiple zones. Moreover, future systems could include real-time communication with farm management systems to automate irrigation or fertilization based on the drone's findings. With ongoing advancements in UAVs, sensors, AI, and IoT, the system can evolve into a comprehensive, intelligent platform for smart and sustainable agriculture.

REFERENCES

- [1] Zhang, C., & Kovacs, J. M. (2012). "The application of small unmanned aerial systems for precision agriculture: A review." *Precision Agriculture*, 13(6), 693–712.
- [2] Hunt, E. R., & Daughtry, C. S. T. (2018). "What good are unmanned aircraft systems for agricultural remote sensing and precision agriculture?" *International Journal of Remote Sensing*, 39(15-16), 5345–5376.
- [3] Nebiker, S., Annen, A., Scherrer, M., & Oesch, D. (2008). "A lightweight multispectral sensor system for mini UAVs: Spectral and radiometric calibration procedures." *ISPRS Congress Beijing 2008 Proceedings*.
- [4] UBX AG. (2013). NEO-7M GPS Module Datasheet.
- [5] GoPro. (n.d.). GoPro Camera Technical Specifications.
- [6] Pinter, P. J., Hatfield, J. L., Schepers, J. S., et al. (2003). "Remote sensing for crop management." *Photogrammetric Engineering & Remote Sensing*, 69(6), 647–664.
- [7] VARI Index Information. (n.d.). "Visible Atmospherically Resistant Index (VARI) for vegetation monitoring."
- [8] Gonzalez, R. C., & Woods, R. E. (2017). *Digital Image Processing* (4th ed.). Pearson Education.
- [9] OpenCV. (n.d.). Open Source Computer Vision Library.

PHOTOGRAPH OF THE PROJECT SETUP



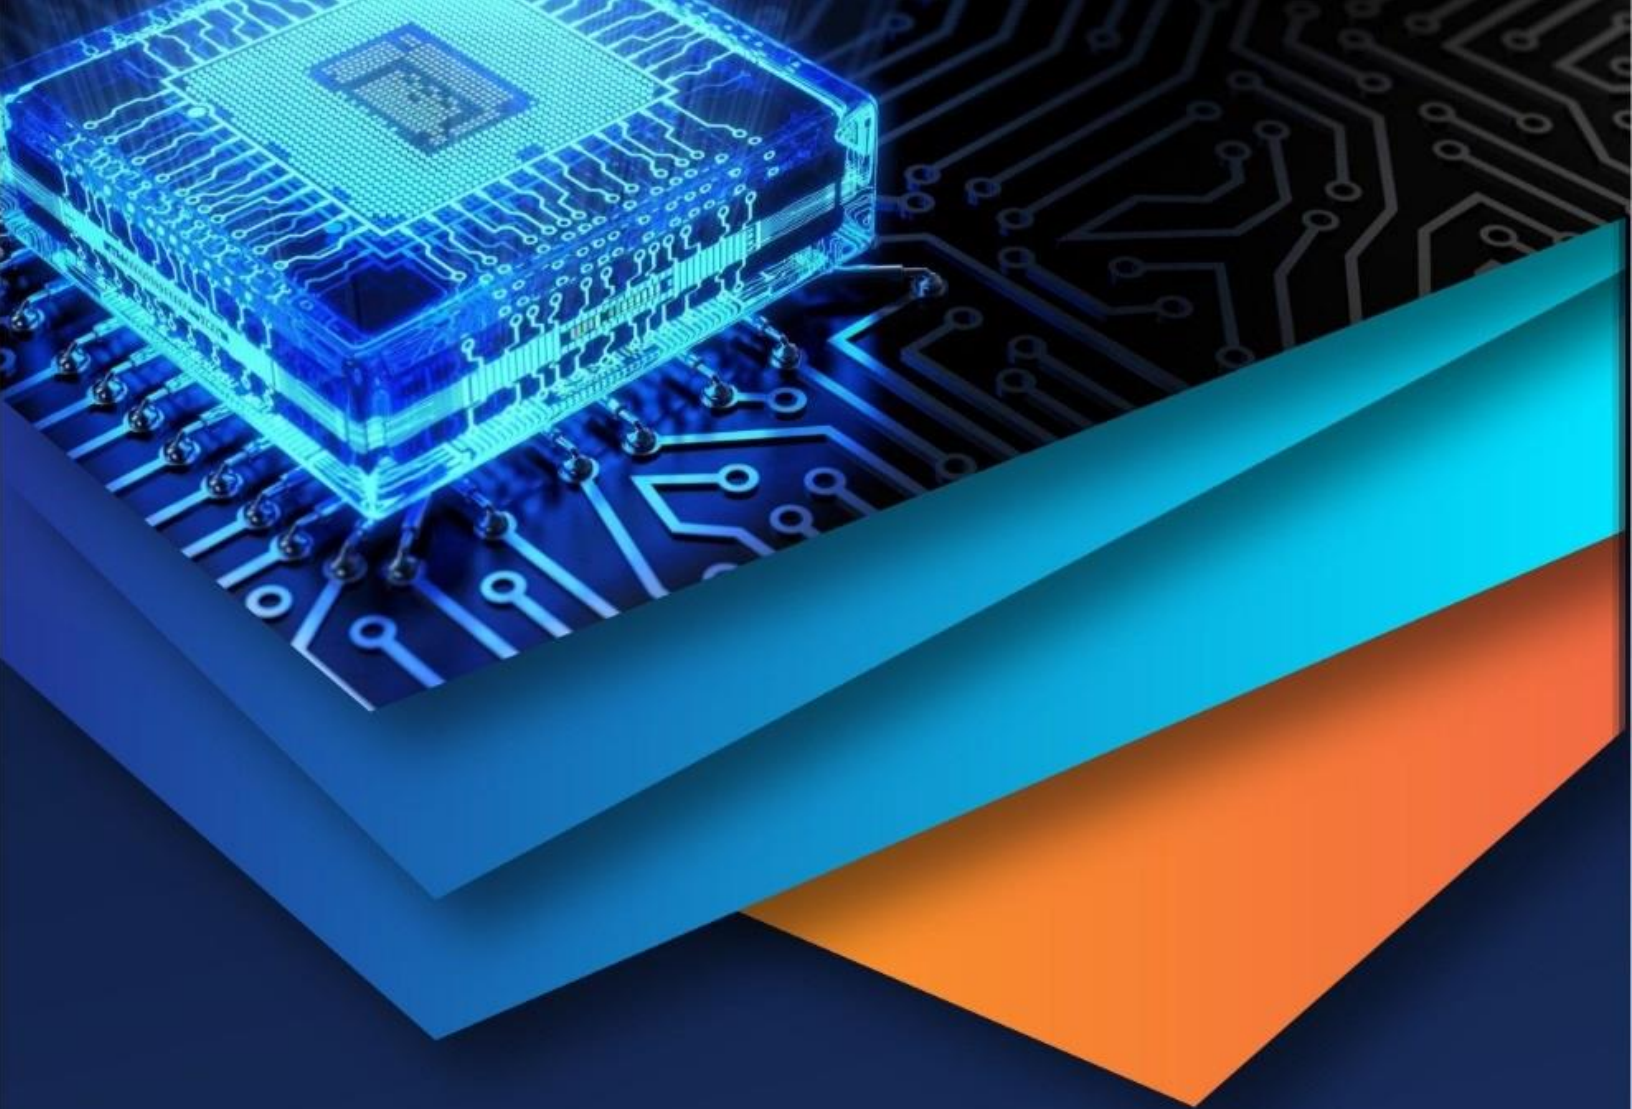

10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)