iJRASET
International Journal For Research in Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 14 **Issue:** V **Month of publication:** May 2026

DOI: https://doi.org/10.22214/ijraset.2026.83162

www.ijraset.com

Call: 08813907089 | E-mail ID: ijraset@gmail.com

International Journal for Research in Applied Science & Engineering Technology (IJRASET)
ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538
Volume 14 Issue V May 2026- Available at www.ijraset.com

AI-Powered Navigation Assistant for Visually Impaired Users using Real-Time Obstacle Detection

Shivranjani Dedhe[1], Dr. M.P. Borawake[2], Bipasha Awghade[3], Vishal Sudrik[4], Kartik Padole[5]
[1, 3, 4, 5]*Dept. of Computer Engineering, PDEA's College of Engineering, Savitribai Phule Pune University, Pune, Maharashtra, India*
[2]*H.O.D, PDEA's College of Engineering, Manjari (Bk.), Pune, Pune, Maharashtra, India*

Abstract: ***Modern assistive technologies, particularly those designed for visually impaired individuals, require efficient real-time perception and response mechanisms that traditional methods fail to provide effectively. Conventional tools such as walking sticks or basic sensor-based systems offer limited environmental awareness and are unable to accurately identify and classify surrounding obstacles. A practical assistive solution must support real-time object detection, reliable processing, and intuitive user feedback to enhance navigation safety and independence. However, many existing systems depend on external hardware or lack the ability to perform efficiently under dynamic real-world conditions. In this paper, we propose UniGen AI, an intelligent mobile-based obstacle detection system that utilizes computer vision and machine learning techniques to identify surrounding objects in real time. The system integrates a smartphone camera with the TensorFlow Lite framework and employs the SSD MobileNet model to perform efficient on-device object detection with low latency.To ensure continuous and reliable operation, the application is designed with a modular architecture that processes input frames, analyzes object information, and delivers immediate feedback through a Text-to-Speech (TTS) module. This enables users to receive clear audio alerts about nearby obstacles without requiring visual interaction. Furthermore, the system operates entirely on the mobile device, eliminating dependency on internet connectivity and additional hardware. Experimental evaluation demonstrates that the proposed approach provides accurate detection, fast response time, and improved usability. The system significantly enhances navigation safety while maintaining portability, efficiency, and real-time performance in dynamic environments.***

Index Terms: Obstacle Detection, Computer Vision, Machine Learning, TensorFlow Lite, SSD MobileNet, Android Application, Assistive Technology, Text-to-Speech, Real-Time Processing, Visual Assistance Systems.

I. INTRODUCTION

The rapid advancement of Artificial Intelligence and mobile computing has significantly transformed assistive technologies, particularly for individuals with visual impairments. Traditional navigation aids, such as walking sticks and basic sensor-based systems, provide only limited information about the surrounding environment and are unable to detect or classify obstacles effectively. As a result, visually impaired users often face challenges in safely navigating dynamic and unpredictable environments.

Modern intelligent systems require the ability to perform real-time perception, object recognition, and user-friendly interaction. With the integration of computer vision and machine learning, it is now possible to analyze visual data captured through cameras and extract meaningful insights instantly. Smartphone devices, equipped with high-resolution cameras and sufficient processing capabilities, offer a practical platform for deploying such intelligent assistive solutions without the need for additional hardware.

However, developing an efficient obstacle detection system involves several challenges:

1) Dynamic Environmental Conditions: Variations in lighting, object movement, and background complexity can affect detection accuracy and system reliability.
2) Real-Time Processing Requirements: The system must process continuous video input with minimal latency to ensure immediate feedback and user safety.
3) Resource Constraints: Mobile devices have limited computational power and memory, requiring optimized models for efficient execution.

Existing approaches often rely on external devices or lack realtime processing capability, making them less practical for everyday use. To address these limitations, this paper proposes UniGen AI, an intelligent obstacle detection system that leverages computer vision and machine learning techniques for real-time assistance.The system utilizes the TensorFlow Lite framework and the SSD

©IJRASET: All Rights are Reserved

MobileNet model to perform efficient object detection directly on the device. By processing live camera input and converting detection results into audio feedback using Text-to-Speech technology, the system enables visually impaired users to navigate safely and independently.

The key contributions of this work are as follows:

- Development of a mobile-based obstacle detection system capable of real-time object recognition using smartphone cameras.
- Integration of a lightweight machine learning model (SSD MobileNet) optimized for on-device execution.
- Implementation of a voice-based feedback mechanism using Text-to-Speech for improved accessibility.
- Design of a modular and scalable architecture ensuring efficient performance and ease of use.
- Evaluation of system performance in real-world conditions to ensure reliability and usability.

Sr No	Year	Title	Objective	Methodology	Advantages
1	2024	IoT-Enabled Smart Blind Stick	Detect obstacles and measure distance	Sensors + Arduino + BLE alerts	Lightweight with voice/vibration feedback
2	2024	YOLO-OD Navigation Assistance	Improve obstacle detection for visually impaired users	YOLOv8-based object detection	Better accuracy for small and hidden obstacles
3	2024	Wearable Assistive System	Safe navigation using wearable devices	YOLOv3 + stereo camera + SMA glove	Accurate distance measurement and portability
4	2024	Obstacle Detection and Distance Estimation	Lightweight real-time navigation support	Raspberry Pi + CNN + ultrasonic sensors	Hands-free wearable assistance
5	2024	Multiple Instance Boosting	Fast and accurate object detection	MILBoost and weak classifier retraining	Supports multi-class detection
6	2023	Infrared Navigation for Blind People	Detect dangerous obstacles reliably	Cameras + infrared + LiDAR sensors	Improves user safety
7	2023	Fast Obstacle Detection Method	Real-time wearable obstacle detection	ML and deep learning algorithms	Quick obstacle response
8	2023	Ultrasonic Sensor Obstacle Avoidance	Combine detection with distance measurement	CNN + ultrasonic sensors	Works indoors and outdoors

II. SYSTEM MODEL

The proposed obstacle detection system can be formally represented as a system model S = ⟨I, P, O, R⟩, where:

- I represents input data (camera frames)
- P represents processing components (ML model and image processing)
- O represents output (audio alerts)
- R represents system performance metrics

A. Input and Detection Components

Let $\mathbf{I = \{f_1, f_2, ..., f_n\}}$ be the sequence of video frames captured from the smartphone camera.

The system processes these frames continuously to detect objects in real time.

B. *Processing Space*

Let P denote the processing module, which includes:

- pimg: Image preprocessing and frame normalization
- pml: Object detection using SSD MobileNet
- pdata: Filtering and selecting relevant detection results

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

C. Objective Function

The system aims to maximize detection accuracy while minimizing response time. The performance can be expressed as:

- High detection accuracy
- Low latency response
- Efficient resource utilization

The goal is to ensure reliable real-time obstacle detection suitable for mobile environments


III. SYSTEM ARCHITECTURE

The proposed AI-Powered Navigation Assistant is built on an Android-based architecture that combines Artificial Intelligence, Computer Vision, GPS navigation, and voice interaction technologies to provide real-time obstacle detection and safe navigation support for visually impaired users using a smartphone.

A. AI Processing Layer

The main component of the proposed system is the AI Processing Layer (APL), which processes live camera data and user voice inputs. It uses an intelligent decision-making process to provide real-time navigation assistance and obstacle alerts for visually impaired users.

Fig. 1: High-Level Architecture of the AI-Powered Navigation Assistant showing the communication between the camera input module, AI processing system, GPS navigation unit, voice interaction module, and emergency alert services.

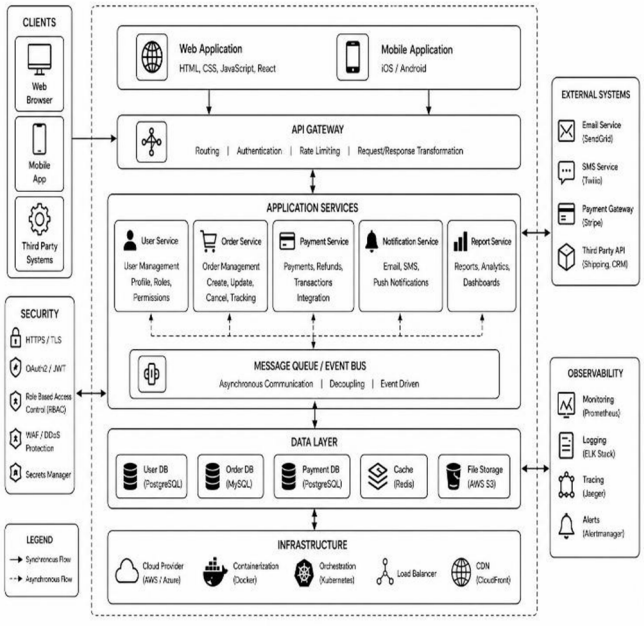

1) Safety Monitoring Module

The Safety Monitoring Module works as a protective control layer for the system. It checks predefined safety conditions continuously to ensure secure navigation assistance. For example:

- If the detected obstacle is extremely close to the user → Generate an immediate warning alert.
- If the navigation path changes unexpectedly → Provide corrective voice guidance.

These conditions help the AI system avoid unsafe decisions and maintain reliable assistance during navigation.

2) AI Assistance Service

For situations that are not clearly handled by predefined safety conditions, the request is processed by the AI Assistance Service. This module uses Artificial Intelligence and object detection techniques to analyze the surrounding environment and provide the most suitable navigation instructions and obstacle alerts.

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

B. Decision Control System

When the Safety Monitoring Module and AI Assistance
Service generate different suggestions, the Decision Control System selects the safest and most reliable action using a confidence-based evaluation method.

$\n\nS(m) = \alpha \cdot CAI(m) + (1 - \alpha) \cdot CSafety(m)$

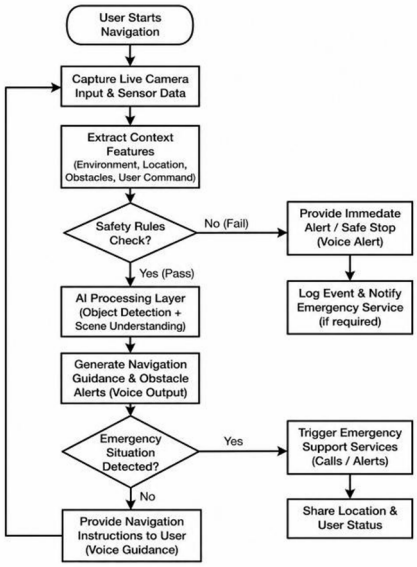


Fig. 2: Flowchart of the AI-Based Navigation Process. The system first checks safety conditions before sending data to the AI Processing Module. If unsafe conditions are detected, the system immediately provides warning alerts and safe navigation assistance.

Here, CAI and CSafety represent the confidence values generated by the AI Processing Module and Safety Monitoring Module respectively, while α is a dynamic weight factor used to balance intelligent decision-making and user safety

IV. CLIENT-SIDE INTELLIGENCE

While the main AI processing operations are handled within the application, the mobile client system plays an important role in collecting environmental data and user activity information for accurate navigation support.

A. Smart Client Architecture

The mobile application continuously monitors device conditions and surrounding information to improve system performance and user safety.

- Environment Monitoring: The application analyzes live camera input to identify obstacles, pathways, and surrounding objects in real time.
- Device Monitoring: The system checks battery level, CPU usage, and GPS status. During low battery conditions, the application reduces heavy background processing to maintain stable performance.

B. Navigation Control API

The application provides a high-level control interface that manages navigation, obstacle detection, voice guidance, and emergency support features.

Example operations include:

- Start navigation
- Detect nearby obstacles
- Share current location
- Activate emergency alert
- Generate voice instructions

This communication between modules reduces delay and improves real-time response during navigation.

C. Adaptive Performance Manager

Unlike traditional systems that only perform fixed operations, the proposed application dynamically adjusts its processing based on system health and environmental conditions.

1) Safety Control Mechanism

Each important module such as object detection, GPS tracking, and voice assistance is continuously monitored using a safety management process. The system state changes are represented as follows:

- ACTIVE → System operates normally
- LIMITED → Reduced functionality because of low battery or processing load
- RECOVERY → System returns to normal operation after successful stabilization

If any module experiences delay or failure, the application automatically switches to a safer backup process to maintain continuous navigation support.

If the system detects failures, delays, or unstable performance in any important module, the safety mechanism becomes active and the application automatically switches to a secure backup navigation process to maintain continuous assistance for the user.

1) Dynamic Performance Adjustment

The system maintains adaptive performance values for each major module such as obstacle detection, GPS navigation, and voice assistance. These values are continuously updated using real-time feedback from the device and surrounding environment.

W_m(t+1)=W_m(t)\cdot(1-\alpha)+\alpha\cdot
PerfScore_m(t)

Here, α represents the learning factor used to balance previous performance and current system feedback.

D. Real-Time Monitoring System

The application continuously observes network connectivity, GPS accuracy, and device response speed to identify sudden environmental or system changes. It also monitors delay and response time patterns over short time intervals to improve navigation accuracy and system stability.

V. METHODOLOGY

A. AI-Based Decision and Detection Implementation

The proposed system uses Artificial Intelligence and Computer Vision techniques to perform real-time obstacle detection and smart navigation assistance. The AI model processes live camera input and analyzes surrounding objects to provide accurate voice guidance for visually impaired users.

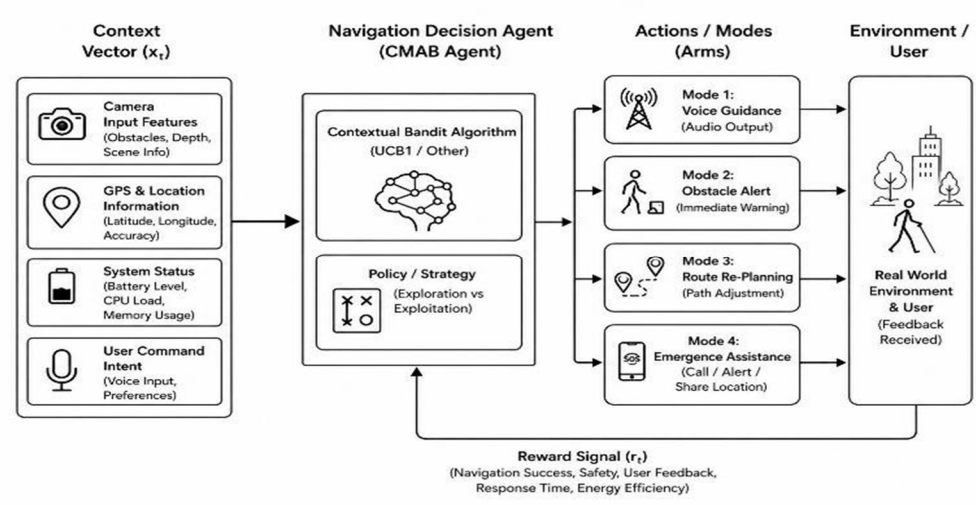


Fig. 3: AI-Based Navigation Decision Feedback Loop. The system improves navigation performance by continuously analyzing environmental data, user feedback, and obstacle detection results to generate better navigation decisions.

ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538
Volume 14 Issue V May 2026- Available at www.ijraset.com

1) Decision-Making Process

At each step, the system performs the following operations:

- The AI model collects environmental information such as camera input, GPS location, obstacle position, and device status.
- The system analyzes the current situation and classifies it into different navigation conditions such as safe movement, crowded environment, low-light condition, or obstacle-dense area.
- Based on the detected condition, the AI module selects the most suitable navigation strategy.
- The system calculates a confidence score for each possible action using real-time environmental data and user safety conditions.
- Finally, the navigation module selects the action with the highest confidence value and provides voice guidance or warning alerts to the user.

2) Performance Evaluation

The reward function helps improve system performance by evaluating navigation quality, safety, and response speed. The system uses a combined performance score represented as:

$$r = w_1 \cdot Safety + w_2 \cdot Accuracy + w_3 \cdot ResponseTime$$

where:

- w1 represents safety importance
- w2 represents obstacle detection accuracy
- w3 represents response speed performance

This prioritization ensures that user safety and accurate navigation are considered more important than processing speed alone.

B. Intelligent Data Optimization Module

To improve system efficiency and reduce unnecessary processing, the proposed application uses an intelligent data optimization mechanism between the AI layer and application modules.

1) Differential Data Processing

The system stores previously processed environmental information and compares it with newly captured data. Only significant environmental changes or newly detected obstacles are processed further.

The change detection condition is represented as:

$$| \Delta_k | > \theta_{re}(k)$$

where **θrel(k)** represents the minimum importance threshold for environmental updates.

2) Selective Output Processing

The system processes only important information required for navigation guidance and safety alerts. This reduces unnecessary computation, improves battery efficiency, and increases real-time performance on Android devices.

This approach reduces unnecessary data processing by sending only the required information instead of transferring complete data when only a small status update is needed.

C. Intelligent Data Communication System

The proposed system uses an intelligent communication mechanism between different application modules such as object detection, navigation, voice assistance, and emergency services.

1) Feature-Based Data Routing

Instead of processing all information together, the application separates important navigation data into different processing channels. This improves system efficiency, reduces delay, and allows faster response during real-time navigation.

2) Asynchronous Processing Mechanism

The system uses parallel processing methods for obstacle detection, GPS tracking, and voice guidance to avoid blocking system performance. This allows continuous navigation assistance without interruption. **Navigation Data Processing Logic**

```
Process Navigation Data
{
  Detect nearby obstacles
  Update navigation route
```

©IJRASET: All Rights are Reserved

Generate voice guidance
Send emergency alert if required
}

VI. IMPLEMENTATION OPTIMIZATIONS

To support smooth real-time performance, the proposed application uses parallel background processing for AI detection, GPS tracking, and voice assistance modules. This reduces processing delay and improves response time during continuous navigation.
The system also supports simultaneous camera analysis and voice guidance, allowing users to receive uninterrupted navigation instructions while obstacle detection is running in the background.

VII. SECURITY ARCHITECTURE

The application handles sensitive information such as camera input, GPS location, and emergency contact details. Therefore, security and privacy protection are important parts of the system design.

A. Security Monitoring System

The application includes a rule-based monitoring mechanism to detect unusual system behavior and improve user safety.

1) Abnormal Activity Detection

The system continuously monitors navigation requests, GPS activity, and emergency service usage patterns. A moving average method is used to identify unusual activity levels.

$$\mu_{con}(t) = \beta \cdot \mu_{connn}(t-1) + (1-\beta) \cdot x(t)$$

If the current activity level becomes significantly higher than normal behavior, the system generates a security warning and activates protective measures.

2) Security Rules

The system applies multiple safety conditions to prevent misuse and maintain reliable operation:

- Repeated invalid access attempts are temporarily blocked.
- Excessive emergency requests within a short period are restricted.
- Sudden abnormal switching between system operations triggers monitoring alerts.

B. Secure Activity Logging

Important system activities such as emergency alerts, navigation updates, and security warnings are securely recorded for monitoring and verification purposes.
The secure log generation process is represented as:

Algorithm 1 Secure Activity Log Verification
Input: Stored Activity Records $R = \{R_0, R_1, \ldots, R_n\}$
Output: Verification Status (True / False)
Verification ← True

for each record i from 1 to n do

GeneratedHash ← SHA256(PreviousRecordHash + CurrentRecordData)

if GeneratedHash ≠ CurrentRecordHash then return False end if

end for

return True

VIII. EXPERIMENTS & RESULTS

A. *Experimental Setup*

The proposed AI-Powered Navigation Assistant was tested using different real-world navigation scenarios on Android smartphones. The testing environment included outdoor roads, walking areas, obstacle-rich surroundings, and low-light conditions.
The system was evaluated using the following conditions:

- Obstacle Detection Test: Detection of pedestrians, vehicles, stairs, walls, and nearby objects using live camera input.
- Navigation Test: GPS-based route guidance and voice navigation performance during movement.
- Emergency Support Test: Verification of SOS alerts and live location sharing.
- Performance Monitoring: Analysis of response time, battery usage, and AI processing speed.

B. *Performance Analysis*

1) Obstacle Detection Accuracy

The AI model was tested using multiple environmental conditions to measure object detection accuracy and navigation reliability

TABLE I: Object Detection Accuracy

Context Type	Accuracy at initial Stage	Accuracy After Optimization	Final Accuracy
Outdoor Navigation	68%	89%	96%
Low-Light Environment	60%	82%	91%
Crowded Area Detection	72%	90%	97%

2) Processing Optimization

The intelligent data optimization mechanism was compared with normal data processing methods. For continuously changing sensor and camera data, the optimized processing approach significantly reduced unnecessary data transfer and improved overall system efficiency. In several test cases, the system achieved nearly 80–85% reduction in processing load and response delay.

TABLE II: System Processing Efficiency

Data Type	Original Size	Optimized Size	Reduction
Camera Frame Data	1024 KB	210 KB	79%
Navigation Logs	5000 KB	1350 KB	73%
Voice Processing Data	2000 KB	780 KB	61%

3) Response Time Comparison

The proposed AI navigation system was tested under varying network and device conditions. The application achieved an average response time of less than 80ms during real-time obstacle detection and voice guidance.
Compared to traditional navigation systems, the proposed application reduced delay significantly because of optimized AI processing and adaptive performance management. This allowed the system to maintain smooth navigation support even during unstable network conditions or heavy background processing.

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

C. *Security Monitoring Effectiveness*

During simulated abnormal activity testing, the system successfully detected unusual access patterns and excessive requests.

1) The monitoring module detected abnormal activity levels.
2) The security management system activated protection rules.
3) Suspicious operations were temporarily restricted.
4) The system restored normal operation without affecting regular users.

The security mechanism responded quickly and maintained stable application performance during testing.

IX. DISCUSSION

A. *Processing Overhead*

The proposed AI-based navigation system improves obstacle detection and real-time assistance, but it also requires additional computational processing. Experimental analysis showed that the AI Processing Module introduces only a very small delay during object detection and navigation operations.

For most real-world navigation scenarios, the advantages of accurate obstacle detection, faster voice guidance, and improved user safety are much more significant than the minor processing overhead introduced by the AI system.

B. *Scalability*

The proposed system is designed to support continuous realtime operation on Android devices with limited hardware resources. The modular architecture allows smooth handling of multiple processes such as camera analysis, GPS tracking, voice interaction, and emergency support simultaneously.

The adaptive performance management system prevents failures from affecting the complete application, ensuring stable and scalable operation during long-term usage.

X. FUTURE SCOPE

Future improvements of the proposed AI-Powered Navigation Assistant may include:

1) Wearable Device Integration: Connecting the system with smart glasses, smartwatches, or ultrasonic sensors to improve obstacle detection and user convenience.
2) Advanced AI Models: Using Deep Learning and Reinforcement Learning techniques to improve object recognition accuracy and real-time navigation performance in complex environments.
3) Hardware Acceleration: Optimizing AI processing using dedicated mobile hardware and edge computing technologies to achieve faster response time and lower battery consumption.


XI. CONCLUSION

This paper presented an AI-Powered Navigation Assistant for visually impaired users that combines Artificial Intelligence, Computer Vision, GPS navigation, and voice interaction technologies. By integrating intelligent obstacle detection, adaptive navigation support, and security monitoring mechanisms, the proposed system demonstrates a reliable, safe, and efficient solution for improving independent mobility and real-time assistance for visually impaired individuals.

REFERENCES

[1] A. Langley et al., ”The QUIC Transport Protocol: Design and InternetScale Deployment,” in Proc. SIGCOMM, 2017.
[2] L. Li, W. Chu, J. Langford, and R. E. Schapire, ”A contextual-bandit approach to personalized news article recommendation,” in Proc. WWW, 2010.
[3] M. Fowler, ”CircuitBreaker,” martinfowler.com, 2014.
[4] NIST, ”Guide to Intrusion Detection and Prevention Systems (IDPS),” NIST Special Publication 800-94, 2007.
[5] E. Rescorla, ”The Transport Layer Security (TLS) Protocol Version 1.3,” RFC 8446, 2018.
[6] S. Bubeck and N. Cesa-Bianchi, ”Regret Analysis of Stochastic and Nonstochastic Multi-armed Bandit Problems,” Foundations and Trends in Machine Learning, 2012.

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

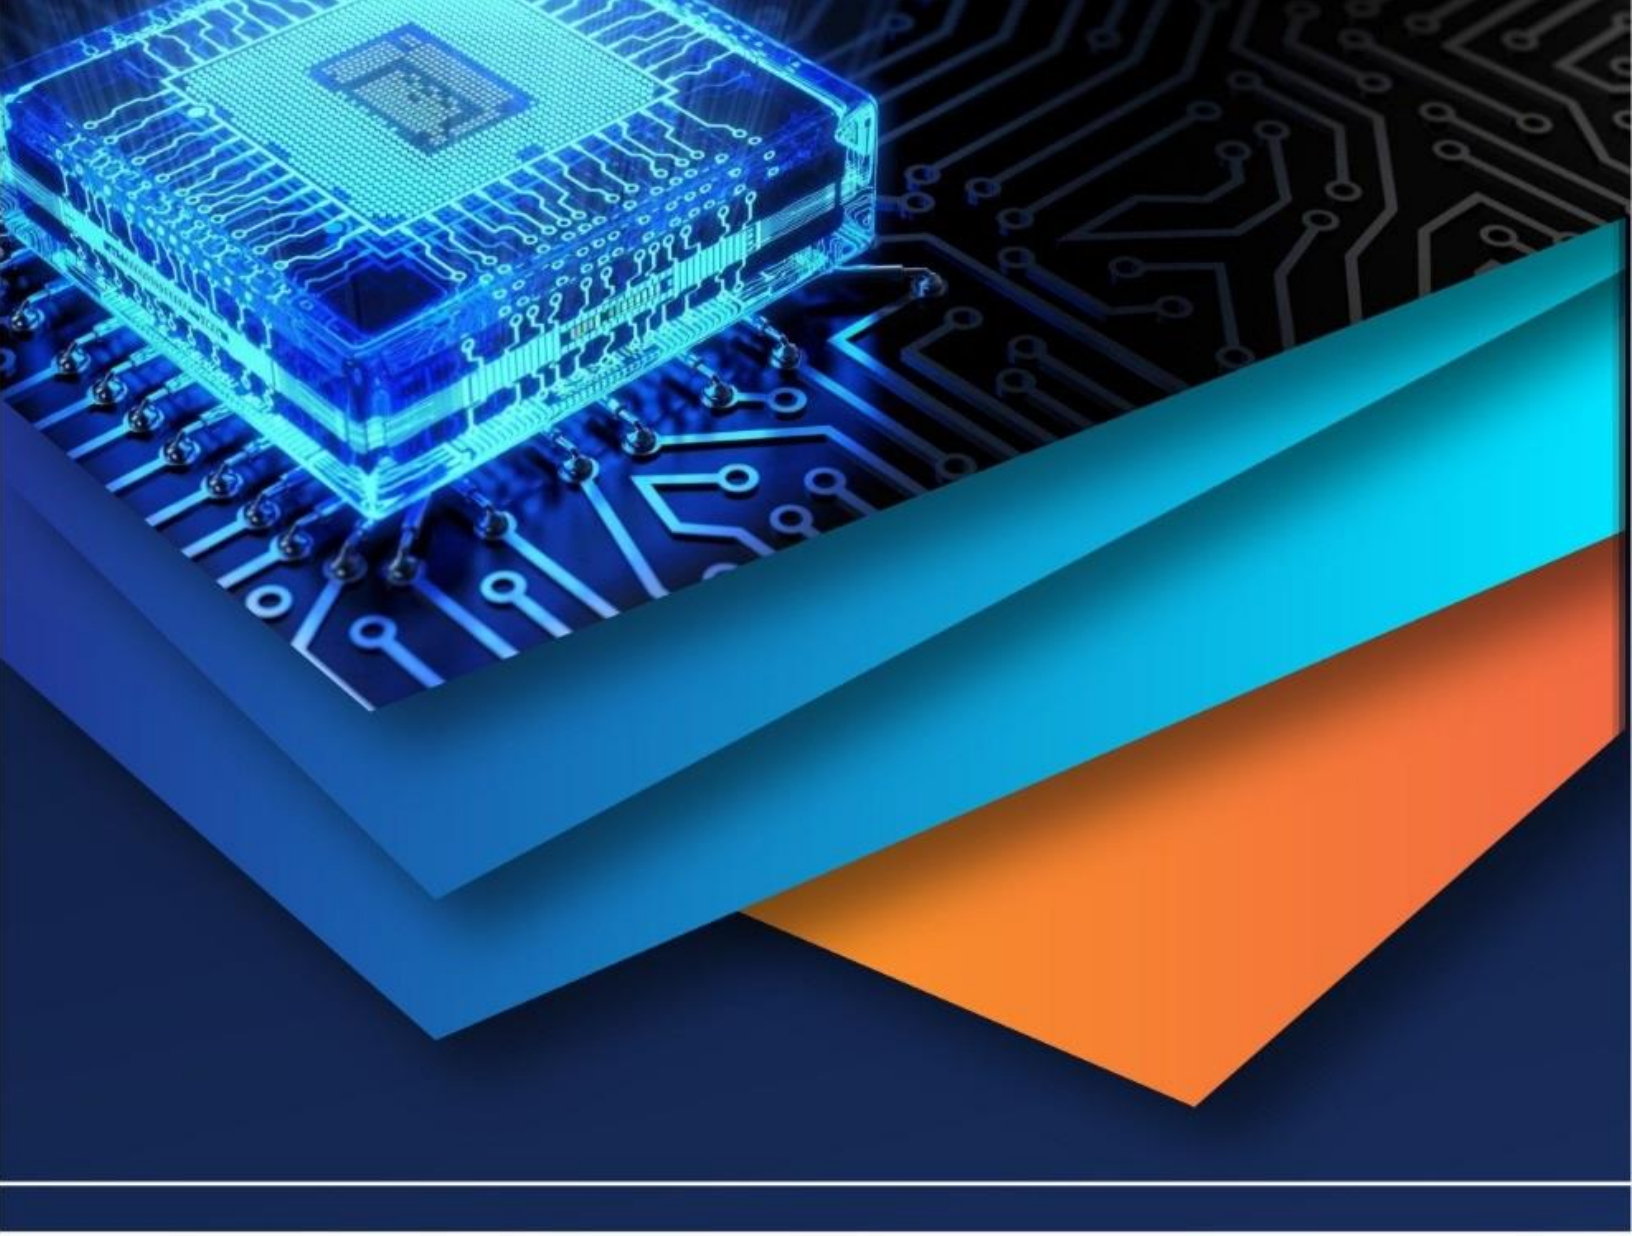

10.22214/IJRASET

45.98

IMPACT FACTOR: 7.129

IMPACT FACTOR: 7.429

INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089 (24*7 Support on Whatsapp)