



iJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 5

Issue: VI

Month of publication: June 2017

DOI:

www.ijraset.com

Call:  08813907089

E-mail ID: ijraset@gmail.com

Design of Broadband Rectangular Ring Patch Antenna for GSM-900, DCS- 1800 and Wi-Fi Bands

K. Jesse¹, K. S. Rajasekhar²

¹ M. Tech Student, Dept. of ECE, University College of Engineering and Technology, Acharya Nagarjuna University, Guntur, AP, India

² Assistant Professor, Dept. of ECE, University College of Engineering and Technology, Acharya Nagarjuna University, Guntur, AP, India

Abstract: The low-profiled broadband multi-frequency double-layer patch antenna which has seven patches with different resonant frequencies are placed together on one plane, operates at three bands that is GSM 900, DCS 1800 and Wi-Fi. These patches are arranged to have linear polarization and are perpendicular to each other. This structure not only avoids coupling but also takes full advantage of space. Simulation results show that good radiation performances and high gain are obtained owing to this design. HFSS software is used to design and simulate the antenna.


Keywords: GSM - 900, DCS-1800, Wi-Fi, Multi-frequency double-layer patch antenna, Coaxial feed and HFSS.

I. INTRODUCTION

Now a days with rapid development of wireless communication systems, we need higher performance and multi-frequency band operating antennas. As the front-end device of wireless communication system, high performance antenna is needed. Therefore, multi-band operation is the main goal of antenna. So to achieve this goal we proposed a multi-frequency patch antenna, named broadband rectangular ring patch antenna, it works at three bands namely GSM 900, DCS 1800 and Wi-Fi. However, it has limited bandwidth of only 3%-8% with the voltage standing wave ratio (VSWR) less than 2, which limits its applications. The three bands are described as GSM 900 for GSM device to base station (1.71-1.785GHz), DCS 1800 for base station to device (1.805-1.880GHz), and Wi-Fi (2.4-2.5GHz). The proposed design gives good performance in the aspects of return loss and gain. In order to operate at the frequencies of DCS 1800, GSM 900 and Wi-Fi which contain both omnidirectional and directive antennas, there are seven rectangular ring patches placed together on one plane and these antennas are arranged to have line polarization and be perpendicular to each other. This arrangement avoids coupling.


II. DESIGN OF AN ANTENNA

The dimensions of the designed patch antenna is shown in Fig.1. Considering that RF-35 is low-loss and stable, the antenna is built on the Taconic RF-35 substrate with permittivity 3.5 and loss tangent 0.0018. Out of many available substrate materials, Taconic RF-35 is chosen because it has very low moisture absorption. The antenna is composed of a patch with a shorting pin and a monopole element. The pin is connected with the micro strip line through the ground by a 1mm diameter copper cylinder. These antennas are arranged to have line polarization and be perpendicular to each other in order to avoid coupling. In this design ground plane is sandwiched between substrate 1 and substrate 2 and a patch is placed on the top of substrate 1.

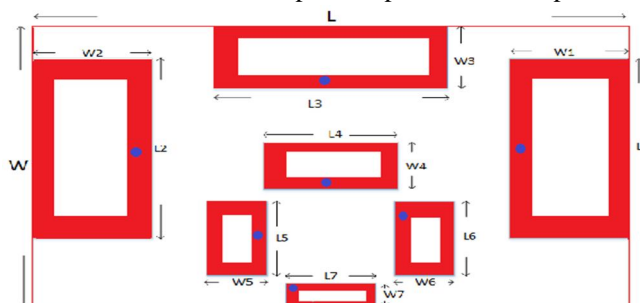


(a) Vertical view

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

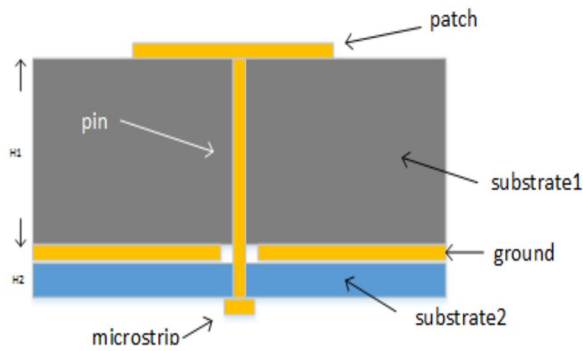

(b) Side view

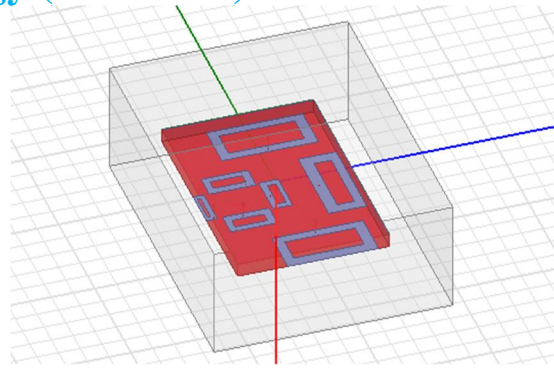


(c) 3D View


Fig.1. Dimensions of the antenna; (a) vertical view, (b) side view and (c) 3D view. ($L=210\text{mm}$, $W=140\text{mm}$, $L_1=84.8\text{mm}$, $W_1=W_2=43.5\text{mm}$, $L_2=83.8\text{mm}$, $L_3=84.5\text{mm}$, $W_3=35\text{mm}$, $L_4=40\text{mm}$, $W_4=18\text{mm}$, $L_5=L_6=43\text{mm}$, $W_5=W_6=23\text{mm}$, $L_7=37\text{mm}$, $W_7=10\text{mm}$, $H_1=11\text{mm}$, $H_2=0.5\text{mm}$).

III. SIMULATION AND RESULTS


The antenna design and simulation is done by using HFSS software. HFSS is a commercial electromagnetic simulator produced by Ansys company. The output graphs like return loss, VSWR and gain patterns were plotted using this software. The results for the three operating bands GSM-900, DCS 1800 and Wi-Fi bands were shown in figure 2, figure 3 and figure 4 respectively. Return loss for GSM -900 band (1.7 GHz) is -10.86dB, for DCS-1800 (1.85GHz) is -11.1277dB, for Wi-Fi band (2.4 GHz) is -35.6828dB. The return loss is less than -10dB for all the three bands.

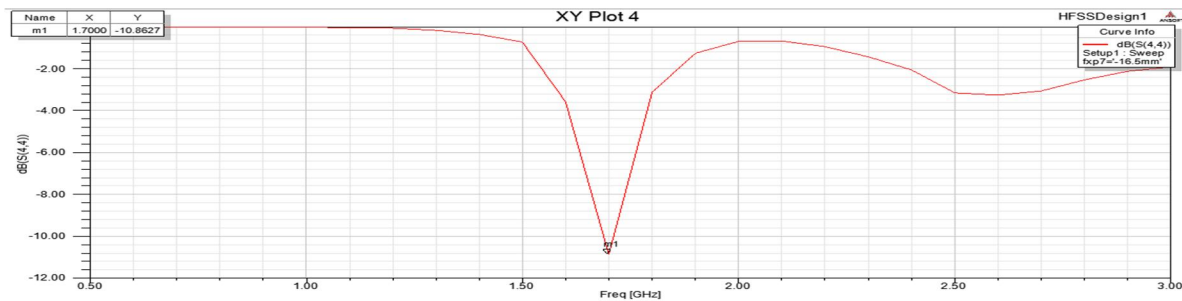

(a) Return losses

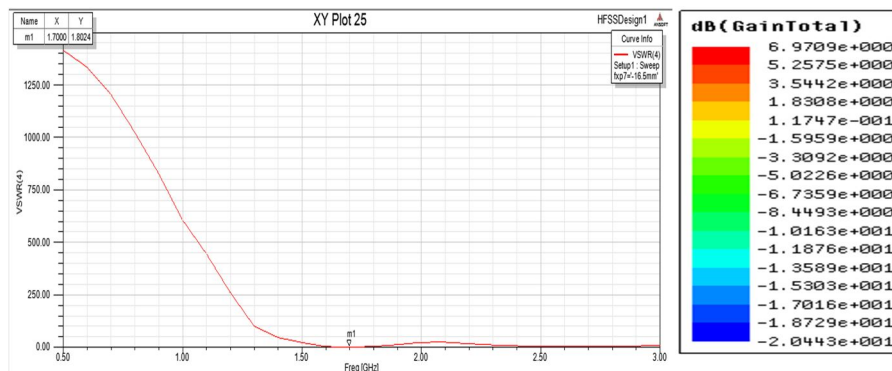

(b) VSWR Plot




(c) 3D polar plot


Fig 2 (a), (b), (c) Results of GSM band

Return loss, VSWR plot and 3D polar plots for GSM band at 1.7 GHz were shown in fig 2. At 1.7 GHz return loss obtained is -10.8627dB, VSWR is 1.8024 and gain is 6.9709dB


International Journal for Research in Applied Science & Engineering Technology (IJRASET)

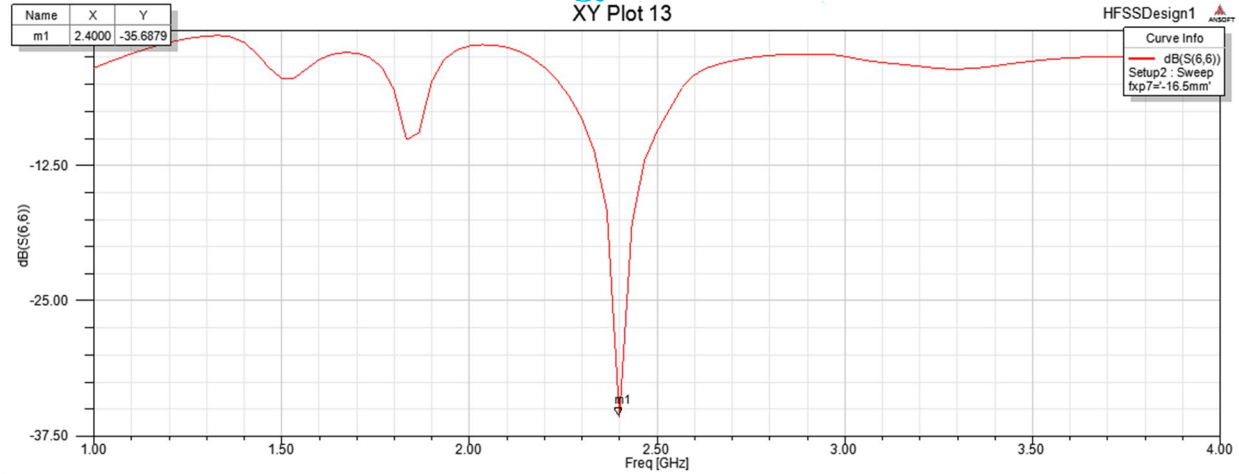

(a) Return loss

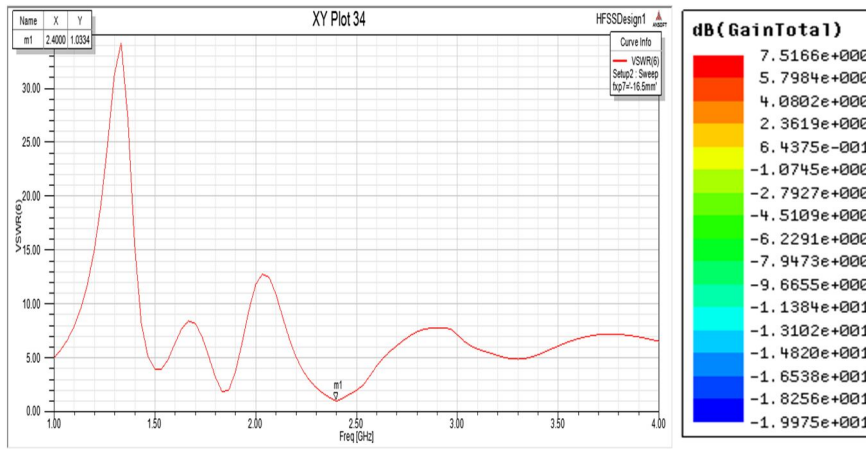


(b) VSWR plot

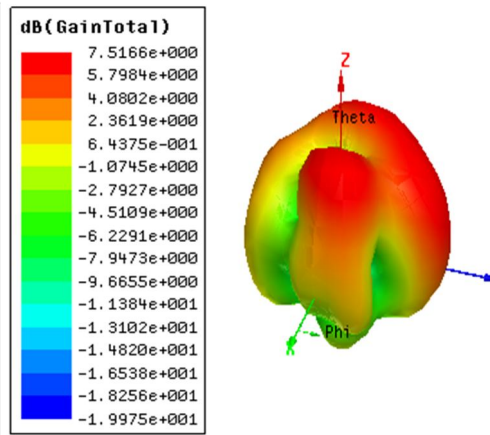

(c) 3D polar plot

Fig 3 (a), (b), (c) Results of Wi-Fi band

Return loss, VSWR plot and 3D polar plots for Wi-Fi band at 2.4 GHz were shown in fig 3. At 2.4 GHz return loss obtained is -35.6879dB, VSWR is 1.0334 and gain is 7.5166dB

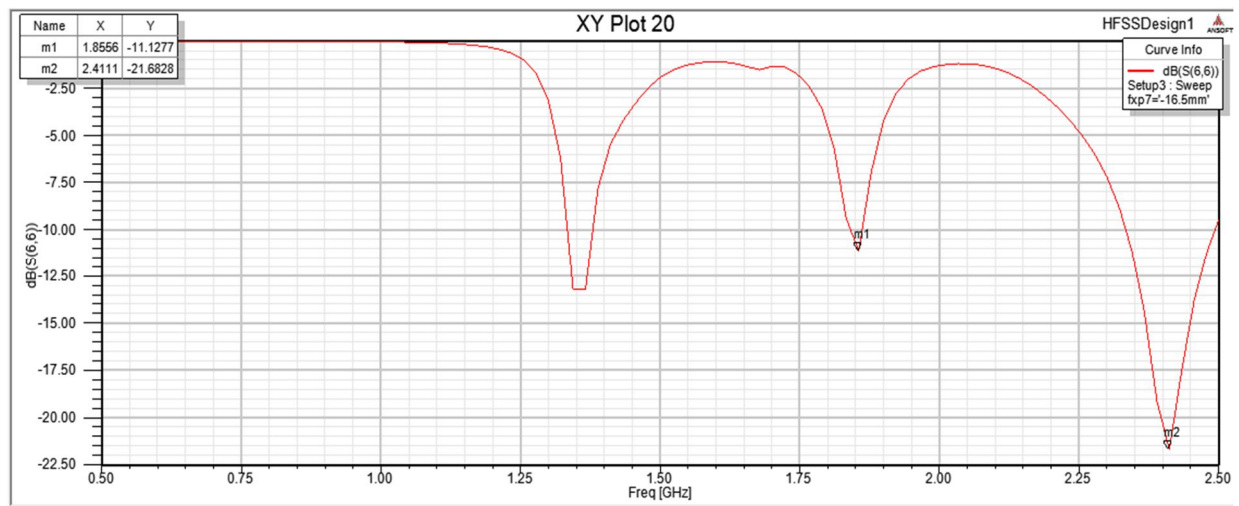

(a) Return loss

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

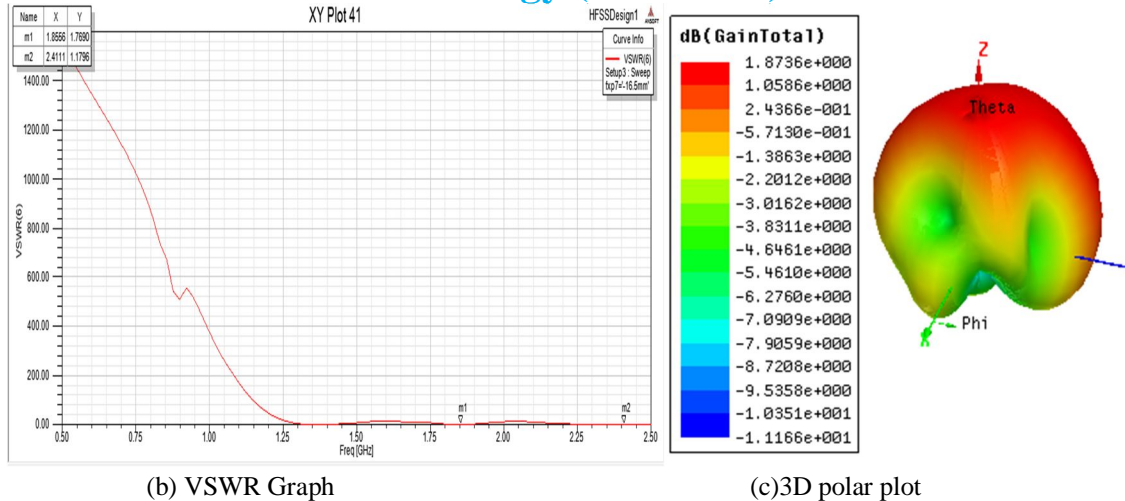


Fig 4 (a), (b), (c) Results of DCS 1800 band

Return loss, VSWR plot and 3D polar plots for DCS 1800 band at 1.8 GHz were shown in the figure 4. At 1.8 GHz return loss obtained is -11.1277dB, VSWR is 1.7690 and gain is 1.8736dB.

IV. CONCLUSION

This paper presents a design framework of a broadband rectangular ring patch antenna. In order to operate at the frequencies of GSM 900, DCS 1800 and Wi-Fi, which contain both omnidirectional and directive antennas, there are seven patches placed together on one plane and these patches are arranged to have line polarization and be perpendicular to each other. By forming different patch antennas, which have different resonant frequencies to the array, miniaturization and broadband can be realized. By this design good radiation performances and high gain are obtained. This type of arrangement avoids coupling.

V. BIOGRAPHIES



K Jesse is currently pursuing M. Tech degree in Communication Engineering and Signal Processing (CESP) from University College of Engineering and Technology, Acharya Nagarjuna University, Guntur, India. He obtained B. Tech degree in Electronics and Communication Engineering from ABR College of Engineering and Technology in 2014. His areas of interest are Antenna designing and RADAR systems.



Mr K S Rajasekhara is currently working as Asst. Professor in the Department of ECE at University College of Engineering and Technology, Acharya Nagarjuna University, Guntur, India. He obtained B.Tech degree from Vijayanagar Engineering College and M.Tech degree from Vignan University. He is currently doing Ph.D at ANU, Guntur. His areas of interest are Embedded Systems, Communications, Biomedical, and Artificial Neural Networks

VI. ACKNOWLEDGEMENT

I extend my grateful thanks to the authorities of Satellite Data Analysis and Application Centre at Acharya Nagarjuna University College of Engineering and Technology, Guntur for their support to utilize their facilities and encouragement to write this paper.

REFERENCES

- [1] Design of Low-Profiled Broadband Multi-frequency Double-Layer Patch Antenna Feihong Tang, Meng Zhang, Heng Du, Peng Chen and Xutao Yu State Key Laboratory of Millimeter Waves Southeast University Nanjing, P.R. China
- [2] Y. Lee and J.-S. Sun, "Dual-Band Dipole Antenna for RFID Tag Applications," Microwave Conference 2008. EuMC 2008. 38th European, Oct. 2013, pp.995-997.
- [3] J.L.N Swathi, Dr.P.Siddaiah, "Comparision of dual frequency rectangular patch antenna with and without shorting pin", IJETR, Volume 2, Issue 8, ISSN: 2321-0869.
- [4] S.-Y. Chen and P. Hsu, "CPW-fed folded-slot antenna for 5.8 GHz RFID tags," Electronics Letters, vol. 40, Nov. 2011, pp.1516-1517.
- [5] S. Jeon, Y. Yu and J. Choi, "Dual-band slot-coupled dipole antenna for 900MHz and 2.45 GHz RFID tag application," Electronics Letters, vol. 42, Oct. 2010, pp.1259-1260.

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

- [6] L. Zhang and X. -P. Li, "A new resonant frequency tunable RFID tag antenna design," Microwave and Millimeter Wave Technology 2008. ICMMT 2008. International Conference on, vol. 3, Apr. 2008, pp.1222-1225.
- [7] H.-W. Son and C.-S. Pyo, "Design of RFID tag antennas using an inductively coupled feed," Electronics Letters, vol. 41, Sept. 2005, pp.994-996.
- [8] A. Ghiotto, S.F. Cantalice and T.P. Vuong, "Miniaturized patch antenna for the Radio Frequency Identification of metallic objects," Microwave Symposium Digest 2013 IEEE MTT-S International, Jun. 2008, pp.583-586.
- [9] C.A. Balanis, Antenna Theory, 2nd Ed., John wily & sons, Inc., NewYork.1982
- [10] Girish Kumar and K.P.Ray, "Broadband Microstrip Antennas," Artech House.]Debatosh Guha and Yahia M.M.Antar, "Microstrip and Printed Antennas," John wily & sons, Inc.



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)