



# **iJRASET**

International Journal For Research in  
Applied Science and Engineering Technology



---

# **INTERNATIONAL JOURNAL FOR RESEARCH**

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume: 5**

**Issue: VII**

**Month of publication: July 2017**

**DOI:**

**[www.ijraset.com](http://www.ijraset.com)**

**Call:  08813907089**

**E-mail ID: [ijraset@gmail.com](mailto:ijraset@gmail.com)**

# Designing of a Miniature Microstrip Patch Antenna for Wireless Applications

Loveleen Kaur<sup>1</sup>, Rajni<sup>2</sup>, Amit Kumar<sup>3</sup>

<sup>1,2</sup>M.Tech Scholar, <sup>3</sup>Assistant Professor, ECE Department, Karnal Institute of Tech. & Mgt., Kunjpura, Karnal(KUK)

**Abstract:** This research paper we have developed a new study concerning the miniaturization of microstrip patch antenna by using defected ground structure DGS resonating at 3.16 GHz. The goal from this work was to shift the resonance frequency from 10 GHz to 3.16 GHz. A miniature microstrip patch antenna has been developed, analyzed and validated for S-Band applications. The aspects of single band microstrip antenna have been studied. In this thesis, a typical miniature microstrip patch antenna with DGS forming a simple and efficient technique of design has been introduced for the betterment of bandwidth and impedance matching, also, giving the same performance at the desired resonant frequency. Finally simulation will be done by using design software HFSS13.0. This parametric study would be of a great interest in the designing of miniature antennas for wireless communications operating in DGS.

**Keywords:** DGS, Ring type slots, Rectangular microstrip patch antenna, S-Parameters, smith chart, radiation pattern, bandwidth, VSWR, resonant frequency, HFSS13.0.

## I. INTRODUCTION

Microstrip Patch Antennas has quite a lot of advantages over other antennas due to their light weight, low profile, low cost of production, and are easily well-suited with optoelectronic integrated circuits (OBICs) and microwave monolithic integrated circuits (MMICs). Due to these striking features, the researchers are having noteworthy attention towards microstrip antennas. Microstrip patch antennas are used in extensive range of applications such as in wireless communication and biomedical diagnosis. There are many feeding techniques used for the Microstrip patch antennas. To keep the structure planar, a microstrip line in the plane of the patch can be etched to feed the antenna. But again, it suffers from the drawbacks that the feed network interferes with the radiating properties of the antenna leading to undesired radiations. For the microstrip feed, an increase in the substrate thickness increases its width, which in turn increases the undesired feed radiations.

In recent years, due to its various number of benefits including stable radiation pattern, high gain, low profile and inexpensive fabrication the printed microstrip slot antennas were significantly researched. For UWB applications numerous antennas were designed. Among them, one of the antenna requires a large ground plane that rises dimension. As a result, that is not included in microwave integration [2]. Various line feeding and waveguide feeding antennas were offered for UWB applications. For achieving the characteristics of wide impedance bandwidth monopole architectures are commonly used, such as elliptical, pentagon, rectangular, square, hexagonal, annular ring and circular ring antennas

Antenna is the most fundamental block of the wireless communication. Recently, the growth of wireless systems leads to a lot of innovations in the Microstrip antenna designs. Microstrip patch antenna has become an integral part of these devices working in ultra to super high frequency ranges. The patch and slot are the two parameters which affect the overall antenna's performance. Microstrip patch antennas are useful in various applications having requirements like broader bandwidth, smaller in size, lighter in weight, lower in cost and compatibility with integrated circuits [1-2]. A variety of wireless communication engineering applications, such as wireless links, remote sensing, cellular mobile phones and internet are in extensive demand and have witnessed a tremendous growth recently. The microstrip antenna has narrow bandwidth of the order upto 5%. This low bandwidth is not useful for many wideband wireless applications. Previously published literature has reported several possible techniques to improve bandwidth of the microstrip antenna.

In recent years, the widespread proliferation of wireless communication has augmented the demand for compact broadband antennas for handheld devices, satellite systems, etc. But it has a disadvantage of producing narrow bandwidth and low gain. To overcome the inherent limitation, many techniques such as probe fed antenna, stacked shorted patches, patch antenna with thick substrate electrically and slotted patch antenna have been planned and investigated[3].

## II. ANALYSIS OF ANTENNA

The length of the patch is denoted by  $L$  and width of the patch is denoted by  $W$ . Because the dimensions of the patch are finite along the length and width, the fields at the edges of the patch undergo fringing. Since some of the waves travel in the substrate and some in air, an effective dielectric constant  $\epsilon_{eff}$  is introduced to account for fringing and the wave propagation in the line.

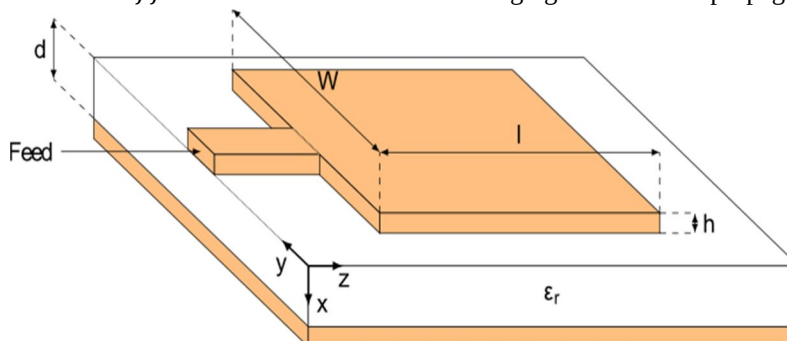


Figure 1 Basic Geometry of Microstrip Patch Antenna

## II. DESIGNS OF MICROSTRIP PATCH ANTENNA WITHOUT DGS

The geometry of proposed antenna which is for S-Band applications and fed by Microstrip Edge line feeding Technique is depicted in figure 2. The dimensions of the designed antenna are taken from reference paper as:

Table 1:- Dimension of antenna without DGS

|                |                   |
|----------------|-------------------|
| Ground size    | 27 x 30mm         |
| Substrate size | 27 x 30mm         |
| Patch size     | 7 x 5.95mm        |
| Feed size      | 1 x 5mm & 3 x 7mm |

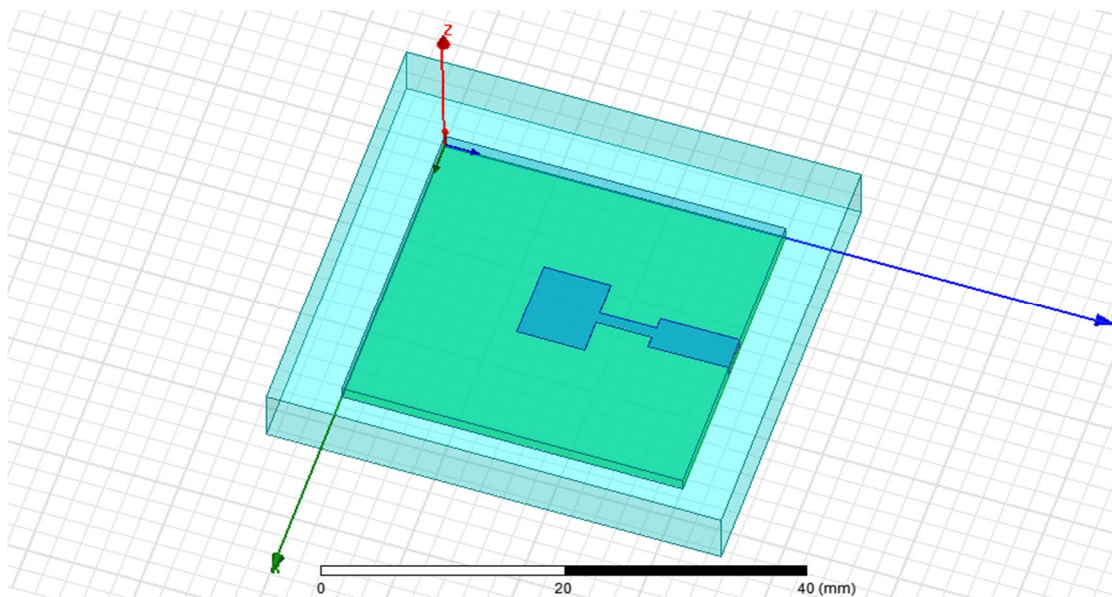


Figure 2:-Geometry dimension of antenna without DGS.

The return loss plot for the designed antenna at -10 dB bandwidth is shown in figure 3 as below. It is observed from the return loss that antenna is resonating at 9.81 GHz at -12.22 db which is very close to the reference antenna frequency and 490 MHz bandwidth also observed.

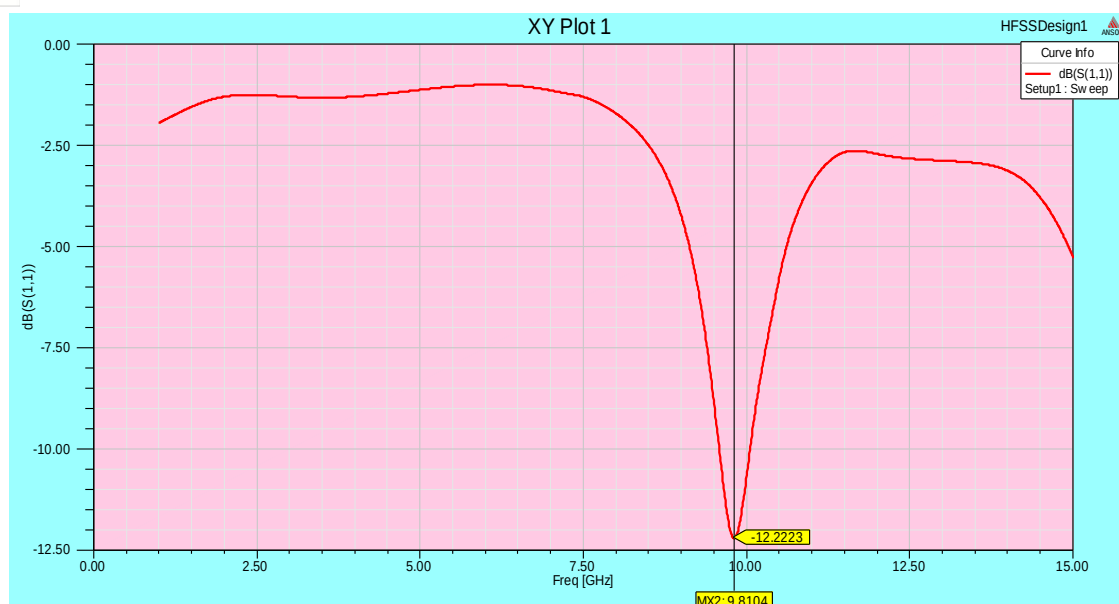


Figure 3:-Simulated return loss

VSWR plot for the proposed antenna. The value of VSWR is 1.64 observed that is less than 2 which is practically good.

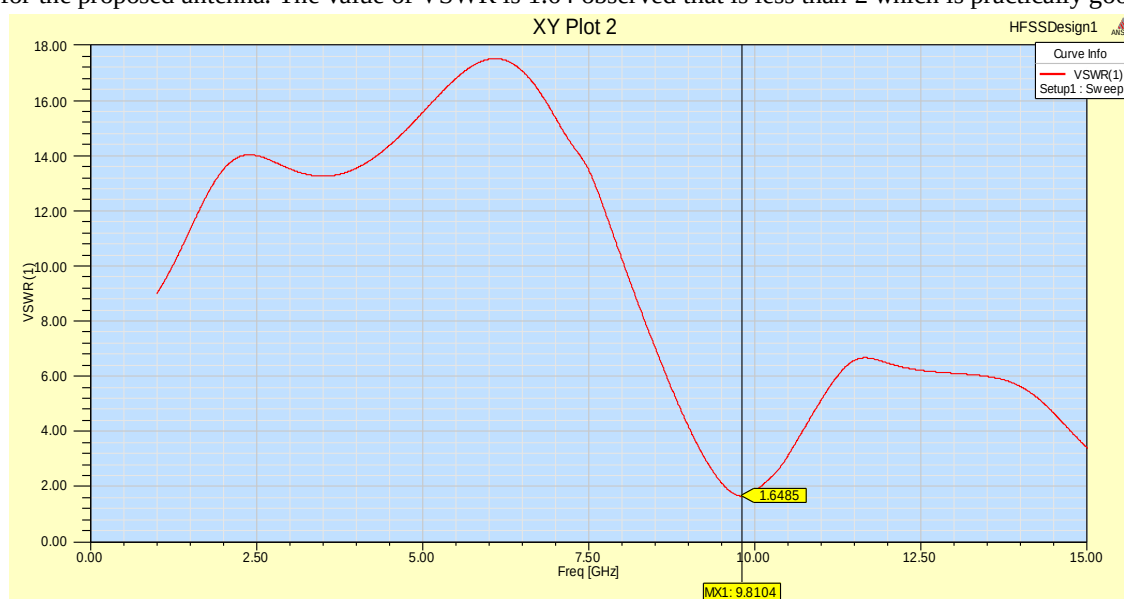


Figure 4:- VSWR plot.

Table 2:- Summarized results of reference antenna without DGS.

| Sr.No | FREQUENCY (GHz) | RETURN LOSS (dB) | BANDWIDTH                      | VSWR |
|-------|-----------------|------------------|--------------------------------|------|
| 1     | 9.81            | -12.22           | (10.04-9.55)GHz=0.49GHz=490MHz | 1.64 |

#### A. Microstrip Patch Antenna Designing Using DGS (Implementation Of Reference Paper):-

The geometry of proposed antenna which is MSL fed for an S-Band application is depicted in figure 5. In which the antenna parameter are same as above but there is a change in the normal structure is that six similar size ring structure and a rectangular slot are subtracted from Ground Structure. The dimensions of the proposed designed antenna are same as above except DGS.



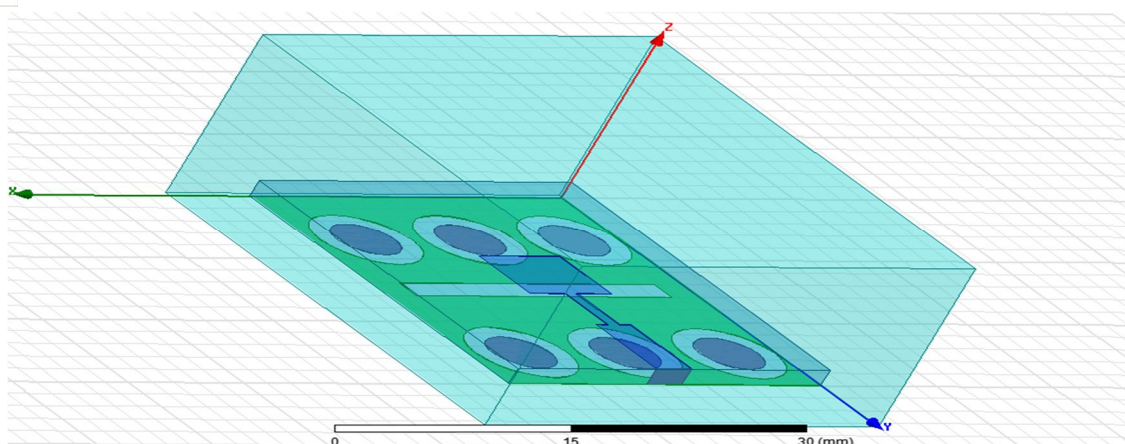


Figure 5:-Geometry dimension of antenna using DGS.

The return loss plot for the designed antenna at -10 dB bandwidth is shown in figure 6 as below. It is observed from the return loss that antenna is resonating at 3.4 GHz at -13.20 db which is very close to the reference antenna frequency and 3000 MHz bandwidth also observed.

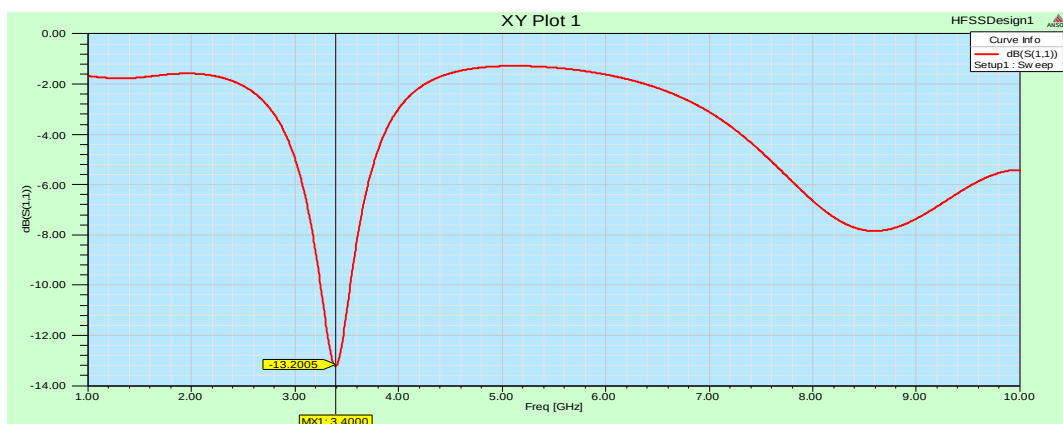


Figure 6:-Simulated return loss

VSWR plot for the proposed antenna. The value of VSWR is 1.56 observed that is less than 2 which is practically good.

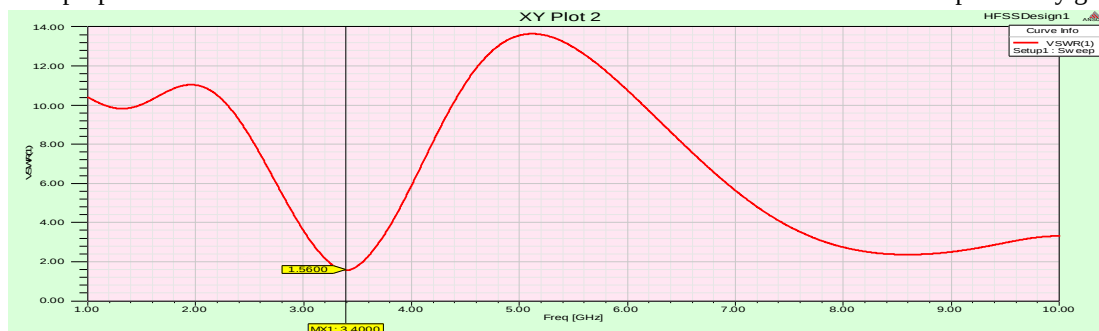


Figure 7:- VSWR plot.

Table 3:- Summarized results of reference antenna using DGS.

| Sr.No | FREQUENCY (GHz) | RETURN LOSS (dB) | BANDWIDTH                    | VSWR |
|-------|-----------------|------------------|------------------------------|------|
| 1     | 3.4             | -13.20           | (3.52-3.22)GHz=0.3GHz=300MHz | 1.56 |

### B. Design of Proposed Antenna

The geometry of proposed antenna which is microstrip line fed for S-Band application is depicted in figure 8. In which the antenna parameter are same as above but there is a change DGS (Defected Ground Structure) and uses normal patch plane.

The position and values of inner and outer radius of the ring slot is changes and double ring is introduced to get the desired result.

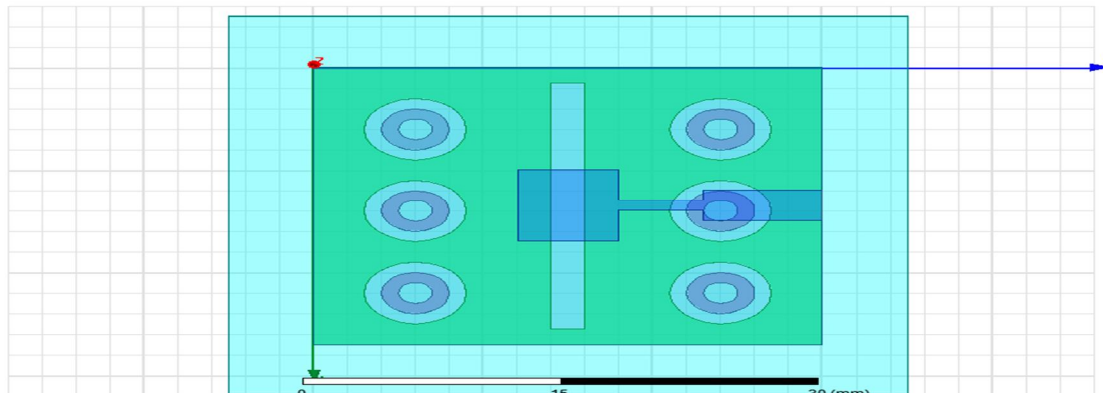


Figure 8:-Geometry dimension of proposed antenna.

The return loss plot for the designed antenna at -10 dB bandwidth is shown in figure 9 as below. It is observed from the return loss that antenna is resonating at 3.16 GHz at -29.92 db and 597.8 MHz bandwidth is observed that is so high (597.8MHz -400 MHz=197.8MHz) w.r.t reference antenna bandwidth.

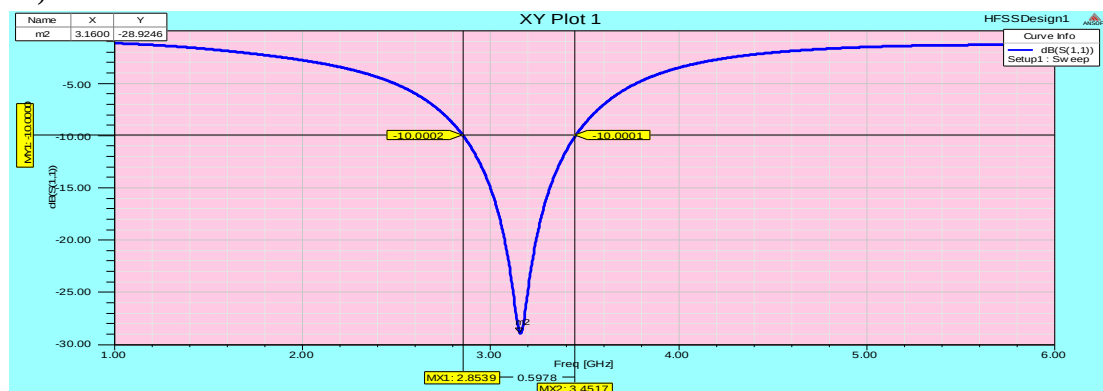


Figure 9:-Simulated return loss

VSWR plot for the proposed antenna. The value of VSWR is 1.07 observed that is not only less than 2 but also very close to ideal value 1.

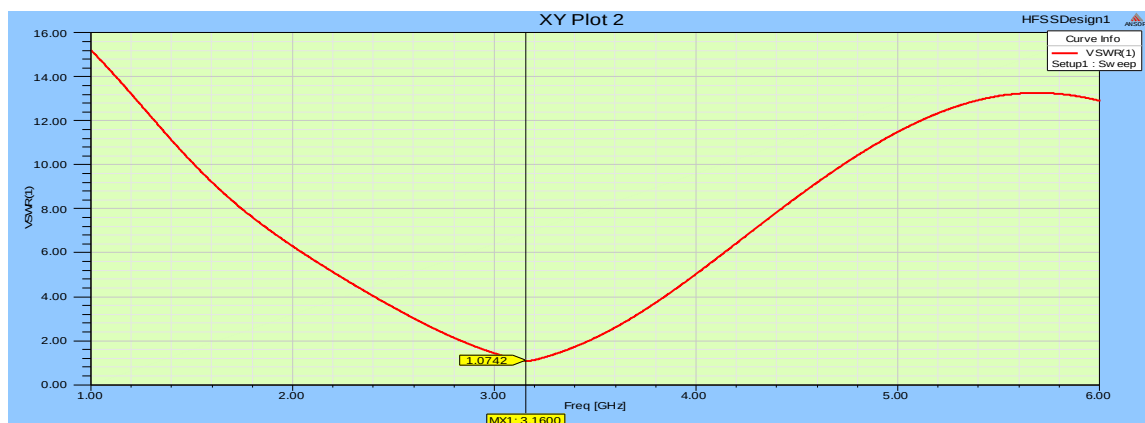


Figure 10:- VSWR plot

Table 4:- Summarized results of the proposed antenna.

| Sr.No | FREQUENCY (GHz) | RETURN LOSS(dB) | BANDWIDTH                                 | VSWR |
|-------|-----------------|-----------------|-------------------------------------------|------|
| 1     | 3.16            | -28.92          | (3.4517-2.8539)GHz=<br>0.5978GHz=597.8MHz | 1.07 |

### C. Comparasion of results of reference & proposed antenna:

Table 5:- Comparison of results

| Sr. No | Difference                      | Frequency (GHz) | RETURN LOSS(dB) | BANDWIDTH                                 | VSWR      |
|--------|---------------------------------|-----------------|-----------------|-------------------------------------------|-----------|
| 1      | Reference Antenna               | 3.5             | -30             | (3.7-3.3)GHz=<br>0.4GHz=400MHz            | Not Given |
| 2      | Reference Antenna (Implemented) | 3.4             | -13.20          | (3.52-3.22)GHz=<br>0.3GHz=300MHz          | 1.56      |
| 3      | Proposed Antenna                | 3.16            | -28.92          | (3.4517-2.8539)GHz=<br>0.5978GHz=597.8MHz | 1.07      |

## IV. CONCLUSION

In this work we have developed a new study concerning the miniaturization of microstrip patch antenna by using defected ground structure DGS resonating at 3.16 GHz. The goal from this work was to shift the resonance frequency from 10 GHz to 3.16 GHz. A miniature microstrip patch antenna has been developed, analyzed and validated for S-Band applications. The aspects of single band microstrip antenna have been studied. In this thesis, a typical miniature microstrip patch antenna with DGS forming a simple and efficient technique of design has been introduced for the betterment of bandwidth and impedance matching, also, giving the same performance at the desired resonant frequency. Also, the feeding point selection i.e. proper matching of feed and patch is very important for having desirable features. The performance properties are analyzed for the optimized dimensions.


The proposed antenna has been designed by using rectangular type defected patch i.e DGS (Defected Ground Structure). We can also conclude that by changing the feed point where matching is perfect, the high return loss can be achieved at the resonant frequency.

## REFERENCES

- [1] Vinita Mathur, "Comparison of Performance Characteristics of Rectangular, Square and Hexagonal Microstrip Patch Antennas", IEEE 978-1-4799-6896-1/14/2014.
- [2] Chandra Bhan, Ajay Kumar Dwivedi, Brijesh Mishra, Anil Kumar, "Quad Bands U-shaped Slot Loaded Probe Fed Microstrip Patch Antenna", IEEE, 2015 Second International Conference on Advances in Computing and Communication Engineering.
- [3] R. Kiruthika T. Shanmuganatham Rupak Kumar Gupta A Novel Dual Band Microstrip Patch Antenna with DGS for X-band Applications IEEE International Conference on Computer, Communication, and Signal Processing (ICCCSP-2017)
- [4] Mohamed Tarbouch and Abdelkebir El Amri, "Compact CPW-Fed Microstrip Octagonal patch antenna with H slot for WLAN and WIMAX Applications", 5090-6681-0/17/2017 IEEE
- [5] T.Shanmuganatham, "Design of Multi Utility Multi Band Microstrip Calculator Shaped Patch Antenna Using Coaxial Feed", IEEE International Conference on Computer, Communication, and Signal Processing (ICCCSP-2017)
- [6] T.Shanmuganatham and Deepansu Kaushal "Dual Band Microstrip Caution Patch Antenna for Space Applications", IEEE International Conference on Computer, Communication, and Signal Processing (ICCCSP-2017)
- [7] <http://compnetworking.about.com/cs/wireless80211/a/aa80211standard.htm>
- [8] R.Bargavi,K.Sankar and S.Arivumani Samson , "Compact Triple band H-Shaped Slotted Circular Patch Antenna", International Conference on Communication and Signal Processing IEEE, April 3-5,2014, India.
- [9] Ramesh Garg, PrakashBhartie, InderBahl, ApisakIttipiboon, "Microstrip Antenna Design Handbook", Artech House Inc. Norwood, MA, 2011, pp. 1-68, 253-316.
- [10] Ahmed Fatthi Alsager , "Design and Analysis of Microstrip Patch Antenna Arrays", M.Tech Thesis in Electrical Engineering– Communication and Signal processing 2011, University College of Boras School of Engineering, SE-501 90 BORAS.
- [11] M. I. Hussein, Elham Serria, Ali Hakam and Indu Jiji Rajmohan, "Split Ring Resonator with Rotated Inner Ring for Microstrip Circular UWB Antenna", IEEE 2017 11th European Conference on Antennas and Propagation (EUCAP)
- [12] H.Liu, Z. Li, and X. Sun, "Compact defected ground structure in microstrip technology," Electron. Lett., Vol. 41, No. 3, 132–134, 2009.

- [13] S.W.Ting, K.W. Tam, and R. P. Martins, "Compact microstrip quasi-elliptic bandpass filter using open-loop dumbbell shaped defected ground structure," IEEE MTT-S Int. Microwave Symp.Digest, 527–530, 2010.
- [14] M. K.Mandal and S. Sanyal, "A novel defected ground structure for planar circuits," IEEE Microwave Compon. Lett., Vol. 16, No. 2, 93–95, 2010.
- [15] K.P. Yang, K.L. Wong, "Dual-band Circularly-polarized Square Microstrip Antenna," IEEE Trans. Antennas Propagation, vol. 49, no.3, pp. 377-382, March 2010.
- [16] Macro A.Antoniades, and George V. Eleftheriades, "A Compact Multiband Monopole Antenna with a Defected Ground Plane," IEEE, Antennas and Wireless Propagation Letters, Vol.7, 2011.
- [17] Joseph Costan Tine1, Karim Y. Kabalan, Al El-Hajj, MohammadRammal "New Multi-Band Microstrip Antenna Design For Wireless Communications" Vol. 49, No. 6, 2011.
- [18] Abdel Fattah Sheta, Ashraf S. Mohra, And Samir F. Mahmoud "Modified Compact H-Shaped Microstrip Antenna For Tuning Multi-Band Operation", 2011.
- [19] L. M. Si And X. Lv, "CPW-Fed Multi-Band Omni-Directional Planar Microstrip Antenna Using Composite Metamaterial Resonators For Wireless Communications" Pier 83, 133–146, 2012.
- [20] P.Mythili, Philip Cherian, S.Mridula, Binu Paul "Design Of A Compact Multiband Microstrip Antenna", 2012.
- [21] PramendraTilanth, P. C. Sharma "Design Of A Single Layer Multiband Microstrip Square Ring Antenna", 2012.
- [22] Muhammad R. Khan, Mohamed M. Morsy, Muhammad Z. Khan and Frances J. Harackiewicz "Miniaturized Multiband Planar Antenna for GSM, UMTS, WLAN and Wimax Bands" 2013.
- [23] Halappa R. Gajera, Anoop C.N, M. M. Naik. G, Archana S. P, Nandini R Pushpitha B.K, Ravi Kumar M.D, "The Microstrip Fed Rectangular Microstrip Patch Antenna(RMPA) with Defected Ground Plane for HIPERLAN/1" IJECT Vol. 2, Issue 3, Sept. 2013
- [24] Zuhura Juma Ali, "A Miniaturized Ultra Wideband (UWB) Antenna Design for Wireless Communications" International Journal of Scientific & Research Publications, Vol 4, Issue 7, July 2014.
- [25] A. Gnandeep reddy, k. Gopivasanth kumar, "Design And Simulation Of A L And U-Shaped Slot Compact Planar Monopole Antenna", International Journal of Science, Engineering and Technology, 2014.
- [26] Udit Raithatha, S. Sreenath Kashyap & D. Shivakrishna, May 2015, "Swastika Shaped Microstrip Patch Antenna for ISM Band Applications" international journal IRJET.
- [27] Sumeet Singh Bhatia, Jagtar Singh Sivian, Manpreet Kaur, "Comparison of feeding techniques for the design of microstrip rectangular patch antenna for x-band applications", International Journal of Advanced Technology in Engineering and Science, Volume No.03, Special Issue No. 02, 2015.
- [28] Gurpreet Kaur, Er. Sonia Goyal, "Effect of Height on Edge Tapered Rectangular Patch Antenna using Parasitic Stubs and Slots", International Journal of Engineering Trends and Technology (IJETT) – Volume 34 Number 8- April 2016.
- [29] R.K. Sharan, S.K. Sharma, "A .Gupta, R.K Chaudhary, An Edge Tapered Rectangular Patch Antenna with Parasitic Stubs and Slot for Wideband Applications, Wireless Pers Commun Vol 86, pp 1213–1220, 2016.
- [30] M. Tarikul Islam, M. Samsuzzaman, M. Z. Mahmud, M.T. Islam, "A Compact Spectacles Shaped Patch Antenna for UWB Applications", 9th International Conference on Electrical and Computer Engineering, IEEE, 20-22 December, 2016, Dhaka, Bangladesh.
- [31] P.Surendra Kumar, B.Chandra Mohan, "Dual-Frequency Vertex-Fed Pentagonal Slot On Rectangular Patch For WLAN/WiMAX Applications", 978-1-5090-3646/ 2016 IEEE.
- [32] Ranjan Mishra, Raj Gaurav Mishra, Piyush Kuchhal, "Analytical Study on the Effect of Dimension and Position of Slot for the Designing of Ultra Wide Band (UWB) Microstrip Antenna", Intl. Conference on Advances in Computing, Communications and Informatics (ICACCI), Sept. 21-24, 2016, Jaipur, India, 978-1-5090-2029-4/16/IEEE.
- [33] Jagori Raychaudhuri, Jayjit Mukherjee and Sudhabindu Ray, "Compact Circularly Polarized Suspended Microstrip Antenna with "Swastika" Shaped Slot", IEEE 2016 International Symposium on Antennas and Propagation (APSYM)
- [34] Amit A. Deshmukh, Priyal Zaveri, Sanjay Deshmukh and Anuja Odhekar, "Analysis of Circularly Polarized E-shaped Microstrip Antenna", IEEE 2016 International Symposium on Antennas and Propagation (APSYM).
- [35] M. Tarikul Islam, M. Samsuzzaman, M. Z. Mahmud, M.T. Islam, "A Compact Spectacles Shaped Patch Antenna for UWB Applications", 9th International Conference on Electrical and Computer Engineering, IEEE, 20-22 December, 2016, Dhaka, Bangladesh.
- [36] P.Surendra Kumar, B.Chandra Mohan, "Dual-Frequency Vertex-Fed Pentagonal Slot On Rectangular Patch For WLAN/WiMAX Applications", 978-1-5090-3646-2/16/2016 IEEE.
- [37] Alejandro Borja, "Reconfigurable Microwave Circuit Based on a Single Triangular Microstrip Patch" 978-1-4799-7815-1/15/2015 IEEE, Page No. 2253, AP-S 2015.
- [38] Chandra Bhan, Ajay Kumar Dwivedi, Brijesh Mishra, Anil Kumar, "Quad Bands U-shaped Slot Loaded Probe Fed Microstrip Patch Antenna", IEEE, 2015 Second International Conference on Advances in Computing and Communication Engineering.
- [39] B. Zoubiri, A. Mayouf, F. Mayouf, S. Abdelkebir and T. Devers, "Rectangular Microstrip Antenna Gain Enhancement Using Elliptical EBG Structure", IEEE 2016 7th International Conference on Sciences of Electronics, Technologies of Information and Telecommunications (SETIT).
- [40] R.Er-rebyiy, J.Zbitou, A.Tajmouati, M.Latrach, A.Errkik and L.El Abdellaoui, "A New Design of a Miniature Microstrip Patch Antenna Using Defected Ground Structure DGS", 978-1-5090-6681-0/17/2017 IEEE.[Reference Paper]



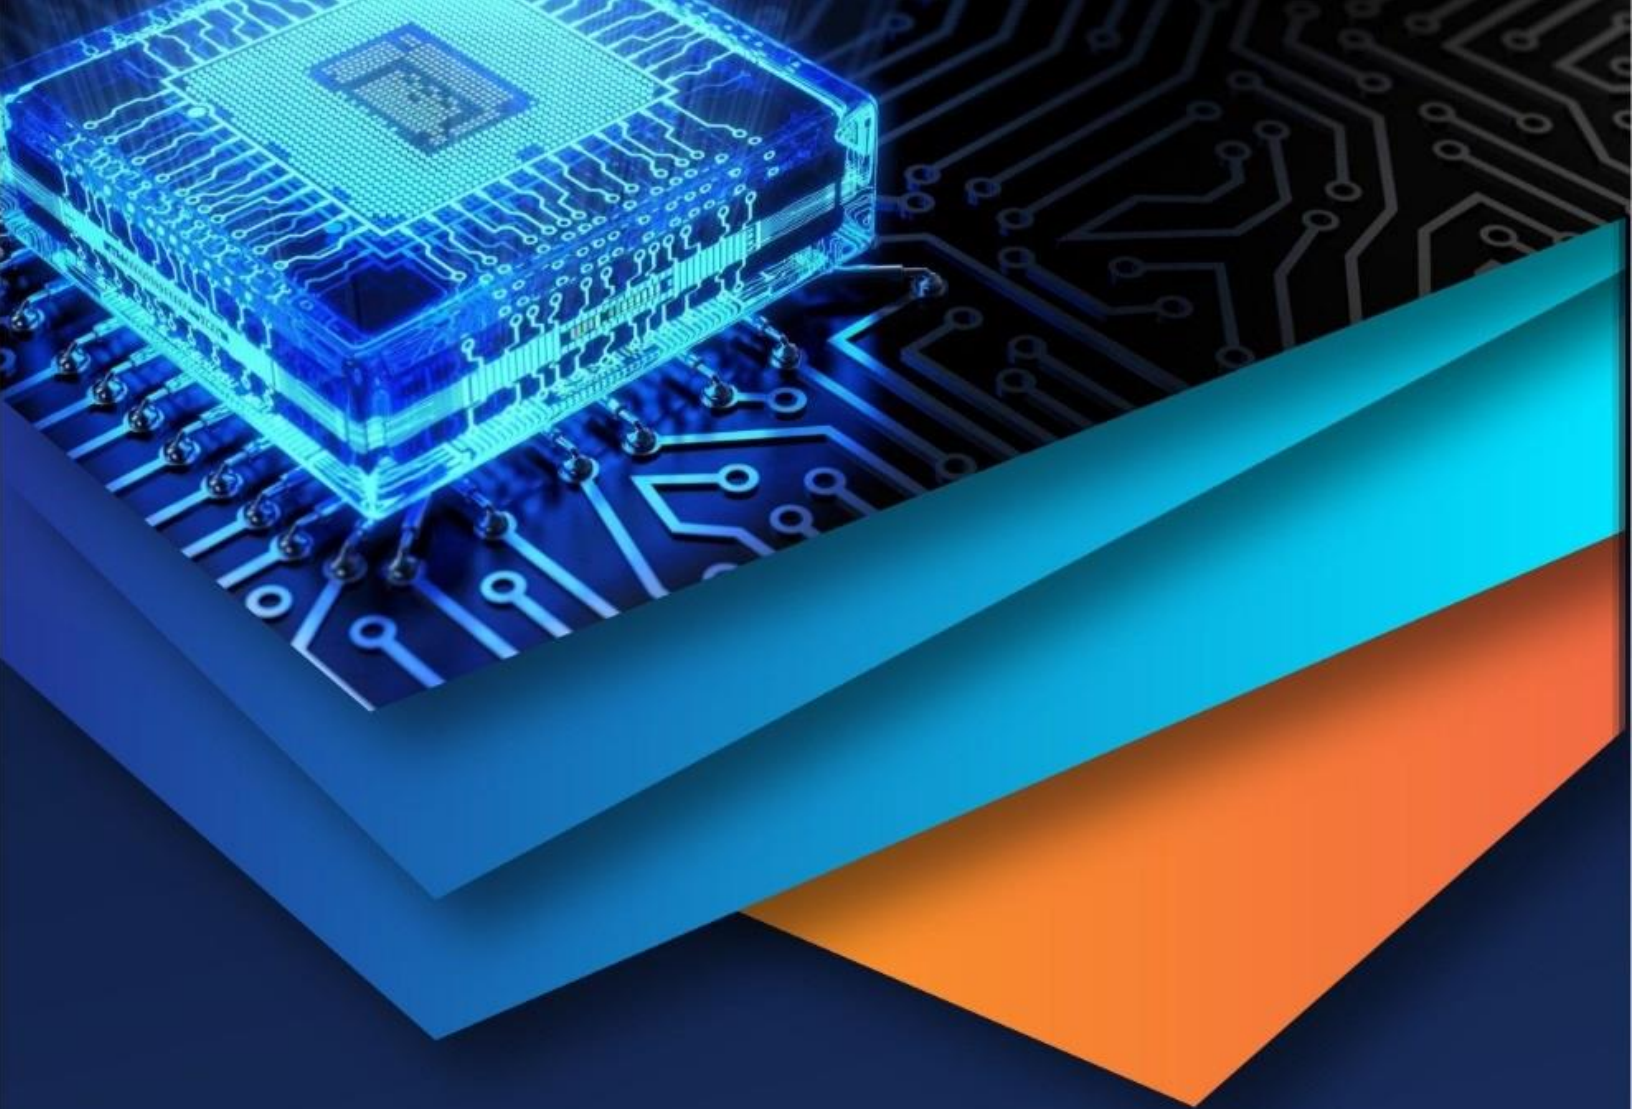

10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)