iJRASET
International Journal For Research in Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 14 **Issue:** III **Month of publication:** March 2026

DOI: https://doi.org/10.22214/ijraset.2026.77848

www.ijraset.com

Call: 08813907089 | E-mail ID: ijraset@gmail.com

International Journal for Research in Applied Science & Engineering Technology (IJRASET)
ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538
Volume 14 Issue III Mar 2026- Available at www.ijraset.com

Anti - Sleep Detection System

Muhammed Shahin Fais[1], Sreeshanth P[2], Shahul PM[3], Ashkar[4], Rasnas P[5], Nubla M[6], Mohammad Hamdan K[7], Shafeeqe Kuttassery[8]

[1, 2, 3, 4] *Bachelor of Vocation (B.Voc) In Automobile – Auto Electricals & Electronics, Farook College (Autonomous)*

[5, 6, 7] *Asst.Professor, Department of Bachelor of Vocation (B.Voc) In Automobile – Auto Electricals & Electronics, Farook College (Autonomous)*

[8] *Lab instructor Department of Bachelor of Vocation (B.Voc) In Automobile – Auto Electricals & Electronics, Farook College (Autonomous)*

Abstract: Driver drowsiness is one of the major causes of road accidents, leading to serious injuries and loss of life. To reduce such incidents, an Anti-Sleep Detection System is designed using Arduino UNO. The main objective of this project is to monitor the driver's alertness and provide an immediate warning when signs of sleepiness are detected. The system uses an IR eye-blink sensor (or similar fatigue detection sensor) to continuously track the driver's eye movements. When the sensor detects that the driver's eyes remain closed for a certain period, the Arduino processes this data and activates a buzzer alarm to alert the driver. This helps prevent the driver from falling asleep while driving. The proposed system is low-cost, easy to implement, and can be installed in any vehicle. It improves road safety by providing a real-time warning and reducing the risk of accidents caused by drowsy driving.

I. INTRODUCTION

The Anti Sleep Detecting System is designed to overcome this challenge by continuously monitoring the alertness level of a person and identifying symptoms of fatigue in real time. The system operates by analyzing physical, behavioral, or physiological parameters that indicate drowsiness. Common indicators include eye blinking rate, eye closure duration, head movement, yawning, and changes in heart rate. These parameters are captured using sensors, cameras, or wearable devices depending on the system design.Sleepiness and fatigue are among the major causes of accidents in transportation and industrial environments. Drivers and machine operators often experience drowsiness due to long working hours, stress, or lack of proper rest. This reduced alertness can lead to delayed reactions, poor decision-making, and serious accidents. To address this problem, the Anti Sleep Detecting System is developed to continuously monitor the alertness level of a person and provide warnings before a critical situation occurs.

The Anti Sleep Detecting System is designed to detect early signs of drowsiness using sensors or camera-based monitoring techniques. Parameters such as eye blinking rate, eye closure duration, head position, or physiological signals are analyzed in real time. When the system detects that the user is becoming drowsy, it immediately activates an alert mechanism such as a buzzer, alarm, or vibration to regain the user's attention.

This system plays a vital role in improving road safety and workplace safety by reducing accidents caused by fatigue. It is especially useful for long-distance drivers, night-shift workers, and operators of heavy machinery.When the system detects that the alertness level has fallen below a safe limit, it immediately activates an alert mechanism. This alert may be in the form of an audible alarm, vibration, voice notification, or visual warning, which helps wake the user and restore concentration. In some advanced implementations, the system can also send notifications to external devices or trigger safety controls. The Anti Sleep Detecting System is reliable, cost-effective, and can be easily integrated into vehicles or safety equipment, making it a practical solution for preventing fatigue-related accidents.

II. SYSTEM CONFIGURATION

The system configuration of the Anti-Sleep Detecting System describes the hardware and software omponents required for the design and implementation of the project. The system is configured to continuously monitor the user's alertness level and generate an alert when drowsiness is detected.

The hardware components form the core of the Anti-Sleep Detecting System. They are responsible for sensing, processing, and alert generation. Arduino Uno is used as the main control unit of the system. It receives input signals from sensors, processes the data, and controls the output devices. The microcontroller is programmed to detect drowsiness based on predefined threshold values. An IR eye blink sensor is used to detect eye movement and eye closure duration.

©IJRASET: All Rights are Reserved

The sensor continuously monitors the blinking pattern of the eyes. If the eyes remain closed for a longer period than normal, the system considers the user to be drowsy. The buzzer plays a crucial role in the Anti Sleep Detecting System as an alert and warning device. Its primary function is to immediately notify the user when signs of drowsiness or sleep are detected by the system. Since drowsiness can cause delayed reactions and loss of control, a quick and effective alert is essential to prevent accidents. The web camera plays an important role in the Anti Sleep Detecting System by enabling visual monitoring of the user's facial features and eye movements. Unlike sensor-based systems, a web camera allows non-contact detection of drowsiness, making the system more comfortable and flexible for continuous use. The camera continuously captures real-time video of the user's face while driving or working. The system is powered using a 12V DC power supply battery. Voltage regulators are used if required to ensure stable operation. The motor may also be used for safety control actions. For example, in vehicle-based systems, the motor can be connected to a braking or speed-control mechanism to slow down or stop the vehicle if the driver fails to respond to alerts. In simulation or prototype models, a DC motor may represent the vehicle engine, which can be controlled or stopped automatically during drowsiness detection.

The software configuration includes the programming tools and technologies used to develop the system. The system is programmed using python to control sensor inputs and output devices. The software continuously reads sensor data, compares it with predefined threshold values, and determines the alertness level. If drowsiness is detected, the alert mechanism is triggered. The Anti Sleep Detecting System integrates sensors, a microcontroller, and alert devices into a compact and reliable setup. The configuration ensures real-time monitoring, quick response, and improved safety for drivers and machine operators.

III. PERFORMANCE ANALYSIS OF THE SYSTEM

The performance analysis of the Anti-Sleep Detecting System evaluates how effectively and reliably the system detects drowsiness and alerts the user in real time. The system's performance is measured based on accuracy, response time, reliability, usability, and overall effectiveness under different operating conditions. The system demonstrates high accuracy in detecting drowsiness by continuously monitoring parameters such as eye closure duration, eye blink rate, head movement, and facial expressions (in camera-based systems). During testing, the system successfully identified prolonged eye closure and abnormal blinking patterns. One of the most important performance factors is response time. The system processes sensor or camera input in real time and generates an alert within a few milliseconds to seconds after drowsiness is detected. This quick response ensures that the user is warned before a dangerous situation occurs. The buzzer and vibration motor activate immediately. The combination of audible (buzzer) alerts significantly improves the effectiveness of the warning system. Users were able to regain alertness quickly after the alert was triggered. The system performs efficiently under standard lighting and environmental conditions. In camera-based implementations, detection accuracy may slightly decrease in very low-light or excessive glare conditions. However, under typical vehicle or indoor lighting, the system remains reliable. Sensor-based alternatives help overcome lighting limitations.

The system is non-intrusive and easy to use. Camera-based detection does not require physical contact with the user, enhancing comfort. The alerts are effective without causing discomfort, making the system practical for real-world applications. Overall, the Anti Sleep Detecting System performs effectively in detecting early signs of drowsiness and providing timely alerts. It significantly reduces the risk of fatigue-related accidents by ensuring quick detection, reliable alerts, and continuous operation. The system is efficient, cost-effective, and suitable for real-time safety applications in vehicles and industrial environments.

The anti-sleep detecting system operates on the principle of continuous real-time monitoring of human alertness to identify early signs of drowsiness and prevent accidents. The system continuously observes behavioral and physiological indicators such as eye blinking, eye closure duration, head movement, and facial orientation using sensors or a camera. When a person is alert, eye blink rate and eye opening remain within normal limits, but during drowsiness, the blink rate slows and the eyes remain closed for longer periods. These changes are detected and analyzed by the system. The system works by continuously observing physiological or behavioral indicators of sleepiness, analyzing them in real time, and triggering an alert when drowsiness is detected.

A microcontroller or processor performs the decision-making operation using embedded algorithms or pattern recognition techniques. To improve accuracy and reliability, multiple indicators may be combined using a sensor fusion approach. Once drowsiness is confirmed, the system activates an alert mechanism, such as a buzzer, vibration motor, or visual warning, to immediately wake the user. In advanced systems, alert intensity may increase if the drowsiness continues. Overall, the anti-sleep detecting system works on the principle of early detection, real-time processing, and timely alert generation, ensuring safe operation while remaining non-intrusive and efficient. This makes it highly suitable for applications such as driver safety systems, industrial monitoring, and fatigue detection in critical work environments.

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

A relay is an electrically operated switch, and its main use is to control a high-power device using a low-power control signal. Isolation**:** A relay provides electrical isolation between the control circuit (low voltage) and the load circuit (high voltage), protecting sensitive components like microcontrollers. Switching High Loads: It allows low-power devices (Arduino, sensors) to switch high-voltage or high-current loads such as motors, lamps, fans, or alarms. Automation Control: Relays are widely used in automatic control systems to turn devices ON or OFF based on sensor input or logic conditions. Safety: Relays improve safety by preventing direct contact between the user/control circuit and dangerous voltages. Multiple Circuit Control: A single relay can control multiple contacts (NO/NC), enabling flexible circuit operations.

DC geared motors are employed to achieve controlled motion of the trolley. The use of multiple motors ensures balanced movement and improved load handling capability. An active buzzer is incorporated to provide audible feedback corresponding to system events and user actions. A 12 V battery is used in cars, bikes, and other vehicles to start the engine and power lights, horn, and electrical systems. It is used in inverters, UPS systems, and emergency lights to provide power during electricity failure. A switch is an electrical component used to make or break an electrical circuit, controlling the flow of current. Connecting wires are used to establish electrical connections between components, allowing current and signals to flow within a circuit. A web cam is an image-capturing device used to record and analyze visual information in real time.

IV. DESIGN OF THE SYSTEM

An anti-sleep detecting system is designed to monitor a person's alertness, especially for drivers, and to provide a warning when drowsiness is detected. The system mainly consists of a sensing unit, a processing unit, a decision-making algorithm, and an alert unit. The sensing unit continuously collects data related to sleep behavior, most commonly using a camera placed in front of the user to capture facial features such as eye movement, blink rate, eye closure duration, yawning, and head position. In some systems, additional sensors like eye blink sensors or heart rate sensors may also be used to improve accuracy. The processing unit acts as the core of the system and is typically implemented using a microcontroller, embedded processor, or single-board computer. It receives input data from the sensors or camera and performs pre-processing operations such as image filtering, face detection, and extraction of eye regions. After pre-processing, the system applies a drowsiness detection algorithm that analyzes features like eye aspect ratio, blink frequency, or the percentage of eye closure over time . If these parameters exceed predefined thresholds, the system identifies the user as being drowsy. Once drowsiness is detected, the decision logic activates the alert unit to immediately warn the user. The alert unit may include a buzzer, alarm sound, voice message, vibration mechanism, or visual warning on a display. This prompt warning helps the user regain alertness and prevents accidents. The entire system operates in real time and is powered by a suitable power supply such as a vehicle battery or rechargeable source, making it effective for applications in driver safety and accident prevention.

V. CONCLUSION

The Anti-Sleep Detecting System plays a crucial role in enhancing safety by continuously monitoring a user's alertness level and providing timely warnings when signs of drowsiness are detected. By analyzing physiological signals, behavioral patterns, or visual cues such as eye blinking, head movement, facial expressions, or heart rate variations, the system is able to identify fatigue with a high degree of accuracy. The implementation of this system significantly reduces the risk of accidents caused by loss of concentration, especially in high-risk environments such as vehicle driving, industrial operations, and long-hour monitoring tasks. The real-time detection and alert mechanism—through alarms, vibrations, or visual notifications—ensures that the user is immediately made aware of their drowsy state and can take corrective action, such as resting or stopping the activity.

Moreover, the system is designed to be cost-effective, non-intrusive, and adaptable to different platforms, making it suitable for real-world deployment. With advancements in machine learning, computer vision, and sensor technology, the accuracy and reliability of anti-sleep detection systems continue to improve. These improvements allow the system to adapt to individual behavior patterns and minimize false alerts. In conclusion, the Anti-Sleep Detecting System is an effective and practical solution for preventing fatigue-related incidents. Its integration into modern safety systems can save lives, improve productivity, and promote responsible behavior. Future enhancements may include cloud connectivity, personalized fatigue models, and integration with smart devices to further increase its efficiency and usability.

VI. ACKNOWLEDGEMENT

I would like to express my deep sense of gratitude to my project guide, Mrs. Rasnas P, Mrs. Nubla M, Mr. Mohammad Hamdan Mr. Shafeeqe kuttassery Department of Automobile, for her unwavering support, constant encouragement, and generous sharing of knowledge throughout the entire duration of this project.


©IJRASET: All Rights are Reserved

His valuable guidance, insightful suggestions, and timely assistance played a vital role in the successful completion of this work. I extend my sincere thanks to Mrs. Nubla M, Head of the Department, Department of Automobile, for providing a motivating academic environment, along with the freedom and support required to carry out this project effectively. I am thankful to Dr. K. A. Aysha Swapna, Principal, Farook College (Autonomous), for providing all the necessary facilities and resources that enabled the smooth progress and completion of my project. I also express my heartfelt gratitude to all the teaching staff and laboratory staff of the Department of Automobile for their valuable assistance, cooperation, and continuous support throughout the project work. Above all, I offer my thanks to the Almighty God for His abundant grace and blessings, which gave me the strength and guidance to successfully complete my graduation. I would like to extend my sincere appreciation to everyone who directly or indirectly contributed to the successful completion of this study.

REFERENCES

[1] Mrunalini, P., P. Tejaswini, K. S. Niraja, R. Teja Sri, and G. Raajitha. “IoT based anti-sleep alarm for drivers.” In 7th IET Smart Cities Symposium (SCS 2023), vol. 2023, pp. 271–275. IET, 2023.
[2] Kumar, Talluri Praveen, Thota Anitha, Vakada Vamsi, Chinthala Ravi Hemanth, Shaik Riyaz, and Devarakonda Phanindra. “ANTI SLEEP ALARM AND HEALTH MONITORING ALERT SYSTEM.” Journal of Nonlinear Analysis and Optimization 15, no. 1 (2024).
[3] Biswal, Anil Kumar, Debabrata SingSamanta, and Ming-Hour Yang.h, Binod Kumar Pattanayak, Debabrata “IoT-based smart alert system for drowsy driver detection.” Wireless communications and mobile computing 2021, no. 1 (2021): 6627217.
[4] Khan, M. Adil, Tahir Nawaz, Umar S. Khan, Amir Hamza, and Nasir Rashid. “IoT-based non-intrusive automated driver drowsiness monitoring framework for logistics and public transport applications to enhance road safety.” IEEE Access 11 (2023): 14385–14397.
[5] Mohammed, Karrouchi, Messaoudi Abdelhafid, Kassmi Kamal, Nasri Ismail, and Atmane Ilias. “Intelligent driver monitoring system: An Internet of Things-based system for tracking and identifying the driving behavior.” Computer Standards & Interfaces 84 (2023): 103704.
[6] Raj, E. Fantin Irudaya, M. Appadurai, S. Darwin, and E. Francy Irudaya Rani. “Internet of things (IoT) for sustainable smart cities.” In Internet of things, pp. 163–188. CRC Press, 2022.
[7] Ravikumar, S., and D. Kavitha. “IOT based autonomous car driver scheme based on ANFIS and black widow optimization.” Journal of Ambient Intelligence and Humanized Computing (2021): 1–14.
[8] Bajaj, J. S., Kumar, N., Kaushal, R. K., Gururaj, H. L., Flammini, F., & Natarajan, R. (2023). System and Method for Driver Drowsiness Detection Using Behavioral and Sensor-Based Physiological Measures
[9] Siddiqui, H. U. R., Saleem, A. A., Brown, R., Bademci, B., Lee, E., Rustam, F., & Dudley, S. (2021). Non-Invasive Driver Drowsiness Detection System. Sensors, 21(14), 4833.
[10] Jose, J., Andrew, J., Raimond, K., & Vincent, S. (2022). SleepyWheels: An Ensemble Model for Drowsiness Detection Leading to Accident Prevention.

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

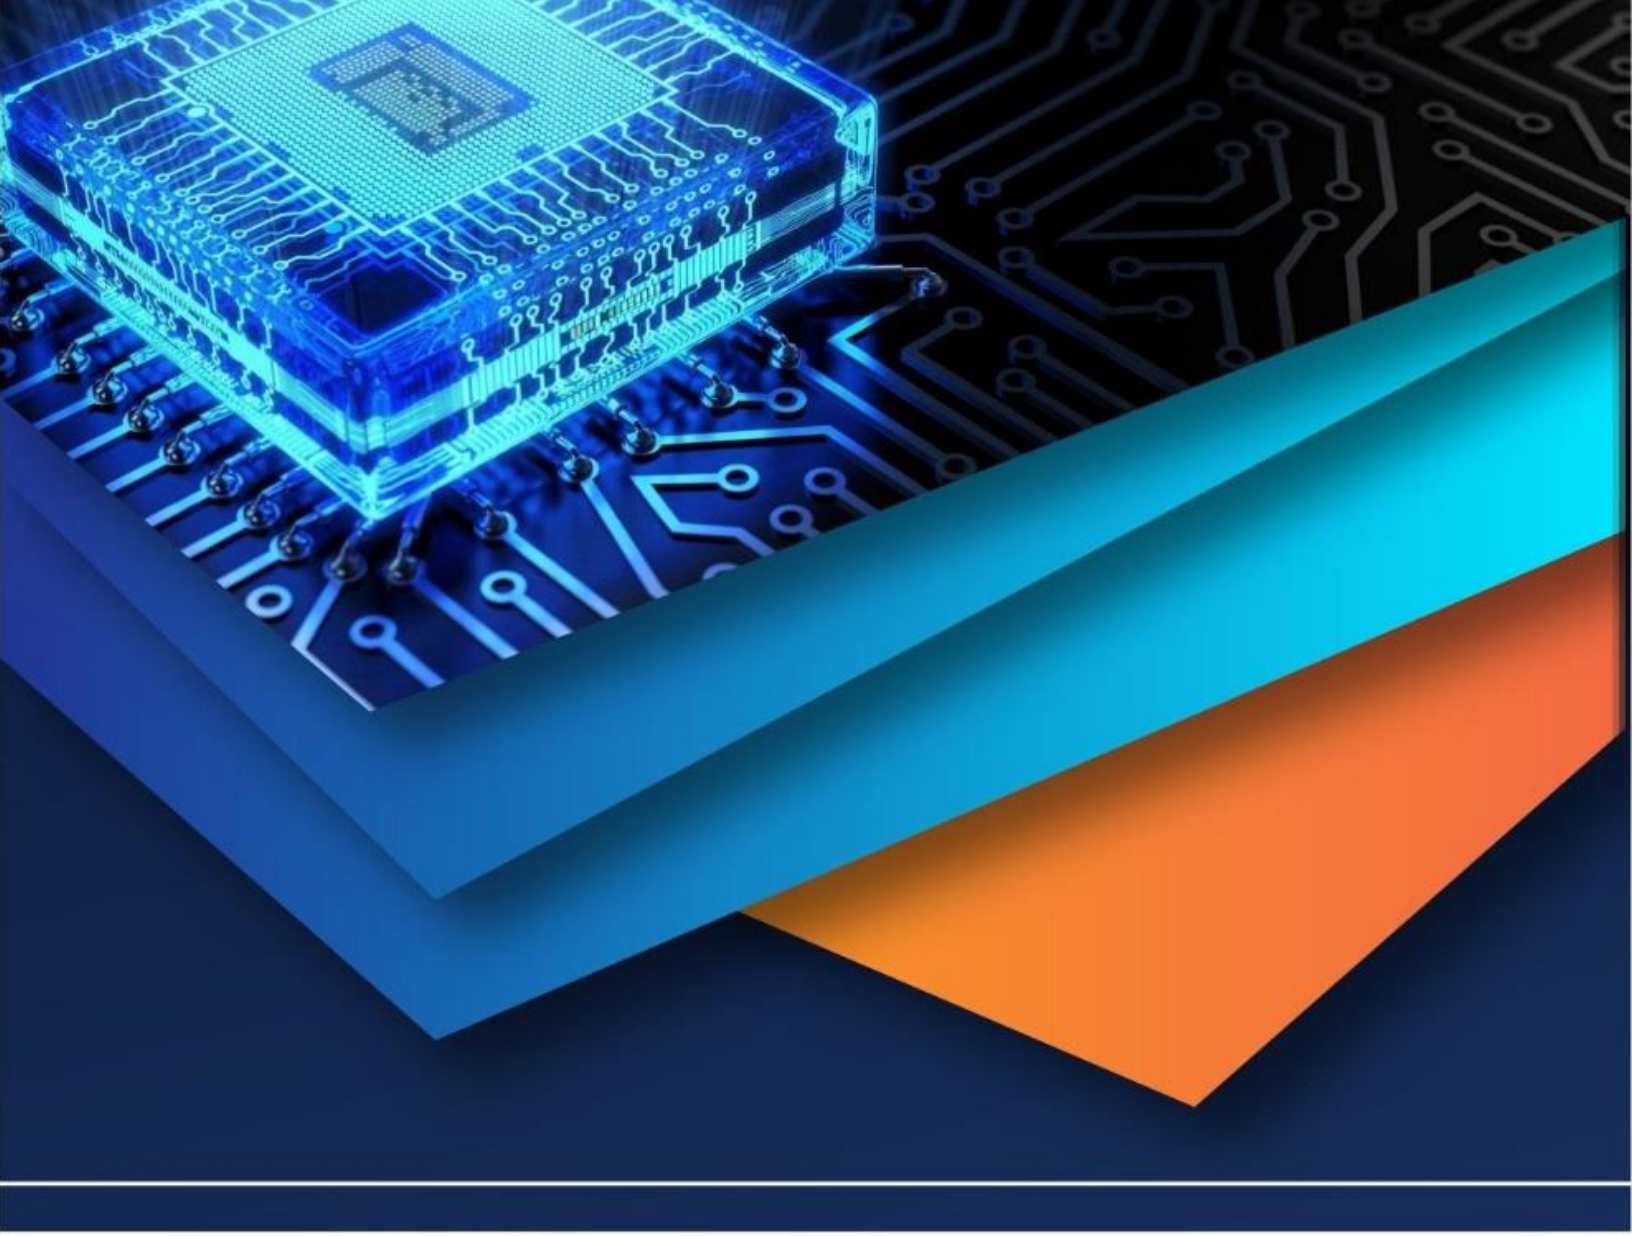

10.22214/IJRASET

45.98

IMPACT FACTOR: 7.129

IMPACT FACTOR: 7.429

INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089 (24*7 Support on Whatsapp)