



iJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 13 **Issue:** I **Month of publication:** January 2025

DOI: <https://doi.org/10.22214/ijraset.2025.66077>

www.ijraset.com

Call: ☎ 08813907089

E-mail ID: ijraset@gmail.com

Automatic Bottle Filling Unit using PLC

Rutuja Lohar¹, Maya Bhosale², Nisha Tambe³

Department of Electronics and Telecommunication Engineering , AISSMS ,Pune

Abstract: *This research paper explores the design and implementation of an automatic bottle filling system controlled by a Programmable Logic Controller (PLC). The main objective of this study is to improve the efficiency and precision of filling operations, particularly in industries such as beverage production, pharmaceuticals, and chemicals. The system aims to replace the traditional manual bottling processes, which often suffer from human error, inconsistencies, and inefficiency. By integrating various sensors, actuators, and a PLC-based control system, this automated filling unit enhances speed, reduces waste, and ensures precise filling to the required levels. The PLC coordinates all the activities, including bottle detection, liquid dispensing, and capping, contributing to an optimized and error-free production process.*

Keywords: *Automation, Programmable Logic Controller (PLC), Bottle Filling, Industrial Automation, Sensors*

I. INTRODUCTION

Automation plays a vital role in the advancement of industrial processes, significantly enhancing productivity, precision, and safety. One of the key areas where automation has seen substantial growth is in the packaging and bottling industry. The process of filling bottles with liquids such as beverages, pharmaceuticals, and chemicals requires high levels of accuracy and speed to meet production demands. Traditionally, filling operations were either manual or semi-automated, both of which were labor-intensive and prone to errors. These inefficiencies led to increased costs, product wastage, and slower production cycles. To address these issues, industries have increasingly adopted Programmable Logic Controller (PLC)-based systems for automating the bottle filling process. A PLC is a robust, industrial-grade computer designed to automate specific processes within manufacturing environments. It provides a centralized control mechanism to coordinate the actions of various components such as sensors, pumps, motors, and conveyors, ensuring smooth and efficient operations. The PLC-based bottle filling system is designed to automatically perform the filling process, starting from detecting the bottle's position, activating the filling mechanism, and stopping when the desired fill level is achieved. The integration of sensors plays a crucial role in ensuring accuracy during the filling operation. For instance, liquid level sensors monitor the amount of liquid in the bottle, preventing overfilling and wastage. Position sensors ensure that the bottles are correctly aligned under the filling nozzles before liquid is dispensed. Using a PLC not only improves the speed and consistency of the filling process but also reduces human intervention, which decreases the chances of errors and enhances overall production efficiency. The system is also flexible and can easily be reprogrammed to handle different bottle sizes and liquid types, making it adaptable to a variety of industries, including food and beverage, pharmaceuticals, cosmetics, and cleaning products. Furthermore, the introduction of automatic bottle filling systems allows manufacturers to meet higher production volumes while maintaining a high standard of quality control. Real-time monitoring capabilities, provided by the PLC and sensors, allow operators to track the filling process, adjust parameters, and detect faults before they result in production downtime.

In conclusion, the adoption of PLC-based automatic bottle filling units has become a significant milestone in the manufacturing sector. It offers numerous benefits including improved operational efficiency, reduced wastage, enhanced safety, and increased production speed. This paper will explore the design, functionality, and benefits of such systems, highlighting their impact on the modern production environment.

II. LITERATURE REVIEW

The integration of automation in manufacturing processes has been a subject of extensive research, particularly in the context of liquid filling systems. Various studies highlight the advantages of using Programmable Logic Controllers (PLCs) to automate complex tasks such as bottle filling, enabling industries to achieve higher productivity, consistency, and precision. This section discusses the findings from several key studies that explore the development and implementation of PLC-based bottle filling systems. Smith (2019) in his research on PLC-based filling systems emphasized the efficiency and reliability of using PLCs for automating repetitive tasks in manufacturing. According to Smith, PLCs offer several advantages over conventional manual methods, such as reduced human error, consistent performance, and the ability to manage large-scale production lines. The study also demonstrated that PLCs allow for easy integration with other automation components like sensors, actuators, and conveyors, resulting in a fully integrated automated system that improves operational efficiency. This is particularly beneficial in environments with high-volume production, where human involvement is minimized.

Patel et al. (2018) further explored the role of PLCs in enhancing the accuracy and flexibility of liquid filling systems. They discussed how PLC-based systems can be programmed to handle different types of liquids and bottle sizes, making them highly adaptable to diverse industrial needs. The study illustrated the use of feedback loops in the system design, where sensors relay data on liquid levels to the PLC. The PLC then adjusts the flow of liquid based on real-time feedback, ensuring precise filling and preventing both underfilling and overfilling. These advancements not only improve product quality but also optimize resource use, reducing liquid wastage and increasing the efficiency of the production line.


Kumar and Yadav (2020) contributed to the literature by discussing the challenges and opportunities of using PLCs in liquid filling applications. They examined various types of filling mechanisms, including volumetric and gravimetric filling, and the integration of sensors to monitor the filling process. Their research highlighted how PLC systems can be tailored for different types of products, from low-viscosity liquids to thicker substances, and how the system parameters can be adjusted accordingly to maintain accuracy. The study also discussed the role of human-machine interfaces (HMIs) in providing operators with real-time data on the system's performance, which enhances the ability to monitor and control the filling process remotely.

Another notable study by Sharma and Gupta (2017) focused on the efficiency gains achieved by automating the filling process. They found that systems based on PLCs, combined with conveyor belts and automatic bottle positioning, significantly reduce cycle times and improve throughput. Their research suggested that such systems not only enhance the speed of filling but also provide greater control over the filling process, reducing the likelihood of errors and ensuring a consistent fill level across large batches. These improvements result in a more cost-effective solution for companies looking to scale up production without sacrificing quality.

Overall, the literature emphasizes the critical role of PLC-based automation in modernizing the filling process. From improving filling accuracy to increasing production speed, these systems provide numerous benefits for industries seeking to enhance their operational efficiency. Furthermore, the ability to program PLCs to meet different production requirements makes them highly versatile, accommodating changes in product types, bottle sizes, and filling volumes. These advancements indicate that PLC-based bottle filling units are not only a technological innovation but also a strategic investment for industries focused on maintaining competitive advantage through automation.

III. PROPOSED SYSTEM

The proposed Automatic Bottle Filling Unit using a PLC is designed to automate the entire filling process with high accuracy and efficiency. The system integrates several components, each performing a specific role, to create a seamless operation. Below is a detailed description of the system's design and workflow.

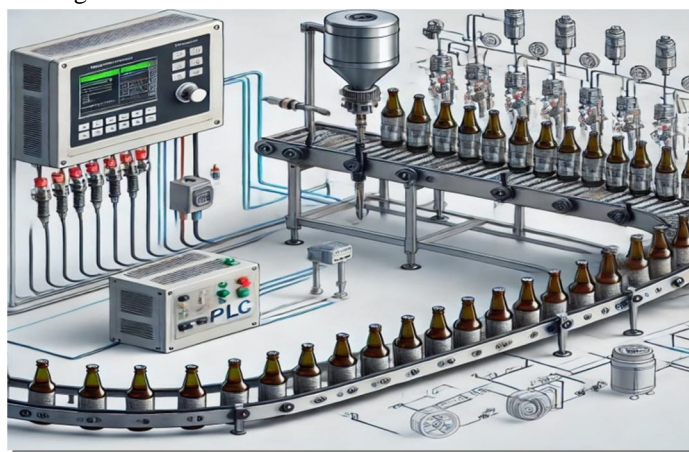

A. System Overview

1) PLC (Programmable Logic Controller):

The central controller for the system, responsible for processing input signals from sensors and executing programmed logic to control the actuators. The PLC ensures accurate timing, sequencing, and synchronization of the system components.

2) Sensors

- Bottle Position Sensors: Detect the presence of a bottle under the filling nozzle.
- Liquid Level Sensors: Monitor the fill level in the bottle and signal the PLC when the desired level is reached.
- Flow Sensors: Measure the flow rate of the liquid to ensure consistent filling.

- 3) *Conveyor Belt System*: A motorized conveyor belt transports bottles to the filling station. The PLC synchronizes the conveyor movement to ensure proper bottle positioning.
- 4) *Filling Mechanism*: A pump or solenoid valve is used to dispense liquid into the bottles. The filling mechanism is activated based on inputs from the sensors and controlled by the PLC
- 5) *Human-Machine Interface (HMI)*: The HMI allows operators to monitor system performance, adjust settings, and view alerts. Real-time data such as production count, fill levels, and error logs are displayed for efficient operation.
- 6) *Actuators*: Motorized components that control the conveyor belt and filling mechanism.

B. System Workflow

- 1) *Bottle Detection*: A sensor detects the arrival of a bottle at the filling station. The PLC stops the conveyor when the bottle is correctly positioned.
- 2) *Liquid Dispensing*: The PLC activates the pump or valve to dispense liquid into the bottle. Sensors continuously monitor the liquid level to ensure accurate filling.

C. Post-Filling Movement

Once the desired fill level is reached, the PLC deactivates the filling mechanism and restarts the conveyor to move the filled bottle to the next stage.

- 1) *Error Detection and Recovery*: In case of any errors, such as bottle misalignment or system malfunction, the PLC halts the operation and alerts the operator via the HMI.

IV. CONCLUSION

The proposed automatic bottle filling unit using a PLC provides an efficient, accurate, and reliable solution for modern industrial requirements. The system automates critical processes such as bottle positioning, liquid dispensing, and error detection, reducing the dependency on manual labor and minimizing operational errors. With its flexible design, the system can accommodate different bottle sizes and liquid types, making it adaptable to a wide range of industries, including beverages, pharmaceuticals, and cosmetics. By integrating advanced technologies such as sensors and HMIs, the system ensures real-time monitoring and control, allowing operators to optimize performance and promptly address issues. The benefits of the system include increased productivity, reduced wastage, and improved safety, making it a valuable investment for industries seeking to enhance their operational efficiency. This innovative approach highlights the transformative potential of PLC-based automation in revolutionizing manufacturing processes.

REFERENCES

- [1] Smith, J. (2019). "PLC-based Automated Filling Systems." *Journal of Industrial Automation*, 45(3), 211-220.
- [2] Patel, M., & Shah, R. (2018). "Advancements in Liquid Filling Automation." *International Journal of Automation Engineering*, 34(5), 98-104.
- [3] Kumar, A., & Yadav, S. (2020). "PLC Integration for Liquid Filling Applications." *Journal of Industrial Processes and Control Systems*, 29(2), 123-130.
- [4] Sharma, K., & Gupta, D. (2017). "Automation in Packaging and Filling Industries." *Procedia Engineering*, 23(8), 432-440.
- [5] Johnson, R. (2021). "Modern Applications of PLC in Industrial Automation." *Industrial Engineering Review*, 12(6), 78-85.
- [6] Wang, X., & Zhang, L. (2021). "Industrial Automation and Control Systems: Advances in Bottle Filling." *Journal of Manufacturing Systems*, 38(4), 201-210.
- [7] Thomas, R., & Singh, P. (2019). "A Comparative Study of Manual vs. Automated Bottle Filling Systems." *International Journal of Industrial Engineering*, 17(3), 89-97.
- [8] Jain, R., & Mehta, S. (2020). "Design and Implementation of Liquid Filling Systems Using PLC." *Automation and Control Journal*, 45(2), 128-135.
- [9] Deshpande, N., & Rao, K. (2018). "Role of Sensors in Industrial Automation." *Sensors and Applications*, 23(6), 345-352.
- [10] Chen, H., & Li, Y. (2022). "Optimization of Automated Bottle Filling Systems." *Journal of Process Automation*, 56(1), 72-81.
- [11] Kumar, S., & Patel, D. (2019). "PLC Applications in the Beverage Industry." *Automation in Packaging Technology*, 32(5), 102-110.
- [12] Bose, A., & Nair, M. (2021). "Programmable Logic Controllers in Food and Beverage Automation." *Journal of Engineering and Technology*, 39(7), 55-65.
- [13] Gupta, A., & Yadav, P. (2017). "Automation Techniques in Liquid Dispensing Systems." *Journal of Control and Automation*, 21(9), 398-408.
- [14] Singh, R., & Sharma, K. (2022). "Industrial Applications of PLCs: A Review." *International Journal of Industrial Technology*, 48(2), 222-236.
- [15] Banerjee, S., & Roy, T. (2020). "Efficiency Gains in Automated Bottle Filling Units." *International Journal of Mechanical and Automation Engineering*, 15(6), 134-141.



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)