iJRASET
International Journal For Research in Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 13 **Issue:** IV **Month of publication:** April 2025

DOI: https://doi.org/10.22214/ijraset.2025.69625

www.ijraset.com

Call: 08813907089 | E-mail ID: ijraset@gmail.com

International Journal for Research in Applied Science & Engineering Technology (IJRASET)
ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538
Volume 13 Issue IV Apr 2025- Available at www.ijraset.com

Automatic Solar Tracking System

Mohd Raza[1], Anant Sharma[2], Pawan Kumar[3], Soumya Kumar[4]
Dept. Electronic and Communication, Noida Institute of Engineering and Technology, Greater Noida, Uttar Pradesh

Abstract: ***This paper introduces the design and development of an automatic solar tracking system aimed at optimizing the efficiency of solar energy collection. The system dynamically adjusts the orientation of solar panels to track the sun's position throughout the day, ensuring maximum exposure to sunlight. Utilizing sensors such as light-dependent resistors (LDRs) or photovoltaic cells, the system detects the intensity and angle of sunlight and employs a micro-controller to control servo motors for precise panel adjustment. The solar tracker is designed to improve energy generation by maintaining the solar panels in the optimal position relative to the sun's path, which can lead to higher energy output compared to fixed systems.***
Keywords: Microcontroller, Servo Motors, Sun Position Detection, Light Dependent Resistor (LDR).

I. INTRODUCTION

The growing demand for renewable energy solutions has spurred considerable advancements in solar power technologies, and solar energy is among the most promising alternatives for sustainable power production. Nevertheless, the efficiency of solar panels largely depends on sunlight exposure. Fixed solar panels that do not move during the day usually cannot maximize the collection of solar energy since they are always not pointing towards the direction of the movement of the sun. In order to counter this shortcoming, automatic solar tracking systems have been invented to maximize the orientation of the solar panels to ensure that they are in the best position with respect to the sun at all times.[1, 2].

An automatic tracking system for sunlight employs sensors, for example, Light Dependent Resistors (LDRs), to identify the direction and magnitude of the sunlight. The system then adjusts the solar panels' position based on this data through actuators like servo motors, making them trace the movement of the sun during the day. This dynamic movement maximizes the amount of sunlight the panels collect and thereby maximizes their energy output by far in comparison to static systems.

By automating the tracking process, this system not only optimizes energy generation but also minimizes the requirement for manual intervention, thus becoming more efficient and cost-effective. The automatic solar tracking system has potential for a variety of applications, ranging from residential solar energy installations to commercial solar installations on a large scale, towards a more sustainable energy future.

The article discusses the functionality, design, and advantages of an automatic solar tracking system in relation to how it can be used to boost the overall efficiency of solar energy systems. Global efforts toward sustainable energy sources have heightened the demand for technologies with the capacity to maximize energy generated from natural sources such as solar power. Solar power, a clean and plentiful resource, has become one of the most popular means of electricity production. Nevertheless, the efficiency of solar panels is greatly determined by their capacity to harness sunlight during the day. Traditional solar power systems usually employ fixed panels that are stationary in one position, which restricts their capacity to maximize energy absorption because of the Earth's rotation and the sun's movement across the sky.

An automatic solar tracking system overcomes this limitation by allowing solar panels to track the sun's path so that they are always facing the sun for maximum light exposure. This method involves the use of sensors like Light Dependent Resistors (LDRs), which measure the angle and intensity of sunlight. Depending on this information, a microcontroller analyzes the data and controls motors or actuators (e.g., servo motors) to change the orientation and tilt of the solar panels. By continuously modifying the panel position in real time, the tracking system can augment solar energy collection by 20-40% based on location and system type.[15 – 21]

II. OBJECTIVES

To enhance the overall efficiency of solar power systems by ensuring that solar panels are always oriented toward the sun, capturing the maximum amount of sunlight throughout the day.To design a system that allows solar panels to dynamically adjust their position, improving their energy output compared to fixed solar systems, especially during periods of low light (early morning or late afternoon).

©IJRASET: All Rights are Reserved

III. THE DATA TYPE AND FLOW DESIGN

In an Automatic Solar Tracking System, information is key to making the solar panels face in the right direction in order to receive as much sunlight as possible during the day. The system design encompasses different types of information that collaborate and move through the system in order to regulate the tracking system and maximize energy harvesting.At the center of this system, sensor information is key. Light sensors, for instance, calculate the amount of sunlight falling on various areas of the solar panel. Such sensors, e.g., Light Dependent Resistors (LDR) or photo-diodes, give information in the form of how much sunlight is present and assist the system in determining which direction the panel should be facing to optimize power generation. Such information is generally available in analog or digital form based on the sensor type. Light intensity could be quantified in lux or the voltage difference across the sensor.

Another critical part of the system is the GPS module, which gives geolocation data such as latitude and longitude. This is required to calculate the position of the sun in the sky based on the particular geographic location and time of day. Based on this information, the system can determine the precise angle in which the solar panel needs to be oriented to receive maximum sunlight. This information is usually made up of coordinates and time.Additionally, sunlight and location, temperature sensors can be included in the system to detect environmental conditions. Temperature information prevents the system from overheating and yields useful information for ensuring safe operation. The temperature readings may be analog or digital and usually record in degrees Fahrenheit or Celsius.

After the readings from these sensors are gathered, they are relayed to the controller unit or micro controller which processes the information through tracking algorithms. The micro controller computes the best position for the solar panel based on the inputs received. For instance, it can calculate the necessary tilt and azimuth angles as a function of the time of day, the solar position at the time, and the current light intensity measurements. The control algorithms may be as basic as a single-axis tracker (which controls only one axis of the panel) or as advanced as a dual-axis tracker (which controls both the tilt and azimuth)The calculated data is translated into control signals that drive the motors or actuators used for moving the solar panels. These control signals position the panel by modifying its tilt or azimuth to be facing the sun. When the panel is being moved, the motor or actuator position sensors provide feedback as the panel adjusts to be in the correct orientation. This feedback information may be either analog (i.e., potentiometer voltage) or digital (i.e., encoder outputs).Once the solar panel is positioned where it should be, it still tracks the sun all day long, tilting its angle from time to time according to the time of day and the changing position of the sun in the sky.The motors or actuators get continual feedback and adjust the panel accordingly. This feedback loop ensures that the panel stays in alignment with the sun, even as it moves across the sky.

In addition to these fundamental operations, the system is also capable of tracking energy efficiency through the measurement of the solar panel's energy output in real time. Comparing this output with that produced by a fixed panel, the system can assess the performance gains realized through tracking. Power sensors track the voltage, current, and power output of the solar panel, offering feedback regarding the tracking system's efficiency.

All throughout the operation, the data flow is consistent: from the sensors (light level, GPS, temperature), through the controller (which computes based on this data and determines the best positions), to the actuators (which move the position of the panel). Besides, monitoring information, like the energy output of the panel and the state of operation of the system, can be presented on a user interface for real-time performance assessment. In general, the information in an automatic solar tracking system is being gathered, processed, and utilized to adjust the orientation of the solar panel to optimize energy harvesting and efficiency. Each data type has a particular function in making the system effective, and their combination enables the panel's position to be continuously adjusted according to the position of the sun and the weather. This data flow is at the core of the design and operation of the solar tracking system.

IV. WORKING OF THE MODEL

The solar tracking system works automatically by constantly adjusting the position of solar panels to follow the movement of the sun during the day. The basic functionality starts with sensors—mainly Light Dependent Resistors (LDRs)—that track sunlight intensity from various directions. These sensors feed real-time information to a microcontroller, which analyzes the information to determine the direction of maximum light intensity.

Based on the sensor data, the microcontroller determines the best tilt and azimuth angles of the panel. It then triggers control signals to servo motors or actuators, which actually tilt the panel into the required direction. This tilting happens on a regular basis to ensure that the most effective angle is used as the sun's position continuously changes.

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

In more advanced models, other elements such as GPS modules and temperature sensors can be employed. GPS gives geographic coordinates and time-based information to determine the sun's precise position, and temperature sensors assist in tracking environmental conditions to provide safe operation and avoid overheating.

A feedback loop guarantees panel alignment accuracy. Motor position sensors give feedback to the microcontroller, verifying if the panel has achieved the desired orientation. The closed-loop system ensures accurate tracking and real-time correction of any misalignments.

The system, in general, operates in a loop—reading data, processing inputs, changing orientation, and checking performance—to optimize solar energy collection and ensure efficient operation in changing sunlight conditions

.

V. OVERFLOW

Overflow in an automatic solar tracking system may result in incorrect sensor responses, misalignment of the solar panel, or erratic motor behavior. Correct overflow handling includes selecting appropriate register sizes, doing range checks, using modular arithmetic for position tracking, and including error handling in the software to prevent system malfunction. This ensures that the system remains stable and operates as required.The system normally operates by employing a mix of actuators, sensors, and controllers. Intensity of sunlight is gauged by light sensors, and optimal placement of the panel is established based on this. GPS modules are also employed in certain systems to identify the precise location and time, enabling the system to figure out the position of the sun. This information is then calculated by a control unit or microcontroller, using algorithms to calculate the best tilt and azimuth angles for the panel according to the path of the sun. After the required position is calculated, motors or actuators move the panel to the desired direction. The system makes constant adjustments to the panel position as the sun travels during the course of the day. The system's feedback mechanism is used to place the panel in the correct position, with sensors on the motors or actuators validating the correct panel alignment as required. Two types of solar tracking systems are used: single-axis and dual-axis. A one-axis tracking system translates the panel on a single axis, usually from east to west, as the sun travels throughout the day. A double-axis tracking system moves both the tilt and azimuth of a panel so that it tracks the sun's path both during the course of the day and throughout various seasons. The major benefit of an automatic solar tracker system is that it can maximize and enhance the energy output of solar panels. By maintaining alignment with the sun, the system can receive as much as 25-40% more solar energy than stationary panels. But these systems do have greater upfront costs because of the increased complexity of motors, sensors, and controllers, and they will also cost more to maintain over the long term because of the moving parts involved.

VI. SYNCHRONOUS CIRCUIT

A synchronous circuit in the context of an Automatic Solar Tracking System refers to a circuit where the operation of various components (such as sensors, motors, and control systems) is synchronized to a clock signal. In a synchronous system, all the state changes happen at specific intervals, usually dictated by a central clock, ensuring predictable and orderly operation.A synchronous circuit for an automatic solar tracking system ensures that the operation of all components (sensors, micro-controller, motor drivers, etc.) is synchronized with a central clock, allowing the system to efficiently adjust the solar panel’s position based on the sun's movement. The use of synchronized timing improves precision, predictability, and reliability in the system’s operation.

VII. BINARY TO BCD TRANSLATION

In an Automatic Solar Tracking System, converting binary data (e.g., sensor readings, motor control values, or any numerical data) to BCD (Binary-Coded Decimal) might be required if the system needs to display or transmit numerical information in a human-readable form (decimal digits). BCD is a way of representing decimal numbers using binary. For instance, the decimal number 45 is represented in BCD as 0100 0101.

VIII. RESULT AND DISCUSSION

The Automatic Solar Tracking System is designed to improve the efficiency of solar panels by ensuring they are consistently oriented towards the sun throughout the day. This is achieved by using sensors a control unit (usually a microcontroller), and motors that adjust the panel's position. By automatically tracking the sun’s movement, the system maximizes the amount of sunlight absorbed, leading to increased energy production compared to stationary solar panels.

The tracking system also showed robustness in maintaining panel orientation even during slight fluctuations in sunlight intensity, such as those caused by passing clouds. This demonstrates that the system can handle real-world conditions where sunlight isn't constant, optimizing power generation even in less -than-ideal circumstances.

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

One of the key observations from the results was the accuracy of the sensor data. The system relied on LDRs, which are simple and cost-effective but are susceptible to some degree of error due to factors like shadows or ambient light interference.

Although the system performed well in direct sunlight, it was noticed that during cloudy or shaded conditions, the accuracy of light intensity readings could be compromised. In such cases, the system might adjust the panel position slightly off from the optimal direction, which would reduce efficiency.

To address this, the sensor calibration process becomes crucial. If sensors are calibrated or incorrectly positioned, the system may fail to make the proper adjustments, resulting in reduced efficiency. To overcome this, adaptive algorithms that can adjust for sensor drift or intermittent light conditions could be integrated to improve system accuracy.

One important aspect that affects the overall efficiency of the system is the power consumption of the components. The system continuously requires energy to run the sensors, micro-controller, and motors. Although the solar panel is used to power the system, the amount of energy used for tracking might reduce the overall efficiency if not properly optimized. Future improvements could involve making the tracking system more power-efficient by using lower-power components or incorporating sleep modes during times of minimal solar movement.

The Automatic Solar Tracking System demonstrated substantial improvements in solar panel efficiency by dynamically adjusting the panel's orientation based on real-time light intensity measurements. The system proved its ability to function effectively under various lighting conditions, although there is potential for improvement in sensor accuracy and motor precision. Future enhancements could focus on reducing power consumption, improving sensor calibration, and fine-tuning motor control to further optimize the system's performance. This system shows promise for widespread adoption, especially in regions with varying sunlight conditions, where optimizing solar energy capture can lead to significant increases in power generation.


IX. CONCLUSION

In conclusion, an automatic solar tracking system represents a significant advancement in solar energy technology, offering substantial improvements in the efficiency and performance of solar panels. By continuously adjusting the orientation of solar panels to follow the sun's movement, these systems Maximize energy capture, enhancing the overall energy output compared to stationary solar panels. The integration of sensors, controllers, and actuators enables precise adjustments, allowing for optimized performance throughout the day and across different seasons. While the initial cost and maintenance requirements may be higher than traditional fixed-panel systems, the benefits in terms of increased energy production and long-term efficiency make solar tracking systems a highly valuable investment, especially for large-scale solar installations and regions where maximizing Solar output is crucial. Additionally, as solar energy continues to grow as a primary source of renewable energy, innovations like the automatic solar tracking system play a pivotal role in making solar power more efficient and cost-effective.

REFERENCES

[1] Kalogirou, S. A. (2009). Solar Energy Engineering: Processes and Systems. Academic Press.
[2] Choi, Y. S., & Lee, D. (2010). "Analysis of an optimal solar tracking system with an adaptive control strategy." Solar Energy, 84(5), 815-825.
[3] Fthenakis, V., & Kim, H. (2011). Photovoltaics: Life-cycle analyses. Handbook of Photovoltaic Science and Engineering, Wiley
[4] Alonso, F., & Moreno, A. (2013). "Design and performance analysis of a low-cost automatic solar tracker." Renewable Energy, 57, 341-347.
[5] Sanchez, G. (2015). "Modeling and Control of a Solar Tracking System." Renewable and Sustainable Energy Reviews, 47, 134-144.
[6] Boucher, C., & Bertho, M. (2016). "Design of a Dual-Axis Solar Tracker." Energy Procedia, 97, 1050-1057.
[7] Zhou, D., & Zhang, X. (2017). "Design and optimization of a single-axis solar tracker." Applied Energy, 201, 1-10.
[8] Kumar, P., & Jain, A. (2017). "Automatic Solar Panel Tracking System using Arduino." International Journal of Emerging Technology and Advanced Engineering, 7(6), 39-45
[9] Pereira, A. A., & Ferreira, L. (2020). "Development of a Solar Tracking System for Off-Grid Applications." Energy Reports, 6, 327-334.
[10] Jadhav, R., & Patil, S. (2021). "Solar Tracking System: A Review of Applications, Technologies, and Control Strategies." International Journal of Renewable Energy Research, 11(3), 999-1013.
[11] 1984: R.R. Reddy and R. Sivaraman, "Design and Development of Solar Tracking Systems"
[12] 1995: D. O. Hall, "Solar Energy: Principles and Applications"
[13] 2002: D. M. Brodrick and P. J. Turner, "Modeling of Single-Axis Solar Trackers"
[14] 2004: R. Jain, A. K. Soni, and M. S. Chouhan, "Design and Development of Automatic Solar Tracking System"
[15] 2006: T. T. Le and M. J. O'Conner, "Dual-Axis Tracking System for Solar Energy Applications"
[16] 2007: S. Ahmed and Z. Ahmed, "Solar Tracking System: A Critical Review"
[17] 2011: P. S. Kothari, P. N. Pahwa, and K. S. P. S. R. S. Kumar, "Solar Panel Tracking System with Microcontroller"
[18] 2014: A. Chatterjee, S. N. K. Sahoo, and S. K. Das, "Automatic Solar Tracker Using Arduino"
[19] 2015: A. R. Vukosav, M. D. Mitić, and M. S. Stanojević, "Design of an Automatic Solar Tracking System for Maximum Energy Efficiency"
[20] 2016: S. R. S. R. A. D. I. Srinivas and G. V. R. S. R. Rao, "Design and Control of Solar Tracker System for Maximum Energy Capture"

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

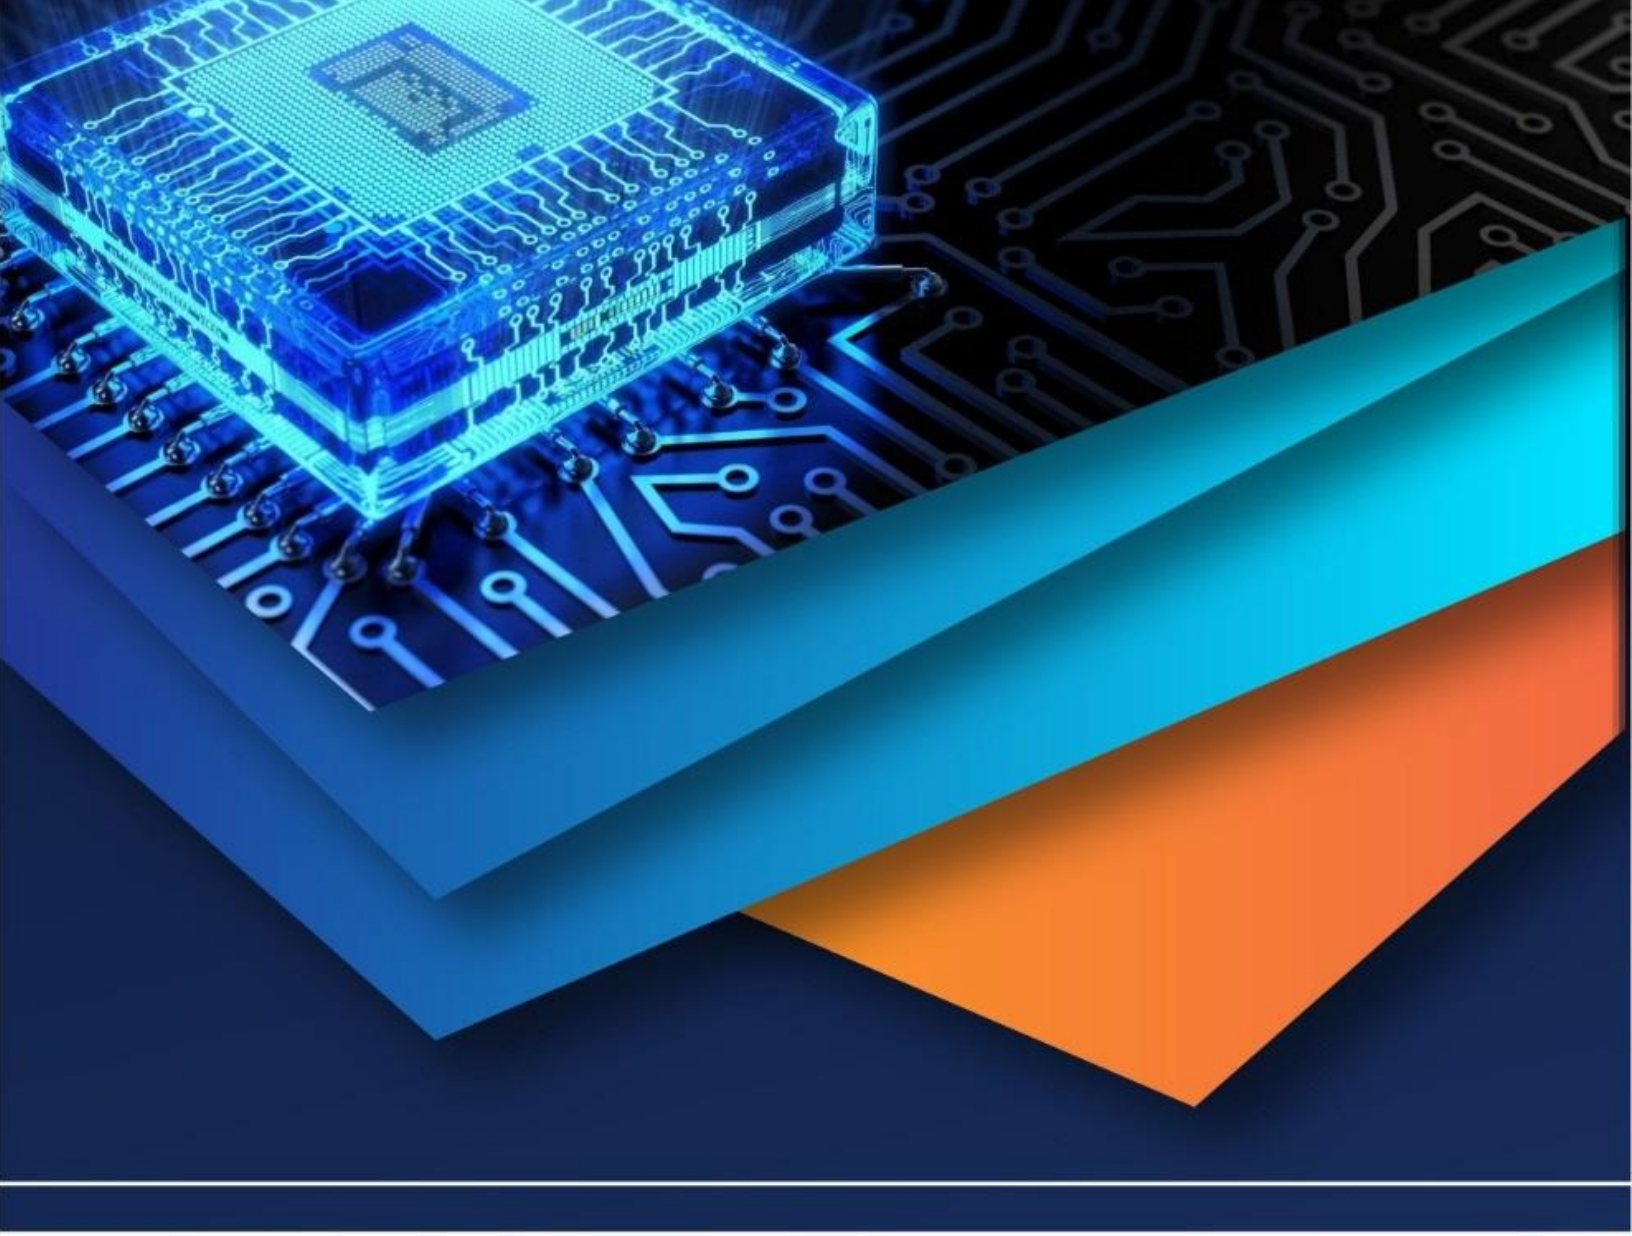

10.22214/IJRASET

45.98

IMPACT FACTOR: 7.129

IMPACT FACTOR: 7.429

INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089 (24*7 Support on Whatsapp)