iJRASET
International Journal For Research in Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 13 **Issue:** VI **Month of publication:** June 2025

DOI: https://doi.org/10.22214/ijraset.2025.72721

www.ijraset.com

Call: 08813907089 | E-mail ID: ijraset@gmail.com

International Journal for Research in Applied Science & Engineering Technology (IJRASET)
ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538
Volume 13 Issue VI June 2025- Available at www.ijraset.com

Automatic Wireless Vehicle Charging System Using Solar Energy

Kaustav Ray[1], Debjit Biswas[2], Surajit Basak[3], Koushik Pal[4], Kaushik Roy[5]
Department of Electronics and Communication Engineering, Guru Nanak Institute of Technology, Kolkata, West Bengal, India

Abstract: ***The global transition to electric vehicles (EVs) necessitates robust, efficient, and sustainable charging infrastructure. This paper presents a comprehensive analysis of automatic wireless vehicle charging systems integrated with solar energy, addressing the critical need for eco-friendly and convenient EV power solutions. The fundamental principles of wireless power transfer (WPT) technologies, including inductive, resonant, and capacitive coupling, are explored, highlighting their suitability and limitations for EV applications. The integration of solar energy is examined, detailing photovoltaic conversion, energy storage mechanisms, and the overall system architecture that enables seamless, grid-independent charging. Key technical challenges such as power transfer efficiency, coil misalignment, foreign object detection (FOD), and electromagnetic interference (EMI) are discussed, alongside proposed mitigation strategies. The paper further investigates the crucial role of smart grid integration and Vehicle-to-Grid (V2G) capabilities in enhancing grid stability and energy management. Current global research, pilot projects, and commercial initiatives demonstrate the accelerating maturity of this technology. While offering significant advantages in environmental impact, energy independence, and user convenience, solar-powered wireless EV charging systems face hurdles related to initial costs, efficiency losses, and land use. The future outlook points towards advanced materials, artificial intelligence (AI)-driven optimization, and standardized protocols as pivotal for widespread adoption, paving the way for a cleaner, more resilient, and sustainable transportation ecosystem.***
Key Words: Electric vehicles, Vehicle-to-Grid, Eco-friendly, Artificial Intelligence, Wireless power transfer.

I. INTRODUCTION

A. Background and Motivation for Sustainable EV Charging

The global automotive industry is rapidly shifting towards electric vehicles (EVs) due to environmental concerns, emission regulations, and declining battery costs, aiming to reduce fossil fuel reliance and greenhouse gas (GHG) emissions [1]. However, traditional wired charging presents inconveniences, wear, and infrastructure strain. Solar-powered wireless charging offers a synergistic solution, addressing sustainability, user convenience, and grid resilience following [2].

B. Overview of Wireless Power Transfer and Solar Energy Integration

Wireless Power Transfer (WPT) transmits electricity without physical contact, primarily using electromagnetic induction. For EVs, magnetic resonance coupling is preferred for its efficiency over air gaps as in [3]. Solar energy, harvested by photovoltaic (PV) cells converts sunlight into electricity. Integrating solar with WPT allows for wireless energy transmission from ground pads to vehicles. This combination creates a robust, self-sufficient, and user-friendly charging ecosystem, enhancing WPT's practicality by eliminating exposed wires and reducing the carbon footprint of charging following [4].

II. FUNDAMENTALS OF WIRELESS POWER TRANSFER (WPT) FOR ELECTRIC VEHICLES

A. Principles of Inductive Charging and Resonant Inductive Coupling

Inductive charging uses electromagnetic induction: an alternating current in a primary coil creates a magnetic field, inducing current in a secondary coil to charge a battery. For EVs, resonant inductive coupling (RIC) is used, adding capacitors to both coils to create tuned LC circuits. This significantly enhances efficiency over mid-range distances and tolerates slight coil misalignment, crucial for real-world EV applications. High-power EV systems typically operate around 85 kHz, as per SAE J2954 in [5].

B. Key Parameters Influencing WPT Efficiency and Performance

WPT efficiency depends on operating frequency, coil size, distance, and alignment. The quality factor (Q-factor) is crucial, affecting efficiency, critical air gap, and capacitor voltage stress. Higher Q-factors allow longer transfer distances but may increase voltage stress, requiring careful design optimization.

©IJRASET: All Rights are Reserved

Mutual inductance also directly impacts efficiency, remaining high until a "critical mutual inductance" is reached. Ongoing research focuses on ultra-thin coils, higher frequencies, and optimized electronics to reduce losses [6].

C. *High-Power Inductive Charging for EV Applications*

High-power inductive charging, exceeding 1 kilowatt, is vital for EVs, offering automated, cordless charging from 1 kW to over 300 kW. This technology, along with dynamic wireless charging (DWC), aims to alleviate "range anxiety" by enabling faster and continuous charging as in [7]. Standardization efforts like SAE J2954 (up to 11 kW) are crucial, with higher-power and dynamic charging standards under development. DWC, allowing charging while in motion, could theoretically enable indefinite vehicle operation and is being piloted by companies like ElectReon in [8]. Table I represents a comparison of different wireless power transfer technologies for EVs.

TABLE I
COMPARISON OF WIRELESS POWER TRANSFER TECHNOLOGIES FOR EVS

Feature	Inductive Coupling (IPT)	Resonant Inductive Coupling (RIC)	Capacitive Coupling (CCWPT)
Working Principle	Magnetic Field (Faraday's Law)	Tuned Magnetic Field (Resonance)	Electric Field (Displacement Current)
Key Advantages	Commercial maturity, Good efficiency (general)	High efficiency, Misalignment tolerance, Mid-range transfer	Negligible eddy-current loss, Low cost/weight, Good misalignment, Metal barrier penetration
Key Disadvantages	One-position, Metal interference, Heat dissipation, Large coil volume	Efficiency sensitive to coil quality factor (Q)	High voltages on electrodes, Safety concerns (conventional), High frequency operation, Small coupling capacitance (conventional)
Typical Efficiency	80-88%	50-95%	~78%, 96% (innovative)
Typical Coupling Distance	<10 cm	5-20 cm, <20 cm (medical)	6-30 cm
Operating Frequency	20 kHz – 100 kHz	85 kHz –1 MHz	[500] kHz – 10 MHz

III. SOLAR ENERGY HARVESTING TECHNOLOGIES

A. *Advancements in Photovoltaic (PV) Cell Efficiency*

Solar panel efficiency has significantly advanced, from ~10% to over 20-25% today. Perovskite solar cells, a third generation, offer high theoretical efficiencies (up to 31% for single-junction, 45% for multi-junction) and flexibility for vehicle integration. Challenges include long-term stability and scalability, but research is addressing these. The authors in [9-10] investigate on bifacial solar panels which absorb light from both sides, increasing generation by up to 27% in reflective environments, though they have higher initial costs and environmental dependence.

B. *Integration Strategies for Solar Panels in Vehicle and Infrastructure Design*

Solar panels can be integrated directly onto vehicles, with flexible perovskite cells enabling self-charging and extended range, as seen in prototypes like the Aptera EV. Infrastructure integration includes standalone solar EV chargers, solar canopy stations, grid-connected hybrid systems, and dynamic road integration for charging while in motion following [9]. These diverse strategies aim to reduce grid strain and provide clean, decentralized energy for various EV use cases as in [7].

C. *Energy Storage Solutions for Solar-Powered Systems*

The intermittency of solar power necessitates robust energy storage for consistent EV charging. Advancements in lithium-ion and emerging flow batteries promise higher energy density and longer life-spans following [11]. Super capacitors can complement batteries by handling peak power demands, extending battery life and improving system reliability. The authors in [12] shows that the effective energy storage is crucial for system reliability, efficiency, and economic viability, balancing energy density, power delivery, and lifespan. Table II shows advancements in solar panel technologies with integration of EVs.

TABLE II
ADVANCEMENTS IN SOLAR PANEL TECHNOLOGIES FOR EV INTEGRATION

Technology Type	Typical Conversion Efficiency	Key Properties/Advantages	Challenges/Limitations	Relevance to EV Integration
Mono-facial Silicon	~20-25%	Established, reliable	Brittle, not flexible	Standard for infrastructure (e.g., canopies, charging stations)
Perovskite	Up to 31% (single-junction),45% (multi-junction theoretical)	Flexible, lightweight, low cost, high theoretical efficiency	Long-term stability (moisture, UV, heat), scalability	Vehicle surface integration (non-flat surfaces), portable devices
Bifacial	Up to 27% gain	Dual-sided absorption, high energy yield in specific environments (e.g., snow, reflective surfaces)	Higher initial cost, environmental dependence (albedo)	Ground-mounted infrastructure, canopies, vertical installations

IV. SYSTEM ARCHITECTURE AND COMPONENTS OF SOLAR WIRELESS EV CHARGING

A. *Integrated System Design: From Solar Capture to Vehicle Battery*

A solar wireless EV charging system integrates multiple energy conversion and control stages. Solar panels generate DC electricity, optimized by an MPPT controller following [13]. The generated power is stored in batteries and converted to AC by an inverter for wireless transmission via a ground-embedded coil. A receiver coil on the EV captures this energy, which is rectified back to DC to charge the vehicle's battery. A microcontroller-based control system manages power flow, monitors parameters, detects faults, and provides real-time data as in [7].

B. *Essential Hardware Components and Their Functions*

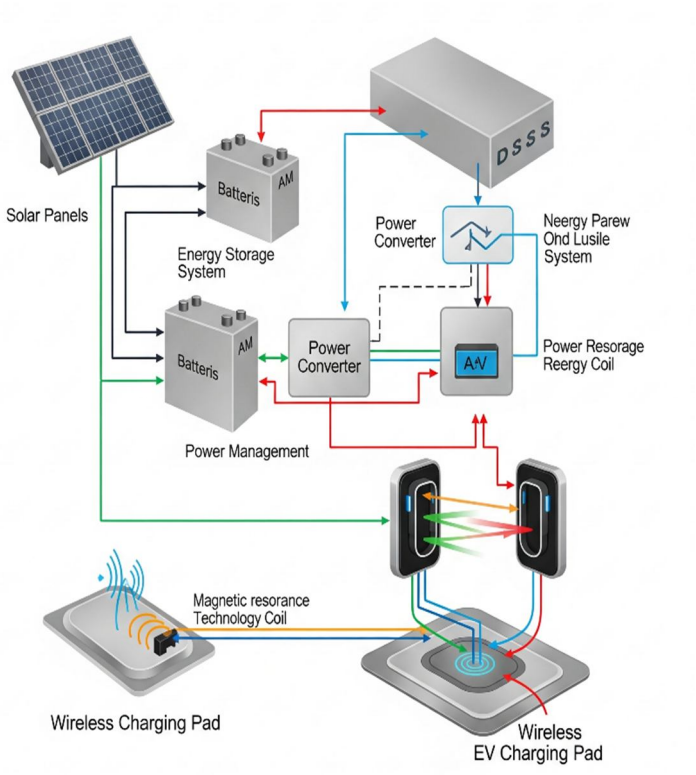


Fig. 1: System Architecture and Components

As shown in Fig. 1, key components include following [7] and [13]:

- Solar Panels: Convert sunlight to DC.
- Battery/Energy Storage: Stores solar energy for stable supply.
- Transformer: Converts DC to AC for wireless transmission.
- Regulator Circuitry: Ensures stable AC power to coils.
- Copper Coils (Transmitter & Receiver): Core of WPT, generating and capturing magnetic fields.
- AC-DC Converter / Rectifier: Converts received AC back to DC for EV battery.
- DC-DC Converter / Boost Converter: Optimizes voltage levels.
- Microcontrollers: Central control units for power management, monitoring, and data display.
- LCD Display: Provides real-time system feedback.
- Light-Dependent Resistors (LDRs): Manage current flow in low-light conditions.
- Relay-based Power Switching Circuit: Controls power flow and provides safety features.

C. Comparison of Static and Dynamic Charging Architectures

Static Wireless Charging (SWC): Charges stationary EVs over ground-embedded pads, offering convenience without physical cables. Precise coil is required for the alignment of optimal efficiency which is suitable for public/private charging stations and garages following [7] and [14].

Dynamic Wireless Charging (DWC): Charges EVs in motion over specialized road infrastructure. Reduces charging time, extends range, and mitigates "range anxiety". It presents greater engineering challenges like managing voltage fluctuations, dynamic mutual inductance, and high infrastructure costs which envisioned for smart cities and public transport fleets following [7] and [14].

V. POWER MANAGEMENT, EFFICIENCY, AND BATTERY MANAGEMENT

A. Energy Conversion Processes and Loss Mitigation

Solar wireless EV charging involves multiple energy conversions: DC from solar to AC for WPT, then back to DC for the EV battery. Each stage introduces losses, such as waste heat from inductive chargers and reactive power losses in resonant circuits. Cumulative inefficiencies can be significant. Mitigation strategies include improved drive electronics, higher operating frequencies, ultra-thin coils, and compensation networks to reduce reactive power losses following [7] and [13].

B. Advanced Power Management Strategies and Optimization Techniques

Intelligent power management is crucial for solar wireless EV charging. Maximum Power Point Tracking (MPPT) optimizes solar energy extraction following [9]. Dynamic control schemes, based on real-time monitoring, adjust power flow according to demand, battery State of Charge (SOC), and renewable energy availability. Advanced algorithms like Model Predictive Control (MPC) and machine learning optimize power distribution across solar, battery storage, and the grid, enabling load balancing and peak shaving to improve grid stability as in [15].

C. Role of Battery Management Systems (BMS) in Performance and Safety

The Battery Management System (BMS) is vital for EV batteries and solar-powered charging. It precisely monitors parameters like voltage, current, and temperature, calculating State of Charge (SOC) and State of Health (SOH). The BMS prevents overcharging/discharging, optimizing battery usage, minimizing energy loss, and extending lifespan. This is especially critical for V2G applications, where batteries undergo frequent cycling. Real-time data is displayed locally and via IoT platforms following [13].

VI. GRID INTERACTION, STABILITY, AND VEHICLE-TO-GRID (V2G) INTEGRATION

A. Impact of Solar Wireless EV Charging on Electrical Grids

Following [16], solar wireless EV charging can reduce charging costs and grid reliance, especially during peak demand. However, increased EV loads can strain grids, causing voltage drops and instability, particularly when solar power is unavailable. Solar PV systems act as Distributed Energy Resources (DERs), altering grid operations and potentially causing reverse power flow and voltage issues if not managed as in [17].

B. Grid Stability Considerations and Load Management

Grid stability with high EV penetration requires active load management. EVs can exacerbate grid imbalances, but intelligent energy management with buffer batteries can reduce utility grid impact. Vehicle-to-Grid (V2G) capable EVs can act as flexible grid assets, providing load balancing, peak shaving, frequency regulation, and demand response services. Modelling EV charging as a cyber-physical system with smart scheduling can transform it into a load balancing tool as in [18-19].

C. V2G and V2H Applications: Opportunities and Challenges

Vehicle-to-Home (V2H) allows EVs to power households, while Vehicle-to-Grid (V2G) enables bidirectional energy flow with the grid. V2H offers emergency power and bill reduction, while V2G provides grid support, stabilizes renewable energy, and creates revenue streams for EV owners. Challenges include accelerated battery degradation from increased cycling, technical complexity, cybersecurity risks, communication overhead, and high infrastructure costs. Pilot projects are exploring V2G integration and repurposing retired EV batteries as in [18] and [20].

VII. SAFETY, ENVIRONMENTAL IMPACT, AND ECONOMIC VIABILITY

A. Electromagnetic Field (EMF) Safety and Regulatory Standards

High-power wireless EV charging raises concerns about Electromagnetic Field (EMF) emissions and potential interference with vehicle electronics. While WPT eliminates physical hazards like electrocution and tangled wires, EMF emissions must adhere to strict international guidelines from ICNIRP, IEEE, and SAE J2954. Magnetic field WPT is considered inherently safer due to hermetically sealed designs and non-interaction with non-metallic materials as in [22].

B. Foreign Object Detection (FOD) and Living Object Detection (LOD)

Foreign Object Detection (FOD) is crucial for wireless EV charging safety, preventing foreign objects (e.g., metallic debris, leaves) from causing overheating or damage. Living Object Detection (LOD) is also vital to protect animals or children who might enter the charging zone. Various detection techniques (mechanical, visual, electrical, thermodynamic, magnetic) are employed to ensure system reliability and public trust following [22].

C. Environmental Benefits and Life Cycle Assessment

Solar wireless EV charging offers significant environmental benefits by reducing fossil fuel reliance and GHG emissions. Life Cycle Assessments (LCAs) show substantial GHG reductions for solar-powered EVs (SEVs) compared to conventional vehicles, also indicating potential reductions in resource depletion. Dynamic Wireless Power Transfer (DWPT) infrastructure can further reduce life cycle GHG emissions by up to 9.0% and enable up to 48% battery downsizing, provided roadside solar panels and storage are integrated as in [23].

D. Economic Analysis: Costs, Benefits, and Return on Investment

The economic viability of solar wireless EV charging involves high initial infrastructure costs, especially for dynamic roads. However, solar energy significantly lowers operational charging costs by reducing grid reliance. Wireless systems also offer lower maintenance due to fewer moving parts. Total Cost of Ownership (TCO) analyses suggest long-term savings from reduced fuel and maintenance can offset higher initial SEV costs. Government incentives are crucial, and for DWPT, environmental benefits can offset infrastructure costs within 20 years, though financial payback may take longer without carbon monetization as in [23]. Table III represents comparison for various solar wireless and traditional EV charging.

TABLE III
ENVIRONMENTAL AND ECONOMIC COMPARISON: SOLAR WIRELESS VS. TRADITIONAL EV CHARGING

Category	Solar Wireless Charging	Traditional Plug-in Charging
Environmental Impact	Reduced fossil fuel reliance, cleaner air, lower carbon footprint (lifecycle), enables battery downsizing (DWPT), energy independence	Reliance on grid electricity (often fossil-fuel derived), higher carbon footprint (depending on grid mix), tailpipe emissions (for ICEVs)

Economic Viability	Initial high investment costs, long-term savings from reduced electricity/maintenance, potential V2G revenue, energy independence	Lower initial infrastructure cost, established technology, ongoing electricity costs, potential grid strain costs
Convenience & Safety	No tangled cables, automated charging, wider access (solar deployment), inherent safety (no electrocution risk), hermetically sealed designs	Physical cables (inconvenience, wear, safety hazards), potential for electrocution from damaged handles, less aesthetic
Infrastructure & Deployment	Requires specialized WPT pads/coils, energy storage, complex power management; high initial setup for dynamic roads; land use for solar arrays	Established infrastructure, widely understood; can strain grid during peak hours

VIII. FUTURE TRENDS, EMERGING TECHNOLOGIES, AND RESEARCH GAPS

A. *Emerging Technologies and Future Developments*

Future trends in solar wireless EV charging include:

- Dynamic and Fast Wireless Charging: Commercialization of DEVC and increased demand for high-power fast charging (up to 50 kW).
- Smart Grid Integration and AI-Powered Optimization: Deeper integration with smart grids and AI for optimized energy distribution and demand forecasting.
- Advanced Battery Technologies: Innovations like solid-state and ultra-fast charging batteries for higher energy density and faster charging.
- Vehicle-to-Grid (V2G) and Vehicle-to-Home (V2H) Integration: EVs as active grid participants and energy storage, including repurposing retired EV batteries.
- Autonomous Charging Robots: Flexible, on-demand charging for micro-mobility fleets.
- Smart Charging Solutions and Digital Integration: Features like "Plug & Charge" and sophisticated EV charging apps for enhanced user experience and route optimization.

B. *Key Research Gaps and Challenges*

Significant research gaps and challenges are:

- Technical Challenges: Improving WPT misalignment tolerance and high-speed transfer timing, reducing energy losses, enhancing DWC robustness, and improving component lifespan.
- Infrastructure and Economic Challenges: High initial costs for infrastructure, lack of universal standardization and interoperability, optimizing infrastructure utilization, developing sustainable revenue models, and accelerating government program rollout.
- Environmental and Safety Challenges: Addressing public concerns about EMF exposure and developing highly reliable Foreign Object Detection (FOD) and Living Object Detection (LOD) systems.
- Grid Interaction Challenges: Mitigating battery degradation in V2G applications, ensuring cybersecurity for smart grids, and establishing reliable, low-latency communication between vehicles and the grid.

IX. CONCLUSION

The automatic wireless vehicle charging system using solar energy represents a pivotal advancement in the pursuit of sustainable transportation. This integrated approach leverages the inherent advantages of wireless power transfer technologies—namely convenience, enhanced safety, and reduced wear and tear—with the environmental and energy independence benefits of solar power. By embracing resonant inductive coupling as the foundational WPT method and incorporating robust battery energy storage systems, the intermittency of solar energy can be effectively managed, ensuring a reliable and continuous power supply for electric vehicles.


©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

While significant technical challenges related to power transfer efficiency, coil misalignment, foreign object detection, and electromagnetic interference persist, ongoing research and innovative mitigation strategies are steadily addressing these hurdles. The seamless integration with smart grids and the proliferation of Vehicle-to-Grid (V2G) capabilities further position these systems as critical components for future energy ecosystems, enabling optimized load management, enhanced grid stability, and efficient utilization of renewable energy resources.

Global pilot projects and commercial initiatives, exemplified by Electreon's dynamic charging roads and various solar-powered charging stations in urban and rural settings, underscore the growing feasibility and market readiness of this technology. Despite the high initial costs and the need for standardized protocols, the long-term environmental benefits, operational cost savings, and the promise of a truly seamless charging experience make solar-powered wireless EV charging a transformative solution. Continued advancements in material science, power electronics, AI-driven optimization, and collaborative policy frameworks will be instrumental in overcoming existing barriers, paving the way for a cleaner, more resilient, and sustainable future for electric mobility.

REFERENCES

[1] S. Iqbal, N. F. Alshammari, M. Shouran, and J. Massoud, "Smart and Sustainable Wireless Electric Vehicle Charging Strategy with Renewable Energy and Internet of Things Integration", Sustainability, vol. 16, no. 6, pp. 2487, Mar. 2024.
[2] Radwan A. Almasri, Talal Alharbi, M. S. Alshitawi, Omar Alrumayh and Salman Ajib, "Related Work and Motivation for Electric Vehicle Solar/Wind Charging Stations: A Review", World Electric Vehicle Journal, vol. 8, no. 5, pp. 215, May 2024.
[3] Nadir Benalia, Idriss Benlaloui, Kouider Laroussi, Ahmad Elkhateb, D. E. M. Wapet, Ammar M. Hassan and Mohamed Metwally Mahmoud, "Enhancing electric vehicle charging performance through series-series topology resonance-coupled wireless power transfer," PLOS One, vol. 19, no. 3, pp. e0300550, Mar. 2024.
[4] Siddesh G K, Nikhil Satyappa Mane, Sureshakumara, Varsha S S and K Shivalinga, "A Solar Powered Wireless Power Transfer for Electric Vehicle (EV) Charging," International Journal of Advance Research and Innovative Ideas in Education (IJARIIE), vol. 11, no. 2, pp. 1146-1151, May 2025.
[5] Mizan Miyan, Neeraj Chauhan and Mahtabul Haque, "Wireless Power Transfer for EV Charging Using Resonant Inductive Coupling" International Journal of Scientific Research and Engineering Development, vol. 8,issue 3, May-June 2025
[6] Vasantharathna S., Paul Samuel I., Arun A.,Balamurugan R. and Bharath R.,"Design and Performance Optimization in Wireless Power Transfer System" IRO Journals, vol. 7, no. 1, pp. 19-33, Apr. 2025.
[7] Ahmed A. S. Mohamed, Ahmed A. Shaier, Hamid Metwally and Sameh I. Selem, "An Overview of Dynamic Inductive Charging for Electric Vehicles," Energies, vol. 15, no. 15, p. 5613, Aug. 2022.
[8] ElectReon Wireless Ltd., "Findings from the World's First Public Wireless Electric Road for Heavy-Duty Commercial Vehicles," ElectReon White Paper, Jan. 2024.
[9] N. Shah, A. A. Shah, P. K. Leung, S. Khan, K. Sun, X. Zhu and Q. Liao, "A Review of Third Generation Solar Cells," Processes, vol. 11, no. 6, p. 1852, Jun. 2023.
[10] Rakesh A. Afre and Diego Pugliese, "Perovskite Solar Cells: A Review of the Latest Advances in Materials, Fabrication Techniques, and Stability Enhancement Strategies," Micromachines, vol. 15, no. 2, p. 192, Feb. 2024.
[11] Nikhil Chandwani, "How advanced battery technologies are transforming solar energy storage," PV Magazine India, Mar. 13, 2025.
[12] S. V. P. S. Reddy and M. V. Kumar, "A New Hybrid Energy Storage System for Electric Vehicle Drive System," Engineering, Technology & Applied Science Research, vol. 14, no. 6, Dec. 2024.
[13] Pulugam Rahul Charith,Gouni Rajeev, Gaddam Shashi Kumar, S. Chandra Shekhar and V. Kumaraswamy, "Solar Powered Wireless Charging with EV BMS and Charge Monitoring," Iconic Research And Engineering Journals, vol. 8, no. 11, pp. 574-578, May 2025.
[14] M. Shen, "A Comparative Analysis of Static and Dynamic Wireless Charging Systems for Electric Vehicles," Academic Journal of Science and Technology, vol. 12, no. 2, pp. 180-183, 2024.
[15] Y. Mohammed, A. Manoharan, S. Kappagantula and H. Manoharan, " Optimizing Electric Vehicle Charging Costs Using Machine Learning", International Information and Engineering Technology Association Journal, June, 2024. **DOI:** https://doi.org/10.18280/isi.290326
[16] B. Biewald, D. Glick, S. Kwok, K. Takahashi, J. P. Carvallo and L. Schwartz, "Electric Vehicle Grid Impact Analysis and Smart-Charge Management", National Renewable Energy Laboratory (NREL), March 5, 2025.
[17] T. Aditya, R. D. A. Raj and M. R. Shinde, "Reduction of PV Reverse Power Flow through the Usage of EV's Battery with Consideration of the Demand and Solar Radiation Forecast," IEEE International Electric Vehicle Conference (IEVC), Oct., 2013.
[18] "Smart-charging and V2G critical for cost savings, grid stability and renewables integration," EY and Eurelectric Report, Mar. 5, 2025.
[19] Guanhua Wang and Qiyan Shu, "The influence of electric vehicles charging and discharging on power grid stability," Global Journal of Engineering and Technology Advances, Dec. 12, 2024.
[20] Mohammad A Razzaque, Shafiuzzaman K Khadem, Sandipan Patra, Glory Okwata and Md. Noor-A-Rahim, "Cybersecurity in Vehicle-to-Grid (V2G) Systems: A Systematic Review," arXiv, Mar. 19, 2025.
[21] Songyan Niu, Qirui Jia, Yang Hu, Chengbo Yang and Linni Jian, "Safety Management Technologies for Wireless Electric Vehicle Charging Systems: A Review," MDPI Electronics, Jun. 11, 2025.
[22] Abdulaziz Alshammari, "Comprehensive Analysis of Foreign Object Detection Techniques for Safe Electric Vehicle Charging," Metallurgical and Materials Engineering, vol. 31, no. 4, pp. 705-717, Apr., 2025.
[23] M. U. Nawaz, S. Umar and M. S. Qureshi, "Life Cycle Analysis of Solar-Powered Electric Vehicles: Environmental and Economic Perspectives," International Journal of Advanced Engineering Technologies and Innovations, vol. 3, no. 1, 2024.

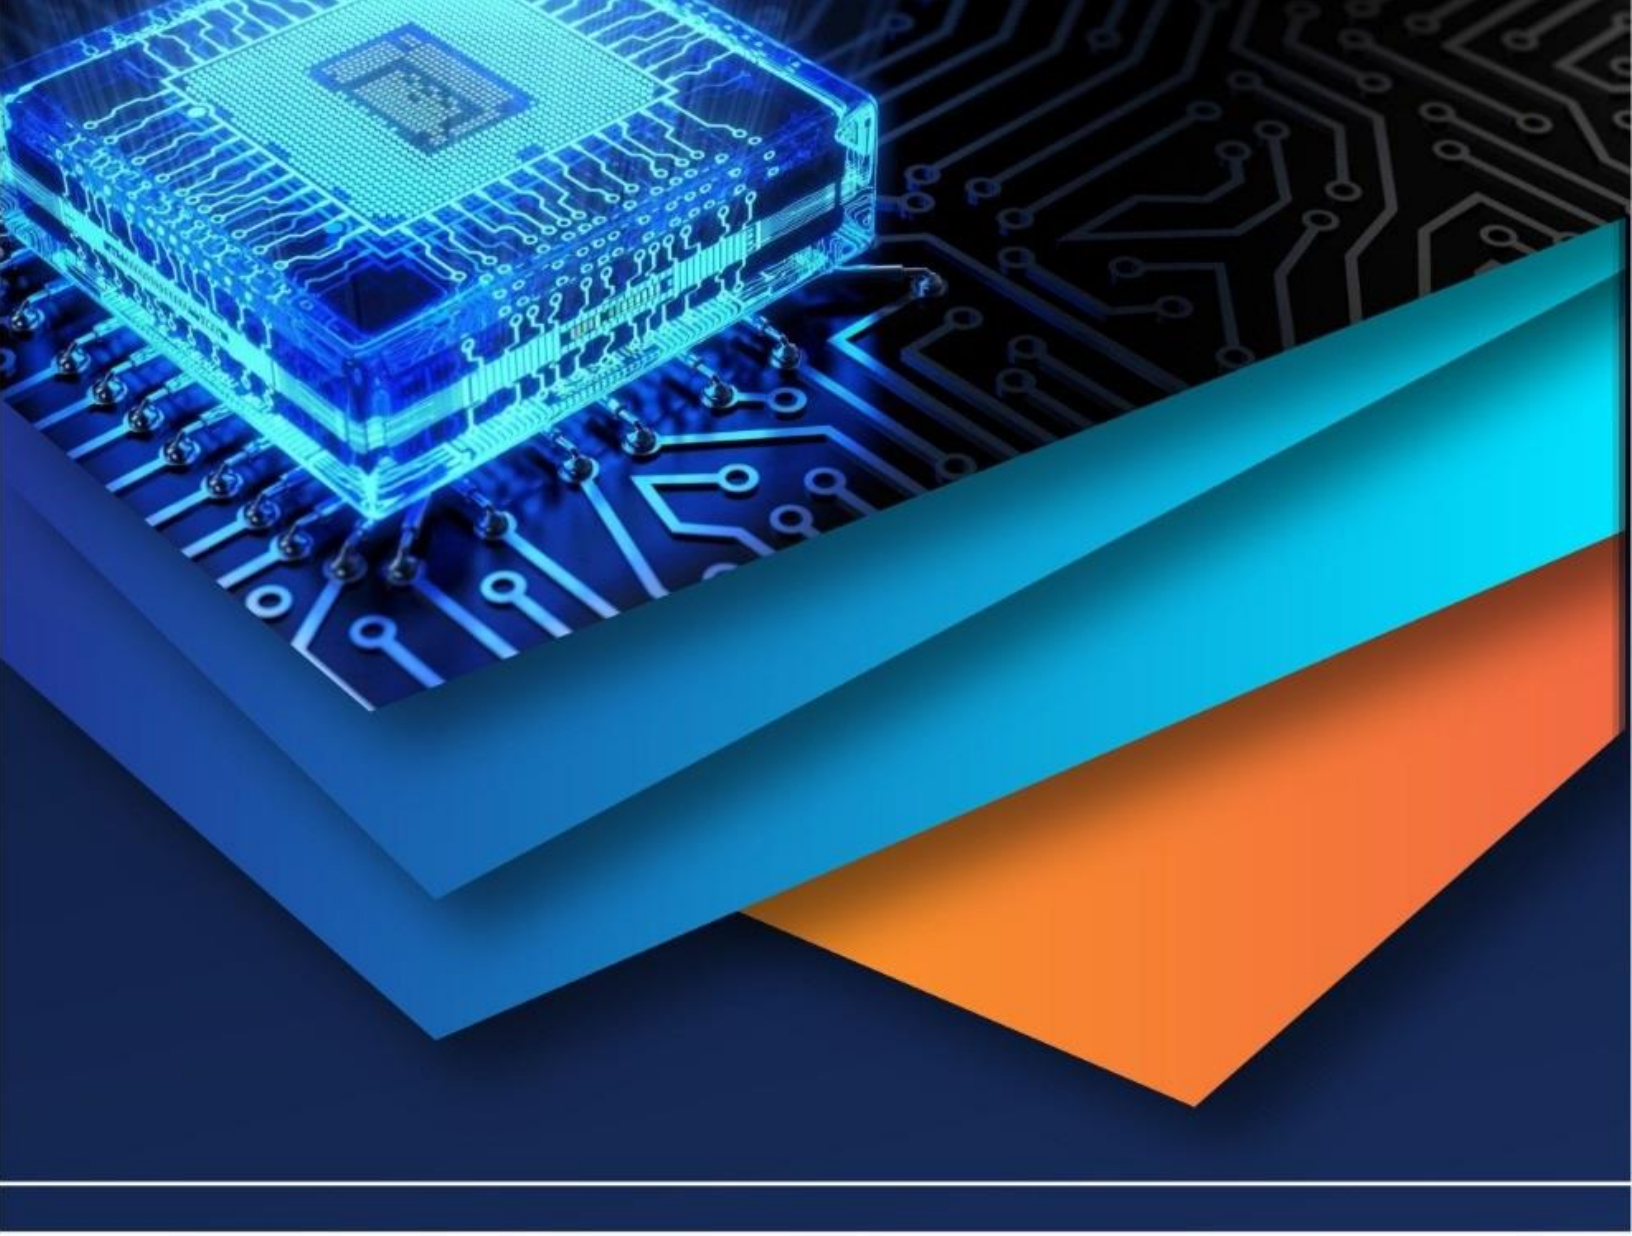

10.22214/IJRASET

45.98

IMPACT FACTOR: 7.129

IMPACT FACTOR: 7.429

INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089 (24*7 Support on Whatsapp)