



IJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 14 **Issue:** II **Month of publication:** February 2026

DOI: <https://doi.org/10.22214/ijraset.2026.77493>

www.ijraset.com

Call:  08813907089

E-mail ID: ijraset@gmail.com

Biomimetic Adaptive Facades: Optimizing Energy Efficiency through Natural Analogues

Aira Shet

Faculty of Architecture, PES University, Bangalore, Karnataka 562285, India

Abstract: *This study deals with how biomimetic adaptive facade designs can improve energy efficiency by replicating natural tactics. The study intends to create unique facade solutions that overcome both the issues of excessive energy consumption and environmental impact in buildings by analyzing the energy optimization strategies of natural systems.*

Cases of how biomimetic elements are used realistically include the Shanghai Tower, the Eastgate Center, and the St. Mary Axe Building. Using daylighting and passive natural ventilation techniques, the St. Mary Axe Building can save up to 50% on energy costs compared to traditional office buildings. The Eastgate Centre uses a passive cooling system that reduces dependency on conventional air conditioning, drawing inspiration from termite mounds. With sustainable facade technologies that maximize energy use and control wind loads in a high-rise setting, the Shanghai Tower is an excellent case of vertical urbanization. This study uses case study analysis, physical prototyping, and computer modelling to find essential biomimetic techniques that greatly enhance energy performance, such as ventilative cooling, dynamic insulation, and self-shading. The results offer innovative methods to minimize energy use while improving the quality of life in the built setting by integrating biomimetic adaptive facades into architectural design.

Keywords: *Biomimicry, Adaptive Facade Design, Energy Efficiency Optimization*

I. INTRODUCTION

The importance of building facades has changed drastically over the last few decades as architects and engineers have been looking for creative solutions to reduce building performance gaps. Facades are no longer just functional or aesthetic. They have turned into active components which work automatically in controlling the interior climate of the building. Passive design strategies have been the norm in the fabric of facade design which is why unnecessary, bulky mechanical systems such as heating, ventilation, and air conditioning (HVAC), were needed to create a comfortable careful environment inside. However as new inventions were created and architecture became of high order, so the idea of remodelling, expanding or changing the building skin resurfaced, so called the idea of adaptive facades. Adaptive facades can change with time and again to wind and sun for instance making the building useable on its own without the want to be further assisted much. In light of this context, there, however, is an interesting perspective regarding how the facade as a component can be further developed with regard to biomimicry.

Biomimicry refers to the act of copying the means, methods and techniques derived from billions of years of natural evolution directed at addressing complex environmental issues. The ability of nature to create advanced designs for energy management, temperature control and physical alteration of environments is a productive source of looking for answers to Designing. Heat, moisture, light, and other such factors, must be dealt with constantly in nature to enable good growth of organisms. Such adaptive behaviour has also led to the emergence of a new trend in facade design whereby the envelope of the building is designed to imitate biological systems in order to reduce energy consumption for the maintenance of building services.

Biomimicry inspired by nature and modern technology is what characterizes the process of creating adaptive facades. Contemporary materials, sensors, and control units allow the facades to act as a responsive system similar to any living organism in responding to the outer environment. For example, we can imagine a facade composed of thermochromic materials where colour change occurs with a change in temperatures, similar to extreme animals that vary their colour to absorb sunlight or disguise. Such materials have the ability to change in intensity and reduce solar incipitance or withhold solar energy in hot weather and this helps achieve quite stable internal temperatures without any mechanical aids.

Biomimetic adaptive facades open up new approach for re-imagining the interaction between structures and their surroundings. With the provision of this adaptive process derived from natural elements, architects are able to create wall systems that not only improve structures' performance but also provide a more engaging and proactive architecture. The blending of biology with construction advances the concept of building envelopes and advances towards building designs with self adaptive capabilities which solves new challenges in design and performance enhancement.

This research focuses on the practical applications of biomimetic adaptive facades in modern architecture. It examines how natural analogues can inform front-end design to improve energy efficiency. Study through case studies and experimental analysis to reduce reliance on more comfortable and efficient mechanical systems.

Exploring the potential of these fronts to create living and working space with complex adaptations found in nature Biomimetic building walls hold promise for transforming the way buildings interact with their environment. And in doing so They lead to a new paradigm for architectures that prioritize responsiveness, innovation, and efficiency.

II. LITERATURE REVIEW

A. Biomimicry in Architectural Design

Biomimicry and biophilic design are emerging approaches in architecture that draw inspiration from nature to create energy-efficient and sustainable building facades. The study examines cutting-edge design concepts, materials, and designs in building facades from the perspectives of biomimetics and bio-design. These strategies aim to reduce energy consumption and improve occupant comfort by mimicking natural processes and incorporating biological elements [1]. Kinetic facades that use smart materials are self-responding and do not require energy to operate, making them better at reducing energy consumption. - The paper identified the basic types of kinetic facades and their characteristics in terms of materials and shading mechanisms, in relation to biomimicry-inspired technologies [2]. Energy efficiency in biomimetic facade systems is achieved by regulating air, water, heat, and light. Biological solutions from nature need to be well-defined and integrated into the facade design to address specific problems. Energy simulation and performance calculation methods should be used to obtain reliable data when analyzing biomimetic facade projects [3]. The study establishes three priority parameters (materials, practices, and thermal behavior) to analyze building façades on a scale from artificial to natural, local to distant, and insulation to inertia. Factors like shading, solar passive energy, and renewable energy use affect the measurements of energy consumption. Modern high-tech insulation relates to biophilia, while traditional local solutions have cultural aspects of biomimicry [4]. These approaches offer innovative and sustainable solutions for energy-efficient building envelopes, addressing the growing demand for reduced carbon emissions in the built environment.

B. Adaptive Facade Innovations in Architecture

Energy efficiency in biomimetic facade systems is achieved by regulating air, water, heat, and light. Biological solutions from nature need to be well-defined and integrated into the facade design to address specific problems. Energy simulation and performance calculation methods should be used to obtain reliable data when analyzing biomimetic facade projects [3]. Biomimicry and bio-design approaches can be used to develop energy-efficient building facades. Natural processes can be leveraged to improve the energy efficiency of building facades.

Biomimetic concepts should be at the center of the design of energy-efficient building facades [1]. Inspired by biological systems, phase change materials and solar concentrators can be integrated into building envelopes to improve thermal energy storage and utilization [5]. These bio-inspired approaches align with the principles of Nearly Zero Energy Buildings (NZEB) and passive solar design. The application of biomimicry extends beyond facades to overall architectural composition, including structural morphology, green roofs, and urban planning [6]. By adopting nature's time-tested strategies, architects can create more sustainable, efficient, and resilient buildings that respond effectively to environmental challenges.

C. Energy-Efficient Facade Design

Energy efficiency in biomimetic facade systems is achieved by regulating air, water, heat, and light. Biological solutions from nature need to be well-defined and integrated into the facade design to address specific problems. Energy simulation and performance calculation methods should be used to obtain reliable data when analyzing biomimetic facade projects [3]. Biomimicry and bio-design principles can be used to develop more sustainable and energy-efficient building facades. The study examines cutting-edge design concepts, materials, and designs in building facades from the perspectives of biomimetics and bio-design. To achieve energy-efficient facade solutions, biomimetic concepts must be at the center of the design [1]. The solar thermal facade system developed in the study improved energy efficiency, reduced heat losses, and reduced CO₂ emissions, demonstrating its suitability for domestic heating in building envelopes. Aerogel was a key material in the solar facade model, with experiments showing it had beneficial thermal and optical properties, and thermal insulation was vital for the energy conservation and reduced energy loss of this system. Both Fresnel lenses and poly-methyl methacrylate acrylic glass were effective at concentrating solar energy and gathering light, with similar performance results between the two materials [5].

Biomimicry was used to design building envelope elements, drawing inspiration from the adaptive strategies of the African reed frog and Hercules beetle. The specific strategies used were heat regulation through reflective skin pigment and moisture control. These biomimetic design strategies were implemented through techniques like high albedo materials, hydrogel chambers, phase change materials, and an adaptive HVAC system, which were evaluated through thermal simulation modeling [7].

III. SECONDARY DATA

Biomimetic adaptive façades are a new approach to sustainable architecture that addresses modern buildings' major energy efficiency problem by drawing inspiration from natural systems. Such innovative ideas improve environmental and urban livability while reducing energy consumption by mimicking biological processes. The increasing need for "green" buildings has revealed creative strategies to control environmental damage while promoting energy efficiency. The modern performance-based challenges addressed by biomimetic adaptive façades-with inspirations from natural strategies of adaptation-make them a true innovation, which redesigns the facade to become nothing more than a continuation of the sensibility between practicality and environmental maintenance by protecting fundamental principles like natural ventilation, thermal regulation, and energy efficiency. The case studies presented here illustrate the potential of a biomimetic adaptive façade to alter architectural design in conserving energy, perfecting indoor environmental conditions, and assisting with generally complex tasks of sustainable global policy. It outlines the implications of such façades in contemporary design through discussions about their advantages, applications, and foundational principles.

A. Case Study 1: 30 St Mary Axe, 'The Gherkin', London, UK

The St. Mary Axe building is designed with continuing environmental development. Its absolute pace and commitment to environmentally sensitive performance well represent these objectives. The building is estimated to consume 50 per cent less energy than a conventional luxury office building that is air-conditioned due to an array of ecological solutions. Fresh air in the building is ensured through spiralling light wells for natural ventilation within the workspace, thus reducing the dependency on artificial heating and cooling. The configuration of the building and the inclusion of light wells augment the provision of natural lighting, reduce dependence on artificial lighting, and provide scenic views from within the bowels of the structure. The balconies along the edge of each light well enable powerful visual relations between the floors while at the same time delineating attention for the collective office zones. The characteristic spiral elements, composed of grey glazing, articulate the interior atria of the building from the exterior. [8]



Fig 1 : The Gherkin, London Source : P. Pintos, 2019 [8]

1) Facade Design

The cladding on the outside comprises 5,500 flat triangular and diamond-shaped glass panes, differing at each level. The glazed units forming the areas of offices are separated by a solar-control blind-fixed central ventilated space from a double-glazed outer layer and a single-glazed inner screen.

The exhaust air from the offices was used to ventilate the cavities, which served as buffer zones that supposedly reduced the need for supplemental heating and cooling. Glazing for the light-wells on each tower's elevations is formed using operable double-glazed panels of grey-tinted glass combined with a high-efficiency solar gain-reducing coating.[8] These spaces function as the "lungs" of the structure, facilitating fresh air circulation through the facade's operable panels.

This approach reduces the building's reliance on air conditioning when integrated with additional sustainable practices. It consumes only fifty per cent of the energy typically used by an office tower with conventional air conditioning systems. Environmental design contributes to a reduction of 25% in CO₂ emissions.[9]

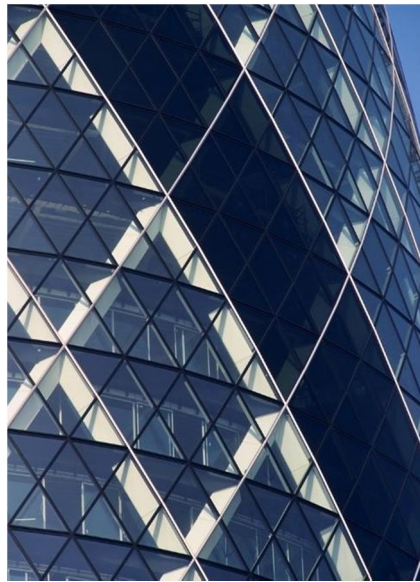


Fig 2: Glass Façade of The Gherkins Source : P. Pintos, 2019 [8]

B. Case Study 2: Eastgate centre – Harare, Zimbabwe Introduction

The Eastgate Centre is one of the innovative architectural designs that are environmentally sustainable. It is located in the central part of Harare, Zimbabwe. This famous building, which elegantly blends ecological sustainability with functionality, symbolises ecologically friendly construction practices. This paper thoroughly examines the intricate details of the Eastgate Centre's interior design, architecture, and urban planning, where biomimicry usage stands out uniquely. This Eastgate Center design is a method known as biomimicry that is inspired by natural elements. Biomimicry is the approach of achieving complex human challenges by emulating natural systems and processes. The architects of Eastgate found inspiration in termite mounds. Termites build mounds that maintain a steady warmth despite exterior temperatures. Furthermore, Eastgate includes a passive cooling system, which lessens its use of conventional air conditioning mechanisms.[10]

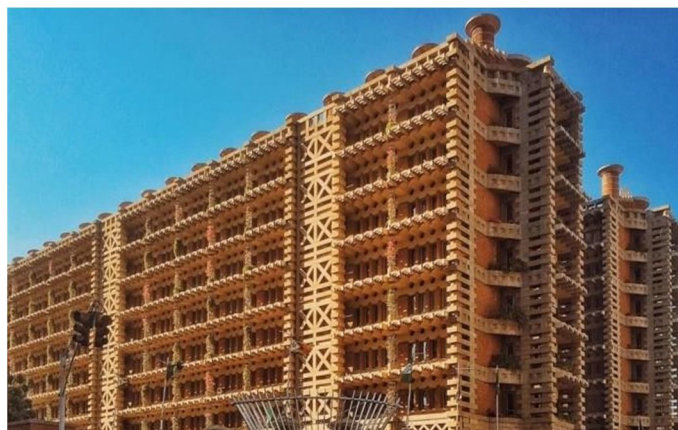


Fig 3: Eastgate Centre, Zimbabwe Source : K. Ansari, 2022 [11]

1) Facade Design

Eastgate's commitment to sustainability is also reflected on the exterior of the building. Contributing an aesthetic quality and use of local materials would also mean that the structure's carbon footprint is reduced. The facade design focuses on the balance of form and function through shading elements that facilitate the passive cooling system of the building.[10] The weak rays of the winter sun were permitted to mildly warm up the interior, while the intense rays of the summer sun were shielded by large eaves characteristic of Africa. In addition, big overhangs of precast concrete and the adjustable bindings of windows regulate light entry into the room. Furthermore, by increasing the external surface area, projecting stone parts reduces daytime heat input and enhances nighttime heat loss. Precast concrete serves as a cover material that exposes the underlying granite aggregate to mimic boulders covered in lichen common in this region's wild, rude landscape.[11]



Fig 4: Eastgate Centre's façade shading strategy Source : ARUP, "Eastgate," *Arup.com*, 2024 [14]

C. Case Study 3: Shanghai tower, China Introduction

This is one of the most significant financial hubs in East Asia: the Shanghai Tower. It's located in Pudong's Lujiazui district. The tower began construction in 2009. Gensler Architects designed it. What made a slice of the Lujiazui skyline made Shanghai a favourite for landmarks has been taken to another level with this tower. In total, it has 127 storeys. Rather than spreading all over the city horizontally, the project reconfigures the public gathering spaces vertically within the tower.[12]



Fig 5 : The Shanghai Tower next to SWFC and Jin Mao Tower Source : A.Khan, 2021 [12]

1) Facade Design

The Shanghai Tower incorporates double-skin facade technology with innovative applications: an external glass layer and an internal curtain wall with better energy efficiency. This methodology decreases heat transfer, encourages natural ventilation, and consequently reduces the dependency of the building on the mechanical system.[12] Aerodynamic twisting designs on the tower reduce wind loads by up to 24%, saving energy and materials at the construction stage. Intensified shading systems and louvers prevent building envelope overheating. The translucent outer surface of the facade will maximize daylight penetration, thereby reducing dependency on artificial lighting.

Also, the low-emissivity (low-E) glass makes light pass through it while reflecting thermal energy, thus providing an excellent insulator for thermal that conserves comfortable temperatures indoors and reduces energy use for heating and cooling.[13]



Fig 6 : The Exterior Skin of Shanghai Tower Source : S.Jain, 2022 [13]

IV. CONCLUSION

Biomimetic adaptive façades are revolutionizing the way energy-efficient buildings are conceptualized by looking into nature for inspiration. The Eastgate Centre in Harare is an example of a design based on termite mounds. It achieves natural methods of managing airflow and temperature, thereby lowering artificial cooling and energy use to a very substantial degree. This passive-cooling method saves money and the environment without losing effectiveness.

Like this, London's 30 St. Mary Axe reduces the requirement for energy-heavy equipment as spiral atria work as natural ventilators. The aerodynamic, streamlined shapes cut wind resistance and allow an increased harmony with the environment, resulting in much more efficiency in buildings. This building stands out with its possibility of showing where sustainability and practicality meet in architecture inspired by nature.

Like natural protective layers, the double skin of the Shanghai Tower allows natural light in and keeps the heat out. It would reduce the energy used in air conditioning and lighting. Its aerodynamic shape will help the environment by using less material and more in resisting wind. The skyscraper deals with practical or environmental problems while showing that biomimetic ideas work well in large city projects.

The following examples demonstrate how biomimicry may assist in achieving ecological goals within modern architectural requirements and allow entry into a sustainable and energy-efficient building trend within cities.

REFERENCES

- [1] R. Sidhu and V. Singh, "Biomimicry for Developing Energy Efficient Facades." Accessed: Nov. 25, 2024. [Online]. Available: https://ijirt.org/publishedpaper/IJIRT151150_PAPER.pdf
- [2] Deyaa, Wijdan & Jalil, Wijdan Deyaa Abdul. (2016). The Application of Biomimicry in Kinetic Facades. *engineering*, 22. 10.31026/j.eng.2016.10.08.
- [3] "Energy-Efficient facade and biomimicry in architecture," <https://dergipark.org.tr/en/download/article-file/1307381>, 2016. <https://dergipark.org.tr/en/download/article-file/1307381> (accessed Nov. 26, 2024).
- [4] N. P. R. Garcia, "The Influence of the Concepts of Biophilia and Biomimicry in Contemporary Architecture," *Journal of Civil Engineering and Architecture*, vol. 11, no. 5, May 2017, doi: 10.17265/1934- 7359/2017.05.010.
- [5] J. Gargasas, K. Baziene, P. Dzienis, Vilnius Gediminas Technical University, and Bialystok University of Technology, "LOW ENERGY BUILDINGS: MULTIFUNCTIONAL STRATEGIES AND SOLUTIONS," *journal-article*, Dec. 2023. [Online]. Available: https://pdfs.semanticscholar.org/8b94/4e044affba70a2370bb76d3551d809ed740d.pdf?_gl=1*1cf5ni1*_gcl_au*MTgzMzc4MDY2Mi4xNzI4OTE5Nzg1*_ga*NTMyNTg2MDg1LjE3Mjg5MTk3ODU*_ga_H7P4ZT52H5*M TczMjU4MjM2Ni4zLjEuMTczMjU4NDUxNi41OS4wLjA.
- [6] A. Carpi and C. A. Brebbia, *Design and Nature : Comparing Design in Nature with Science and Engineering*. 2002. [Online]. Available: <http://ci.nii.ac.jp/ncid/BA58820105>



- [7] R. Hyde, "Refining the principles of passive design," *Architectural Science Review*, vol. 60, no. 5, pp. 357– 359, Aug. 2017, doi: 10.1080/00038628.2017.1368165.
- [8] P. Pintos, "30 St Mary Axe Tower / Foster + Partners," *ArchDaily*, Nov. 12, 2019. <https://www.archdaily.com/928285/30-st-mary-axe-tower-foster-plus-partners>
- [9] "30 St Mary Axe, London, UK," *Urban Systems Design | MEP & Environmental Engineers*. <https://www.urbansystems.design/30-st-mary-axe-london-uk>
- [10] R. T. Future, "Eastgate Center, Zimbabwe: A Marvel of Sustainable Architecture," *RTF | Rethinking The Future*, Jan. 02, 2024. https://www.re-thinkingthefuture.com/articles/eastgate-center-zimbabwe/#google_vignette
- [11] K. Ansari, "Biomimicry Architecture: Eastgate centre - Harare, Zimbabwe -," *archEstudy*, Aug. 17, 2022. <https://archestudy.com/biomimicry-architecture-eastgate-center-harare-zimbabwe/>
- [12] A. Khan, "Sustainably advanced tall building: Shanghai tower, China. - archEstudy," *archEstudy*, Aug. 23, 2021. <https://archestudy.com/sustainably-advanced-tall-building-shanghai-tower-china/#ultp-id-f56271d0>
- [13] S. Jain, "The Shanghai Towers by Gensler: China's tallest building," *RTF | Rethinking The Future*, Jun. 27, 2022. <https://www.re-thinkingthefuture.com/case-studies/a7139-the-shanghai-towers-by-gensler-chinas-tallest-building/>
- [14] ARUP, "Eastgate," *Arup.com*, 2024. <https://www.arup.com/projects/eastgate/>



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)