iJRASET
International Journal For Research in Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 13 **Issue:** IV **Month of publication:** April 2025

DOI: https://doi.org/10.22214/ijraset.2025.69624

www.ijraset.com

Call: 08813907089 | E-mail ID: ijraset@gmail.com

International Journal for Research in Applied Science & Engineering Technology (IJRASET)
ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538
Volume 13 Issue IV Apr 2025- Available at www.ijraset.com

Design and Fabrication of A Bicycle Frame Under Static Loading Conditions

Kandasamy Ragupathi[1], S Bharathiraja[2], R Karthikeyan[3], M Santhosh[4], S Suvithan[5]
[1]*Assistant Professor,* [2, 3, 4, 5] *UG Student, Department of Mechanical Engineering, Selvam College of Technology, Namakkal, Tamil Nādu, India*

Abstract: ***The design and fabrication of a bicycle frame require a careful balance between strength, weight, and durability to ensure optimal performance and safety. This study focuses on the structural analysis and manufacturing of a bicycle frame under static loading conditions. A detailed design process is carried out using computer-aided design (CAD) software, followed by finite element analysis (FEA) to evaluate stress distribution, deformation, and factor of safety under different loading scenarios. The material selection plays a crucial role in achieving a lightweight yet strong frame, with considerations given to aluminium alloys, carbon fibre, and steel. Based on analytical results, a prototype is fabricated using suitable manufacturing techniques, such as welding or brazing, to ensure structural integrity. Experimental validation is performed through static load testing to compare theoretical predictions with real-world performance. The results provide insights into the structural efficiency and reliability of the bicycle frame, contributing to advancements in bicycle engineering and material optimization.***
Keywords: Bicycle frame, Static loading, Finite Element Analysis, Material selection Structural integrity, Fabrication.

I. INTRODUCTION

Bicycle frames are critical components that dictate the overall performance, safety, and durability of a bicycle. The structural integrity of the frame is influenced by various factors such as material selection, geometry, and manufacturing techniques. This study aims to investigate the structural behaviour of a bicycle frame under static loading conditions using computational and experimental methods.

II. DESIGN METHODOLOGY

The bicycle frame is designed using computer-aided design (CAD) software to ensure an optimized structure. The design process includes defining the frame geometry, tube dimensions, and joint configurations.

A. CAD Modeling

The initial step involves creating a 3D model of the bicycle frame using industry standard CAD software. The frame design adheres to ergonomic and mechanical requirements to ensure rider comfort and stability.

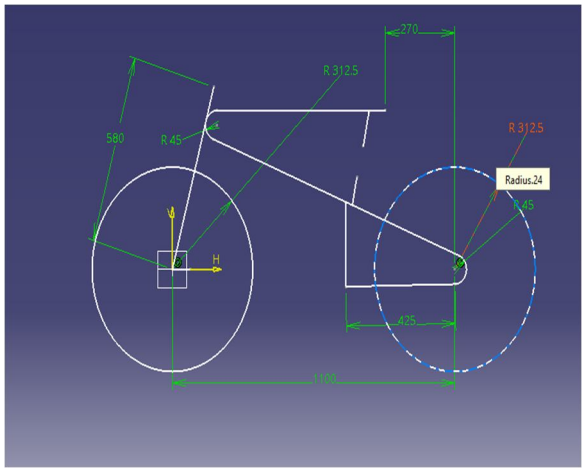


Fig No 2.1 2D Sketch of Bicycle Design

©IJRASET: All Rights are Reserved



Fig No 2.2 Bicycle 3D Draft

B. Material Selection

Material selection is crucial for achieving the desired strength-to-weight ratio. Commonly used materials include:

- Aluminium Alloys: Lightweight and corrosion-resistant, suitable for high-performance bicycles.
- Carbon Fiber: Provides superior strength-to-weight ratio but is expensive.
- Steel: Offers high durability and affordability but increases weight.

Properties	Values
Density(kg/mm^3)	7.85E-06
Poisson's Ratio	0.3
Elastic Modulus(MPa)	2.00E+05
Ultimate Tensile strength(MPa)	460
Bulk Modulus(MPa)	1.66E+05
Shear Modulus(Mpa)	76923
Coefficient of Thermal expansion(10^-5/°C)	1.20E+00
Reference Temperature (°C)	22

Table No 2.1 Properties of Structural steel

III. FINITE ELEMENT ANALYSIS (FEA)

Finite element analysis (FEA) is used to simulate the structural response of the bicycle frame under different static loading conditions. The analysis provides insights into stress distribution, deformation, and safety factors.

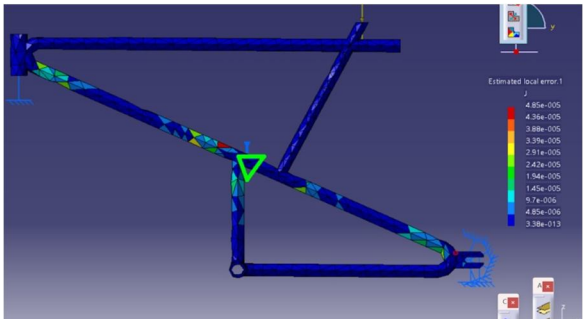


Fig No 3.1 Finite Element Analysis

A. *Loading Scenarios*

The frame is analyzed under various static loads, including:

- Rider weight distribution.
- Braking forces.
- Pedaling forces.

B. *Stress and Deformation Analysis*

The FEA results reveal critical stress points and deformation patterns, helping in refining the design to enhance durability and performance.

IV. FABRICATION PROCESS

Based on analytical findings, a prototype frame is fabricated using suitable manufacturing techniques such as welding or brazing to ensure structural integrity.

A. *Welding and Brazing*

The joining method depends on the selected material:

- Aluminium Frames: TIG welding is used to ensure strong and lightweight joints.
- Steel Frames: Brazing provides reliable connections with enhanced fatigue resistance.



Fig No 4.1 Welding

V. EXPERIMENTAL VALIDATION

The fabricated prototype undergoes static load testing to validate the theoretical predictions obtained from FEA. The experimental setup includes:

- Load application at critical stress points.
- Measurement of deflection and strain using strain gauges.
- Comparison with simulated results to evaluate discrepancies.



Fig No 5.1 U Turn Test

ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538
Volume 13 Issue IV Apr 2025- Available at www.ijraset.com

The "U-turn test" in bicycle testing is typically used to assess a bike's handling, stability, and maneuverability. A U-turn is a sharp turn in the road, and testing how well a bike can handle this maneuver helps understand how responsive it is when making tight turns.

- Rider Comfort and Control
- Manoeuvrability
- Stability and Balance
- Geometry and Frame Design



Fig No 5.2 Bump Test

The "Bump test" in bicycle testing is typically used to evaluate how well a bike's suspension system (especially on mountain bikes or other bikes with shock absorbers) handles different terrains and conditions. It primarily focuses on how the bike responds to small bumps and how effectively it absorbs shock without losing performance or comfort.

- Suspension Performance:
- Efficiency and Comfort
- Durability and Maintenance

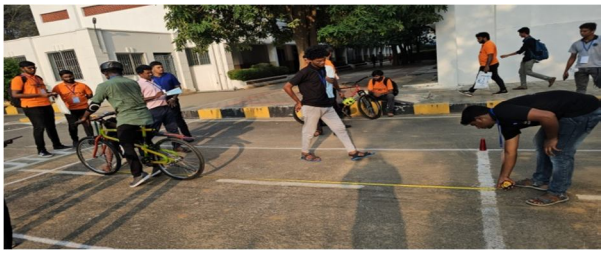


Fig No 5.3 Break Test

The "brake test" in bicycle testing is crucial for ensuring that the bike's braking system is functioning properly, safely, and effectively. Brakes are one of the most important safety features on a bicycle, so this test is designed to evaluate their performance in various conditions.

- Safety
- Brake Performance Evaluation
- Brake Wear and Durability
- Adjustment and Maintenance



Fig No 5.4 Pedal Stroke Test

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538
Volume 13 Issue IV Apr 2025- Available at www.ijraset.com

The pedal stroke test in bicycle testing is used to evaluate the efficiency, smoothness, and overall performance of a bike's drivetrain, especially when it comes to pedaling. This test involves assessing how the bike performs while the rider applies pressure to the pedals in a full stroke (from the downstroke to the upstroke).

- Smoothness of Pedalling
- Power Transfer Efficiency
- Crank and Pedal Alignment
- Pedal Stroke Symmetry



Fig No 5.5 Weight Test

The weight test in bicycle testing is used to assess and measure the overall weight of a bike, which can have significant effects on its performance, handling, and comfort.

- Performance and Speed
- Comfort and Ride Quality
- Material and Design Evaluation
- Comparison and Market Positioning



Fig No 5.6 Slow Cycle Test

The slow cycle test in bicycle testing is used to assess a bike's stability, handling, and overall performance at low speeds. It is particularly useful for evaluating how well a bike behaves when the rider is cycling slowly or navigating tight spaces.

- Stability at Low Speeds
- Maneuverability in Tight Spaces
- Comfort at Low Speeds
- Control Over Pedaling and Braking

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

VI. RESULTS AND DISCUSSION

The experimental results confirm the reliability of the FEA model, with minor deviations attributed to material imperfections and fabrication tolerances. The frame demonstrates adequate strength and rigidity under operational loads.

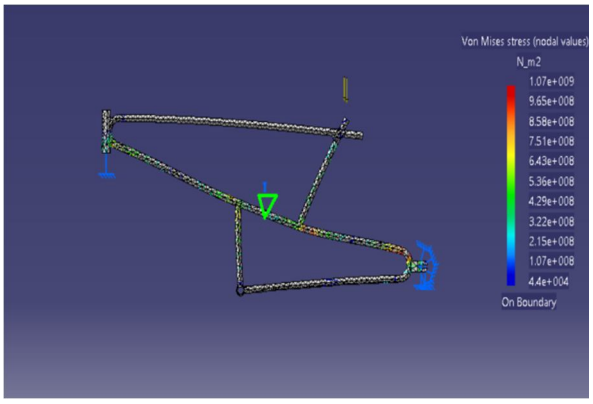


Fig No 6.1 Static Case Solution Von Mises stress


The maximum Von-Mises stress generated in the frame is 3479 Pa.
The minimum Von-Mises stress generated in the frame is 4.309E+007 P

VII. CONCLUSION

This study presents a systematic approach to designing, analyzing, and fabricating a bicycle frame. The combination of CAD modeling, FEA, and experimental validation ensures an optimized design with enhanced structural efficiency. Future work may focus on dynamic loading conditions and fatigue analysis to further improve frame performance

REFERENCES

[1] Rishabh. S. Khobragade [1], Sanket Moriya [2], Design and Fabrication of SUPRA [F1] Vehicle, International Research Journal of Engineering and Technology, 5(9), 2018, 798- 808
[2] Rahul J P and Kishor P K 2016 Vibrational Analysis of Bicycle Chassis 3 136-14
[3] Barve, D. S. (March 2016). Design and Development of Solar Hybrid Bicycle. International Journal of Current Engineering and Technology, 378,379.
[4] Prof. Palak Desai, P. D. (June 2016). Design and Fabrication of Solar Tri Cycle. International Journal of Engineering Sciences & Research, 664.
[5] Abagnalea C, Cardoneb M, Iodicea P, Marialtoc R, Stranoa S, Terzoa M, Vorraroabc G., Design and Development of an Innovative E-Bike. Energy Procedia, 101, 2016, 774-781.
[6] Design, Analysis and Optimization of Chassis for an Electric Vehicle January 2016 Abdulkadir Yasar Cukurova University Emre Koca Durmus Ali Bircan Cukurova University
[7] Ashish Powar, Hrishikesh Joshi, Sanket Khuley and Yesane DP. Analysis and Topological Optimization of Motorcycle Swing-Arm. International Journal of Current Engineering and Technology, Special Issue-6, 2016, 270-274.
[8] Ifeanyichukwu U. Onyenanu, Swift ONK, Atanmo PN, Design and Analysis of a Tubular Space Frame Chassis for FSAE Application, Journal of Emerging Technologies and Innovative Research, 2 (10), 2015, 497 -201.
[9] Pardeshi S and Desle P 2014 Design and Development of Effective Low Weight Racing Bicycle Frame 3 18215-21
[10] Pazare M V and Khamankar S D 2014 Stress Analysis of Bicycle Frame 6 287-294
[11] Srijan Manish, Jitendra Kumar Rajak, Vishnu Kant Tiwari and Rakesh, Quad Bike Design and Simulation: A Premanufacturing Methodology, International Journal of Advanced Research in Engineering and Technology (IJARET)Volume 5, Issue 6, June (2014), pp. 6876
[12] Dr. Kirpal Singh, Automobile engineering Vol. 2 by Standard publication, Delhi 13th edition 2014.
[13] Suraj Kumar1, Ravi Girgoswami2, Abhishek Shukla3, Pranit Shinde4, Mr. N.T. Rathod5, ISB&M College of Engineering, Pune, India
[14] Dr. Kirpal Singh, Automobile engineering Vol. 1 by 13th edition 2012, Standard publication, Delhi 13th edition 2013.
[15] Aikenhead, G. S. (2011). Bicycle Applications for Onboard Solar Power Generation. 9,10
[16] Champoux Y, Richard S and Drouet J M 2007 Bicycle structural dynamics Sound and Vibration 41 16-24
[17] Sagar Pardeshi1, Pankaj Desle 2, Design and Development of Effective Low Weight Racing Bicycle Frame, International Journal of Innovative Research in Science, Engineering and Technology, 3(12), 2014, 18215 - 18221
[18] Ujjal Kalita, Yenduru Surya Teja, Darisi Sri Veera Venkata Manikanta., Design and Analysis of Go-Kart Chassis, International Journal of Engineering Development and Research, 6(2), 2018, 290-295.
[19] Galvin P and Morkel A 2001 The Case of the World the Effect of Product Bicycle Industry 8 31– 47

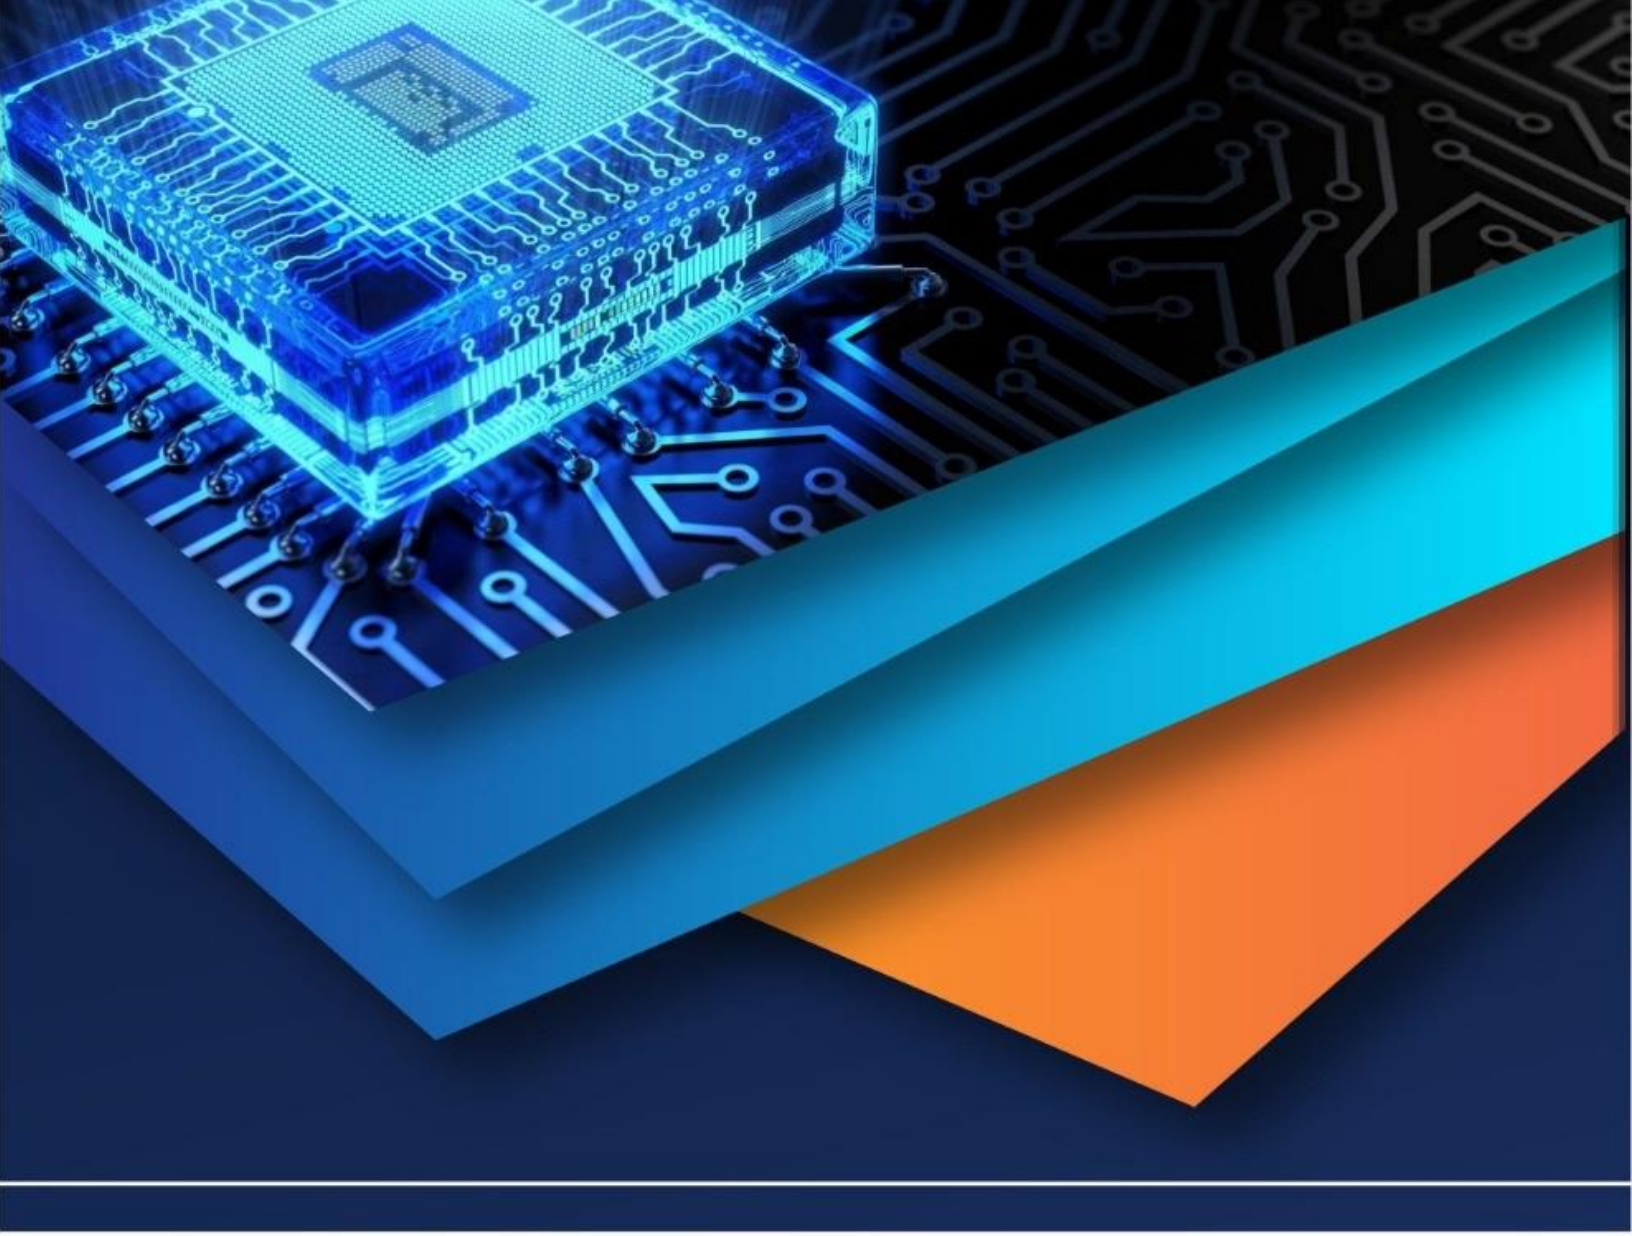

10.22214/IJRASET

45.98

IMPACT FACTOR: 7.129

IMPACT FACTOR: 7.429

INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089 (24*7 Support on Whatsapp)