iJRASET
International Journal For Research in Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 14 **Issue:** III **Month of publication:** March 2026

DOI: https://doi.org/10.22214/ijraset.2026.77922

www.ijraset.com

Call: 08813907089 | E-mail ID: ijraset@gmail.com

International Journal for Research in Applied Science & Engineering Technology (IJRASET)
ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538
Volume 14 Issue III Mar 2026- Available at www.ijraset.com

Design and Implementation of a Wi-Fi Controlled Multi- Functional Agricultural Robot for Precision Farming

Anamika Gajanan Ingole[1], Dr. A. S. Telang[2], Anurag R. Totare[3], Anshul S. Pote[4], Kartika B. Bhokse[5], Dhanashri D. Lajurkar[6], Shweta Jawanjal[7]

[2]*Professor, Department of Electrical Engineering, Amravati, M.S, India*
[1, 3, 4, 5, 6, 7]*UG Students, Department of Electrical Engineering, Amravati, M.S, India*
P. R. Pote Patil College of Engineering & Management, Amravati, M.S, India

Abstract: ***The rapid advancement of embedded systems and wireless communication technologies has enabled significant progress in agricultural automation. This paper presents the design and development of a Wi- Fi controlled smart agricultural robot based on the ESP32 microcontroller. The proposed system integrates multiple farming operations including ploughing, seed sowing, irrigation, and grass cutting into a single automated platform. The ESP32 serves as the central processing unit, managing motion control, actuator operation, and wireless communication with a mobile-based control interface. The system is designed to reduce human labor, improve operational efficiency, and provide a cost-effective solution for small and medium-scale agricultural applications. Experimental evaluation of the prototype demonstrates stable communication, reliable actuator control, and effective multi-tasking capability under practical field conditions.***

Keywords: Smart Agriculture, ESP32, Agricultural Robot, Wireless Control, Seed Sowing System, Irrigation Automation, Embedded Systems

I. INTRODUCTION

Agriculture remains one of the most essential sectors contributing to economic stability and food security worldwide. However, traditional farming methods are labor-intensive, time-consuming, and often inefficient. With the growing demand for increased productivity and reduced operational cost, automation in agriculture has become increasingly important. The integration of embedded systems and wireless technologies offers a practical solution to modern agricultural challenges.

The ESP32 microcontroller has emerged as a powerful and versatile platform for IoT-based applications due to its integrated Wi-Fi capabilities, high processing speed, and multiple input-output interfaces. Utilizing these features, this work proposes a multi-functional agricultural robot capable of performing essential farming operations through wireless control. The system enables farmers to operate various tools remotely using a mobile interface, thereby enhancing convenience and reducing physical effort.

The primary objective of this research is to develop a compact, efficient, and user-friendly agricultural robot that can execute ploughing, seed sowing, irrigation, and grass cutting operations using a single embedded controller.

II. SYSTEM ARCHITECTURE

The overall architecture of the proposed system is centered around the ESP32 microcontroller, which functions as the primary control unit. The system consists of locomotion motors for movement, servo motors for positional control of agricultural tools, relay modules for switching high-power loads, and DC motors for seed dispensing and grass cutting mechanisms.

The ESP32 establishes Wi-Fi communication with a mobile-based control application. Upon receiving commands from the user, the controller processes the inputs and activates the respective actuators. Motor driver circuits are used to control the direction and speed of the movement motors, while relay modules provide electrical isolation and switching capability for higher power devices such as the irrigation pump and cutting blade motor.

The modular architecture ensures that each agricultural function operates independently while being coordinated through a centralized control mechanism. The overall system architecture of the proposed Wi-Fi enabled agricultural robot is illustrated in Fig. 1.

©IJRASET: All Rights are Reserved

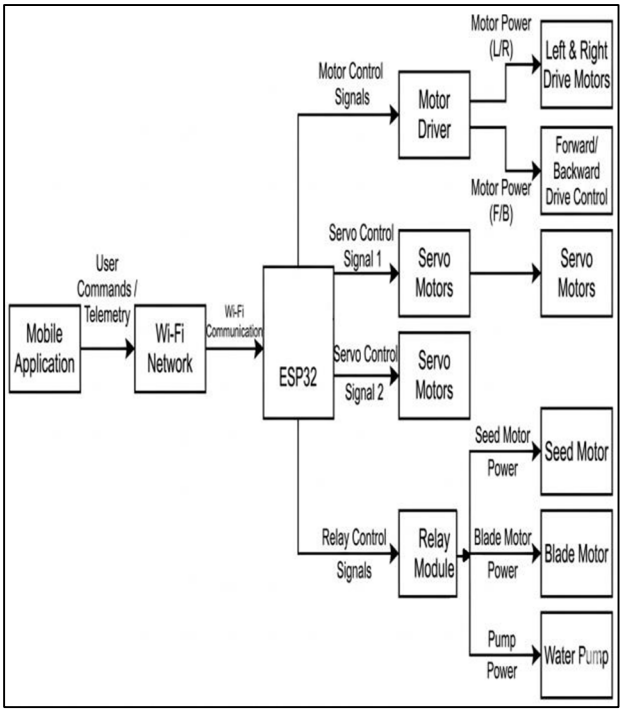


Fig.1: Block diagram of the proposed ESP-32 based smart agricultural robot system

III. HARDWARE DESIGN AND IMPLEMENTATION

The hardware architecture of the proposed smart agricultural robot is designed to integrate mechanical subsystems with embedded control electronics in a compact and modular configuration. The system is structured to perform multiple agricultural tasks while maintaining electrical safety, operational reliability, and ease of maintenance.

At the core of the hardware design is the ESP32 microcontroller, which functions as the central processing and communication unit. The ESP32 was selected due to its dual-core processing capability, integrated Wi-Fi module, multiple General Purpose Input Output (GPIO) pins, and PWM support for motor control applications. Its high processing speed ensures real-time command execution without noticeable latency. The locomotion subsystem consists of high-torque DC motors mounted on a wheeled chassis structure. These motors are interfaced with the ESP32 through a motor driver module capable of handling bidirectional current flow. The motor driver enables directional control (forward, backward, left, and right) by altering the polarity of the voltage applied to the DC motors. This arrangement allows the robot to navigate across agricultural terrain with stability and controlled speed. The mechanical frame is designed to maintain balance even when additional tool mechanisms are engaged. The ploughing mechanism is implemented using a servo motor to provide controlled angular displacement of the plough arm. The servo motor receives PWM signals from the ESP32, allowing precise control over the plough depth. The ability to adjust the plough position enhances soil preparation efficiency and ensures adaptability to different soil conditions. The mechanical linkage between the servo and plough is designed to convert rotational motion into vertical displacement effectively. The seed sowing mechanism incorporates a DC motor-driven rotating seed dispensing system. This mechanism ensures uniform seed distribution by controlling the rotational speed and activation duration of the motor. The motor is connected to a relay module that isolates the high-current path from the microcontroller circuitry. When activated, the motor rotates the seed dispensing shaft, allowing seeds to fall through calibrated openings. The structural design ensures consistent spacing between seeds, which is critical for crop growth optimization.

The grass cutting subsystem includes a high-speed DC motor attached to a cutting blade assembly. The blade motor is also controlled via a relay module to ensure electrical isolation and safe operation. In addition, a servo motor is used to adjust the height of the cutting arm, allowing the system to adapt to varying grass lengths. The integration of adjustable cutting height enhances precision and prevents unnecessary energy consumption.

The irrigation mechanism utilizes a DC water pump capable of delivering controlled water flow to crops. The pump is switched using a relay module controlled by the ESP32. This configuration ensures that high-current loads are electrically isolated from the logic circuitry. The pump operation can be activated remotely through the Wi-Fi interface, enabling timely irrigation without manual intervention.

ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538
Volume 14 Issue III Mar 2026- Available at www.ijraset.com

Overall, the hardware design emphasizes modularity, scalability, and operational safety. Each subsystem operates independently while being centrally coordinated by the ESP32, enabling efficient multi-functional agricultural operations.

Table 1: Major Hardware Components Used in the Proposed System

Component	Quantity	Function
ESP32 Microcontroller	2	Central control unit with Wi-Fi capability
DC Motors	2	Robot locomotion
Servo Motors	2	Plough and grass cutting arm control
Relay Module (4-Channel)	1	Switching high-power devices
DC Motor (Seed Mechanism)	1	Seed dispensing
DC Motor (Blade)	1	Grass cutting
Water Pump	1	Irrigation system
Motor Driver Module	1	Direction and speed control of DC motors
Chassis with Wheels	1	Mechanical support and movement

The program structure is optimized to minimize delay functions and blocking code segments, ensuring real-time responsiveness. Error-handling routines are incorporated to manage communication interruptions and reconnection attempts automatically.

IV. SOFTWARE DESIGN AND CONTROL ALGORITHM

The software implementation of the proposed system is developed using the Arduino development environment, leveraging the ESP32 Wi-Fi libraries and GPIO control functions. The firmware architecture follows a structured programming model that ensures responsiveness, reliability, and efficient multitasking.

Upon initialization, the ESP32 establishes a secure connection with the predefined Wi-Fi network. Once connected, it continuously listens for control commands transmitted through the mobile-based interface. The system operates using an event-driven programming approach, where specific actions are executed upon receiving corresponding user inputs.

Motor control algorithms are implemented to regulate the locomotion subsystem. The direction of movement is controlled by manipulating digital output signals to the motor driver inputs. Conditional logic structures ensure that conflicting commands (such as forward and backward simultaneously) are prevented, thereby enhancing operational safety.

Servo motors are controlled using Pulse Width Modulation (PWM) signals generated by the ESP32. The duty cycle of the PWM signal determines the angular displacement of the servo shaft. By varying the pulse width within specified limits, precise positioning of the plough and grass cutting arms is achieved.

Relay control logic is implemented using digital output pins. When a specific command is received, the ESP32 triggers the corresponding relay channel to activate the connected DC motor or pump. The software ensures that relay activation states are maintained until a stop command is received, allowing continuous operation when required.

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

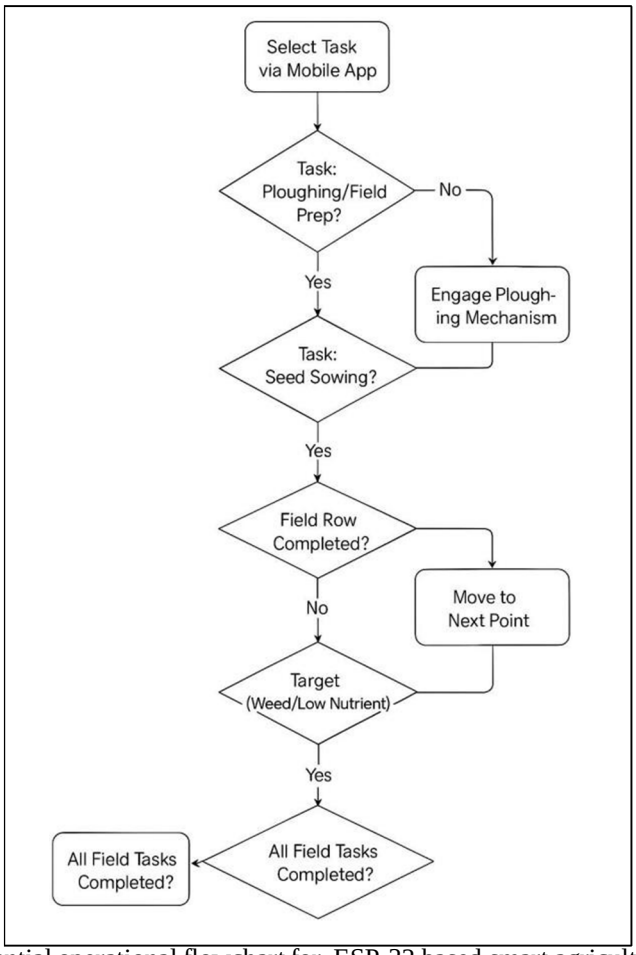


Fig. 2: Sequential operational flowchart for ESP-32 based smart agricultural robot system

V. WORKING PRINCIPLE

The working principle of the proposed agricultural robot is based on wireless command execution and centralized actuator coordination. Once powered on, the ESP32 initializes its internal peripherals and connects to the configured wireless network. After successful network authentication, the system enters a standby mode awaiting user instructions.

When a movement command is transmitted from the mobile interface, the ESP32 processes the instruction and activates the motor driver accordingly. The DC motors rotate in the desired direction, enabling the robot to move across the field.

For ploughing operations, the servo motor adjusts the plough arm downward to engage the soil. The controlled angular displacement ensures consistent plough depth. During seed sowing, the dispensing motor is activated through the relay module, allowing seeds to be released in a regulated manner.

Grass cutting is achieved by simultaneously adjusting the cutting arm height and activating the blade motor. The irrigation function is executed by switching on the water pump via relay control. Each subsystem operates independently yet harmoniously under the coordination of the central controller.

The integrated approach ensures efficient execution of multiple farming tasks within a single robotic platform.

VI. EXPERIMENTAL RESULTS AND PERFORMANCE EVALUATION

The developed prototype was subjected to practical testing under simulated agricultural conditions to evaluate operational reliability and performance efficiency. The evaluation focused on communication stability, actuator responsiveness, mechanical performance, and overall system integration.

During testing, the ESP32 maintained a stable Wi-Fi connection within the operational range. Command transmission latency was minimal, demonstrating effective real-time control. The locomotion system exhibited stable directional movement across uneven surfaces, indicating adequate torque and chassis stability.

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

The ploughing mechanism demonstrated accurate depth control, and the servo maintained consistent positioning without significant deviation. The seed dispensing system achieved relatively uniform seed distribution during multiple trials. Minor variations were observed due to mechanical tolerance, which can be optimized in future designs.

The grass cutting mechanism operated efficiently, and the adjustable cutting height feature improved operational precision. The irrigation pump delivered consistent water flow when activated, confirming reliable relay switching performance.

Overall, the experimental results validate the feasibility and effectiveness of the proposed smart agricultural robot.

Table 2: Technical Specifications of the Proposed Robot

Parameter	Specification
Controller	ESP32
Communication	Wi-Fi (2.4 GHz)
Operating Voltage	12V System
Control Interface	Mobile Application
Actuator Type	DC Motors and Servo Motors
Maximum Speed	0.8 – 1 m/s (approx.)
Operating Range	Within Wi-Fi coverage area
Functional Operations	Ploughing, Seed Sowing, Irrigation, Grass Cutting

VII. ADVANTAGES

1) Reduction in Human Labor and Physical Effort: The proposed agricultural robot significantly reduces the dependence on manual labor for repetitive and physically demanding farming tasks such as ploughing, seed sowing, irrigation, and grass cutting. Traditional farming practices require continuous human supervision and physical exertion, especially in large fields. By automating these processes, the system minimizes fatigue and improves overall productivity. This is particularly beneficial in rural regions facing labor shortages.
2) Wireless Remote Operation: The integration of Wi-Fi communication through the ESP32 enables remote control of the robot via a mobile application. Farmers can operate the robot without being physically present in the field. This reduces exposure to harsh environmental conditions such as extreme heat and humidity. Remote accessibility also enables better time management and flexibility in farming operations.
3) Multi-Functional Integration in a Single Platform: Unlike conventional agricultural machines that perform only a single function, the proposed system integrates ploughing, seed sowing, irrigation, and grass cutting into one compact robotic unit. This reduces the need for multiple machines, lowering equipment costs and storage requirements. The modular architecture allows smooth switching between different operations.
4) Cost-Effective Solution for Small and Medium Farmers: Large-scale automated agricultural systems are often expensive and inaccessible to small-scale farmers. The proposed design uses affordable components such as ESP32, DC motors, servo motors, and relay modules, making it economically viable. The reduced operational cost increases its practical applicability in developing agricultural economies.
5) Modular and Scalable Design: The hardware architecture is modular, allowing easy replacement or upgrading of individual subsystems. Additional sensors, automation modules, or AI-based monitoring systems can be integrated without redesigning the entire system. This ensures long- term adaptability.
6) Improved Operational Precision: The use of servo motors and controlled actuation ensures precise plough depth and seed distribution. Accurate control improves crop spacing and soil preparation quality, which directly impacts agricultural yield.

VIII. DISADVANTAGES

1) Dependence on Stable Wi-Fi Connectivity: Since the system operates through wireless communication, unstable internet connectivity may affect performance. In remote rural areas where network coverage is weak, real-time control may experience delays or interruptions.

2) Limited Operational Coverage: The robot's operating range is limited to the Wi-Fi coverage area. Without network extenders or mesh systems, it may not function efficiently in very large agricultural fields.
3) Battery Dependency and Charging Requirements: The system relies on battery power for motors and control electronics. Continuous operation may drain the battery quickly, requiring periodic charging. This may limit uninterrupted working hours.
4) Semi-Automatic Nature: The proposed system is remotely controlled rather than fully autonomous. It requires user intervention for decision-making and navigation, which may limit efficiency compared to AI-based autonomous agricultural robots.
5) Mechanical Wear and Maintenance: Mechanical components such as cutting blades, plough arms, and motor shafts are subject to wear and tear due to continuous exposure to soil and debris. Regular maintenance is required to ensure long-term reliability.

IX. FUTURE SCOPE

1) Integration of Soil and Environmental Sensors: Future enhancements may include soil moisture sensors, temperature sensors, humidity sensors, and nutrient detection modules. This would enable automatic irrigation and smart decision-making based on real-time environmental data.
2) Autonomous Navigation Using GPS and Path Planning: Incorporating GPS modules and path- planning algorithms can enable fully autonomous field navigation. The robot could follow predefined coordinates without manual control, increasing operational efficiency.
3) Obstacle Detection and Avoidance System: Ultrasonic sensors or LiDAR modules can be integrated to detect obstacles such as stones, animals, or uneven terrain. This would improve safety and prevent mechanical damage.
4) Artificial Intelligence-Based Crop Monitoring: Machine learning algorithms can be implemented for plant disease detection and crop health analysis using camera modules. AI integration would enhance precision farming techniques.
5) Solar-Powered Energy Management: Adding solar panels to the robot can improve sustainability and reduce dependency on battery charging. Renewable energy integration would make the system more eco-friendly.
6) Cloud-Based Data **Analytics:** Integration with cloud platforms can enable real-time data storage, remote monitoring, and predictive analytics.

X. CONCLUSION

The proposed ESP32-based smart agricultural robot demonstrates a practical and cost-effective solution for modern farming challenges. By integrating ploughing, seed sowing, irrigation, and grass cutting functionalities into a single wireless-controlled platform, the system enhances operational efficiency while reducing manual labor requirements. The modular hardware design and Wi-Fi-based control architecture ensure flexibility, scalability, and ease of use.

Experimental evaluation confirms reliable performance, stable communication, and effective actuator control under simulated field conditions. Although certain limitations such as Wi-Fi dependency and semi-automatic operation exist, the system provides a strong foundation for future advancements in autonomous precision agriculture.

With further enhancements such as sensor integration, AI-based monitoring, and renewable energy support, the proposed system has significant potential to contribute to sustainable and smart farming practices.


REFERENCES

[1] J. A. Blackmore, B. Stout, M. Wang, and B. Runov, “Robotic agriculture – The future of agricultural mechanisation?” 5th European Conference on Precision Agriculture, pp. 621–628, 2005.
[2] S. Bechar and C. Vigneault, “Agricultural robots for field operations: Concepts and components,” Biosystems Engineering, vol. 149, pp. 94–111, 2016.
[3] Q. Zhang and F. Pierce, Agricultural Automation: Fundamentals and Practices, CRC Press, 2013.
[4] M. Bakker et al., “A vision-based row detection system for agricultural vehicles,” Computers and Electronics in Agriculture, vol. 89, pp. 31–40, 2012.
[5] R. Eaton, J. Katupitiya, K. S. Pathirana, and J. D. Meyer, “Autonomous farming: Modeling and control,” IEEE Robotics & Automation Magazine, vol. 15, no. 4, pp. 68–76, 2008.
[6] H. Hamuda, M. Glavin, and E. Jones, “A survey of image processing techniques for plant extraction,” Computers and Electronics in Agriculture, vol. 125, pp. 184–199, 2016.
[7] P. Corke et al., “Autonomous field robotics: Developing a robotic platform,” IEEE Robotics & Automation Magazine, vol. 14, no. 1, pp. 50–60, 2007.
[8] A. Roldán et al., “Multi-robot systems in agriculture,” Sensors, vol. 16, no. 7, pp. 1–22, 2016.
[9] T. Duckett et al., “Agricultural robotics: The future of robotic agriculture,” UK-RAS White Paper, 2018.
[10] L. Grimstad and P. From, “The Thorvald II agricultural robotic system,” Robotics, vol. 6, no. 4, 2017.
[11] Espressif Systems, “ESP32 Technical Reference Manual,” 2022.
[12] M. Kassim et al., “Development of smart irrigation system using IoT,” IEEE International Conference on Smart Sensors and Applications, 2017.
[13] R. Shamshiri et al., “Advances in greenhouse automation,” Information Processing in Agriculture, vol. 5, pp. 1–18, 2018.

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

[14] S. Wolfert et al., "Big data in smart farming," Agricultural Systems, vol. 153, pp. 69–80, 2017.
[15] Y. Chen et al., "Design of IoT-based agriculture monitoring system," IEEE Access, vol. 7, pp. 173– 182, 2019.
[16] J. Reid et al., "Precision agriculture and robotics integration," Journal of Field Robotics, vol. 25, no. 8, pp. 589–608, 2008.
[17] S. S. Mehta and K. P. Gohil, "Automation in agriculture using embedded systems," International Journal of Engineering Research, 2015.
[18] A. McBratney et al., "Future directions of precision agriculture," Precision Agriculture, vol. 6, pp. 7–23, 2005.
[19] B. Zhang et al., "Smart farming technologies," IEEE Internet of Things Journal, vol. 5, no. 4, pp. 1– 10, 2018.
[20] M. O. Olatunji and A. T. Oladimeji, "IoT-based smart farming system," International Journal of Advanced Computer Science, 2020.

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

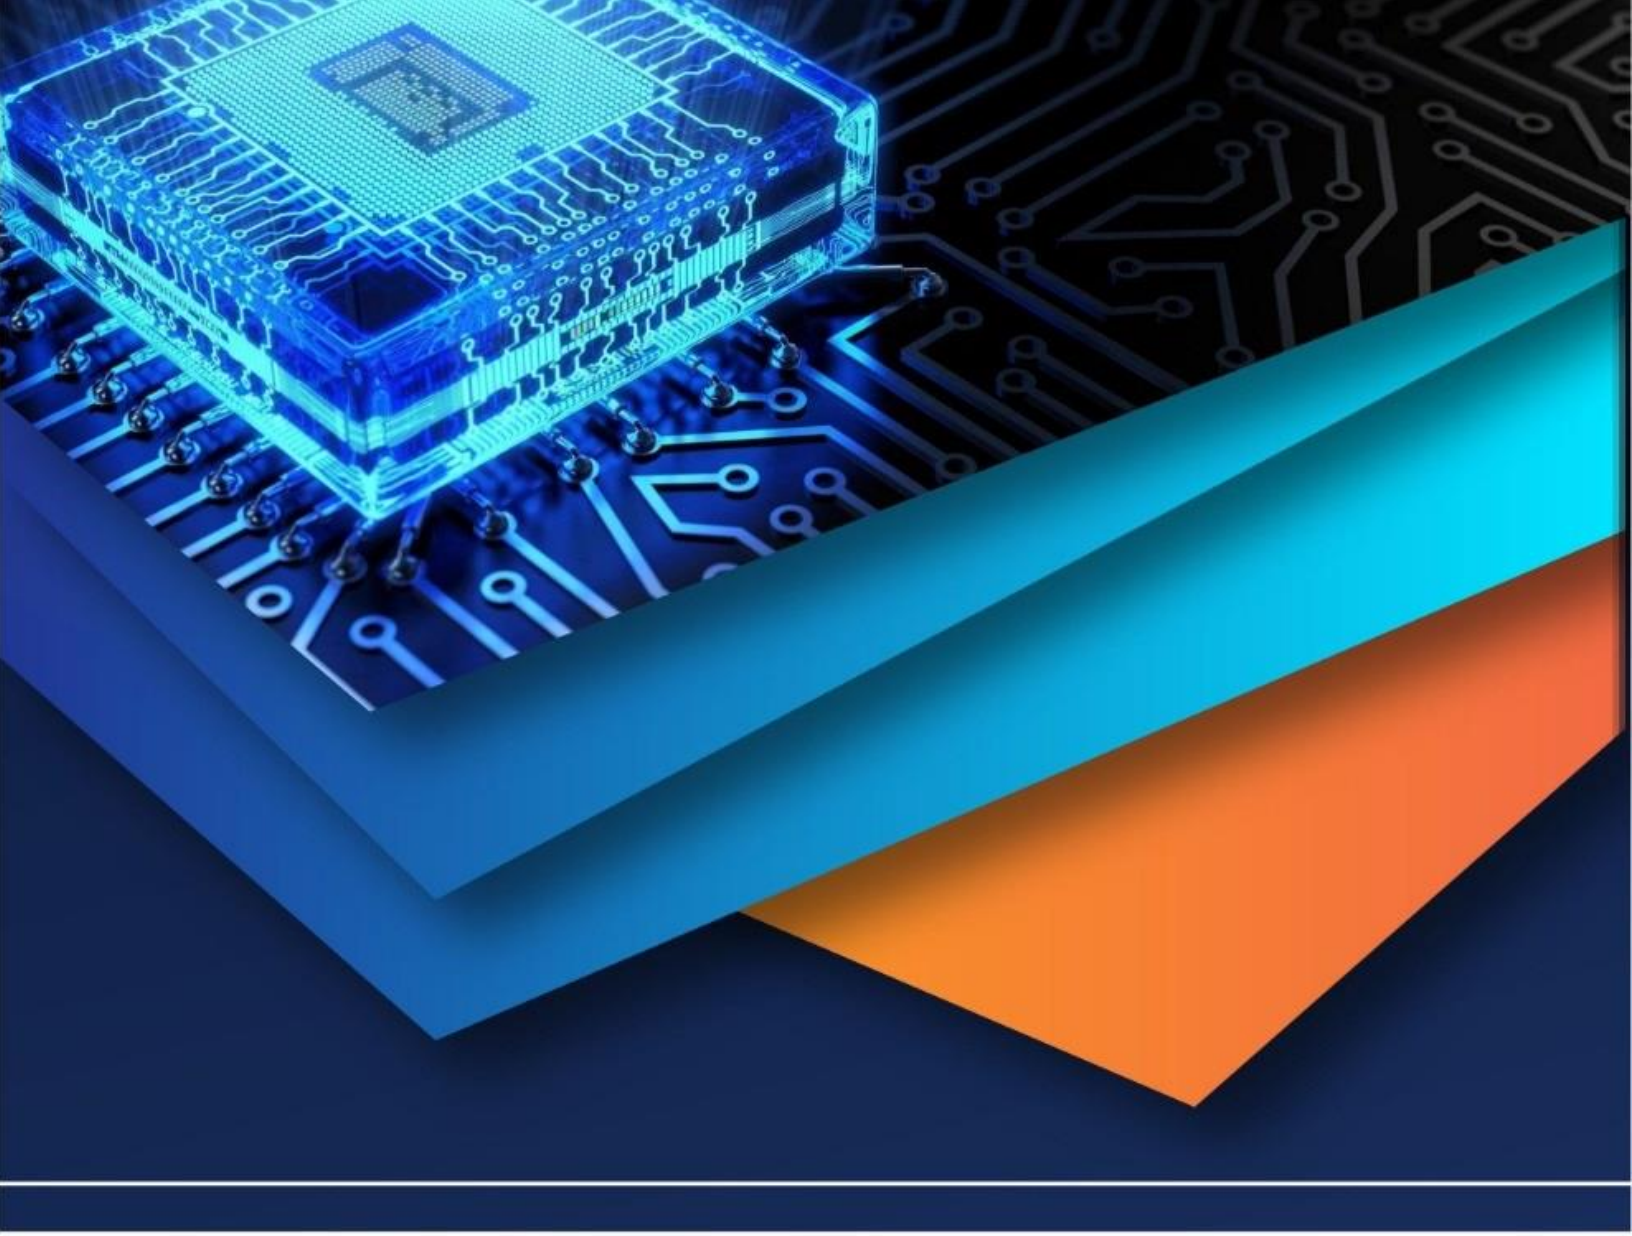

10.22214/IJRASET

45.98

IMPACT FACTOR: 7.129

IMPACT FACTOR: 7.429

INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089 (24*7 Support on Whatsapp)