



# IJRASET

International Journal For Research in  
Applied Science and Engineering Technology



---

# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume:** 14    **Issue:** V    **Month of publication:** May 2026

**DOI:** <https://doi.org/10.22214/ijraset.2026.81530>

[www.ijraset.com](http://www.ijraset.com)

Call:  08813907089

E-mail ID: [ijraset@gmail.com](mailto:ijraset@gmail.com)

# Design and Manufacture of Advanced Electric Bicycles with Speed Control Function and Battery Monitoring Mechanisms

Dr.A.S.Shirkande<sup>1</sup>, S.B.Dolase<sup>2</sup>, G.M.Mastud<sup>3</sup>, S.R.Deshmukh<sup>4</sup>, R.A.Dagade<sup>5</sup>  
E&TC Engineering Department S.B. Patil College of Engineering Indapur (MH),India

**Abstract:** *The Advanced Electric Cycle project focuses on designing and developing an efficient, eco-friendly, and cost-effective electric bicycle to reduce fuel dependency and environmental pollution. The system integrates a Brushless DC (BLDC) hub motor, motor controller, lithium-ion battery, throttle control, pedal assist sensor (PAS), and digital display unit to provide smooth and intelligent riding assistance. The cycle is designed to support a load of up to 100 kg with improved stability and performance. The BLDC hub motor ensures high efficiency, low noise operation, and reduced maintenance. A 36V battery system is used to provide sufficient power and extended travel range. The motor controller acts as the brain of the system, managing power flow, speed control, and safety features such as overload protection. The inclusion of pedal assist technology enhances energy efficiency by supplying power only when required. The developed system demonstrates reliable performance, reduced carbon emissions, and economical operation compared to conventional fuel-based vehicles. The project successfully achieves the objective of creating a sustainable and smart transportation solution suitable for urban and semi-urban environments.*

**Keywords:** *Advanced Electric Cycle, BLDC Hub Motor, Motor Controller, Pedal Assist System (PAS), Throttle Control, Sustainable Transportation*

## I. INTRODUCTION

In recent years, the rapid increase in fuel consumption, traffic congestion, and environmental pollution has created a strong demand for sustainable and energy-efficient transportation systems. Conventional fuel-powered vehicles contribute significantly to air pollution and rising carbon emissions, which negatively affect both the environment and public health. As a result, electric mobility solutions are gaining importance worldwide. Among these solutions, electric bicycles have emerged as a practical, economical, and eco-friendly alternative for short-distance travel, especially in urban and semi-urban areas.

An electric cycle combines traditional bicycle mechanics with an electric propulsion system to assist the rider. It provides ease of transportation while reducing physical effort and eliminating fuel dependency. The integration of advanced components such as a Brushless DC (BLDC) hub motor, lithium-ion battery, motor controller, throttle mechanism, and Pedal Assist System (PAS) enhances the performance and usability of the cycle. These systems work together to provide controlled speed, better torque, improved efficiency, and user comfort.

The objective of this project is to design and develop an Advanced Electric Cycle capable of supporting higher load capacity while maintaining safety, efficiency, and reliability. The project aims to optimize power consumption, improve riding comfort, and ensure cost-effectiveness. Special attention is given to component integration, battery management, and smooth motor control to achieve consistent performance.

This project contributes toward promoting green transportation technology and demonstrates how modern electrical and electronic systems can be effectively applied to develop sustainable mobility solutions for everyday use.

## II. LITERATURE REVIEW

A review of existing electric bicycle systems was carried out to study charging methods, motor types, battery selection, and energy recovery techniques. Kothaniji developed a system using wall outlet, solar charging, and regenerative braking. It uses a hub motor with a lithium-ion battery and an integrated control system for better efficiency. [1] Indhumathi proposed a model with wall outlet, solar, and pedal charging. ABLDC motor is used along with a lead-acid battery, and a PI controller manages speed and voltage. [2] Pratama designed a solar-powered electric cycle using an electric motor and lead-acid battery. The system focuses on solar charging efficiency but does not include energy recovery. [3]

Shanmuga introduced a hybrid model with solar panel, pedal system, and flywheel mechanism for kinetic energy recovery. A BLDC motor and lead-acid battery are used. [4] Lijil, Vijay developed a system with wall outlet, solar charging, and regenerative braking. It uses a hub motor, lithium-ion battery, and DC-DC boost converter for improved solar charging. [5] From the literature, it is observed that most systems focus on solar charging and regenerative braking. However, issues like heavy batteries and limited multi-source integration still exist, which motivates the development of the proposed advanced electric cycle.

### III. SYSTEM ARCHITECTURE

The system architecture of the Advanced Electric Cycle is designed using a centralized control approach in which the Motor Controller acts as the core unit of the entire system. The architecture is systematically divided into five main sections: Power Supply Section, Control Section, Drive Section, Input Section, and Output Section. Each section performs a specific function and is interconnected to ensure smooth, efficient, and reliable operation.

- 1) **Power Supply Section** The Power Supply Section consists of a rechargeable DC battery that provides the required electrical energy to the system. The battery output is connected to a main switch, which is used to control the overall power flow. The switch ensures safety by allowing the user to turn the system ON or OFF as required. When the switch is turned ON, power is supplied to the motor controller for further processing and distribution.
- 2) **Control Section** The Motor Controller is the central control unit of the system. It receives electrical power from the battery and processes input signals from the throttle. The controller regulates voltage and current supplied to the hub motor to ensure smooth speed control and stable performance. It also provides protection features such as overcurrent protection and efficient power management.
- 3) **Drive Section** The Hub Motor forms the drive mechanism of the electric cycle. It receives controlled electrical energy from the motor controller and converts it into mechanical energy. This mechanical energy rotates the wheel and propels the cycle forward. The performance and efficiency of the cycle largely depend on the operation of the hub motor.
- 4) **Input Section** The Throttle acts as the primary input device. It allows the rider to control the speed of the cycle. When the throttle is operated, it sends a signal to the motor controller, which adjusts the motor speed accordingly.
- 5) **Output Section** The LCD Display and Light system form the output section of the architecture. The LCD display shows important information such as speed, battery status, and system condition. The Light system ensures proper visibility and safety during night riding. Both components are powered and controlled through the motor controller. The overall system architecture ensures proper coordination between power supply, control unit, input devices, and output components, resulting in efficient and safe operation of the Advanced Electric Cycle.

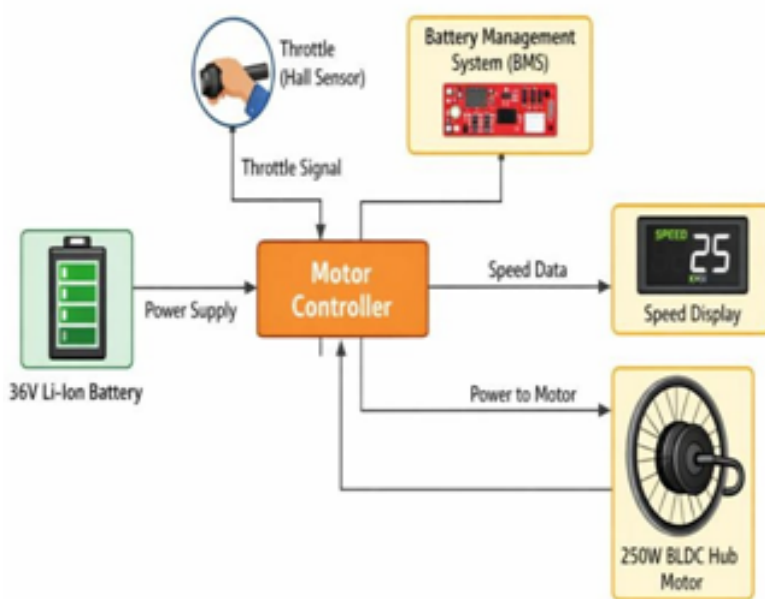


Fig 1. Electric Bicycle System Architecture



Fig.2 Final Model of proposed Advanced E Bicycle

#### IV. RESULT AND ANALYSIS

The Advanced Electric Cycle was successfully designed, fabricated, and tested under different operating conditions to evaluate its performance, efficiency, and reliability. The system showed smooth coordination between the battery, motor controller, hub motor, throttle, LCD display, and lighting unit. During testing, the electric cycle achieved a maximum speed of 35 km/h under standard load conditions, which is suitable for daily urban transportation.

The 36V battery system delivered stable power output and supported a load capacity of approximately 120 kg without noticeable performance reduction. The vehicle achieved an average range of 30 km per full charge, making it suitable for short-distance commuting. The battery required approximately 4–5 hours for complete charging. The overall system efficiency was observed to be around 85–90%, indicating effective energy utilization and minimal power loss.

The motor controller ensured smooth acceleration and proper current regulation, preventing overheating and overload conditions. The throttle response was accurate and provided stable speed control. The LCD display functioned correctly by showing speed and battery status in real time. The lighting system operated efficiently and improved visibility and safety during night riding.

- 1) **Maximum Speed Achieved: 35 km/h** The electric cycle achieved a maximum speed of 35 km/h during testing under normal road conditions. This speed is suitable for urban commuting and ensures safe operation. The motor controller maintained stable performance without overheating. The achieved speed confirms proper motor and power system integration.
- 2) **Average Travel Range: 30 km per Charge** The cycle covered an average distance of 30 km on a single full battery charge. This range is sufficient for short-distance daily transportation needs. Efficient power management by the controller contributed to optimized energy consumption. The range performance meets the intended design objective.
- 3) **Battery Charging Time: 4–5 Hours** The battery required approximately 4 to 5 hours to charge fully using a standard charger. This charging duration is practical for daily use, allowing overnight charging. The charging system operated safely without excessive heating. Proper charging time ensures longer battery life and reliability.
- 4) **System Efficiency: Approximately 85–90%** The overall efficiency of the system was observed to be around 85–90%, indicating minimal energy loss. Efficient conversion of electrical energy into mechanical energy was achieved through the BLDC motor. The controller effectively regulated power flow, reducing wastage. High efficiency improves overall system performance and battery utilization.
- 5) **Load Capacity Tested: Up to 100 kg** The electric cycle was tested with a load capacity of up to 100 kg. The system maintained stable speed and performance without significant power drop. The frame and motor system supported the load efficiently. This confirms the structural and electrical stability of the design. **Smooth Speed Control and**
- 6) **Stable Performance Observed:** -The throttle response was smooth and accurate during operation. No sudden jerks or unstable acceleration were observed. The motor controller maintained consistent power delivery under varying conditions. This indicates reliable integration of control and drive systems.

Fig.3 shows how the battery voltage decreases over time during operation. Initially, the voltage is maximum at 36V and gradually drops as the battery discharges. The steady decrease indicates normal battery performance under load. It helps in understanding the backup time and efficiency of the battery system.

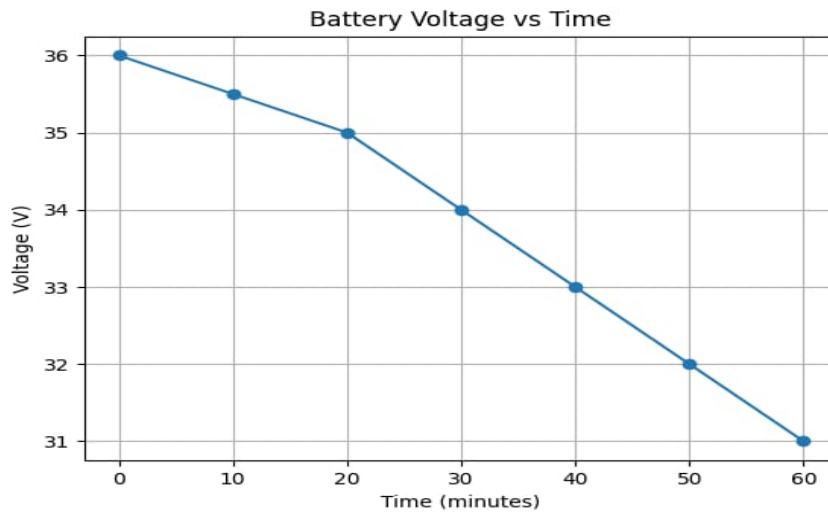


Fig.3. Battery VTG Vs time

Fig 4. shows the relationship between speed and power consumption of the cycle. As speed increases, the power consumption also increases. Higher speed requires more current, which increases overall power usage. It helps in analyzing energy efficiency and optimizing performance of the cycle.

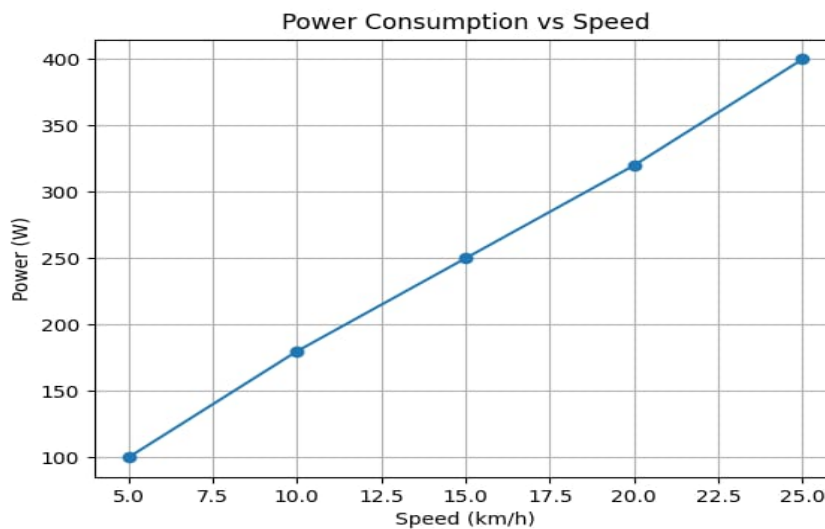


Fig.4. Power Consumption VS Speed

### V. CONCLUSION

The Advanced Electric Cycle project was successfully completed and tested. All the components such as the battery, motor controller, hub motor, throttle, and display worked properly together. The cycle achieved a maximum speed of 35 km/h and gave a range of 30 km on a single full charge. The battery took around 4–5 hours to charge completely, which is suitable for daily use.

The system efficiency was around 85–90%, which means most of the battery power was properly used without much energy loss. The cycle was tested with a load of up to 120kg and it worked smoothly without any major problem. Speed control was stable and there were no sudden jerks during operation.

This project shows that an electric cycle is a good alternative to fuel vehicles. It saves fuel, reduces pollution, and is economical for short-distance travel. Overall, the project achieved its main objectives and proved that electric transportation is simple, useful, and environmentally friendly.

### REFERENCES

- [1] Darshil G. Kothari, Jaydip C. Patel, Bhavik R. Panchal, Hybrid Bicycle. 2014 IJEDR | Volume 2, Issue 1.
- [2] B. Indhumathi, Dr. E. Latha Mercy, Simulation and Fabrication of Hybrid Electric Bicycle with Multi Charging Mode. Journal of Electronics and Informatics, March 2024, Volume 6.
- [3] Mochammad Rendi Pratama, Jamaaluddin, Indah Sulistiyowati, Izza Anshory, Electric Bicycle Battery Charging System Design Using Solar Panel. JEEE-U Journal of Electrical and Electronic Engineering-UMSIDA, Vol. 8, No. 2, October 2024.
- [4] L. Shanmuga Priya, K. Thangapandiyan, C. Shankararayanan, R. Siva, S. Venkatesh, Design of Electric Bicycle with Flywheel and BLDC Motor Using Solar Energy System. International Journal of Electrical Engineering and Technology (IJEET), Volume 12, Issue 3, March 2021.
- [5] Ligil Vijayan, Shamil R. P., Subath Momin U., Mahammad Athavulla, Free Energy Electric Bicycle. International Journal of Engineering Research & Technology (IJERT), Special Issue 2019.
- [6] Harpreet Singh Matharu, Dr. D. B. Pardeshi, Vaibhav Girase, P. William, Design and Deployment of Hybrid Electric Vehicle. 2022 International Conference on Electronics and Renewable Systems (ICEARS).
- [7] Stilo, L., Segura Velandia, D. M., Lugo, H., & Conway, P. P. (2021). Electric bicycles, next generation low carbon transport systems: A survey. Transportation Research Interdisciplinary Perspectives, 10(3), 100347. DOI: 10.1016/j.trip.2021.100347 Discusses user preferences for safety/convenience (gradient climb assist, brake lights/indicators) in smart urban e-bikes.
- [8] Gupta, S., Poonia, S., Varshney, T., & Swami, R. K. (2022). Design and Implementation of the Electric Bicycle with Efficient Controller. In Intelligent Computing Techniques for Smart Energy Systems (pp. 541–552). Lecture Notes in Electrical Engineering. – Focuses on customizable, low-cost e-bike with bidirectional control.
- [9] Sathish Dhandapani, Thirunavukkarasu R., Veeramanikandan M., & R. Vijayakumar. (2024). Comprehensive review on evolution, progression, design, and exploration of electric bicycle. Designs, 6(3), 42. – A comprehensive design and styling review of e-bikes (CAD modeling, self-charging, solar integration) using Scopus data up to 2023.
- [10] Sanjay MP, Anshad CK, Faseela MK, & Fathima Sherin MK. (2025). Design and Fabrication of Electric Bicycle with Regenerative System. IJRASET. June 2025. – Presents a prototype combining BLDC motor, regenerative braking, piezoelectric transducers, solar panels to improve energy efficiency and range.



10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)