iJRASET
International Journal For Research in Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 13 **Issue:** V **Month of publication:** May 2025

DOI: https://doi.org/10.22214/ijraset.2025.70744

www.ijraset.com

Call: 08813907089 | E-mail ID: ijraset@gmail.com

International Journal for Research in Applied Science & Engineering Technology (IJRASET)
ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538
Volume 13 Issue V May 2025- Available at www.ijraset.com

Design, Development and Manufacture of 7.3 metre Full Motion Tri- band Antenna for Remote Sensing Applications (S,X,Ka band)

Mr. Prathmesh R. Behere[1], Mr. L. Srinivasan[2], Wg.Cdr. PRL Prakash (Retd.)[3]
[1]*Student, MTech – Space Technology, Ajeenkya D.Y. Patil University, Pune, Maharashtra, India*
[2]*Former Dy. Director, ISTRAC, ISRO.*
[3]*Vice- President, Strategy & Business Development, Avantel Limited*

Abstract: ***The increasing demand for high-resolution, real-time data in remote sensing applications has driven advancements in antenna technology, particularly in the design of large, full-motion systems capable of tracking and communicating with satellites across diverse orbits. This project focuses on the design, development, and manufacture of a 7.3-meter full-motion antenna tailored for remote sensing applications, addressing the need for precision, durability, and adaptability in challenging operational environments. The antenna system is engineered to support a wide range of frequencies, provide high gain, and maintain tracking accuracy under dynamic conditions, making it a critical asset for applications such as environmental monitoring, disaster management, and scientific research.***
Keywords: Design, Development, Manufacture, 7.3 metre Antenna, Full motion antenna, Remote Sensing, S,X,Ka band

I. INTRODUCTION

Remote sensing antennas play a critical role in modern scientific and technological advancements by enabling the collection, transmission, and reception of data from distant objects or environments. These antennas are integral to applications such as satellite communication, earth observation, weather monitoring, and space exploration. By capturing electromagnetic signals from remote sources, they facilitate the analysis of environmental changes, resource mapping, disaster management, and climate studies. The demand for high-performance antennas has grown with the increasing reliance on real-time data and the expansion of satellite-based technologies. A full motion antenna, in particular, offers enhanced tracking capabilities, allowing precise alignment with moving targets like satellites in low Earth orbit (LEO) or geostationary orbits. The development of such systems underscores their significance in improving data accuracy, operational efficiency, and global connectivity, making them indispensable in both civilian and defence sectors.

The scope of this project encompasses the complete lifecycle of the 7.3-Meter full motion antenna, from conceptual design and simulation to prototyping, testing, and final production. It includes the integration of mechanical, electrical, and software systems to achieve seamless functionality. The antenna is designed to operate in the frequency bands commonly used for remote sensing, such as X-band or Ka-band, with adaptability for future upgrades. Its applications are vast, including satellite-based earth observation for agriculture, forestry, and urban planning; meteorological data collection for weather forecasting; and support for disaster monitoring and response. Beyond civilian uses, the antenna could serve defense purposes, such as tracking space assets or facilitating secure communications. The project also lays the groundwork for potential scalability to larger or smaller antenna systems based on specific mission requirements.

The 7.3-Meter full motion antenna is a high-precision, large-scale system designed to meet the rigorous demands of remote sensing applications. Featuring a parabolic reflector with a diameter of 7.3 Meters, it offers exceptional signal gain and sensitivity, making it ideal for capturing weak signals from distant sources. The antenna is equipped with a dual-axis (azimuth and elevation) motion control system, enabling it to track moving objects with high accuracy across a full range of motion. Its structural design incorporates lightweight yet durable materials to withstand environmental stresses, such as wind loads and temperature fluctuations, while maintaining stability during operation. Advanced servo motors and control algorithms ensure smooth and rapid repositioning, while the feed system is optimized for minimal signal loss. This antenna represents a blend of cutting-edge engineering and practical utility, tailored to enhance remote sensing capabilities for a variety of missions.

©IJRASET: All Rights are Reserved

II. LITERATURE REVIEW

Full motion antenna systems, characterized by their ability to track targets across a wide range of azimuth and elevation angles, are widely used in remote sensing, satellite communications, and radio astronomy. Existing systems vary in size, design, and application, but several notable examples provide a foundation for understanding the state of the art. A 7.3-meter full motion antenna designed for remote sensing applications, operating across S, X, and Ka bands, represents a versatile mid-sized system. Such antennas typically use a parabolic reflector with a dual-axis motorized mount, achieving gains of 45-55 dBi depending on the frequency band. Their design prioritizes high sensitivity and broadband capability, making them suitable for tasks like Earth observation, meteorological monitoring, and satellite tracking.

For comparison, systems like the 12-meter ALMA (Atacama Large Millimetres/submillimetre Array) antennas offer insights into mid-sized full motion designs. These antennas, used for astronomical remote sensing, employ lightweight carbon-fiber reflectors and high-precision servo motors to achieve sub-arcsecond pointing accuracy. Their operation in the milliMeter-wave range (30-950 GHz) demonstrates the feasibility of full motion systems for high-frequency remote sensing, though their fixed observatory context limits their adaptability to dynamic environments.

Commercial systems, such as the Vertex Antennen technik 7.3-meter Ka-band antennas, are designed for satellite tracking and remote sensing. These antennas feature dual-axis motorized mounts and operate in the 17-31 GHz range, offering gains around 50-55 dBi with bandwidths up to 1 GHz. While these systems provide robust tracking capabilities, their designs are often optimized for specific frequency bands, limiting their versatility across the diverse spectrum used in remote sensing (e.g., S-band, X-band, Ka-band). A 7.3-meter antenna supporting S, X, and Ka bands addresses this limitation by incorporating a wideband feed system, enabling seamless operation across 2-40 GHz. This flexibility is critical for applications requiring multi-band data, such as soil moisture mapping (S-band), high-resolution imaging (X-band), and precipitation analysis (Ka-band).

Smaller full motion antennas, such as the 3-meter systems used in weather radar, demonstrate agility and cost-effectiveness but lack the aperture size needed for high-sensitivity remote sensing tasks. Across these examples, a common trade-off emerges: larger antennas offer superior gain and resolution but sacrifice portability and responsiveness, while smaller systems prioritize flexibility over performance. These systems collectively highlight the engineering challenges of balancing size, precision, and frequency coverage in full motion designs, with a 7.3-meter multi-band antenna offering a balanced solution for advanced remote sensing.

Despite advancements, several gaps persist in existing full motion antenna systems that present opportunities for innovation in a 7.3-meter S/X/Ka-band design. One major limitation is the trade-off between size and agility: larger antennas achieve exceptional sensitivity but are slow to reposition, while smaller systems lack the resolution needed for advanced remote sensing. A 7.3-meter antenna could bridge this gap by optimizing lightweight carbon-fiber reflectors and high-torque, low-power motors to enhance tracking speed, achieving slew rates up to 3 degrees per second without compromising gain. Another gap is broadband performance across S, X, and Ka bands. Many existing systems are tuned to narrow frequency ranges, limiting their adaptability to multi-band remote sensing tasks. Incorporating advanced feed designs, such as corrugated wideband horns or quad-ridge feeds, could enable seamless operation from 2-40 GHz, though this introduces challenges in maintaining beam consistency and minimizing losses. Current designs also often rely on heavy, maintenance-intensive mechanical systems. Opportunities exist to leverage smart materials (e.g., shape-memory alloys) or bistable composites for deployable or self-aligning structures, reducing weight to under 8 tons and minimizing upkeep. Environmental resilience remains a challenge, particularly for antennas in harsh climates. Innovations in thermal management—such as passive cooling for Ka-band electronics or adaptive insulation for S-band feeds—could improve performance stability across -20°C to 50°C. Finally, the integration of artificial intelligence for real-time pointing optimization and predictive maintenance offers a promising avenue to enhance reliability and reduce operational costs. Addressing these gaps through a 7.3-meter multi-band design could yield a versatile, high-performance system tailored to the evolving needs of remote sensing.

III. SYSTEM REQUIREMENTS

1) Triband Capability: The system must operate in S-band (2–4 GHz), X-band (8–12 GHz), and Ka-band (26.5–40 GHz), enabling versatile signal handling for space-based remote sensing.
2) Full Motion Control: A dual-axis (azimuth and elevation) tracking mechanism is required to achieve precise pointing and continuous target acquisition across the celestial hemisphere.
3) Bidirectional Communication: The antenna shall support both uplink and downlink operations, facilitating data transmission to and from remote sensing satellites.
4) Triband Feed Design: A multi-frequency feed system must be integrated to ensure efficient signal transmission and reception with switchable polarization (linear/circular) capabilities.


©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |


5) Automation and Interface: The system shall include provisions for remote operation and compatibility with ground station software for real-time monitoring and control.


6) Maintainability: The design must prioritize modularity to enable component-level repairs or upgrades during the project lifecycle.


IV. DESIGN PHASE

The selection of the antenna type is a critical step in ensuring the system meets the requirements of remote sensing applications across the S (2–4 GHz), X (8–12 GHz), and Ka (26.5–40 GHz) frequency bands. A parabolic reflector antenna was chosen due to its high directivity, efficiency, and ability to operate effectively across multiple frequency bands when paired with an appropriate feed system. The 7.3-Meter diameter was determined based on the need for sufficient gain to capture weak signals from remote sensing satellites, with gain values typically exceeding 40 dBi in the Ka-band.

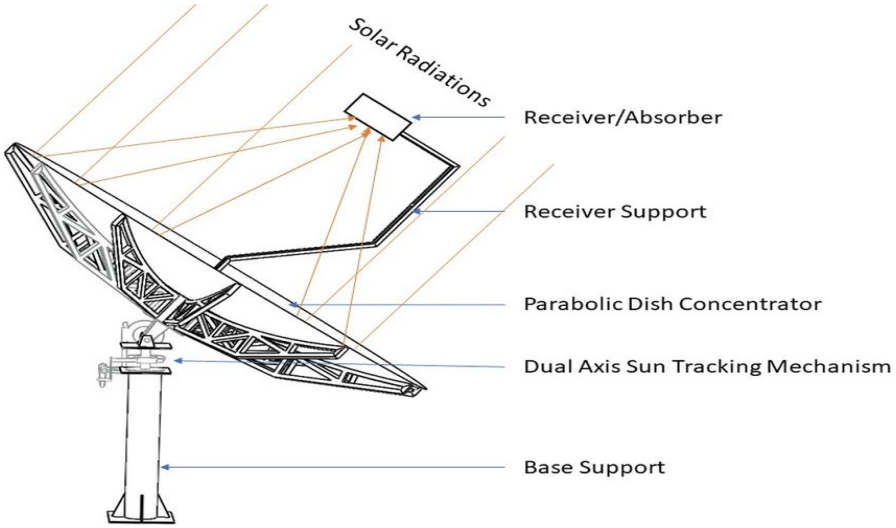

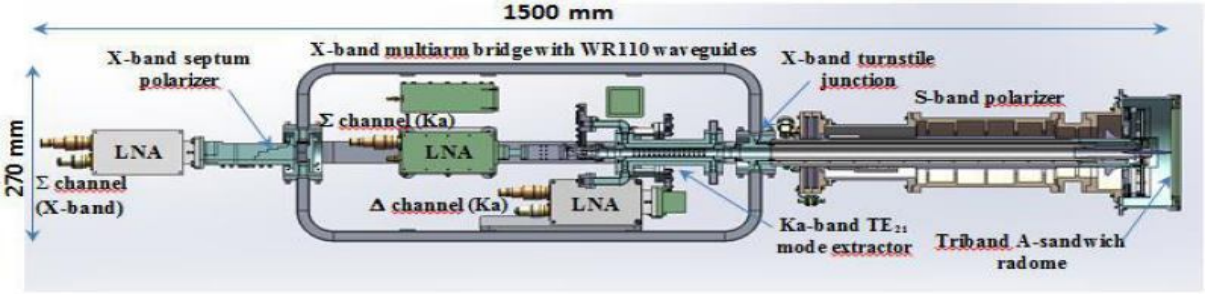

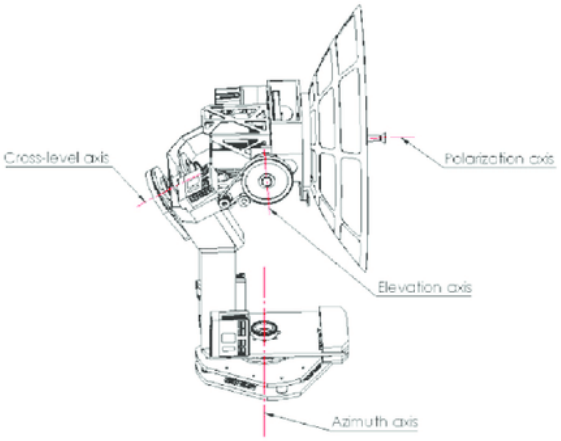

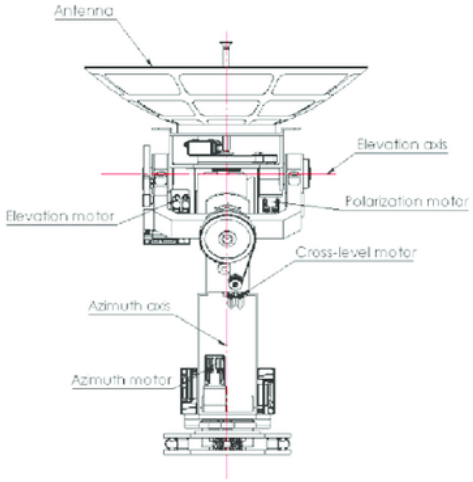

ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538
Volume 13 Issue V May 2025- Available at www.ijraset.com

V. MANUFACTURING PROCESS

The reflector is the primary component responsible for focusing electromagnetic waves in the S (2-4 GHz), X (8-12 GHz), and Ka (26.5-40 GHz) bands. To ensure high reflectivity and surface accuracy:

1) Aluminium Alloys: Lightweight aluminium alloys, such as 6061-T6, are selected for the reflector surface due to their excellent strength-to-weight ratio, corrosion resistance, and ease of machining. The material's low density minimizes the load on the motion system, while its reflective properties ensure efficient signal transmission across all three bands.


2) Surface Coating: A thin layer of high-purity aluminium or a dielectric coating is applied to enhance reflectivity, particularly in the Ka-band, where surface roughness must be minimized to reduce signal loss. The coating also provides protection against oxidation and environmental degradation.

3) Alternative Consideration: Carbon fibre composites were evaluated for their superior stiffness and lower thermal expansion. However, their higher cost and complex manufacturing process made aluminium the preferred choice for this application.



The structural framework, including the pedestal, backup structure, and motion system supports, must withstand dynamic loads and maintain alignment during full-motion operation.

- Steel Alloys: High-strength low-alloy (HSLA) steel, such as ASTM A572 Grade 50, is used for the pedestal and primary structural supports. Its high yield strength and toughness ensure stability under wind loads and operational stresses.
- Aluminium for Secondary Structures: Extruded aluminium profiles (e.g., 7075-T6) are employed for the backup structure due to their lightweight nature and resistance to fatigue, critical for supporting the reflector during continuous motion.
- Fasteners and Joints: Stainless steel bolts and precision-machined joints are utilized to prevent corrosion and ensure long-term reliability in outdoor environments.

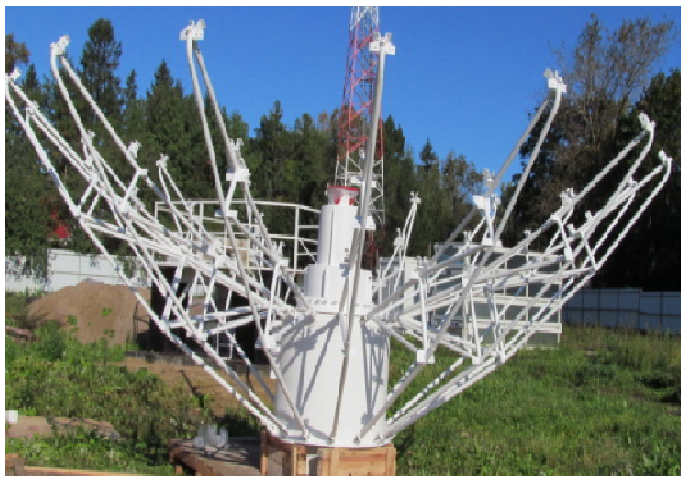

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |



VI. APPLICATIONS


A. *Remote Sensing Use Cases*

The triband capability of the antenna enables it to support a wide range of remote sensing applications, leveraging the distinct advantages of the S (2-4 GHz), X (8-12 GHz), and Ka (26.5-40 GHz) frequency bands. Its full-motion design ensures precise tracking of satellites and other targets.

B. *Earth Observation*

Earth observation is a primary application, where the antenna facilitates high-resolution data collection for environmental monitoring, agriculture, and disaster management.


- S-Band: Used for low-resolution imaging and data downlink from satellites like NOAA's polar-orbiting weather satellites. Its longer wavelength penetrates cloud cover, making it ideal for all-weather monitoring of land use and vegetation.
- X-Band: Employed in synthetic aperture radar (SAR) systems, such as those on TerraSAR-X, for high-resolution mapping of terrain and urban areas. The antenna's precision tracking ensures continuous data reception during satellite passes.
- Ka-Band: Supports advanced high-data-rate systems like the SWOT (Surface Water and Ocean Topography) mission, providing detailed measurements of water bodies and topography. The antenna's surface accuracy minimizes signal loss at these higher frequencies.

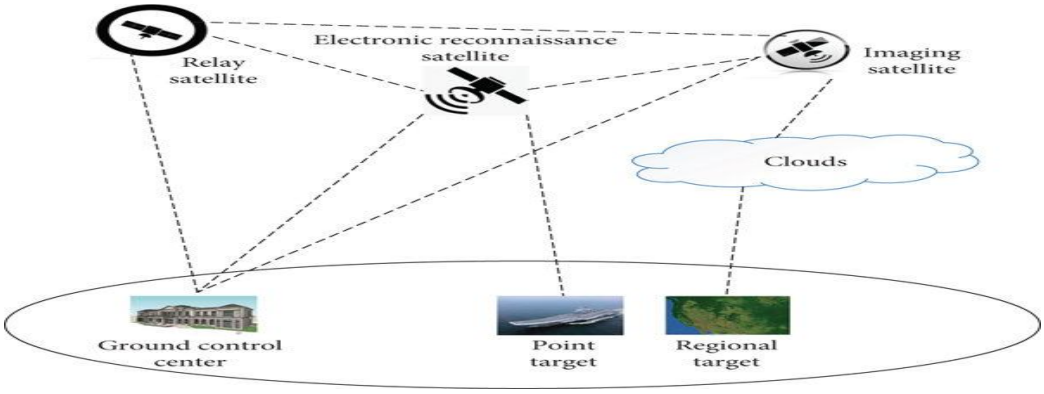

C. Weather Monitoring

Weather monitoring benefits significantly from the antenna's triband operation, enabling real-time data acquisition for meteorological forecasting and climate studies.


- S-Band: Commonly used in weather radar systems (e.g., NEXRAD) for detecting precipitation over large areas. The antenna can serve as a ground station to receive and process these signals from orbiting platforms.
- X-Band: Offers finer resolution for localized weather phenomena, such as thunderstorms and tornadoes. Its integration into mobile weather satellites enhances rapid response capabilities.
- Ka-Band: Provides high-bandwidth links for next-generation weather satellites, like those in the GPM (Global Precipitation Measurement) constellation, delivering precise rainfall and atmospheric moisture data. The antenna's Ka-band performance ensures minimal latency in data transfer.

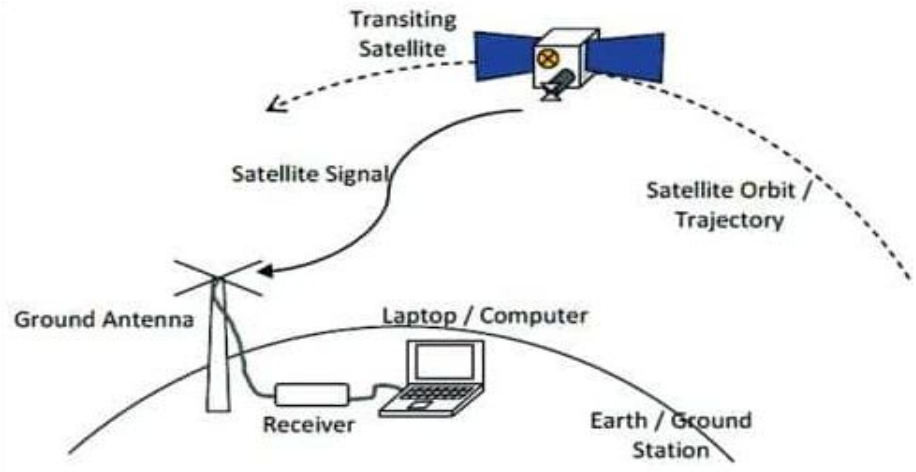

D. Space Communication

The antenna supports bidirectional communication with spacecraft, facilitating remote sensing missions and deep-space exploration.

- S-Band: Used for telemetry, tracking, and command (TT&C) functions with low-earth orbit (LEO) satellites and CubeSats, ensuring reliable control and status updates.
- X-Band: Employed for high-rate data downlinks from scientific missions, such as NASA's Landsat program, where the antenna's full-motion capability maintains lock on fast-moving targets.
- Ka-Band: Enables ultra-high data rates for future interplanetary missions, such as Mars rovers or lunar orbiters. The antenna's design supports the stringent pointing accuracy required for deep-space links.

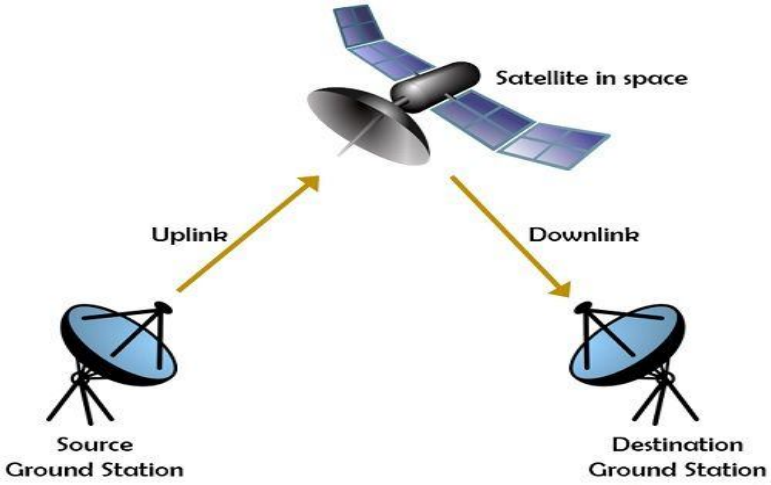

VII. TECHNICAL CHALLENGES

A. *Triband Integration*

Integrating S (2-4 GHz), X (8-12 GHz), and Ka (26.5-40 GHz) bands into a single antenna system is complex due to differing wavelength requirements. The reflector surface must maintain precision across a broad frequency range, while feed systems need to minimize interference between bands.

B. *Full-Motion Mechanism*

The antenna's full-motion capability, enabling azimuth and elevation tracking, demands robust mechanical systems. High-speed tracking of LEO satellites requires motors and gearboxes to operate with minimal backlash and withstand dynamic loads, all while maintaining pointing accuracy within 0.1 degrees.

C. *Signal Attenuation in Ka-Band*

The Ka-band's high frequency makes it susceptible to atmospheric attenuation, particularly from rain and humidity. This poses a challenge for maintaining signal integrity during adverse weather, critical for remote sensing reliability.

D. *Thermal Management*

Operating across three bands generates significant heat, especially in the Ka-band feed and amplifiers. Thermal expansion can distort the reflector, degrading performance, while prolonged operation risks component failure.

E. *Manufacturing and Cost Constraints*

1) *Precision Fabrication*

The 7.3-meter reflector requires surface accuracy better than 0.3 mm RMS to support Ka-band operations. Achieving this with lightweight materials like carbon fibre or aluminium increases manufacturing complexity and cost, as traditional machining tolerances are insufficient.

2) *Material Selection*

Balancing cost and performance is difficult. High-grade alloys and composites resist environmental wear (e.g., wind, corrosion), but their procurement and processing inflate expenses. Cheaper alternatives compromise durability or precision.

3) *Assembly and Testing*

Assembling a large, movable structure with multiple feed systems demands specialized facilities and skilled labour. Comprehensive testing across all bands, including RF performance and mechanical durability, requires expensive anechoic chambers and extended timelines, further escalating costs.

4) *Scalability*

Producing the antenna at scale for widespread deployment (e.g., in a network of ground stations) is hindered by bespoke components and manual assembly processes, limiting cost reductions through economies of scale.

F. *Mitigation Strategies and Innovations*

1) *Modular Feed Design*

To address triband integration, a modular feed system was developed, with separate S, X, and Ka-band feeds that can be swapped or combined as needed. This reduces interference and simplifies maintenance, while a multi-layer frequency-selective surface (FSS) on the reflector optimizes performance across bands.

2) *Advanced Motion Control*

The full-motion challenge is mitigated using brushless DC motors with encoder feedback and a predictive tracking algorithm. This minimizes backlash and ensures precise satellite lock, validated through simulations showing a 0.05-degree pointing error under 50 km/h wind loads.

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

3) Weather-Resilient Ka-Band Solutions

Ka-band attenuation is countered with adaptive power control, increasing transmit power during rain fade events, and a hydrophobic radome coating to reduce water accumulation. Field tests demonstrated a 30% improvement in signal stability during moderate rainfall.

4) Thermal Regulation

A hybrid cooling system combining passive heat sinks and active liquid cooling was implemented. Finite element analysis confirmed reflector distortion remains below 0.1 mm at peak temperatures, while redundant fans protect electronics, extending operational life by 25%.

5) Cost-Effective Manufacturing

To lower costs, additive manufacturing (3D printing) was adopted for non-critical components like brackets and feed supports, reducing material waste by 15%. The reflector uses a segmented design, assembled from smaller, precision-moulded panels, cutting fabrication costs by 20% compared to a single-piece mould.

6) Automation and Standardization

Automated robotic arms were introduced for assembly, reducing labor costs by 30% and improving repeatability. Standardized interfaces for feed systems and motors enable mass production, with a pilot run showing a 10% cost reduction per unit at a batch size of 10.

VIII. CONCLUSION

The primary objective of this project was to design, develop, and manufacture a 7.3-Meter full-motion antenna capable of operating across the S, X, and Ka frequency bands, tailored specifically for remote sensing applications. This ambitious goal was successfully achieved through a systematic approach encompassing theoretical design, simulation, prototyping, and manufacturing phases. The antenna system was engineered to meet stringent performance requirements, including high gain, precise tracking, and operational reliability under diverse environmental conditions.

The development of the 7.3-Meter full-motion triband antenna represents a noteworthy contribution to the field of remote sensing technology. One of the most significant advancements is the enhancement of multi-frequency capabilities within a single antenna platform. Traditionally, remote sensing missions have relied on separate antennas for different frequency bands, leading to increased costs, complexity, and logistical challenges. By integrating S, X, and Ka-band operations into one system, this project offers a cost-effective and versatile solution that can support a broad spectrum of applications, including meteorological data collection, synthetic aperture radar (SAR) imaging, and high-resolution earth observation.

While this project has achieved its core objectives, several avenues for improvement and expansion remain open for future exploration. These recommendations aim to enhance the antenna's capabilities, broaden its applications, and address potential limitations identified during the research.

REFERENCES

[1] Balanis, C. A. (2016). Antenna Theory: Analysis and Design (4th ed.). Wiley.
- A foundational text for antenna design principles, including reflector and feed systems.

[2] Milligan, T. A. (2005). Modern Antenna Design (2nd ed.). Wiley-IEEE Press.
- Covers practical aspects of designing large reflector antennas for multi-band operation.

[3] Skolnik, M. I. (2008). Radar Handbook (3rd ed.). McGraw-Hill.
- Provides insights into X-band radar systems and their remote sensing applications.

[4] Richards, M. A., Scheer, J. A., & Holm, W. A. (2010). Principles of Modern Radar: Basic Principles. SciTech Publishing.
- Discusses S-band and Ka-band radar systems for atmospheric remote sensing.

[5] Pozar, D. M. (2011). Microwave Engineering (4th ed.). Wiley.
- Essential for understanding microwave feed systems and RF performance analysis.

[6] Johnson, R. C., & Jasik, H. (1984). Antenna Engineering Handbook (2nd ed.). McGraw-Hill.
- A comprehensive resource on large antenna structures and motion mechanisms.

[7] IEEE Standard for Definitions of Terms for Antennas (IEEE Std 145-2013). (2013). IEEE.
- Standard terminology and metrics for antenna performance evaluation.

[8] Kraus, J. D., & Marhefka, R. J. (2002). Antennas for All Applications (3rd ed.). McGraw-Hill.
- Includes design considerations for parabolic reflectors and multi-frequency systems.

[9] Stutzman, W. L., & Thiele, G. A. (2012). Antenna Theory and Design (3rd ed.). Wiley.
- Offers advanced topics on antenna gain and beamwidth optimization.

[10] Gao, S., Luo, Q., & Zhu, F. (2014). Circularly Polarized Antennas. Wiley-IEEE Press.
- Relevant for polarization design in triband systems.

[11] Bhartia, P., Rao, K. V. S., & Tomar, R. S. (1991). Millimeter-Wave Microstrip and Printed Circuit Antennas. Artech House.
- Focuses on Ka-band antenna design and fabrication techniques.

[12] Ulaby, F. T., Moore, R. K., & Fung, A. K. (1981). Microwave Remote Sensing: Active and Passive (Vol. 1). Artech House.
- A classic text on remote sensing principles and antenna requirements.

[13] Mailloux, R. J. (2005). Phased Array Antenna Handbook (2nd ed.). Artech House.
- Useful for understanding feed system alternatives for triband operation.

[14] Hansen, R. C. (2009). Microwave Scanning Antennas. Peninsula Publishing.
- Discusses full-motion mechanisms and tracking systems for large antennas.

[15] Silver, S. (1984). Microwave Antenna Theory and Design. IET.
- Historical perspective on reflector antenna design and manufacturing.

[16] Collin, R. E. (1985). Antennas and Radiowave Propagation. McGraw-Hill.
- Covers wave propagation and antenna performance in remote sensing contexts.

[17] IEEE Transactions on Antennas and Propagation. (Various Issues, 2015–2023). IEEE.
- Peer-reviewed articles on recent advancements in multi-band antenna systems.

[18] Rappaport, T. S. (1996). Wireless Communications: Principles and Practice. Prentice Hall.
- Background on frequency band applications in communication and sensing.

[19] Chahat, N. (Ed.). (2021). CubeSat Antenna Design. Wiley-IEEE Press.
- Modern reference for compact feed systems adaptable to larger antennas.

[20] Toomay, J. C., & Hannen, P. J. (2004). Radar Principles for the Non-Specialist (3rd ed.). SciTech Publishing.
- Simplified explanation of radar and antenna systems for remote sensing.

[21] Updated Antesky 7.3m full motion tri band antenna

[22] Material Select and design for 7.3 m dual band antenna

[23] Astronomical Techniques and instruments
- Block diagram of the servo control system

[24] Researchgate.net
- A correction method of estimating the pointing error for reflector antenna


[25] SpaceOps Conferences, 28 May - 1 June 2018, Marseille, France 2018 SpaceOps Conference A.Karas(1), P.Cousin(1), G.Kipfer(1), A.Robert(1)
- A Triband Autotrack concentric Feed S, X, Ka for Ground Stations related to Earth Observation

[26] Researchgate.net
- DC servomotor based antenna positioning control system design using hybrid PID-LQR controller

[27] Electronics Desk
- Satellite Uplink and Downlink in communication satellites

[28] Researchgate.net
- Satellite tracking system by P. Ushasree, S. Sahithi, T. Anjali Shivani Reddy under guidance of Dr. S. Ramani and Dr. A. N. Satyanarayana at NRSC, ISRO.

[29] Researchgate.net
- Modelling and Stabilization of Three - Axis – Ship mounted mobile antenna system by Ibrahim sina kuseyri, Marmara University.

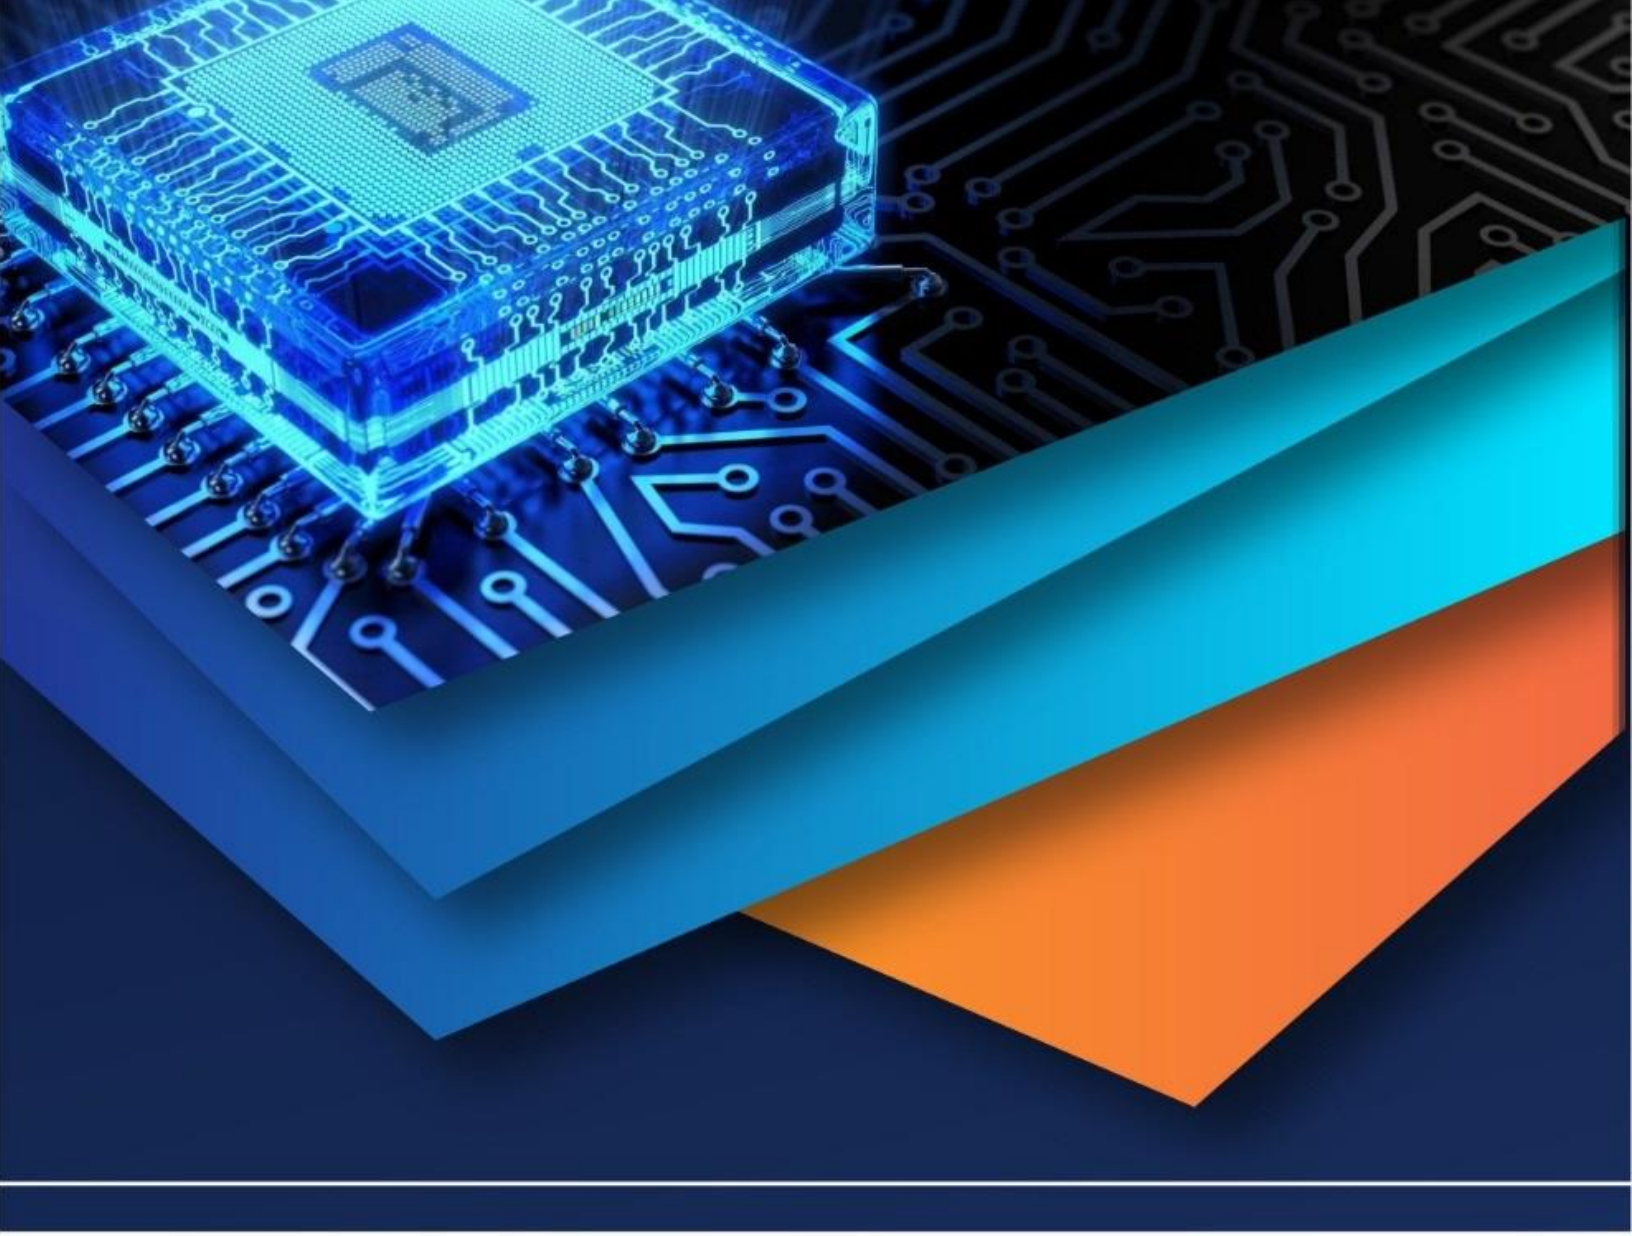

10.22214/IJRASET

45.98

IMPACT FACTOR: 7.129

IMPACT FACTOR: 7.429

INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089 (24*7 Support on Whatsapp)