iJRASET
International Journal For Research in Applied Science and Engineering Technology



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

**Volume:** 13 **Issue:** XI **Month of publication:** November 2025

**DOI:** https://doi.org/10.22214/ijraset.2025.75142

www.ijraset.com

Call: 08813907089 | E-mail ID: ijraset@gmail.com

International Journal for Research in Applied Science & Engineering Technology (IJRASET)
*ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538*
*Volume 13 Issue XI Nov 2025- Available at www.ijraset.com*

# Detection of Power Grid Synchronization

Dr. Nilesh Bodne[1], Prof. Manjeet Sakhare[2], Gaurav Mogre[3]
[1]*Project Guide, Department of Electrical Engineering, Vidarbha Institute of Technology, Nagpur, Maharashtra*
[2]*Project Co-Guide, Department of Electrical Engineering, Vidarbha Institute of Technology, Nagpur, Maharashtra*
[3]*Student, Department of Electrical Engineering, Vidarbha Institute of Technology, Nagpur, Maharashtra*

***Abstract:*** ***The modern power grid faces challenges in maintaining synchronization, reliability, and operational efficiency due to the increasing integration of renewable energy sources and complex load demands. Traditional grids rely heavily on manual inspection and reactive fault handling, leading to delayed detection of abnormalities such as voltage fluctuations, transformer overheating, and synchronization failures. This study proposes an IoT-based intelligent power grid monitoring and synchronization detection system that ensures real-time supervision, fault identification, and load management. The system employs sensors to measure parameters like voltage, current, frequency, and temperature, while microcontrollers process and transmit data to a cloud platform for real-time visualization. A synchronization detection module ensures stable interconnection between grids, preventing phase mismatches and power instability. By integrating automation, predictive analytics, and wireless communication, the system enhances operational reliability, minimizes downtime, and supports renewable energy integration. The proposed model aims to create a more resilient, efficient, and sustainable smart grid infrastructure suitable for modern energy demands.***

***Keywords: Real time monitoring, Power grid synchronization, Transformer fault detection, Smart grid system, Real-time data acquisition etc.***

## I. INTRODUCTION

The power grid serves as the backbone of modern civilization, ensuring the reliable transmission and distribution of electricity to industries, businesses, and households. However, the traditional power grid infrastructure, primarily based on manual monitoring and static control systems, struggles to meet the growing demands for reliability, efficiency, and sustainability. With the increasing integration of renewable energy sources such as solar and wind, maintaining grid stability and synchronization has become a significant challenge. Power grid synchronization — the alignment of frequency, phase, and voltage magnitude between interconnected power sources — is crucial to avoid disturbances, overloads, and blackouts. Even slight mismatches can lead to severe equipment damage, energy losses, or complete system failure.

Conventional monitoring systems lack real-time data collection and intelligent analytics, resulting in delayed fault detection and inefficient load management. As a result, abnormal conditions like voltage fluctuations, current overloads, and transformer overheating often go unnoticed until they escalate into major system failures. Furthermore, manual inspection increases maintenance costs and human error probability, reducing overall grid reliability. The integration of the Internet of Things (IoT) presents a transformative solution to these challenges. IoT-based smart grids enable continuous monitoring of key electrical parameters using sensors connected to microcontrollers and cloud-based platforms. These systems not only detect faults instantly but also analyze trends to predict potential issues before they occur. The detection of power grid synchronization further ensures that all connected grids operate harmoniously, especially when incorporating renewable energy sources or switching between multiple supply lines.

Real-time communication and automation enhance grid responsiveness, enabling immediate corrective actions during synchronization errors or overload conditions. For instance, automatic load balancing can redistribute power dynamically to prevent failures during peak demand. Cloud-based dashboards and mobile alerts offer operators immediate access to grid performance data, promoting proactive maintenance and decision-making.

In addition, the environmental benefits of efficient grid management are noteworthy. By reducing energy wastage, minimizing unbalanced loads, and improving system performance, IoT-based monitoring systems contribute to a significant reduction in carbon emissions. This aligns with global sustainability goals and supports the transition toward smart, green energy systems.

In summary, this study focuses on developing an IoT-enabled system for real-time detection of power grid synchronization and fault monitoring. The proposed model combines sensor-based data acquisition, wireless communication, and cloud analytics to create a robust framework for intelligent grid management. This innovation aims to enhance operational safety, reduce downtime, and improve overall grid performance, ensuring a more reliable and sustainable energy future.

©IJRASET: All Rights are Reserved 

## II. PROBLEM IDENTIFICATION

1) Synchronization Failures: Power grids face instability due to poor phase and frequency synchronization between different power sources.
2) Delayed Fault Detection: Manual monitoring methods delay identification of faults such as transformer overheating or overloads.
3) Inefficient Load Management: Traditional systems fail to dynamically balance energy supply and demand during varying load conditions.
4) High Transmission Losses: Inefficient grid control leads to increased transmission and distribution losses.
5) Lack of Real-Time Data: Conventional grids lack continuous monitoring, causing delayed responses to anomalies.
6) Dependence on Human Intervention: Manual inspection increases operational costs and human error risk.
7) Poor Predictive Maintenance: Absence of data-driven insights reduces equipment lifespan and reliability.
8) Difficulty Integrating Renewables: Irregular generation from renewable sources challenges synchronization and stability.
9) Environmental Concerns: Inefficient grid operations contribute to higher carbon emissions.
10) Limited Automation: Existing systems lack self-regulating mechanisms for automatic fault handling and synchronization correction.



Fig.1. Fire situation on power grid

## III. PROPOSED SYSTEM

### A. *Block Diagram of System*

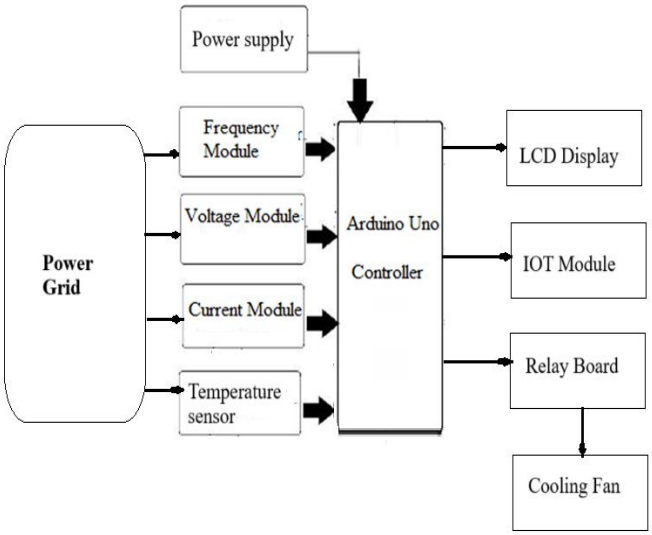



Fig.2. Block Diagram of system

*B. Working Principle*

1) Power Supply: The system is powered using an external power supply, which provides the required voltage to the Arduino Uno controller and other modules.
2) Power Grid Monitoring: The system monitors key parameters of the power grid using various sensor modules.
3) Frequency Module: This module measures the frequency of the power grid to ensure it remains within safe operating limits.
4) Voltage Module: It detects the voltage levels of the power grid and sends the data to the Arduino Uno.
5) Current Module: This module monitors the current flowing through the grid to detect any fluctuations or faults.
6) Temperature Sensor: It measures the temperature of the system to prevent overheating and damage.
7) Arduino Uno Controller: It acts as the central processing unit, collecting data from all sensor modules and making decisions based on predefined conditions.
8) LCD Display: The collected data is displayed on an LCD screen for real-time monitoring.
9) IoT Module: The system is integrated with an IoT module to enable remote monitoring via the internet.
10) Relay Board and Cooling Fan: If an anomaly is detected, the relay board activates the cooling fan to regulate temperature and prevent system failure.

*C. Features*

1) Data Collection: IoT sensors continuously monitor key parameters such as voltage, current, frequency, and temperature of the power grid. These sensors are strategically placed on transformers and other grid components.
2) Data Transmission: The collected data is sent in real-time to a central control room using IoT communication technologies like Wi-Fi or GSM. This enables immediate access to grid performance information.
3) Temperature Monitoring & Cooling Activation: The system continuously tracks temperature levels of critical components. If the temperature exceeds a predefined threshold, an automated cooling fan is activated to prevent overheating.
4) Fault Detection & Alerting: In case of abnormal conditions, such as sudden voltage fluctuations or high temperature, the system generates alerts. These are displayed on an LCD screen and accompanied by a buzzer sound to notify the operators.
5) Real-Time Monitoring & Control: Operators can remotely monitor the grid's status and make adjustments if necessary, ensuring optimal energy distribution and efficient power management.

## IV. ADVANTAGE

1) Real-Time Monitoring: Continuously tracks voltage, current, frequency, and temperature for immediate response.
2) Automated Cooling: Activates a cooling fan when temperature exceeds safe limits, preventing equipment damage.
3) IoT-Based Alerts: Sends data and alerts remotely to the control room, reducing the need for manual checks.
4) Improved Grid Efficiency: Enhances power distribution by detecting faults and managing load efficiently.
5) Cost and Energy Savings: Helps in conserving electricity and reducing operational costs through timely intervention.
6) User-Friendly Interface: LCD display and buzzer make it easy for operators to identify and address issues quickly.

## V. APPLICATIONS

1) Grid Monitoring: Real-time monitoring of power grid parameters (voltage, current, temperature) for efficient operation and fault detection.
2) Fault Detection & Maintenance: Automatic detection of faults (e.g., temperature rise) and triggering of corrective actions such as activating cooling systems or sending alerts for maintenance.
3) Energy Efficiency: Optimizes energy usage by balancing supply and demand, reducing power wastage, and improving overall grid efficiency.
4) Smart Home Integration: IoT-based grids can be integrated with smart homes for energy management, ensuring power is used efficiently.
5) Renewable Energy Integration: Helps in managing the distribution of renewable energy sources by balancing fluctuating power inputs and optimizing usage.

## VI. RESULTS AND DISCUSSION

The LM35 temperature sensor is fixed firmly to the body of the transformer. This temperature sensor produces an analog voltage signal at its output terminal which is directly proportional to the temperature of its environment.

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

The heat dissipated by the transformer is detected by the temperature sensor through conduction and as such the temperature sensor produces an increasing or decreasing voltage signal at its output when the transformer heats up or cools down respectively. This voltage signal is sent through wires to the analog to digital converter (ADC) register of the arduino microcontroller. The ADC converts the analog signals from the temperature sensor to digital signals and stores it in the designated registers of the microcontroller's memory.

Pre-set temperature values are also inputted into designated registers of the microcontroller's memory with aid of three contact switches. These pre-set values are reference values that govern the operation and decisions of the microcontroller. The temperature of the transformer which is required to trigger the fan relay and dc pump with thermoelectric module cooling effect for oil cooling system. If the temperature of transformer exceeds the pre-set value in the microcontroller's memory, the microcontroller triggers all cooling effect connected with controller unit, thus the fan comes on and blows cool air into the cooling chambers and fins of the transformer. The fan is only turned off when the temperature of the transformer drops below the pre-set value. It turn on the all cooling system required to cool down temperature of transformer. The LCD screen displays the temperature of the transformer to ensure that the temperature is properly monitored. The LCD also acts as a visual interface between the device operator and the microcontroller by displaying pre-set temperature values that are being entered and stored in the microcontroller's memory. Lastly the LCD shows changes in the fan status whenever it comes on or goes off also send this information on Smartphone Through IOT Module.

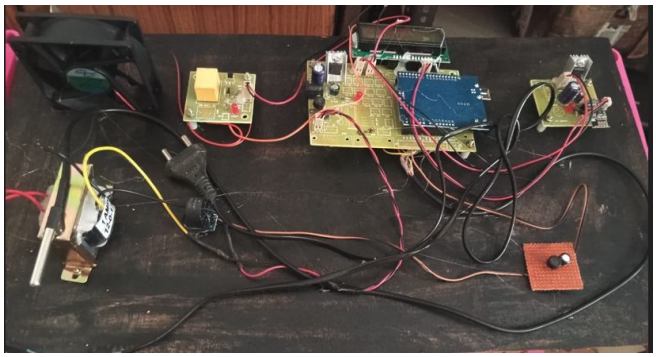


Fig.3. Project Image

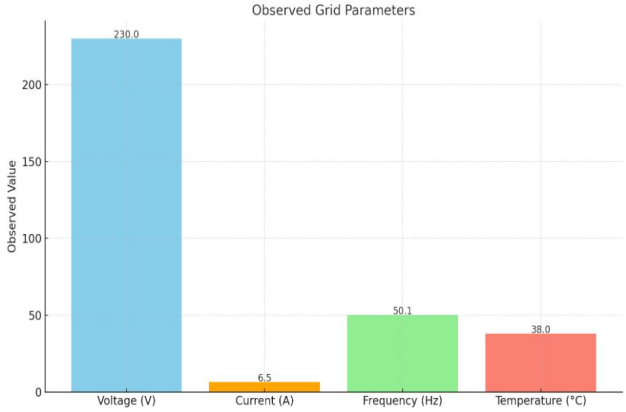



Fig.5. Graphical view of Power Grid Parameters

Table 1: Parameters measurement with alert system

| Parameter | Normal Range | Observed Value | Threshold Trigger | Action Taken |
|---|---|---|---|---|
| Voltage (V) | 210–240 | 230.0 | >240 or <210 | Alert |
| Current (A) | 0–10 | 6.5 | >10 | Alert |
| Frequency (Hz) | 49.8–50.2 | 50.1 | >50.2 or <49.8 | Alert |
| Temperature (°C) | 20–40 | 38.0 | >40 | Cooling Fan ON |

### A. System Functionality and Performance

The developed smart grid monitoring system successfully integrates various sensor modules (frequency, voltage, current, and temperature) with an Arduino Uno controller to ensure real-time monitoring of key power grid parameters. The system functions efficiently with the following verified results:

1) Voltage, Current, and Frequency Monitoring: The sensor modules accurately captured live data from the grid. This real-time input was essential for analyzing the health and stability of the power supply. Fluctuations in any of these parameters were promptly detected and visualized on the LCD.
2) Temperature Monitoring and Cooling Activation: The system was observed to react swiftly to increases in temperature. When the temperature sensor detected values beyond the safe threshold, the Arduino activated the relay module, triggering the cooling fan to prevent component overheating. This demonstrated an effective feedback control loop in action.
3) IoT-Based Remote Monitoring: The integration of the IoT module enabled seamless data transmission to a central monitoring platform using Wi-Fi/GSM. This feature allows for remote supervision, reducing the dependency on manual checks and increasing the operational efficiency of grid systems.
4) Real-Time Alerts and Visual Feedback: Anomalies such as overvoltage, overcurrent, or over-temperature conditions were indicated via an LCD display and a buzzer (if implemented), enabling operators to take immediate corrective actions. The clarity of the output display simplified operator understanding and response.

### B. Smart Grid Integration and Discussion

The system aligns closely with the five foundational Smart Grid Technologies (SGT) as identified by the U.S. Department of Energy:

1) Integrated Communications: All hardware components are linked via a shared open architecture (Arduino Uno), allowing seamless communication and integration between sensors, actuators, and output interfaces.
2) Sensing and Measurement: The system employs multiple sensors to continuously track the health of the power grid. Accurate readings enable demand-side management and faster fault detection.
3) Advanced Components: The use of IoT modules and microcontroller-based architecture illustrates how modern embedded systems are applied in power electronics to monitor and control grid performance.
4) Advanced Control Methods: The system uses a combination of sensors and a programmable controller to trigger smart actions, such as turning on the cooling fan. This real-time decision-making approach is central to smart grid implementation.
5) Improved Interfaces and Decision Support: With real-time LCD readouts and cloud-based monitoring via IoT, operators are equipped with better tools for quick and informed decisions.

### C. Smart Transmission Grid Features

The implementation reflects key aspects of smart transmission grids:

1) Flexibility and Sustainability: The system architecture allows easy modification or scaling, making it future-proof and adaptable to various grid sizes and conditions.
2) Embedded Intelligence: The Arduino Uno handles input-output processing and executes control logic, demonstrating intelligent local response mechanisms.
3) Reliability and Quality of Service: Automated fault detection and cooling ensure consistent and safe operation of the system, maintaining service quality even under irregular grid conditions.
4) Customer Benefit: By preventing grid failures and enabling efficient energy use, the system supports a more stable supply and minimizes downtime for end-users.

The smart grid monitoring prototype demonstrated efficient, responsive, and intelligent behavior, proving its potential for integration into real-world power infrastructure. The combination of sensing, IoT communication, and automated control showcases a low-cost, scalable, and sustainable approach toward the future of power grid systems.

## VII. CONCLUSION

The proposed IoT-based power grid synchronization and fault detection system demonstrates a significant advancement toward achieving a more reliable, intelligent, and efficient electrical network. By integrating real-time monitoring, automated synchronization detection, and predictive fault analysis, the system effectively addresses the limitations of conventional grid management.

The use of sensors and microcontrollers enables continuous data acquisition of voltage, current, and frequency, ensuring early detection of anomalies such as phase mismatches and overloads. Cloud-based analytics further enhance decision-making by providing remote accessibility and real-time alerts to operators. This approach not only reduces downtime and maintenance costs but also supports efficient energy distribution and renewable integration. The system's automated synchronization capability ensures stable interconnection among multiple grids, preventing power losses and blackouts. Overall, the research contributes to building a smarter, safer, and more sustainable grid infrastructure capable of meeting the dynamic challenges of modern power systems while paving the way for future innovations in IoT-enabled smart energy management.

This system is especially relevant for developing smart cities and rural electrification projects where maintaining power quality and minimizing outages are critical. The use of affordable components makes it a cost-effective solution for small to medium-scale deployments.


## VIII. FUTURE SCOPE

The future scope of this system is broad and promising. It can be further enhanced by:

*1)* Expanding Parameters: Incorporating power factor, energy consumption, and load forecasting for deeper analytics.
*2)* AI & Machine Learning: Leveraging AI algorithms for predictive maintenance and anomaly detection based on historical data.
*3)* Mobile Application Integration: Developing a dedicated mobile app for remote control and notification alerts in real-time.
*4)* Scalability: Deploying the system across multiple nodes in a smart grid to provide a complete end-to-end energy monitoring and control infrastructure.
*5)* Renewable Integration: Modifying the system to monitor hybrid grids incorporating solar or wind sources.
*6)* Cybersecurity: Adding secure communication protocols to prevent unauthorized access and data breaches in IoT-based grids.

## REFERENCES

[1] Gharavi, H., & Hu, B. (2011). "Multigate communication network for smart grid." IEEE Transactions on Industrial Informatics, 7(4), 554-560.
[2] Fang, X., Misra, S., Xue, G., & Yang, D. (2012). "Smart grid—the new and improved power grid: A survey." IEEE Communications Surveys & Tutorials, 14(4), 944-980.
[3] Yan, Y., Qian, Y., Sharif, H., & Tipper, D. (2013). "A survey on smart grid communication infrastructures: Motivations, requirements and challenges." IEEE Communications Surveys & Tutorials, 15(1), 28-46.
[4] Mohanta, D. K., Patra, S., & Khan, A. A. (2014). "Internet of things: A survey on architecture, enabling technologies, security and privacy, and applications." IEEE Internet of Things Journal, 1(4), 362-373.
[5] Mishra, S., & Jha, R. (2015). "IoT-based smart grid system for real-time energy monitoring and control." International Journal of Electrical Power & Energy Systems, 67, 295-303.
[6] Sharma, P., & Singh, R. (2016). "Smart power grid: IoT-based monitoring and fault detection." Journal of Energy and Power Engineering, 10(8), 1361-1368.
[7] Gungor, V. C., et al. (2017). "Smart grid technologies: Communication technologies and standards." IEEE Transactions on Industrial Informatics, 13(1), 147-157.
[8] Ahmed, S., & Malik, A. (2018). "IoT-enabled smart grid: A review of technologies, challenges, and future directions." Renewable and Sustainable Energy Reviews, 81, 2434-2444.
[9] Kumar, A., & Verma, P. (2019). "Real-time monitoring of power grid using IoT and cloud computing." International Journal of Smart Grid and Clean Energy, 8(4), 674-683.
[10] Gupta, R., & Sharma, M. (2020). "Integration of IoT in smart grids: Challenges and solutions." Journal of Electrical and Electronics Engineering, 12(1), 45-53.
[11] Patel, H., & Mehta, D. (2021). "IoT-based power grid monitoring system with real-time alerts." Energy Reports, 7, 232-239.
[12] Singh, V., & Rajput, A. (2022). "Smart grid automation using IoT: An efficient approach for energy conservation." Sustainable Energy Technologies and Assessments, 47, 101548.
[13] M. Helmi Prakoso and Heri Gunawan, "Redundant Control of Power Transformer Cooling System Using Actual Load Indicator", Proceedings of IEEE 10th International Conference on Information Technology and Electrical Engineering (ICITEE), 2018.
[14] S. Sankar, R. Raghul, C. Selvakumar, and A. Sasidha, S. Jaisiva "250MVA generator transformer cooling system control using plc", proceedings of IEEE International Journal of Pure and Applied Mathematics, Vol.119, No. 14, 631-636,2018.
[15] Vladimir N. Kostin, Tatyana E. Minakova, and Alexandra V. Kopteva, "Urban Substations Transformers Allowed Loading", proceedings of IEEE, published on 2018.

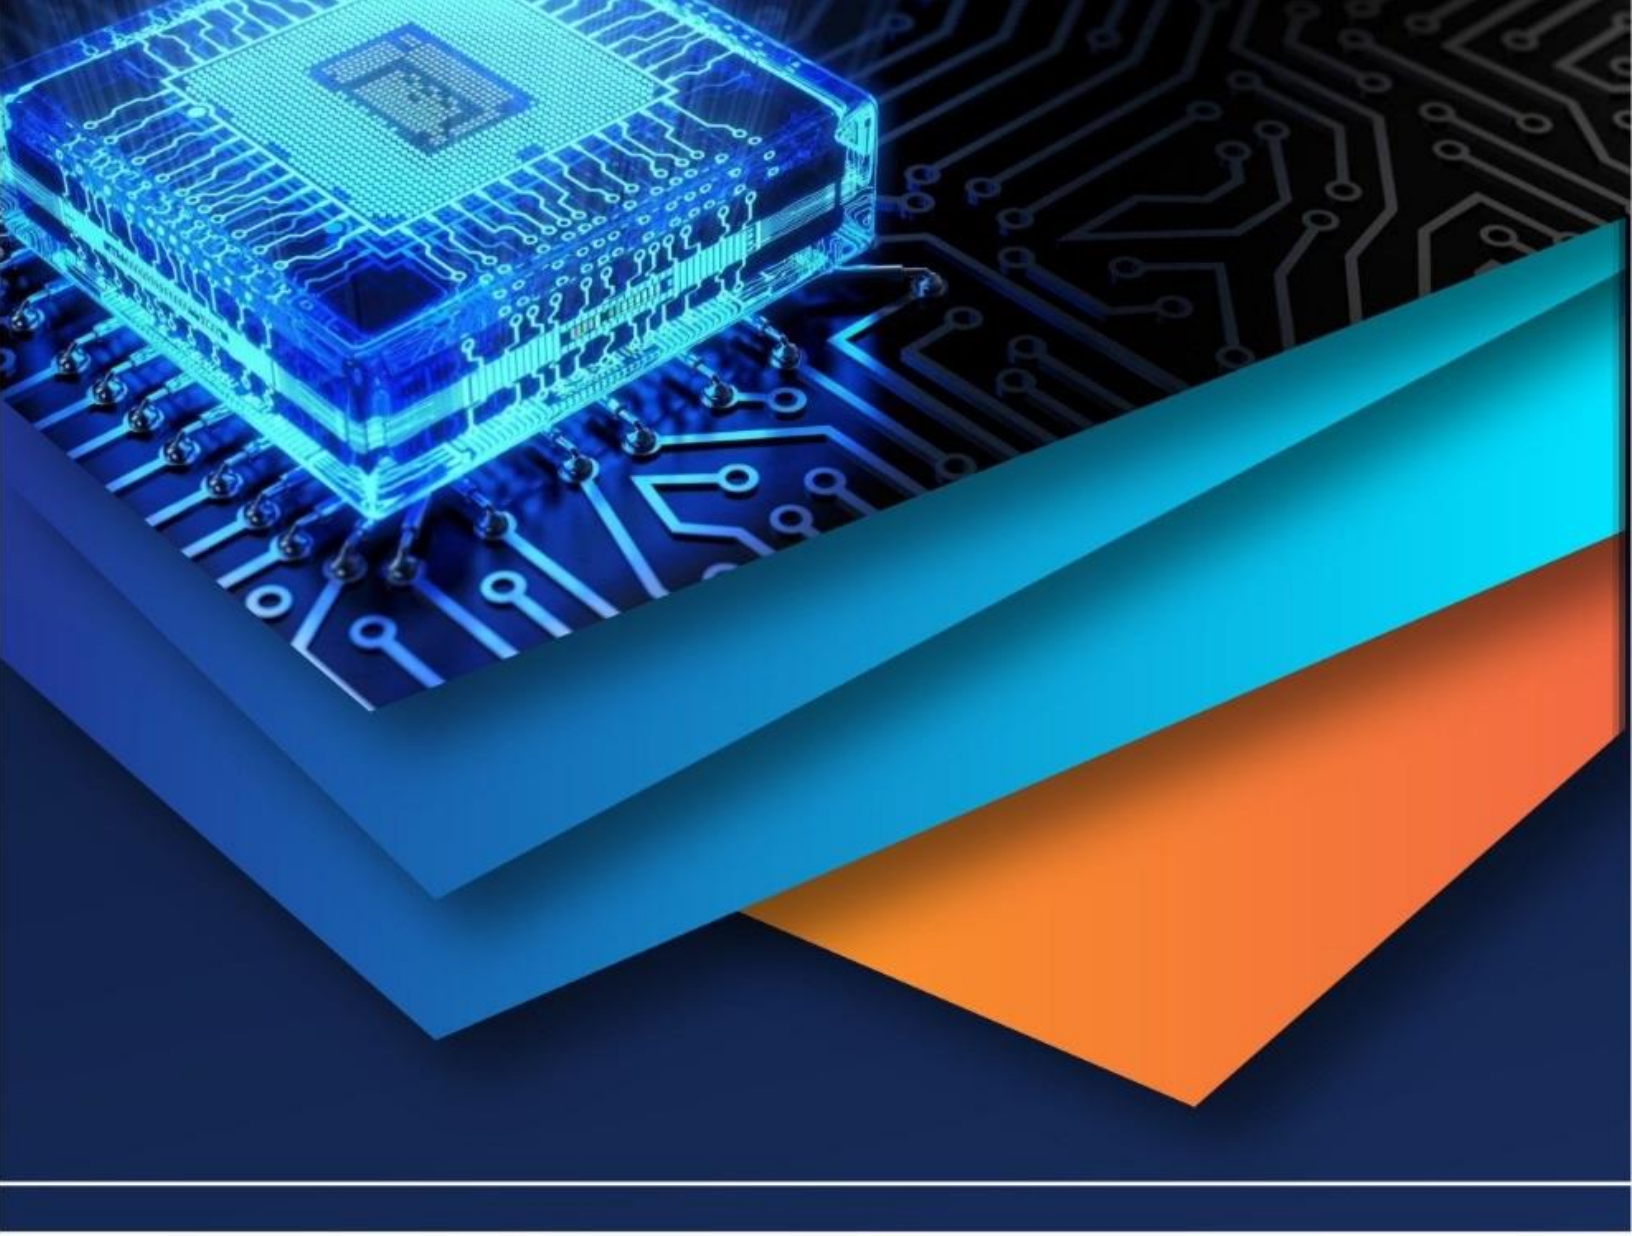

10.22214/IJRASET

45.98

IMPACT FACTOR: 7.129

IMPACT FACTOR: 7.429

# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089 (24*7 Support on Whatsapp)