



IJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 11 Issue: IV Month of publication: April 2023

DOI: <https://doi.org/10.22214/ijraset.2023.50784>


www.ijraset.com

Call:  08813907089

E-mail ID: ijraset@gmail.com

- 1) **Transformer:** In detecting power grid synchronization failure system on seeing frequency or voltage beyond the respectable range, the motor is used for step down the ac voltages. It steps down the 220V ac into 12V.
- 2) **Bridge Rectifier:-** In detecting power grid synchronization failure system on seeing frequency or voltage beyond the respectable range, the ground remedy is used for converting the ac voltages into dc voltages for supping the voltages to the other electronics factors
- 3) **Block Diode:-**In this system, the blocking diode is used for block the hamper opposition current for saving the motor.
- 4) **Voltage Regulator:** In detecting power grid synchronization failure system on seeing frequency or voltage beyond the respectable range, the voltage controller is used for regulating the dc voltages. also LM 7805 have been used for regulating the 12V dc into 5V dc.
- 5) **LCD Display:-** In detecting power grid synchronization failure system on seeing frequency
- 6) **Voltage Detector:** detecting power grid synchronization failure system on seeing frequency or voltage beyond the respectable range, the voltage sensor is used for detecting the voltage of voltage or voltage beyond the respectable range, the TV display is used for displaying the force frequency and voltages of different sources. It's connived with microcontroller and powered up with 5V dc. source.
- 7) **Frequency Sensor:** In detecting power grid synchronization failure system on seeing frequency or voltage beyond the respectable range, the frequency sensor is used for detecting the frequency of force source and functional amplifier is used for this purposes.
- 8) **Microcontroller PIC 18F452:** In detecting power grid synchronization failure system on seeing frequency or voltage beyond the respectable range, the microcontroller is used for the intelligent control of this system. It's powered up with 5V dc and is connived with TV display and voltage, frequency sensors.
- 9) **Alternate Source:** In this system, the 555- timekeeper integrated circuit IC is used as an alternate source. The frequency is changed by using this IC.
- 10) **Relay:** motorist In this system, the motorist IC is used for operating the weight relay and is connived with microcontroller..

IV. CIRCUIT DIAGRAM

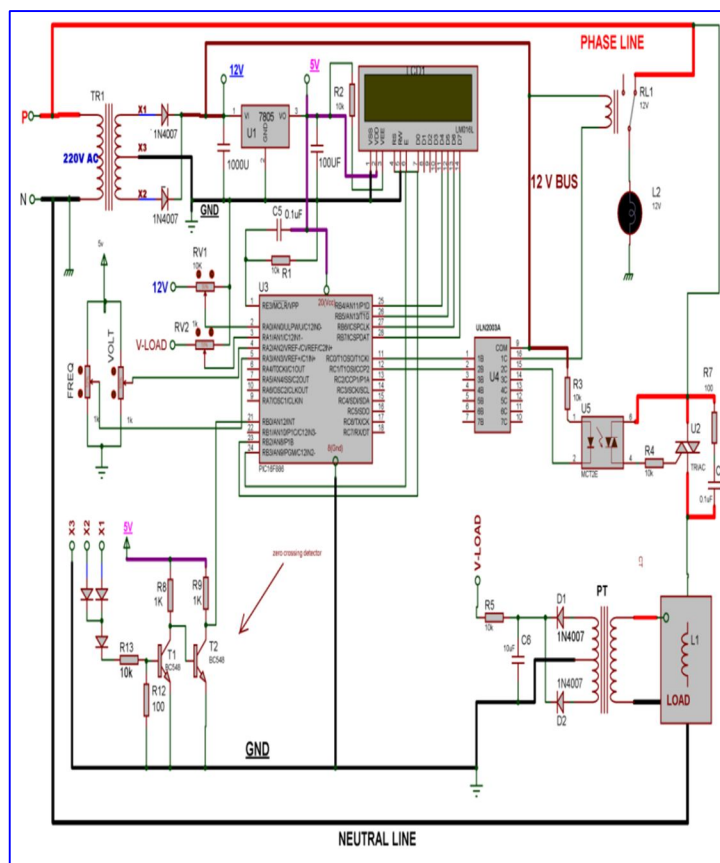

Working of Circuit diagram

So basically the power will be of 3 phase from the actual power source now, the two parameters and analysis here first one is frequency and second one voltage so if the voltage is ranges between ± 5 v then the relay activate due to sensing of low or high voltage and an abnormal condition arises so the tripping action is seen there ,as the rectangular led screen is provided so that the parameters are seen there like variation in frequency and voltage of all the three phases. (RYB respectively) .two sensing relays are used here first one is ARMO-UFTR frequency relay and other one is SPAU 12 C relay is used against the protection for under and over voltage and to sense all the parameter accordingly the microcontroller is used so that microprocessor is used

V. RESULTS

Following observation are made:

Voltage (V)	LCD Display	LAMP Indication
<240	Low Voltage	ON
240-250	Stable Voltage	OFF
>250	High Voltage	ON

Frequency(Hz)	LCD Display	LAMP Indication
<48	Display frequency	ON
48-52	Display frequency	OFF
>52	Display frequency	ON

We estimated the system under a variety of conditions, including both normal and failure scripts. The results showed that the system is able of snappily and directly detecting synchronization failures. In addition, the results showed that the system is robust and dependable, indeed in the presence of noise and other disturbances.

VI. CONCLUSION

In conclusion, the proposed method for detecting power grid synchronization failure based on the sensing of frequency and voltage beyond acceptable range provides a reliable and effective means for ensuring the stability and reliability of power grids. The results of our simulation study demonstrate the performance and robustness of the method, and they provide evidence that it is a valuable tool for preventing power outages and other serious consequences. With further refinement, this method has the potential to play a virtual role in the ongoing efforts to modernize and improve power grid systems.

REFERENCES

- [1] Shubhdeep Joshi, Tushar Parihar, Varun Kumar Shakya, "Detection of power grid synchronization failure on sensing frequency and voltage beyond acceptable range"-International journal of advance research in electrical Engineering, Vol.6.
- [2] Karan Gupta, Shreyas Gupta, Kummad Varma, Anil Singh, Abhimanou Shrmma, "Detection power grid synchronization failure on sending bad voltage or frequency documentation"-International journal of Engineering research and general science, Vol.4, issue 2.
- [3] Rohan Solanki, Divyesh Patel, Yuvraj Gharia, Daivik Sailor, BHumit Patel, Ashih Chaudhari, "Detection and protection of power grid synchronization failure "- International research Journal of Engineering and technology, Vol 3, Issue5.
- [4] J.Nitin Dhama, Abhishek Gupta, Ajay Mundra, Ekta Rai, Shreya Singh, "Developing Islanding Arrangement Automatically For Grid on Sensing Voltage or Frequency Beyond Range"-International Journal of Engineering Research & Management Technology, Volume 2, Issue-2, March- 2015
- [5] CH H S RAVI TEJA, "Analysis of Grid Synchronisation Techniques for Distributed Generation system During Grid Abnormalities-June 2013.



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)