iJRASET
International Journal For Research in Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 13 **Issue:** VI **Month of publication:** June 2025

DOI: https://doi.org/10.22214/ijraset.2025.72139

www.ijraset.com

Call: 08813907089 | E-mail ID: ijraset@gmail.com

International Journal for Research in Applied Science & Engineering Technology (IJRASET)
ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538
Volume 13 Issue VI June 2025- Available at www.ijraset.com

Development of a Modular Robotic Adapter for Autonomous Navigation Using Jetson Nano

Sayali Belhe[1], Disha Chordiya[2], Vedant Badre[3], Siddharth Bhimpure[4], Pratham Chandratre[5]
AISSMS Institute of Information Technology, India

Abstract: ***AdaptX is an AI-powered autonomous ground robot designed for autonomous navigation, high-resolution 3D environmental mapping, and real-time decision-making. AdaptX, which was created with scalability and adaptability in mind, combines robotic technologies and cutting-edge artificial intelligence to address important issues in autonomous mobility. The system makes use of YOLOv9 for fast object recognition, Simultaneous Localization and Mapping (SLAM) for precise real-time mapping and localization, and a web-based control interface for smooth remote monitoring and communication. AdaptX uses a combination of LiDAR and camera sensors, powered by the NVIDIA Jetson Nano, to provide dependable autonomous navigation and strong environmental awareness.***

AdaptX's plug-and-play hardware architecture is a noteworthy feature that enables quick integration and replacement of sensor modules or computing components without requiring significant software changes. This modular design makes platform adaption, maintenance, and upgrades easier while guaranteeing versatility for a wide range of applications. The system's potential for quick deployment in dynamic contexts and across many use cases is further increased by its plug-and-play functionality.

This study provides a thorough analysis of the software architecture, system design, and implementation approach of AdaptX. The system's ability to autonomously navigate complex and dynamic landscapes, recognize and react to impediments with high precision, and create real-time 3D maps for spatial awareness is demonstrated via performance evaluation in a variety of terrain situations. Results from experiments confirm the robot's dependability and efficiency in real-world situations.

AdaptX has great potential in a number of fields, such as automated surveillance, smart agriculture, industrial automation, and disaster relief. To further cement AdaptX's position as a flexible solution for next-generation autonomous robotic systems, future developments will concentrate on incorporating deep learning models for enhanced contextual comprehension, behavior prediction, and adaptive decision-making.

I. INTRODUCTION

Autonomous robotic systems have received considerable attention in recent years due to their ability to transform various sectors, including surveillance, agriculture, logistics, and defense. These systems utilize artificial intelligence, sensor fusion, and real-time data processing to traverse intricate environments with minimal human oversight. However, achieving seamless integration of various technologies while maintaining precision and adaptability continues to present challenges. AdaptX seeks to tackle these issues by offering an AI-driven autonomous ground robot that excels in real-time decision-making, navigation, and 3D mapping.

The main goal of AdaptX is to develop a resilient and scalable autonomous system capable of functioning in dynamic surroundings without continuous human oversight. Conventional autonomous navigation systems frequently encounter difficulties with variations in the environment, obstacle detection, and immediate adaptability. By employing SLAM (Simultaneous Localization and Mapping) for accurate mapping, YOLO for rapid object identification, and a web-based interactive control interface, AdaptX improves real-time decision-making and adaptability.

A significant innovation of AdaptX lies in its hardware-software integration. The system is constructed using Jetson Nano as its core processing unit, while LiDAR, cameras, and IMU sensors collaboratively gather and analyze environmental data. This multi-sensor strategy enables the creation of precise 3D maps and allows the system to autonomously maneuver through complicated terrains. The web-based interface facilitates real-time monitoring and control, enabling users to remotely supervise the robot's performance.


The versatility of AdaptX spans numerous fields. In agriculture, it can assess crops utilizing multispectral imaging to enhance resource management. In surveillance, it can streamline security operations with accurate object detection. Furthermore, the system's adaptability makes it appropriate for industrial automation, disaster response, and defense tasks. By merging AI-driven navigation with real-time environmental awareness, AdaptX provides a highly flexible solution for autonomous operations.

©IJRASET: All Rights are Reserved

This paper offers an in-depth overview of AdaptX, outlining its system architecture, methodology, implementation, and performance assessment. The research investigates how merging AI and robotics can improve autonomous decision-making and navigation. Additionally, it addresses the challenges encountered during development and considers possible future improvements to enhance efficiency, scalability, and adaptability.

II. SYSTEM ARCHITECTURE

The system architecture of AdaptX is engineered to facilitate effortless autonomous navigation, smart decision-making, and instantaneous 3D mapping in changing environments. This architecture incorporates a powerful computing unit, state-of-the-art sensor technology, and AI-enhanced perception models, guaranteeing reliable performance across diverse operational situations. The system consists of both hardware and software elements that collaborate within a well-organized data processing pipeline, enabling AdaptX to sense, interpret, and react to its environment efficiently.

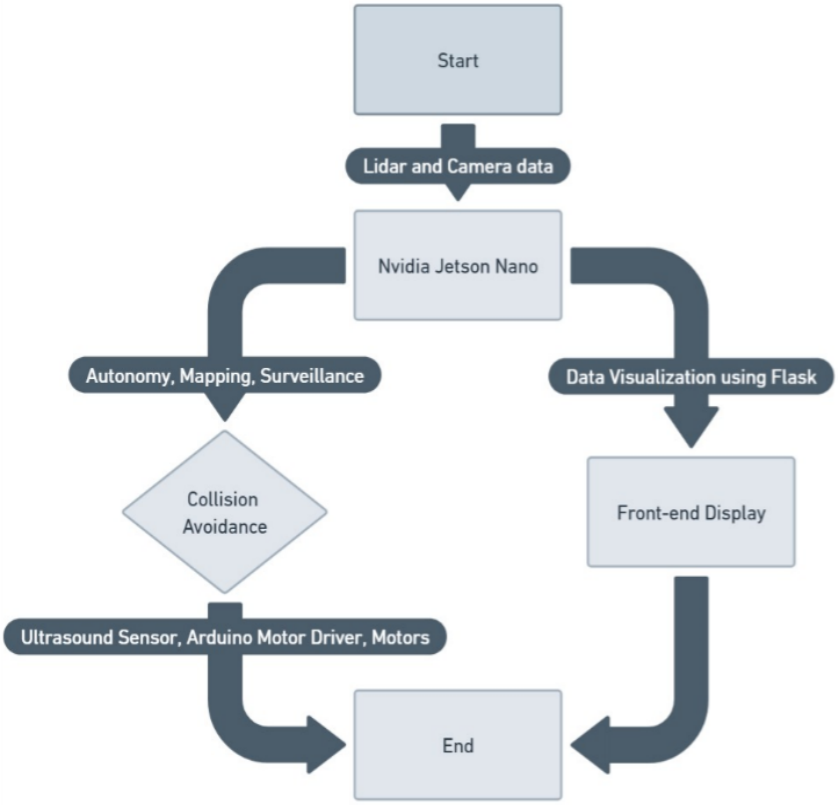

A. *Overview of System Design*

AdaptX employs a modular design approach, facilitating scalability and adaptability across various robotic applications. Its architecture is comprised of three fundamental subsystems:

1) Perception and Sensing Subsystem – This subsystem is tasked with gathering environmental information using a 2D LiDAR sensor and an onboard camera. The information gathered is processed for simultaneous localization and mapping (SLAM) as well as for object detection.

2) Computation and Decision-Making Subsystem – At the heart of the system, the Jetson Nano acts as the main computing unit, performing SLAM algorithms, object detection models, and real-time motion planning.

3) Control and Actuation Subsystem – The processed sensor inputs are used to generate motor control commands, which are sent to the robot's locomotion unit for navigation. Moreover, a web-based interface allows for remote monitoring and user control.

The interplay among these subsystems enables AdaptX to navigate autonomously and react to obstacles in dynamic, unstructured environments with minimal human involvement.

B. Hardware Components

The hardware selection for AdaptX aims to achieve maximum computational efficiency, sensor precision, and instant responsiveness. The system comprises:

1) Jetson Nano – An embedded system powered by a GPU that executes AI models and analyzes sensor data for immediate navigation and decision-making. It acts as the main computational center, overseeing SLAM, object detection, and motion control.
2) X2 RPLiDAR – A 360-degree LiDAR sensor that produces high-resolution point cloud data for mapping the environment and detecting obstacles. It enables the real-time implementation of SLAM, allowing the robot to determine its location while concurrently creating a 2D map of its environment.
3) Camera Module – Captures live visual data for object recognition. The camera footage is processed using YOLO (You Only Look Once), a deep learning-based algorithm for object detection that pinpoints obstacles and navigational risks.
4) Motor Driver and Locomotion Unit – Supports movement and navigation via motorized wheels controlled through an Arduino interface. Instructions generated by the Jetson Nano are transmitted to the motor driver, ensuring seamless motion and obstacle avoidance.

These hardware components operate together in a cohesive manner, guaranteeing accurate sensing, effective data processing, and smooth navigation in scenarios requiring autonomous operation.

C. Software Stack

The architecture of the AdaptX software is designed using a blend of robotics middleware, artificial intelligence frameworks, and web-based control platforms. The system incorporates:

1) Robot Operating System (ROS) – Acts as the fundamental framework for integrating sensor information, executing SLAM algorithms, and managing communication among various system components. ROS supports a modular design and facilitates real-time sensor data integration.
2) OpenCV – Utilized for image preprocessing and immediate vision-based perception. It is essential for improving the quality of input data for object detection algorithms.
3) YOLO (You Only Look Once) – A framework for object detection powered by deep learning, allowing for the instantaneous identification of obstacles and objects in the surroundings. The model analyzes camera feeds to recognize potential dangers and modify the robot's trajectory accordingly.
4) Hector SLAM – A SLAM algorithm based on LiDAR that provides real-time mapping and localization without the need for odometry data. It is optimized to create highly accurate maps while ensuring precise robot positioning.
5) Flask-based Web Interface – Offers a dashboard for remote monitoring and control, enabling users to observe the robot's navigation, access mapped environments, and send control commands through a wireless network.

The software stack is fine-tuned for low-latency computation and real-time processing, guaranteeing that AdaptX operates effectively in scenarios involving autonomous navigation and real-world applications.

D. System Workflow and Data Processing Pipeline

The operation of AdaptX follows a structured data processing pipeline, enabling seamless perception, decision-making, and actuation. The workflow consists of the following sequential steps:

1) Data Acquisition – LiDAR scans the environment, generating point cloud data, while the camera captures visual input for object detection. Sensor data is transmitted to the Jetson Nano for processing.
2) SLAM and Mapping – The Hector SLAM algorithm processes LiDAR data to construct a real-time map of the surroundings. This allows the robot to estimate its position and generate an updated navigation path.
3) Object Detection and Obstacle Avoidance – The YOLO model processes the camera feed to detect objects and obstacles in the robot’s path. Based on the detected objects, avoidance strategies are implemented using motion planning algorithms.
4) Motion Planning and Control – Navigation commands are computed based on the mapped environment and detected obstacles. The motor driver receives control signals from the Jetson Nano, ensuring smooth navigation.
5) Remote Monitoring and User Control – The processed data is sent to a Flask-based web interface, allowing users to visualize the mapped environment, monitor the robot’s movement, and issue manual commands if necessary.

By following this pipeline, AdaptX can autonomously navigate, detect obstacles, and adapt to dynamic environments while allowing remote interaction through an intuitive web interface.


©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

III. METHODOLOGY

The design of AdaptX adheres to a systematic methodology that guarantees smooth autonomous navigation, accurate object recognition, an effective control system, and instantaneous communication. The amalgamation of various artificial intelligence, robotics, and deep learning techniques allows AdaptX to function efficiently in changing environments. This methodology focuses on Simultaneous Localization and Mapping (SLAM), real-time object detection using deep learning, a web-based control interface, and reliable communication among system components.

A. Autonomous Navigation & SLAM

AdaptX utilizes Hector SLAM, a highly efficient LiDAR-based SLAM algorithm that operates without the need for odometry, making it ideally suited for real-time applications. The X2 RPLiDAR sensor perpetually surveys the environment, producing a 2D point cloud that serves as the foundation for an occupancy grid map. The SLAM algorithm processes these LiDAR scans by identifying significant environmental features and correlating them with earlier frames to accurately estimate the robot's position. This method enables the robot to generate a comprehensive depiction of its surroundings while simultaneously determining its location within the mapped area.

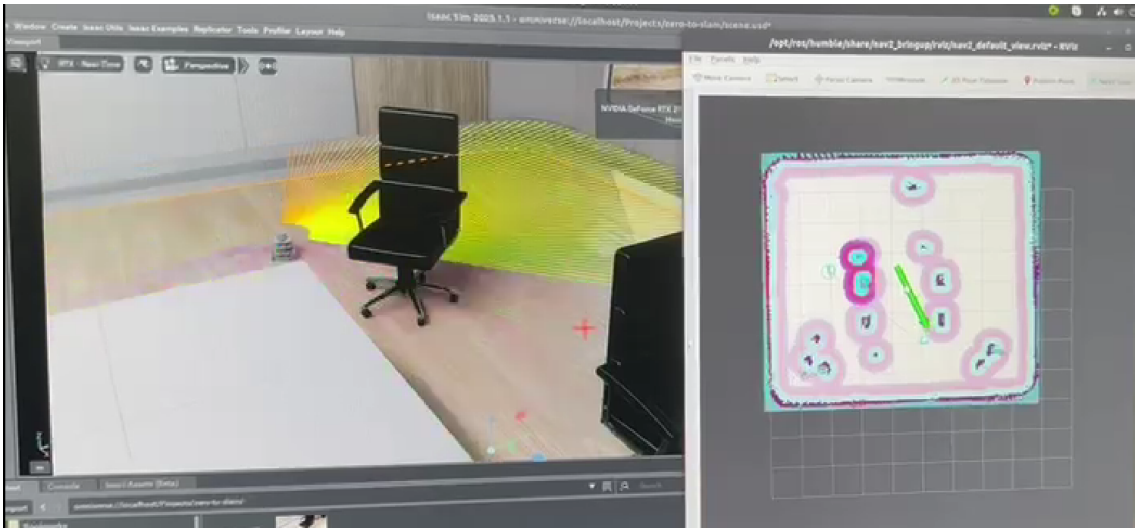

The mapping function is closely linked to the path-planning and obstacle-avoidance system. As new zones are scanned, the robot updates its trajectory in real-time, ensuring efficient and smooth navigation. Due to Hector SLAM functioning without explicit odometry, it excels even in scenarios where wheel-based movement tracking is unreliable. This advantage makes it particularly suitable for applications in unstructured terrains, industrial environments, and disaster response situations.

B. Object Detection

To improve its perception abilities, AdaptX integrates deep learning-based object detection using the YOLO (You Only Look Once) model. The camera records live images of the environment, which are processed through a streamlined inference pipeline. The YOLO model recognizes and categorizes objects, pinpointing obstacles or areas of interest within the surroundings.

The detection pipeline includes preprocessing the captured images to guarantee precise feature extraction. Following this, the YOLO algorithm assigns bounding boxes and confidence ratings to identified objects, enabling the system to distinguish between pertinent and irrelevant components. If an obstacle is identified, this information is transmitted to the navigation module, prompting an adaptive reaction such as rerouting or halting to prevent collisions. The integration of SLAM-based mapping and YOLO-driven object detection provides a thorough understanding of the environment, allowing the robot to make educated decisions in real time.

C. Control System

The versatility and functionality of AdaptX are further improved through a Flask-based web interface that allows for remote oversight and management. The interface offers a real-time view of the mapped environment, recognized objects, and the robot’s status, enabling operators to engage with the system with ease.

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

Through the web interface, users can visualize the occupancy grid map created by SLAM, access a live video feed from the onboard camera, and even toggle between autonomous and manual control modes. The system supports direct command execution, allowing users to adjust parameters like speed, obstacle detection sensitivity, or path-planning tactics. This control system is vital for applications that necessitate human intervention, such as industrial monitoring, security patrolling, or teleoperated robotics.

D. Communication

To guarantee seamless operation, AdaptX relies on an effective communication framework that enables real-time data exchange among its core modules. The Jetson Nano acts as the main computational unit, managing SLAM processing, object detection, and decision-making. It continuously receives sensor data, processes this information, and transmits control signals to the Arduino, which is tasked with motor actuation.

The Flask-based server supports bidirectional communication, allowing users to input control commands from the web interface while receiving instantaneous feedback on the robot's status. The communication pipeline is optimized for low latency, ensuring that navigation modifications, obstacle detection updates, and command execution happen with minimal delay. Furthermore, the system logs crucial operational data, facilitating performance assessment and troubleshooting.

IV. IMPLEMENTATION & EXPERIMENTAL SETUP

The execution of AdaptX followed a structured methodology, guaranteeing the harmonious incorporation of hardware and software elements. The system was both developed and evaluated in simulated and actual environments to confirm its efficiency and adaptability. The experimental framework was structured to test the effectiveness of SLAM-based mapping, object identification, and independent navigation utilizing a compact mobile platform.

A. Configuring Jetson Nano and Software Requirements

The Jetson Nano functioned as the main computing unit, tasked with executing SLAM algorithms, object detection models, and control systems. To ensure optimal performance, the setup process included the installation of critical libraries, frameworks, and dependencies.

The software architecture was established as follows:

- Operating System: An Ubuntu-based JetPack SDK was used for compatibility with AI and robotics platforms.
- SLAM Implementation: ROS (Robot Operating System) Noetic was installed to support Hector SLAM for real-time mapping.
- Object Detection: YOLOv5 was incorporated using OpenCV and PyTorch, optimized for the CUDA cores of the Jetson Nano to boost real-time processing efficiency.
- Web-Based Control: A Flask server was established to manage data flow between the Jetson Nano and the web interface, enabling remote monitoring and command operations.
- Communication Framework: Serial communication was set up between the Jetson Nano and Arduino to control actuators based on outputs from SLAM and object detection.

After the dependencies were installed and configured, the subsequent step was to calibrate the sensors and ensure that the LiDAR, camera, and motor controller communicated effectively with the Jetson Nano. The RPLiDAR X2 was tested to confirm its scanning range, resolution, and precision, while the camera module was adjusted for optimal performance in object detection.

B. Evaluating the System with an RC Car as a Test Vehicle


To assess the functionality of AdaptX in a controlled environment, the system was integrated with an RC car serving as the test vehicle. The motor driver controlled by Arduino allowed for accurate motion control, enabling AdaptX to navigate autonomously based on SLAM data and outputs from object detection.

The initial testing phase concentrated on achieving smooth motor actuation, where movement commands were derived from SLAM-based path planning. The LiDAR scans were displayed in real time to ensure accurate perception of the environment.

In the object detection validation phase, various test objects were positioned along the path to evaluate the precision of the YOLO-based recognition pipeline. The detection outcomes were documented, and the system's response to obstacles was analyzed. The performance of the Flask-based control system was also examined by transmitting remote commands to test latency and responsiveness.

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

C. Simulation and Real-World Testing Scenarios

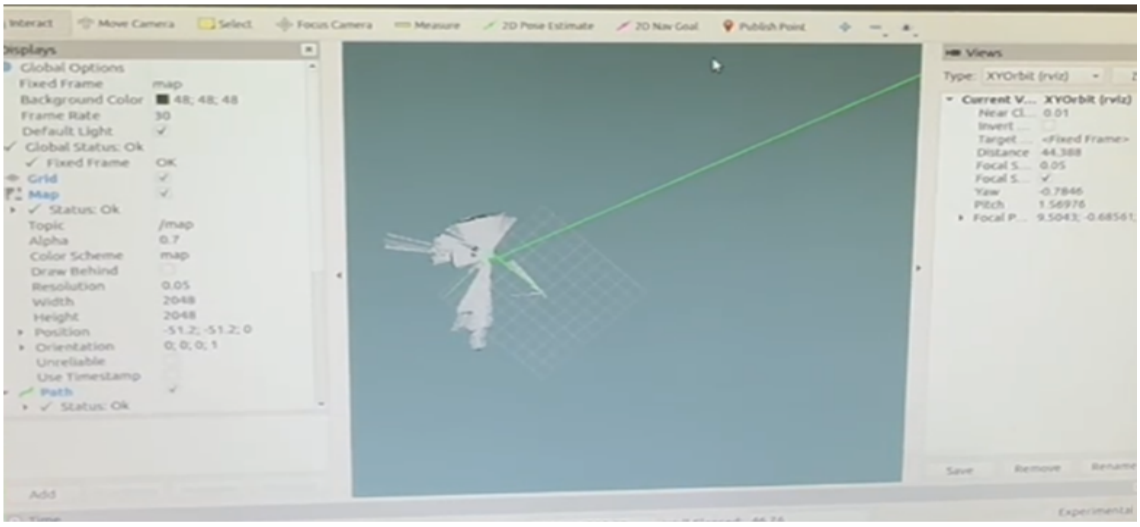

Prior to deploying AdaptX in an actual environment, the system was initially tested in a simulation setting to evaluate its performance across various scenarios. The ROS-based Gazebo simulator was used
to create virtual environments with obstacles, ensuring that the SLAM mapping and object detection models operated correctly before real-world implementation.

Following successful simulation tests, real-world testing was conducted in indoor and outdoor environments:

- Indoor Testing: The robot navigated within a structured environment, mapping hallways, rooms, and obstacles while avoiding collisions. The SLAM accuracy was compared against the actual layout to evaluate mapping precision.
- Outdoor Testing: The system was tested on uneven terrains to assess its adaptability. The LiDAR's performance under varying lighting conditions and the object detection accuracy were analyzed. The navigation model was fine-tuned to improve obstacle avoidance in open spaces.

The final phase of testing focused on real-time adaptability by introducing dynamic obstacles, ensuring that AdaptX could adjust its path and react to environmental changes autonomously. The system's response time, data processing speed, and navigation efficiency were recorded to measure overall performance.

V. RESULTS AND PERFORMANCE EVALUATION

The effectiveness of AdaptX was assessed through experiments carried out in both indoor and outdoor settings, concentrating on mapping fidelity, object detection capabilities, autonomous navigation effectiveness, and system responsiveness.The Hector SLAM algorithm efficiently processed LiDAR data to create real-time maps, allowing the robot to pinpoint its location and adjust to the environment around it. The resulting occupancy grid maps were reliable and visually precise, facilitating stable route planning and awareness of the surroundings.

The object detection component, developed using YOLOv9 alongside a monocular camera, successfully recognized various objects and obstacles in real time. The model operated smoothly with minimal latency, guaranteeing prompt identification and integration into the navigation framework.The autonomous navigation capabilities demonstrated considerable reliability, as the robot adeptly avoided both static and moving obstacles during several test runs. The system ensured steady movement and quickly modified its path in response to unforeseen environmental changes.

End-to-end system latency remained within acceptable boundaries, allowing for smooth interactions among perception, planning, and actuation. The remote monitoring interface introduced negligible delays, enabling users to monitor the robot's activities and intervene when necessary without significantly impacting performance.The Jetson Nano platform delivered sufficient computational power to support all modules, ensuring stable operation under real-time demands. The system also remained energy-efficient and resource-conscious, making it suitable for potential deployment in low-power environments.

The Flask-based web interface improved usability by providing real-time insights into the robot's status, sensor data, and mapping results. Additionally, it included manual control options and override functionalities, which were both responsive and beneficial in remote operational contexts.

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

VI. FUTURE WORK

While AdaptX has demonstrated strong autonomous capabilities, there are several areas for further enhancement and expansion. Future developments will focus on improving system efficiency, expanding adaptability to diverse robotic platforms, and integrating advanced AI techniques for more sophisticated decision-making.

A. Possible Improvements and Optimizations

One key area for improvement is enhancing SLAM efficiency. While Hector SLAM provided reliable mapping, incorporating multi-sensor fusion—such as stereo vision cameras or additional LiDAR units—could improve mapping accuracy, especially in featureless or open environments. Additionally, reducing computational overhead by optimizing data processing pipelines can lead to lower power consumption and faster response times, making the system more suitable for real-time applications.

Another optimization involves refining object detection performance. While YOLO performed well in various lighting conditions, its accuracy can be further improved using context-aware detection models that incorporate temporal information to track objects across multiple frames. Moreover, training on a more diverse dataset with real-world variations will enhance the robustness of object classification.

B. Expansion to Different Robotic Platforms

AdaptX was initially designed for deployment on an RC-based test platform, but its modularity allows it to be adapted to a wide range of autonomous robotic systems. Future work will involve integrating AdaptX with drones, industrial robots, and autonomous delivery systems, expanding its applicability across logistics, security, and search-and-rescue operations.

- Drone-Based Integration: Adapting AdaptX for aerial platforms would enable autonomous aerial mapping, object tracking, and terrain analysis in disaster relief or surveillance applications.
- Industrial Robotics: The system could be used for warehouse automation, where AdaptX-powered robots navigate warehouses, detect objects, and optimize inventory management.
- Autonomous Vehicles: AdaptX can be expanded for self-driving applications, enabling navigation in urban environments and obstacle avoidance in real-time traffic scenarios.

C. Integration with Deep Learning for Enhanced Decision-Making

While AdaptX relies on predefined algorithms for navigation and object detection, integrating deep learning-based decision-making would significantly enhance its autonomy. Reinforcement learning (RL) techniques could allow the system to learn optimal navigation strategies by interacting with its environment, improving efficiency in complex, dynamic settings.

Additionally, semantic segmentation models could improve scene understanding, allowing AdaptX to differentiate between different object types, identify drivable paths, and make more informed navigation decisions. Implementing neural network-based sensor fusion would further enhance multi-modal perception, enabling AdaptX to perform better in challenging environments such as low-visibility areas or highly cluttered spaces.

VII. CONCLUSION

AdaptX represents a significant advancement in autonomous robotic systems, combining real-time decision-making, SLAM-based navigation, object detection, and web-based control into a seamless and adaptable module. The research highlights the design, development, and performance evaluation of AdaptX, demonstrating its ability to operate autonomously in dynamic environments. By integrating Hector SLAM for mapping, YOLO for object detection, and a Flask-based interface for remote control, the system showcases a well-rounded approach to modern robotic autonomy.

The results indicate that AdaptX is highly effective in generating accurate maps, detecting objects in real time, and responding efficiently to environmental changes. Its modularity allows it to be deployed across various robotic platforms, making it a versatile solution for applications such as search and rescue, surveillance, industrial automation, and smart mobility. The system's adaptability and performance in real-world scenarios underscore its potential to enhance the capabilities of autonomous robotics.

Moving forward, AdaptX has immense potential for further development, including deep learning integration, improved sensor fusion, and expansion to aerial and industrial robotic platforms. With continuous improvements, it could become a benchmark for autonomous modules, contributing to the advancement of AI-driven robotics.

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

The research provides a foundation for future innovations in autonomous navigation, intelligent perception, and AI-driven decision-making, paving the way for smarter and more efficient robotic systems.

REFERENCES

[1] C. Wei and Z. Jian, "Application of intelligent UAV onboard LiDAR measurement technology in topographic mapping," 2021 IEEE International Conference on Emergency Science and Information Technology (ICESIT), Chongqing, China, 2021, pp. 942-945, doi: 10.1109/ICESIT53460.2021.9696811.

[2] B. Cao, R. C. Mendoza, A. Philipp and D. Göhring, "LiDAR-Based Object-Level SLAM for Autonomous Vehicles," 2021 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS), Prague, Czech Republic, 2021, pp. 4397-4404, doi: 10.1109/IROS51168.2021.9636299.

[3] Yaseen, Muhammad. (2024). What is YOLOv9: An In-Depth Exploration of the Internal Features of the Next-Generation Object Detector. 10.48550/arXiv.2409.07813.

[4] M. U. Khan, S. A. A. Zaidi, A. Ishtiaq, S. U. R. Bukhari, S. Samer and A. Farman, "A Comparative Survey of LiDAR-SLAM and LiDAR based Sensor Technologies," 2021 Mohammad Ali Jinnah University International Conference on Computing (MAJICC), Karachi, Pakistan, 2021, pp. 1-8, doi: 10.1109/MAJICC53071.2021.9526266.

[5] Thale, Sumegh & Prabhu, Mihir & Thakur, Pranjali & Kadam, Pratik. (2020). ROS based SLAM implementation for Autonomous navigation using Turtlebot. ITM Web of Conferences. 32. 01011. 10.1051/itmconf/20203201011.


[6] Iram Noreen, Amna Khan and Zulfiqar Habib, “Optimal Path Planning using RRT* based Approaches: A Survey and Future Directions” International Journal of Advanced Computer Science and Applications(IJACSA), 7(11), 2016. http://dx.doi.org/10.14569/IJACSA.2016.071114.

[7] Landa, Jaromir & Procházka, David & Stastny, Jiri. (2013). Point cloud processing for smart systems. Acta Universitatis Agriculturae et Silviculturae Mendelianae Brunensis. 61. 2415-2421. 10.11118/actaun201361072415.

[8] Wang, Xin & Pan, HuaZhi & Guo, Kai & Yang, Xinli & Luo, Sheng. (2020). The evolution of LiDAR and its application in high precision measurement. IOP Conference Series: Earth and Environmental Science. 502. 012008. 10.1088/1755-1315/502/1/012008.

[9] Quigley, Morgan & Conley, Ken & Gerkey, Brian & Faust, Josh & Foote, Tully & Leibs, Jeremy & Wheeler, Rob & Ng, Andrew. (2009). ROS: an open-source Robot Operating System. ICRA Workshop on Open Source Software.

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

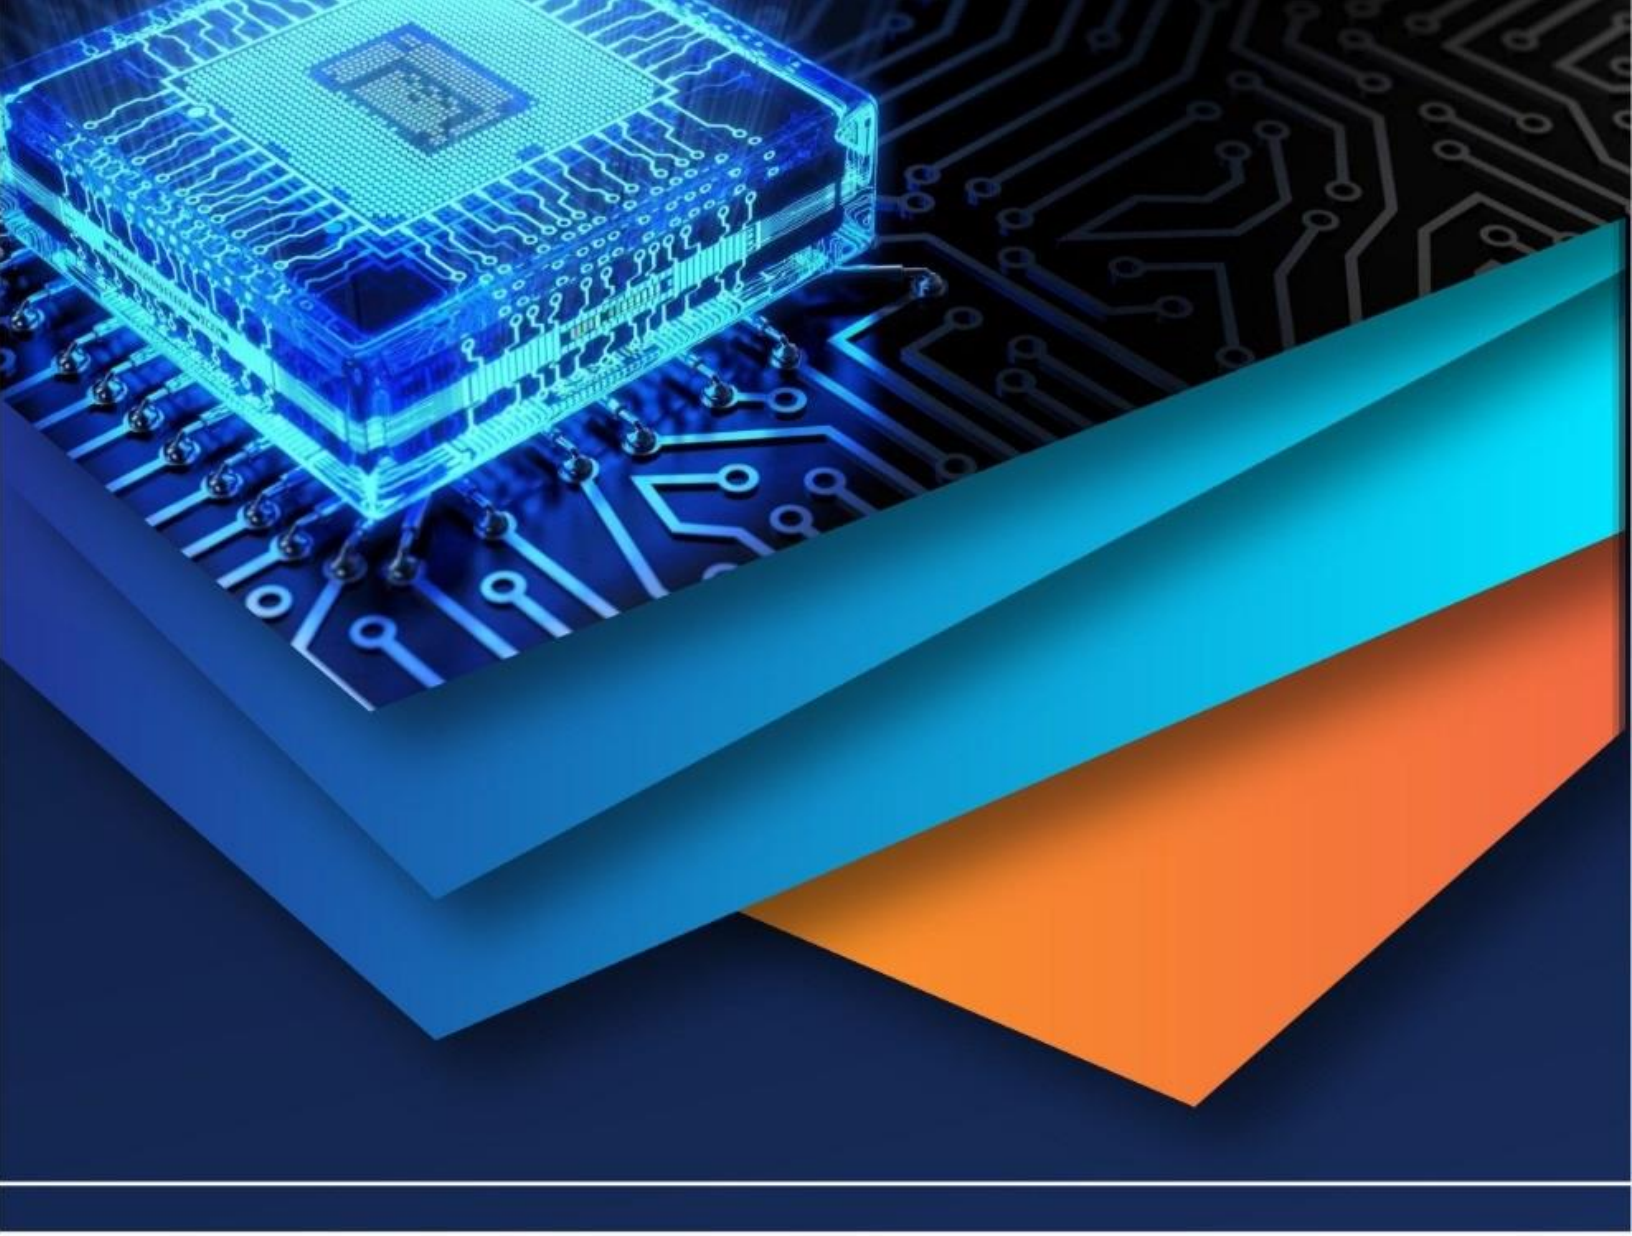

10.22214/IJRASET

45.98

IMPACT FACTOR: 7.129

IMPACT FACTOR: 7.429

INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089 (24*7 Support on Whatsapp)