



# **iJRASET**

International Journal For Research in  
Applied Science and Engineering Technology



---

# **INTERNATIONAL JOURNAL FOR RESEARCH**

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume: 13    Issue: IV    Month of publication: April 2025**

**DOI: <https://doi.org/10.22214/ijraset.2025.68037>**

**[www.ijraset.com](http://www.ijraset.com)**

**Call:  08813907089**

**E-mail ID: [ijraset@gmail.com](mailto:ijraset@gmail.com)**

# Development of a Smart Stretcher with Arduino Based Automation for Enhanced Patient Transport

K. Prabhakara Rao<sup>1</sup>, B.Anil Kumar<sup>2</sup>, Anupama Bollampally<sup>3</sup>, M.Venkata Sai Kishore<sup>4</sup>, S.Sai Manish Reddy<sup>5</sup>, Usha .V<sup>6</sup>

Dept. of ECE, B V Raju Institute of Technology Narsapur, Medak(dist),Telangana

**Abstract:** The objective of this research is to build a remote-control stretcher using an Arduino which is mounted with an explosive. The car is controlled by using a mobile app. The connection is patched using the Bluetooth from mobile with HC05 Bluetooth module connected to the Arduino. The device is made versatile such that it is able to move every direction. The device boasts its versatility in moving freely and at respectable speed in all terrains with minor changes in parts. The device is made for free movement by boring the thought of various obstacles in various terrain and effects of weather changes. The device's main task is to rescue the injured soldier whose vital signs are down or hit by devising a route to the patient and returning in the same route avoiding all obstacles. The device is mainly operated by using the L293D shield which is a motor driver used to drive two motors operating the directions of the stretcher. The device moves as per the instructions given by mobile through the Bluetooth module.

The device is wirelessly connected with the help of Bluetooth which even helps in long range communication. This tactical lifesaver can be used in rescue and save a soldier's life without risking or involving other soldier's life. This device can also be used in hospital ambulance services to transport emergency patients to the correct ICU ward faster and correctly than humans. The device detects which ICU ward is not occupied with a patient and follows the routes set to the ward. This tactical lifesaver greatly helps soldiers to get out of a pinch situation with very less risk by involving very less involvement.

## I. INTRODUCTION

The objective of our research is to build a remote-controlled stretcher with battery and BMS. The usage of the device makes it easy to fight in harsh terrains such as rough forests where soldiers have less spatial awareness, snowy places where moving is difficult and steep hills where climbing is difficult as the device can easily reach our allies with very less personal involvement. The device can be easily connected and operated with any mobile device using Bluetooth. After the Bluetooth receives command, the two motors are driven by the L293D Shield motor driver. This makes the stretcher versatile to move in all directions. The device is made such that it travels at a decent speed in all-weather terrains while carrying the injured. The stretcher body's preferred to be made using carbon fiber with a reinforcement of steel to make the stretcher strong yet lightweight for easy traveling. Glass material can also be used as replacement for carbon fiber but is more heavy compared. This way the stretcher can resist the blast force and also protect the soldier.

The device core operator is Arduino with L293D Shield motor driver. The output and input components are connected and operated through Arduino and shield driver. The Bluetooth module is connected as an input device through which the commands are taken by the Arduino and shield driver. The motors act as output devices which are operated with L293D shield. The circuit is also connected with BMS of the actual battery to operate the main servo motor. The device uses batteries as their power source. We are using a pack of 18650 lithium-ion batteries of rating 3.7 voltage and 4000 mah. The batteries are connected in master-slave BMS format with each other, so the total rating is 1176 khw.

$I_{total} = I_1 + I_2 + \dots + I_n$

Hence,  $I_{total} = 4000 + 4000 \dots = 12000 \text{ mah}$  The voltage all together remains the same  $V_{total} = 14.8 \text{ V}$

| Material                | Density (kg/m <sup>3</sup> ) | Tensile Strength (GPa) |
|-------------------------|------------------------------|------------------------|
| Carbon Fiber (Standard) | 1760                         | 3.53                   |
| Titanium (grade 4)      | 4510                         | 0.55                   |

The hospital won't need a high-power stretcher compared to military use. The hospital mainly uses ultrasonic sensors to detect obstacles and IR sensors to detect threshold. The stretcher

The stretcher uses a servo motor for military purposes and dc motor for hospital purposes. The Servo motor is the latest replacement for the A.C motor Induction motor. Servo motor is said to generate higher starting torque and has less back emf on high speed which consumes less battery and runs for longer duration. The battery needs to be charged and can run for about 4 hours with no problem and 6 hours in low power mode. The BMS is used to maintain and run the battery in an efficient manner. The war may take place in an area where the temperature is not a friendly circumstance for the battery to run. To avoid this problem BMS always checks the outer and battery temperature and maintains the heat in the circuit by running 5V throughout the circuit.

The BMS uses a master-slave format with I2C communication where every four slaves have 1 master with a total of 4 masters. The masters are connected in a parallel manner and the slaves are connected in a serial manner. The BMS is a module which takes care of the battery and the motor circuit and helps them run in any harsh weather conditions.

The hospital won't be needing a BMS to handle the battery as the hospital always has a room temperature and the circuit is always ready to go. The brushless dc motor is a great motor to use as it is both silent and produces a great amount of power to run the stretcher. The brushless battery is able to run in reverse and forward direction effortlessly. The power ratings of various depend on the price put on the dc motors.

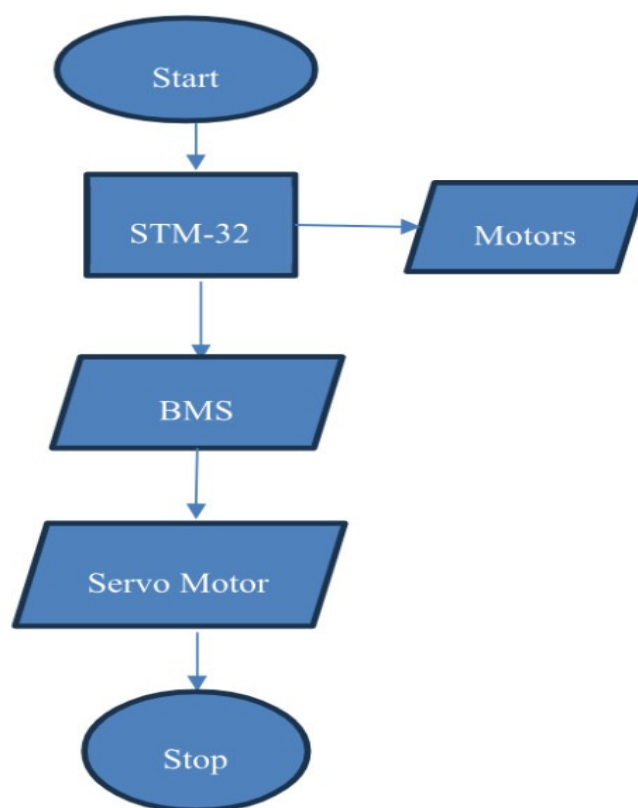


Figure 1. Flowchart of the driving circuit

## II. LITERATURE SURVEY

In the research process, the team explored various papers and journals for learning the process and structure of the device. In many situations of war and terrorist incidents, the soldiers are being personally participated and risking their lives which places their job and national security in threat. To tackle this problem the team came up with this idea and we first focused on the tracking of the patient. The team took reference from [1] R. N. George, P. J. Zachariah, R. Mohan, M. Yaseen and B. John and from papers [2] S. Sarker, M. S. Rahman and M. N. Sakib [3] M. Syedul Amin, J. Jalil and M. B. I. Reaz. These papers mainly focused on GPS detection of location on satisfying a certain condition based by which the stretcher can be operated to enroute to the location. The team modified the stretcher such that it could perform well in all weather and terrain.

The team then focused on enroute to the location of GPS by finding the exact location through cloud and IOT applications.

[4] R. Rishi, S. Yede, K. Kunal and N. V. Bansode,[5]S.Gatade,S.V.KulkarniandS.N,[6]P.Koganti,K. S.K,A.P,S.K.R,P.KishoreandS.R.Prasadrefer various waystodetectandenroutetowardsthegpsusingtraditionalways bysatellite communication andhumaninterference. Thismethod is rather helpful in precision basing on the remote control by human but there are some errors which can't be avoided. Therefore, the team go deep into the topic of ML and research on the topic.

[7] M.Khosyi'in,E.N.Budisusila,S.A.DwiPrasetyowati,B.

Y. Suprpto and Z. Nawawi,[8] S. Filippou etal are thepapers which helped around the way to use machine learning interface todetect andenroutethewaythroughcloudwithoutanyhuman interfacewithout any humaninteractionwhichreducesthetime taken to process the information. This could open up a lot of opportunities for further development based on the system requirements and budget put on the project.

The team focused on the main part, that is to display the audio andvideoofthecurrentlivedisplaythroughcloudnetwork.The reference of this part was taken from the previous work of the author[11]A.K.Bandani,A.Bollampally,S.Sahithi,R.Naik,

N. KumarandGoutham,theinterfaceissimilarandrequiredfor the extension of project. [9]Y.Yu and S. Lee and [10]M. R. T. Hossai, M. A. Shahjalal and N.. F. Nuri were also used for referencestoexploreandmakeupfortheother setbacksandto update and make a better updated model.

The team is working on making further developments by using artificial intelligence for selfdriving. By setting the coordinates of location the device would be reaching the location and performsitstaskefficientlycomparedtothatofahuman.Inthis contexttheteamis pickinguppreferencesfrompaper[7]andisworkingonitsresearchtomakeitpossible.

### III. PROPOSED MODULE

On taking the reference related to topic of research theteam started adlib on the on the prototype and make it possible such that the stretcher is able to move the gps location on remote control . The video quality and the audio quality are noticed to be low compared to the initially expected model. The main objective and the initial point of the protype is the gps signal. The gps sensor sends information about location of the injured soldierwhentheisdropsinhisvitalsorheisinjuredwhichcan be known by the bulletproof jacket worn by the soldier. The prototype alerts the nearby soldier to bringhim to safety. The stretcher is enrout and controlled throughremote and sent to thelocation.Afterthesoldierismounted,thestretcherreturnson thesameroutewithpacemorethanthatofahuman. Thisreduces casualties in war and helps in gaining an upper hand over the enemy.Thestretchermainlymoveswiththe helptheservomotor and the dc motors helping in changing the direction of the stretcherhelpingasagreatdrivingassist. Thestretcherisableto moveatspeedof60kmphbecauseofthepowergeneratedbythe motor. Thekeyrolehereisplayedby thecloudinterface withit's control over the sensors and alert the controller about the situation in war.

Similarly the team focused also on the alerting system as the stretcher can't autoupickthesoldier,thenearestsoldierisalerted topickandplaceonthestretcher.Thissysteminasimilarformat canalsobeusedforthehospitalemergencybutthegps sensoris replaced with ultrasonic and IR sensor . The stretcher is also equipped with IR sensor and ultrasonic sensor for it follow the line and avoid any obstacles if detected. The ultrasonic and IR sensormeasurethresholdtorecognizeiftheICUward isvacant or not.

### IV. RESULT

The followingpictureshowthestretcher andthehardwarecircuit oftheprototype.Theprototypeisbeingoperatedusingbluetooth simulation from our mobile asit is easierto operate and run the program and control the prototype.



Figure3:Stretcher



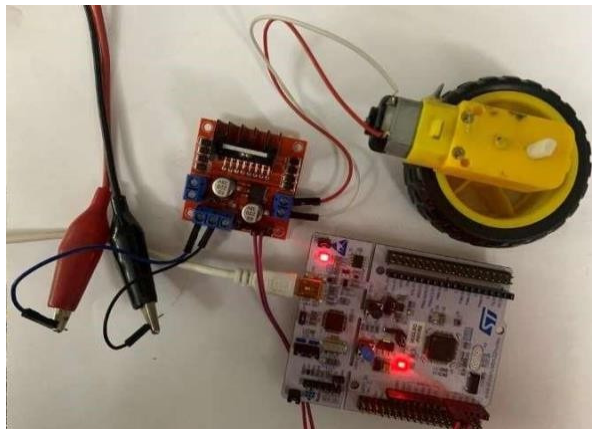


Figure4:Roughhardwarecircuit

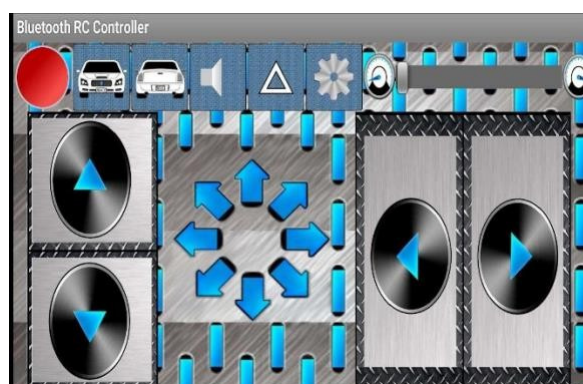


Fig.5.Simulation

## V. CONCLUSION

As per commands the stretcher moves in all directions in versatile and speedy manner while carrying the patient on it. The robot doesn't involve any other human interference to move or to be personally involved in the task. The prototype has a lot of variable options according to the demand of the user. By using AI assistant, the driving can become automatic without any human intervention and this makes the movements of the stretcher more precise and efficient. Arduino is the most preferable board for AI applications in terms of price efficiency. This project has a lot of future scope and is pretty low cost. This could help strengthen our defense and reduce the number of casualties in war and helping the heroes of our country during the high time.

## REFERENCES

- [1] R. N. George, P. J. Zachariah, R. Mohan, M. Yaseen and B. John, "WanderMate: GPS based bus tracking interface system," 2021 International Conference on Innovative Computing, Intelligent Communication and Smart Electrical Systems (ICES), Chennai, India, 2021, pp. 1-7, doi: keywords: {Navigation; Computational modeling; Transportation; Machine learning; Real-time systems; Delays; Faces; Android application; Navigation; GPS; real-time; location based service; Google Map},
- [2] S. Sarker, M. S. Rahman and M. N. Sakib, "An Approach Towards Intelligent Accident Detection, Location Tracking and Notification System," 2019, IEEE International Conference on Telecommunications and Photonics (ICTP), Dhaka, Bangladesh, 2019, pp. 1-4, doi:10.1109/ICTP48844.2019.9041759. keywords: {Optical losses; Law enforcement; Roads; Vehicles safety; Transportation; Process control; Telecommunications; Intelligent transportation system; vehicle accident; road traffic accident; roads safety; accident detection; location tracking},
- [3] M. Syedul Amin, J. Jalil and M. B. I. Reaz, "Accident detection and reporting system using GPS, GPRS and GSM technology," 2012 International Conference on Informatics, Electronics & Vision (ICIEV), Dhaka, Bangladesh, 2012, pp. 640-643, doi: 10.1109/ICIEV.2012.6317382. keywords: {Accidents; Global Positioning System; Vehicles; GSM; Ground penetrating radar; Receivers; Monitoring; accident monitoring; GPS; accident detection; GPRS; GSM},
- [4] R. Rishi, S. Yede, K. Kunal and N. V. Bansode, "Automatic Messaging System for Vehicle Tracking and Accident Detection," 2020 International Conference on Electronics and Sustainable Communication Systems (ICESC), Coimbatore, India, 2020, pp. 831-834, doi:10.1109/ICESC48915.2020.9155836. keywords: {Global Positioning System; Road accidents; GSM; Detectors; Accelerometers; Medical services; Accelerometer; automatic emergency messaging system; Accident detection; abrupt change in threshold value detector; Arduino; GSM Module; GPS Module},

- [5] S.Gatade,S. V.KulkarniandS.N,"Automated VehicleAccidentDetectionandHealthcareUnitAlerting Using IoT," 2022 IEEE 2nd Mysore Sub Section International Conference (MysuruCon), Mysuru, India, 2022, pp. 1-5, doi: 10.1109/MysuruCon55714.2022.9972705.keywords: {Roadaccidents;Hospitals ;Prototypes;Mobilehandsets;Manufacturing;Internetof Things;Intelligentsensors;ESP32 Microcontroller;IRSensor;UltrasonicSensor;MQ-3 Gas Sensor;Accelerometer;GPS;GSM;BlynkApplication},
- [6] P.Koganti,K.S.K,A.P,S.K.R,P.Kishoreand S.R.Prasad,"SatellitebasedRoadTaggerGPSRadioNavigation system with Integration of Artificial Intelligence," 2021 4th International Conference on Recent Developments in Control, Automation & Power Engineering (RDCAPE), Noida, India, 2021, pp. 536-539, doi:10.1109/RDCAPE52977.2021.9633626.keywords:{Globalnavigation satellite system;Powerengineering;Roads;Satellitebroadcasting;Neuralnetworks;Radionavigation;Machinelearning;radionavigation;geolocation;satellite;globalpositioning system;Roadtagger;neural network},
- [7] M.Khosyi'in,E.N.Budisusila,S.A.Dwi Prasetyowati, B. Y. Suprpto and Z. Nawawi, "Design of Autonomous Vehicle Navigation Using GNSS Based on Pixhawk 2.1," 2021 8th International Conference onElectrical Engineering, Computer Science and Informatics (EECSI), Semarang, Indonesia, 2021, pp. 175-180, doi : keywords:{Performanceevaluation;Magnetometers;Magneticsensors;Buildings;Radio navigation;Sensorsystems;Sensors;autonomousvehicle ;Here2GPS/GNSS;GPS/IMU;pixhawk2.1;navigation},
- [8] S.Filippouet al., "AMachineLearningApproachfor Detecting GPS Location Spoofing Attacks in Autonomous Vehicles," 2023 IEEE 97th Vehicular Technology Conference (VTC2023-Spring), Florence, Italy, 2023, pp. 1-7, doi: 10.1109/VTC2023-Spring57618.2023.10200857.keywords: {Training; Vehicular and wireless technologies;Uncertainty;Computational modeling;Urbanareas; Receivers;Machinelearning; Locationspoofing;attack detecti on;machine learning ;autonomousvehicles;cybersecurity},
- [9] Y. Yu and S. Lee, "Remote Driving Control With Real- Time Video Streaming Over Wireless Networks:DesignandEvaluation,"inIEEEAccess,vol.10,pp. 64920-64932, 2022, doi: 10.1109/ACCESS.2022.3183758. keywords: {Streaming media;Autonomousvehicles;Delays;Vehicles;Automobiles;Remotecontrol;Protocols;Autonomousdriving;feedbackdelay;human- vehicle interaction;live streaming;network latency;remotecontrol;remotedriving;round trip time;ROS;video streaming},
- [10] M.R.T.Hossai,M.A.ShahjalalandN.F.Nuri, "Design of an IoT based autonomous vehicle with the aid of computervision,"2017InternationalConferenceonElectrical, Computer and CommunicationEngineering(ECCE),Cox'sBazar,Bangladesh, 2017, pp. 752-756, doi:10.1109/ECACE.2017.7913003.keywords:{Computers;Internet ofThings(IoT);RaspberryPI;ArduinoUno;ComputerVision;OpenCV;SonarModule;Picamera;MachineLearning;Python;ApacheWeb Server},
- [11] A.K.Bandani,A.Bollampally,S.Sahithi,R.Naik, N. Kumar and Goutham, "Design of Spy Robot with Wireless Night Vision Camera Using Android," 2023 International Conference for Advancement in Technology (ICONAT), Goa, India, 2023, pp. 1-5, doi: 10.1109/ICONAT57137.2023.10079953 .keywords:{Nightvision;Wirelesscommunication;Bluetooth;Robot vision systems;Cameras;Software;Robots;Surveillance};



10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)