



IJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 13 **Issue:** III **Month of publication:** March 2025

DOI: <https://doi.org/10.22214/ijraset.2025.67985>

www.ijraset.com

Call: ☎ 08813907089

E-mail ID: ijraset@gmail.com

Development of Smart EV Charging Station Using Hybrid Power Generation System

Ms. Vishakha Puram¹, Prof. Rajendra Bhombe², Dr. Kishor Porate³, Prof. Saurabh Bagde⁴

Department Of Electrical Engineering Guru Nanak Institute of Technology, Nagpur, India.

Abstract: In today's technology-driven world, electricity is one of the most important things in our daily lives. Because we all don't know that renewable energy sources run out immediately. So it is time for us to shift our focus from conventional energy sources to unconventional energy production. The hybrid system can be used both in industry and at home. In this project we will generate electricity from unconventional and conventional sources. All renewable energy sources, such as solar energy, wind energy, are used to produce electricity in industry. This paper deals with the use of a solar-electric-wind system in the design of a hybrid energy system. Use of Battery can reduce the need to maintain electrical cables and we can manage the load demand at very high times. The project shows that the renewable hybrid energy system using Supercapacitor. It creates a pollution-free environment.

Keywords: Solar energy , wind energy , Hybrid power system , Battery , power saving etc.

I. INTRODUCTION

Renewable energy sources provide clean energy that is sufficient on earth. These renewable sources are obtained from land, water, sun, plants, etc. These sources are widely used in the production of electricity. Solar and wind power generation are attractive sources because they are environmentally friendly. A hybrid system is a mixture of different renewable energy sources such as solar energy, biomass electricity, wind energy, etc. In hybrid energy production, the produced power is first stored in the battery and then used to meet the energy demand. Today, the wind and solar energy system is growing rapidly, and the traditional energy source is depleting every day and disappearing in the coming years. So we must look for a new source of energy that is non-polluting and easily accessible. On sunny days you get energy from the sun and on cloudy days from the wind system.

A growing global problem related to rapid economic development and a relative lack of energy, because we all do not know that renewable energy sources are quickly running out. So it is time for us to use both conventional and non-conventional sources of energy to generate electricity. Today,

Supercapacitors are widely used. These high pressure and efficient energy storage devices are also known as ultracapacitors or electrochemical double layer capacitors (EDLC). Their favorable properties make them ideal for use in energy storage systems, including the ability to charge and discharge quickly without losing efficiency in the long term. The supercapacitor package can be used in a HESS (battery-supercapacitor system), which integrates various energy storage technologies with a specific control strategy that maximizes the benefits of each energy source used for overall efficiency.

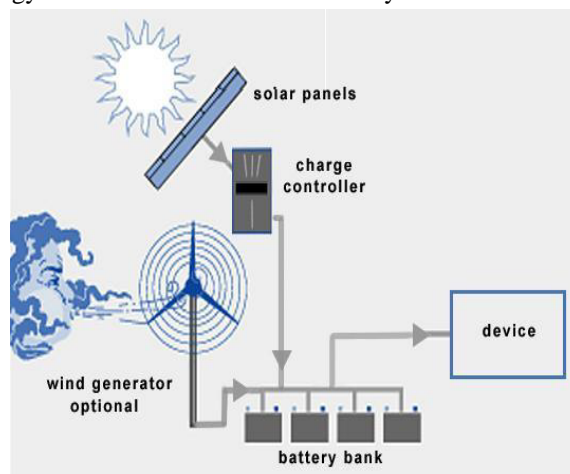


Fig. 1 Schematic of a conventional photovoltaic Hybrid System.

II. PROBLEM STATEMENT

The use of renewable energy as a source of energy is expanding as the price of petroleum fluctuates. Therefore, it is crucial that engineering and technological students have a grasp of and awareness of technology related to renewable energy at the educational level. Solar energy is one of the most popular renewable energy sources. There is a lot of research being done to develop alternatives to improve the efficiency of photovoltaic systems (solar panels). One such method is to employ a solar panel tracking system.

Key Statement:

- Install sources such as horizontal axis wind turbines to increase power outages.
- Also add a solar system to generate electricity.
- Create a similar model that will be able to reflect system features and functionality as needed.

III. BEHIND RESEARCH

Fast charging as an indoor electric vehicle board is hindered by the cost of the electronic components needed to convert the electricity, which increases the overall cost of the electric car. However, built-in chargers cannot ensure fast EV charging due to the high cost of EV-related electronics and increasing the charging capacity of the car.

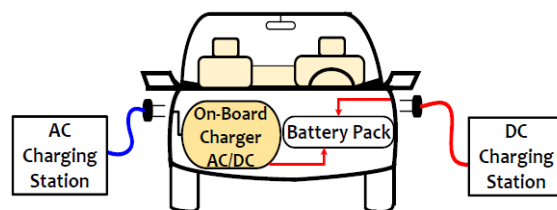


Fig.1. Hybrid EV Charging Station

To ensure faster charging of electric vehicles, external chargers are used that provide high direct current. It is worth noting that in external chargers, the entire conversion from AC/DC is done by an independent inverter. That is why it is important to increase the power of the converters to ensure faster charging of the car. The results of several published studies have been used in the design and development of efficient and reliable electric vehicle charging systems at electric vehicle charging stations.

A. Hybrid Power :

A hybrid power tool combines two energy sources to supply electricity efficiently. It is a system designed to generate power using multiple sources, ensuring reliability, efficiency, and low emissions at a minimal cost. In the proposed system, solar and wind energy are utilized for electricity generation. These renewable sources offer significant advantages over conventional power, providing a sustainable and cost-effective solution. The system requires minimal investment and can be installed anywhere without location constraints. By integrating solar and wind power, the hybrid system ensures continuous energy availability, making it an ideal choice for various applications.

In this proposed gadget, solar and wind power are employed to generate electricity. Sun and wind strength have distinct advantages as compared to all other unconventional electricity sources. Each power asset is required in all areas. It desires a low fee. There is no need to identify a specific area to put in this gadget.

B. Solar Power :

Solar energy is power generated by the sun's radiation, which is constantly and readily available on the earth. It is freely accessible, does not emit pollutants, has minimal upkeep expenses, and is cost-effective. However, it has difficulty producing power in bad weather conditions. Solar energy is more efficient than conventional sources, requiring an upfront investment but having a longer lifespan and lower emissions.

C. Wind Power :

Wind power is generated from the wind utilizing a windmill, which is a sustainable energy source with minimal production and maintenance costs. Wind energy is accessible virtually 24 hours a day and produces little emissions. The starting cost is cheaper than for solar energy, and the amount of power produced is determined by the direction of the air flow.

The recommended Hybrid Energy System mixes solar and wind power to solve the short-term nature of individual renewable energy sources. This provides continuous power generation, increases dependability, and overcomes the limitations of individual sources. The system may be deployed in remote places, lowering gearbox costs while providing a dependable, low-emission, and cost-effective option providing continuous power delivery.

IV. PROJECT DESCRIPTION

Block Diagram

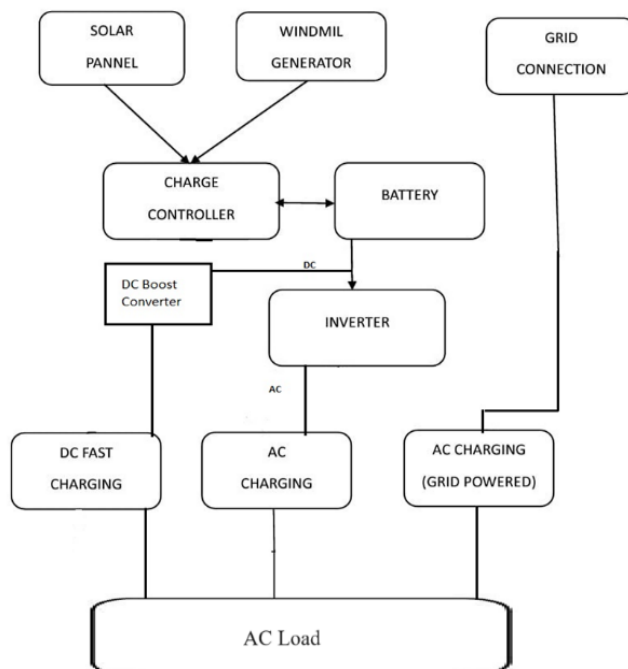


Fig. 2. Block Diagram of system

V. WORKING

- 1) The project provides a clear picture of a solar-wind hybrid energy system with supercapacitor base charging. And it's easier to replace the battery with a continuous supply hybrid electric system when it's repaired.
- 2) This work was done considering the hybrid electric system that will be completed soon. The performance of the proposed centralized energy management strategy with interleaved conversion steps is investigated and validated under different real-time scenarios.
- 3) These scenarios consist of different weather profiles covering a 2-hour horizon and different intermittent power load conditions. The entire system is modeled and the corresponding test is performed.
- 4) Controller is used to control the entire charging function. The LCD display shows the real-time power monitoring system.
- 5) Solar and wind generator and DC boost converter are also used to store energy in a supercapacitor.
- 6) Finally, the inverter module is used to convert DC to AC for direct AC loading.
- 7) Different real-time PV profiles covering sunny, partly sunny and cloudy conditions are considered to investigate the performance of the proposed strategy. All scenarios are recorded, analyzed and concluded that the energy balance between the sources and the AC load is maintained.
- 8) In addition, the system maintains a uniform regulated voltage on the DC bus thanks to the proposed power management and control architecture.

VI. COMPONENTS

- 1) Wind Generator
- 2) Solar Panel
- 3) Solar Charge Controller

- 4) LCD Display
- 5) Development Board
- 6) Inverter Module
- 7) Voltage Sensor
- 8) AC Load
- 9) Charging Socket
- 10) Adapter
- 11) LED Indicator
- 12) Others

VII. COMPONENTS SPECIFICATION

1) Solar Panel (12v25w)

Solar energy is that energy which we get from the sun in form of radiation. It does not cause any kind of pollution, it is inexhaustible. It is available free of cost. A solar cell is used to convert solar energy into electric energy, it is also known as photovoltaic cell.



2) DC Generator (12v)


A DC generator is an electrical machine whose main function is to convert mechanical energy into electricity.



3) LCD Display (5v)

A liquid crystal display (LCD) is a thin, flat panel used for electronically displaying information such as text, images, and moving pictures.

LCD stands for **L**iquid **C**rystal **D**isplay. LCD is finding wide spread use replacing LEDs (seven segment LEDs or other multi segment LEDs)



4) DC to DC boost Converter (Regulated 12v)

A boost converter (step-up converter) is a DC-to-DC power converter that steps up voltage (while stepping down current) from its input (supply) to its output (load). It is a class of switched-mode power supply (SMPS) containing at least two semiconductors (a diode and a transistor) and at least one energy storage element: a capacitor, inductor, or the two in combination.



5) Inverter (12v DC to 220v AC)

As we know that most of the electrical appliances require AC voltage, so first the DC output of the batteries will be converted into AC voltage with the help of an inverter and then it will be transferred to the loads. The inverter must be having over voltage protection, reverse polarity and short circuit protection.



6) Inverter

An inverter is an electrical device that converts direct current (DC) to alternating current (AC); the converted AC can be at any required voltage and frequency with the use of appropriate transformers, switching, and control circuits.



7) SMPS Unit (220v AC to 12v DC)

SMPS is an electronic power supply system that makes use of a switching regulator to transfer electrical power effectively. It is a PSU (power supply unit)



8) PCB's Board



A printed circuit board (PCB) mechanically supports and electrically connects electrical or electronic components using conductive tracks, pads and other features etched from one or more sheet layers of copper laminated onto and/or between sheet layers of a non-conductive substrate.

VIII. PROPOSED CALCULATIONS

Total energy generated by the system is the total energy generated by the solar PV panel and the power generated by the wind turbine. According to statistics, it can be represented by,

$$PT = NW * P_w + N_s * P_s$$

There,

$$\text{Total energy generated} = PT$$

$$\text{Power generated by wind turbines} = P_w$$

$$\text{Energy produced by solar panels} = P_s$$

$$\text{Wind turbine number} = NW$$

$$\text{Number of solar panels used} = N_s$$

A. Calculations for wind energy:

The energy produced by wind power is provided by,

$$\text{Energy} = (\text{air density} * \text{swept area} * \text{cubed velocity}) / 2$$

$$P_w = \frac{1}{2} * \rho * (AW) * (V)^3$$

There,

P is the power in watts (W)

ρ air pressure per kilogram per cubic meter (kg / m^3) AW area of air per square meter (m^2) V wind speed per meter (m / s).

B. Calculations for solar energy

To determine the size of the PV modules, the required power consumption should be measured. Therefore, power is calculated as

$$PS = I_{ns} (t) * AS * \text{Eff} (pv)$$

There,

$I_{ns} (t)$ = separation at t (kw / m^2)

AS = one PV panel area (m^2)

Eff_{pv} = full efficiency of PV panels and dc / dc converters.

The overall efficiency is provided by,

$$\text{Eff} (pv) = H * PR$$

There,

H = Annual rate of solar radiation on oblique panels.

PR = Performance rate, loss coefficient.

C. Cost

The total cost of a solar-wind energy system depends on the total number of wind turbines used and the total number of solar panels used. The total cost is therefore provided as follows

Total Cost = (Wind Turbine Number * Cost of One Wind Turbine) + (Solar Panel Number * Cost of One Solar Panel) + (Number of Batteries Used in Battery Bank * Cost of One Battery)

$$CT = (NW * CWT) + (NS * CSP) + (NB * CB)$$

There,

CT is the total cost per Rs

CWT is the cost of a single wind turbine

CSP costs one day panel per Rs

CB One Battery Cost Rs

NW is the amount of wind turbine used

NS is the number of solar panels used

NB is the number of batteries used in the Battery Bank.

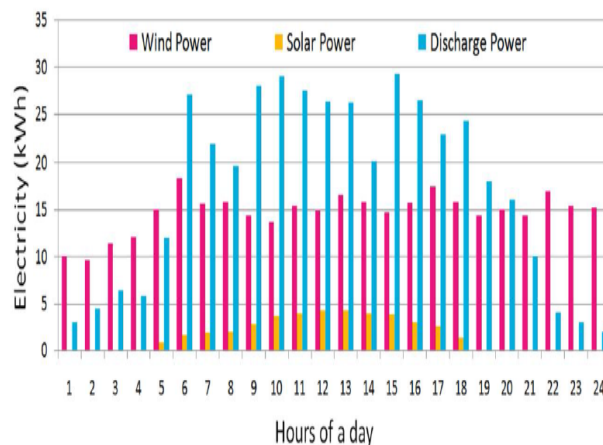


Fig. 4 Hourly generated electricity by both wind and solar from the proposed method

The hourly required load, the total power generated by the recharging station, and the power supplied to the grid are shown in Fig. 5. In some cases such as hour 1-3.5 and 12-16.5 the station supplies few kilowatt of power to the grid.

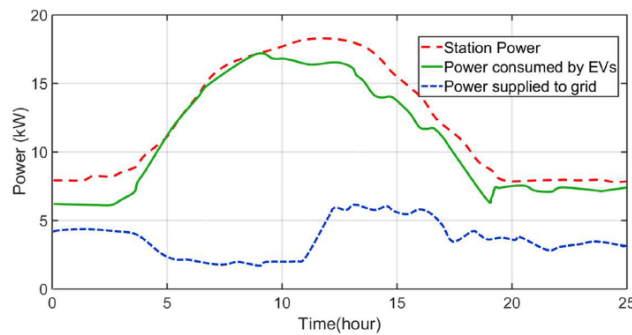


Fig. 5 Hourly power measured during a day.

IX. ADVANTAGES WITH HYBRID SYSTEM

- 1) During the rainy season and winter the amount of sunlight is insufficient as this season energy is complemented by the wind energy system.
- 2) Due to climate change when there is a lack of wind power beyond the power provided by solar panels.
- 3) Low operating costs and maintenance costs make you a savings.
- 4) Used in any place whether it is remote or crowded.
- 5) Efficient power generation
- 6) Solar and wind sites benefit the environment as they will reduce carbon and other harmful pollutants by about 90% in the area.

X. APPLICATIONS

- 1) Distributed electricity generation
- 2) Hospital, Hotels, Guest House etc.
- 3) Electricity installation in remote and rural areas.
- 4) Street lighting.
- 5) Transfer and contact Tower with multiple application.

XI. CONCLUSION

Developing Portable hybrid systems is one of the simplest and most efficient solutions for generating electricity compared to non-renewable energy resources using supercapacitor. Not only is it expensive but it also does not cause environmental damage. Also, it can be used to generate electricity in hilly areas, where it is difficult to transfer electricity in normal ways. Depending on the need the setting can be determined. All the people in the world should be encouraged to use extraordinary resources to generate electricity so that they can be relatively reliable. Longevity, minimal care is one of your best places. It just needs a higher initial investment.

As we know the mixed system has additional production costs per unit but uses the resources available effectively. This Hybrid program is also capable of recovering from any accidental or unwanted situation. And the hybrid system is able to harness power in remote and rural areas. So it is clear that the Hybrid system is the best choice.

REFERENCES

- [1] Pritesh P. Shirsath "Solar-Wind Hybrid Energy Generation System", B.E., Department of Electronics, NMIET, Savitribai Phule Pune University, Pune, India , International Journal of Engineering Research and General Science Volume 4, Issue 2, March-April, 2016.
- [2] Laukik Sanghavi , "Hybrid Vibration and Solar Power Generation System using Piezoelectric Sensors and Fuzzy Logic based Sun Tracking Solar Panels" ,Department of Instrumentation & Control Engineering Department of Instrumentation & Control Engineering AISSMS's IOIT, Pune India , International Journal of Science Technology & Engineering | Volume 2 | Issue 10 | April 2016 .
- [3] Yatin Sharma, "Hybrid Power Generation Using Solar Panel And wind energy", B.tech in Electronics Engg. BVDUCOE, Pune, Maharashtra, India, International Research Journal of Engineering and Technology (IRJET) , May -2017.
- [4] K.Aneelkumar , Design Of Multi Electricity Generator Using Solar And Piezo Electric Transducer , Student Department of EEE, Pragati Engineering College, Surampalem, A.P , International Research Journal of Engineering and Technology (IRJET) , July -2017.
- [5] Bharat Raj Singh , "Solar-Wind Hybrid Power Generation System", B.tech Students, Department of Electrical and Electronics, KIET Group of Institutions, Ghaziabad-201206, Uttar Pradesh , International Research Journal of Engineering and Technology (IRJET) , Jan-2018.



- [6] Ms. Bhusari Priya Govind, "A Hybrid Piezoelectric-Solar Based Power Generation System", Department of E&TC Engineering, Bharati Vidyapeeth's College Of Engineering For Women, Pune, India, International Journal of Advanced Research in Computer and Communication Engineering Vol. 4, Issue 3, March 2015.
- [7] Li Wang, "Design of Electric Vehicle Charging Station Based on Wind and Solar Complementary Power Supply", 6th International Conference on Computer-Aided Design, Manufacturing, Modeling and Simulation (CDMMS 2018).
- [8] Jagruti Gowardhan¹, Souras Ghotekar², Shibu Thomas³ Hybrid Solar-Wind Charging Station for Electric Vehicles and Its Simulation, International Journal for Research in Applied Science & Engineering Technology (IJRASET), Volume 10 Issue VIII Aug 2022.
- [9] Nilesh Dhongade^{*1}, Rakesh Dhopare^{*2}, Arpita Malode^{*3}, Hrushikesh Dandwate^{*4}, Hybrid Solar-Wind Powered Charging Station For Electric Vehicles, International Research Journal of Modernization in Engineering Technology and Science, Volume:04/Issue:05/May-2022.
- [10] Haiying Li, Hao Liu, Aimin Ji, Feng Li, Yongli Jia, Design of a hybrid solar-wind powered charging station for electric vehicles, National Technology Support Program of China, IEEE 2013.
- [11] A. Adejumbi, S.G. Oyagbinrin, F. G. Akinboro & M.B. Olajide, "Hybrid Solar and Wind Power: An Essential for Information Communication Technology Infrastructure and people in rural communities", IJRRAS, Volume 9, Issue 1, October 2011, pp 130-138.
- [12] Kavita Sharma, Prateek Haksar "Designing of Hybrid Power Generation System using Wind Energy- Photovoltaic Solar Energy- Solar Energy with Nanoantenna" International Journal of Engineering Research And Applications (IJERA) Vol. 2, Issue 1, Jan-Feb 2012, pp.812-815.
- [13] Sandeep Kumar, Vijay Kumar Garg, "A Hybrid model of Solar-Wind Power Generation System", International Journal of Advanced Research in Electrical, Electronics and Instrumentation Engineering (IJAREEIE), Vol. 2, Issue 8, August 2013, pp. 4107-4016.
- [14] International Journal of Electronic and Electrical Engineering. ISSN 0974-2174, Volume 7, Number 5 (2014), pp. 5355-542 © International Research Publication House <http://www.irphouse.com> Hybrid Renewable Energy System: A
- [15] Arjun A. K., Athul S., Mohamed Ayub, Neethu Ramesh, and Anith Krishnan, "Micro-Hybrid Power Systems – A Feasibility Study", Journal of Clean Energy Technologies, Vol. 1, No. 1, January 2013, pp.27-32.



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)