



# IJRASET

International Journal For Research in  
Applied Science and Engineering Technology



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

**Volume:** 13    **Issue:** V    **Month of publication:** May 2025

**DOI:** <https://doi.org/10.22214/ijraset.2025.71661>

[www.ijraset.com](http://www.ijraset.com)

Call:  08813907089

E-mail ID: [ijraset@gmail.com](mailto:ijraset@gmail.com)

# Development of Spreadsheet Design Tool for R.C.C. One way Slab Design Using V.B.A.

Harshit Dubey<sup>1</sup>, Rakesh Grover<sup>2</sup>

<sup>1</sup>PG Student, <sup>2</sup>Professor Department of Civil Engineering, Jabalpur Engineering College, MP

**Abstract:** Reinforced Cement Concrete (RCC) slabs are one of the most widely used structural elements in buildings, providing a flat horizontal surface for flooring and roofing. Their safe and economical design is crucial in structural engineering. While commercial design software like STAAD Pro and ETABS are powerful, they are often complex, require significant expertise and costly. On the other hand, manual design methods, though conceptually straightforward, can be time-consuming, repetitive, and prone to calculation errors. To address these challenges, this thesis presents the development of a spreadsheet-based design tool using Microsoft Excel and Visual Basic for Applications (VBA) for the analysis and design of RCC slabs. The tool aims to simplify and automate the structural design of one-way and two-way simply supported RCC slabs based on IS 456:2000 guidelines. The user-friendly Excel interface allows users to input essential design parameters such as slab dimensions, loading conditions, material grades (concrete and steel), and support configurations. The VBA code performs structural analysis, calculates design moments, determines the required area of steel reinforcement, checks serviceability criteria such as deflection, and provides reinforcement detailing as output. The developed tool has been validated using standard design problems with manual calculations and RCDC design software. Results show high accuracy and reliability, with significant time savings for design engineers. Additionally, the use of Excel and VBA ensures accessibility, making it a practical solution for students, educators, and professionals who may not have access to advanced design software. This thesis demonstrates that spreadsheet tools, when combined with simple programming logic, can provide efficient and accurate solutions for structural design. The tool can be further extended to cover more structural elements such as beams, columns, and footings, thereby increasing its scope and usability in practical applications.

**Keywords:** Spreadsheet design Tool, V.B.A., R.C.C. Slab, Reinforcement, Design, IS456-2000, One Way Slab

## I. INTRODUCTION

Reinforced Cement Concrete (RCC) slabs are among the most fundamental elements in structural systems, serving as the horizontal platforms for floors and roofs in buildings. The safe and economical design of slabs is crucial in structural engineering, as they transfer loads from above to beams and walls and ultimately to the foundation. Depending on the support conditions and aspect ratios, slabs are categorized into one-way or two-way slabs, each requiring different design approaches as per established codes like IS 456:2000. Traditionally, the design of RCC slabs is carried out manually using standard procedures, formulas, and design charts. While this method ensures a clear understanding of the structural behavior and design process; it is often time-consuming, tedious, and vulnerable to calculation errors. On the other hand, commercial software such as STAAD Pro, ETABS, and SAFE offer advanced analysis capabilities but may be expensive, complex, and less accessible to students or professionals in smaller firms. There is a clear need for a middle-ground solution that is simple, accessible, accurate, and capable of reducing the time required for RCC slab design. Spreadsheet tools, particularly Microsoft Excel, are widely available and familiar to most engineers. When combined with Visual Basic for Applications (VBA), Excel can be transformed into a powerful platform for custom engineering applications.

### A. Introduction to visual basics for applications

Visual Basic for Applications (VBA) is an event-driven programming language developed by Microsoft. It is built into most Microsoft Office applications, including Excel, and allows users to automate tasks, customize functions, and create powerful tools within the familiar spreadsheet environment. VBA is a simplified version of Visual Basic, designed specifically for use with Office applications, and is particularly useful for engineers, analysts, and professionals who need to perform repetitive or complex tasks.

### B. Advantages of using Excel with VBA

- 1) One can make his own tailor-made programs which include sets of functions and formulas all bind up with a VBA Programs.
- 2) If a VBA program is well created, a person with no info of VBA can run it without any strain.

- 3) One can do things in Excel that are otherwise not possible.
- 4) Looping or repetition process is possible in Excel Sheets only with use of VBA
- 5) Data Analysis becomes calmer and more orderly with use of VBA
- 6) While writing complex calculations, use of VBA program can lessen the chances of unplanned changes in cell while working.

**C. Importance of Spreadsheet as a Design Tool**

Spreadsheets, particularly Microsoft Excel, have become indispensable tools in engineering design due to their versatility, accessibility, and efficiency. Their tabular structure allows for the organized presentation of data and formulas, making them highly intuitive for engineers and students alike. In structural design, especially for RCC elements like slabs, spreadsheets offer real-time calculation capabilities. Any change in input values automatically update the results, making iterative design fast and efficient. One of the key advantages of using spreadsheets is the transparency they offer in the design process. Each step, formula, and result is visible and traceable, which is essential for reviewing and verifying structural calculations. Spreadsheets can also be customized to suit various design standards, such as IS 456:2000, allowing users to build tailored solutions for specific structural problems. This flexibility makes them applicable to a wide range of structural elements beyond slabs, including beams, columns, and footings. In addition to numerical calculations, spreadsheets support data visualization through built-in charting tools. This enables the graphical representation of loads, stress distributions, and reinforcement layouts, aiding in better interpretation of design results. Moreover, with the integration of Visual Basic for Applications (VBA), spreadsheets evolve from simple calculation sheets into powerful design tools. VBA enhances functionality by allowing automation, conditional logic, and the creation of interactive user forms, turning Excel into a lightweight yet intelligent design platform. The use of spreadsheets also facilitates proper documentation and record-keeping. Input data, intermediate steps, and final results can be saved, shared, and printed easily, ensuring clarity and professionalism in design reports. Due to these benefits, spreadsheets are widely used in both academic environments for teaching design principles and in professional practice for preliminary and detailed design tasks.

**D. Importance of Spreadsheet as a Design Tool**

- 1) Unlike design software, spreadsheets can be made for an exact problem.
- 2) The Design Software need proper working out to use them; however, a spreadsheet is designed correctly it can be used without any prior training.
- 3) Design Software are expensive and have patent issues.
- 4) Spreadsheet are totally customizable as per necessity of user.
- 5) Design Spreadsheet can run on any system with running Microsoft Office, hence need no installation prior to use.

**II. OBJECTIVE**

The basic purpose behind writing this paper is to develop a spreadsheet tool in MS Excel using Visual Basic Application, which will let user to design RCC Slab. The spreadsheet design is fundamentally based on the several characteristics of MS Excel along with development in Visual Basic Editor Atmosphere. The spreadsheet comprises of all the numerical functions and mathematical relations and expressions for different design methods.

**III. OVERVIEW OF DEVELOPED SPREADSHEET**

The developed Design Spreadsheet contains three modules excluding Main Menu, which let the user simply toggle between different modules, by just clicking the respected button.



Fig.1: Snapshot of Main Menu of Design Tool

Module:1 Design of one-way slab: This module focuses on the automated design of one-way RCC slabs using VBA in Excel. A one-way slab is defined as a slab where the ratio of longer span ( $L_y$ ) to shorter span ( $L_x$ ) is greater than or equal to 2. In such slabs, the primary bending occurs in the shorter direction. This module focuses on the automated design of one-way RCC slabs using VBA in Excel. Based on user inputs such as span, loads, concrete and steel grade, and effective cover, the program calculates bending moment, required effective depth, and area of reinforcement as per IS 456:2000. The tool uses standard formulas to compute the moment and depth, and then selects appropriate bar diameter and spacing. A simple and user-friendly interface is provided, and the design results are displayed instantly upon clicking the “Design” button. The module reduces manual errors and saves time in routine slab design tasks.

Module:2 Design of two-way unrestrained slab: This module deals with the design of two-way unrestrained RCC slabs using VBA in Excel. When the slab’s longer span to shorter span ratio is less than 2, it is considered a two-way slab. The program calculates bending moments in both directions using moment coefficients from Table 27 of IS 456:2000, assuming all edges are simply supported (unrestrained). Based on the calculated moments, the tool computes the required effective depth and reinforcement in both directions. The VBA code automates these calculations and suggests appropriate bar sizes and spacing, displaying results in a structured output sheet. This module ensures quick, accurate design of two-way slabs without boundary restraints.

Module 3: Design of two-way restrained slab This module is designed to automate the structural design of two-way restrained RCC slabs, where all edges are supported and partially or fully restrained against rotation. Unlike unrestrained slabs, restrained slabs develop negative moments at supports and require special consideration in design. The moment coefficients used in this module are derived from Table 26 of IS 456:2000, which provides values for nine different slab edge conditions, depending on the degree of continuity along the edges.

The tool allows the user to select from the following 9 standard cases as per IS 456:

- 1) All four edges discontinuous
- 2) Two adjacent edges continuous
- 3) Two adjacent edges discontinuous and the other two continuous
- 4) Three edges continuous and one edge discontinuous
- 5) Two opposite edges continuous and the other two discontinuous
- 6) All four edges continuous
- 7) Two adjacent edges continuous and the other two discontinuous
- 8) Three edges discontinuous and one edge continuous
- 9) Two adjacent edges discontinuous and the other two continuous (alternate arrangement)

#### IV. OPERATING SPREADSHEET DESIGN TOOL

This segment primarily deals with the method by use of which spread sheet should be operated. Since, the design spreadsheet is outcome of use of programming in VB Editor, the spreadsheet contains visual basic programming language and there by saved as Microsoft Excel Binary Worksheet. The user must, therefore check first the “Enable Content” Button positioned below the ribbon of the spreadsheet. Some programming process run upon opening of the workbook; thus, the user is suggested to always enable the macros content of this program.

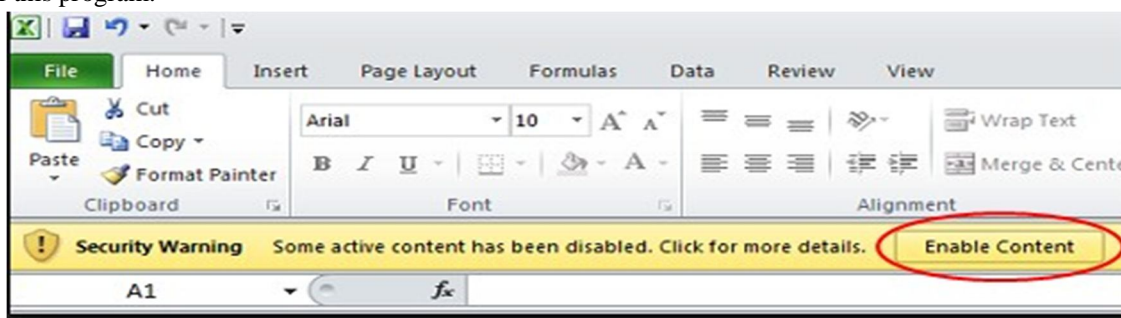


Fig.2: Snapshot of Enable content Option

Now, as discussed earlier, the design spreadsheet contains three modules. As we open the design Spreadsheet the Main Menu Page Opens Figure below, shows the presence of the main menu as it looks once opened.

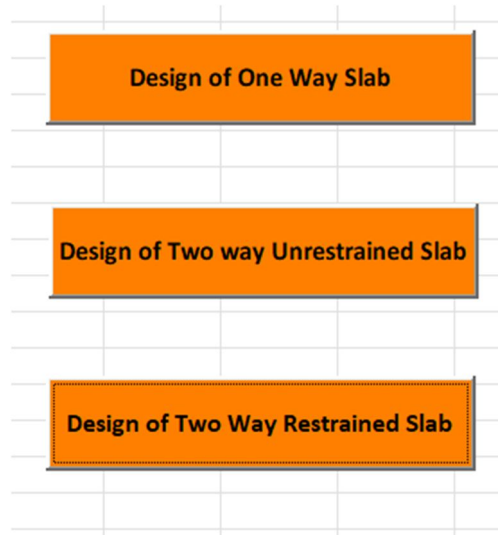


Fig.3: Snapshot of Main Menu of Design Tool

1) *Operating Module: 1, Design of one-way slab*

As discussed earlier this module deals with design of one-way slab.

Clear Longer Span (Ly)	9
Clear Shorter Span (Lx)	4
Live Load	2
Floor Finish	1.75
Supporting Wall Thickness	300
Strength of Concrete (fck)	20
Grade of Steel (Fy)	415

Fig.4: Snapshot of input units

As can be seen from the figure the spread sheet contains following

As can be seen from the figure the spread sheet contains following

1) Input Box: To input following data

- Clear Longer span (Ly)
- Clear Shorter span (Lx)
- Live load
- Floor finish
- Supporting wall thickness
- fck

2) After input data when we click on design msg box asked for bar diameter.



Fig.5: Snapshot of msg box for bar diameter

3) After entering bar diameter results are displayed.

	Provided area of R/F	Bar dia	Spacing
Along shorter span Astx	456.909 mm <sup>2</sup>	8 mm	110 mm
Along longer span Asty	264.421 mm <sup>2</sup>	8 mm	190 mm
Thickness of slab	225 mm		

Fig.6: Snapshot of Results

### V. VBA PROGRAMMING CODE IN VB EDITOR

```
Private Sub CommandButton1_Click()
Worksheets(1).Visible = True
Worksheets(1).Select
Worksheets(2).Visible = False
End Sub

Private Sub Design_Click()
'STEP-1 DETERMINATION OF TYPE OF SLAB
Range("v8") = Range("b6") / Range("b7") 'Determination of Type of Slab , Ly/Lx ratio
If Range("v8") > 2 Then 'Ly/Lx ratio > 2

'STEP-2 CALCULATION OF EFFECTIVE DEPTH
Dim D As Integer
D = Range("b7") * 50 'Determination of depth in mm , d=(Lx*1000)/20 , clause 23.2.1 page no. 37 IS456:2000
If D < 100 Then
Range("v9") = 100

'STEP-3 CALCULATION OF EFFECTIVE SPAN
If ((Range("b7") * 1000) + Range("v9")) < ((Range("b7") * 1000) + Range("b10")) Then
Range("v10") = Range("b7") + (Range("v9") / 1000)
Else
Range("v10") = Range("b7") + (Range("v9") / 1000) 'calculation of effective span , Lx+(effective depth/1000) , page34 , IS456:2000
End If
Else
Range("v9") = D
If ((Range("b7") * 1000) + Range("v9")) < ((Range("b7") * 1000) + Range("b9")) Then
Range("v10") = Range("b7") + (Range("v9") / 1000)
Else
Range("v10") = Range("b7") + (Range("v9") / 1000) 'calculation of effective span
End If
End If
End If
```

Fig.7: Snapshot of VBA code

```
End If
Range("v11") = Range("v9") + Range("x11") 'overall depth , D=(effective depth + effective cover)

'STEP-4 LOAD CALCULATIONS
Range("v13") = (Range("v11")) / 1000 * 1 * 25 'dead load , DL=D*1*unit wt of rcc
Range("v14") = Range("B8") 'live load
Range("v15") = Range("B9") 'floor finish
Range("v16") = 1.5 * (Range("v13") + Range("v14") + Range("v15")) 'ultimate load , Wu=1.5* w

'STEP-5 ULTIMATE MOMENT
Range("v17") = (Range("v16") * (Range("v10")) ^ (2)) / 8 'ultimate moment , Mu=(wu*Le*Le)/8

'STEP-6 CHECK FOR EFFECTIVE DEPTH
Dim k As String
k = Range("b12")
Select Case k
Case 250
Range("x18") = 0.148
Case 415
Range("x18") = 0.138
Case 500
Range("x18") = 0.133
End Select
Range("v18") = Sqr((Range("v17") * 1000000) / (Range("x18") * Range("b11") * 1000)) 'check for effective depth , drequired=sqrt(Mu/0.138*fck*1000)
Range("v20") = Range("v9") > Range("v18") 'dprovided > dreq , safe
```

Fig.8: Snapshot of VBA code

'STEP-7 RIENFORCEMENT CALCULATIONS

```

Range("v22") = (0.5 * Range("b11") / Range("x22")) * (1 - Sqr(1 - (4.6 * Range("v17") * 1000000) / (Range("b11") * 1000 * Range("v9") * Range("v9"))))
If Range("b12") = 250 Then
Range("v24") = (0.15 / 100) * 1000 * Range("v11") 'Minimum Ast , 0.15% of b*D For mild steel Fe250
Else
Range("v24") = (0.12 / 100) * 1000 * Range("v11") 'Minimum Ast , 0.12% of b*D For hysd steel
End If
If Range("v22") > Range("v24") Then 'Ast check Ast>Astminimum , safe
Range("v26") = Range("v22")
Else
Range("v26") = Range("v24")
End If

```

Fig.9: Snapshot of VBA code

'Bar Dia Selection

```

sinput = Application.InputBox("Please enter dia of bar to be used")
If sinput = False Then
Exit Sub
Else
Range("v28") = sinput
If Range("v28") < (Range("v11") / 8) Then
Select Case sinput 'v29 = area of bars choosen

Case 8
Range("v28") = 8
Range("v29") = 50.26
Case 10
Range("v28") = 10
Range("v29") = 78.54
Case 12
Range("v28") = 12
Range("v29") = 113.09
Case 16
Range("v28") = 16
Range("v29") = 201.06
Case 20
Range("v28") = 20
Range("v29") = 314.16
Case 25
Range("v28") = 25
Range("v29") = 490.87
Case 32
Range("v28") = 32
Range("v29") = 804.25
Case Else
dummy = MsgBox("wrong input", vbCritical)
End Select
Else

```

Fig.10: Snapshot of VBA code

'SPACING FOR MAIN R/F

```
If (Range("v29") / Range("v26")) * 1000 > 300 Then
Range("v30") = 300
Else
If (Range("v29") / Range("v26")) * 1000 < 3 * Range("v9") And (Range("v29") / Range("v26")) * 1000 < 300 Then 'spacing for main r/f
If (Range("v29") / Range("v26")) * 1000 > 30 Then
Range("v30") = (Round((Range("v29") / Range("v26")) * 1000) / 10) * 10)
Else
Range("v30") = 30
End If
ElseIf (3 * Range("v9")) < (Range("v29") / Range("v26")) * 1000 And (3 * Range("v9")) < 300 Then
Range("v30") = 3 * Range("v9")
Else
Range("v30") = 300
End If
End If
```

'SPACING FOR DISTRIBUTION STEEL

```
If (Range("x29") / Range("v24")) * 1000 < 5 * Range("v9") And (Range("x29") / Range("v24")) * 1000 < 300 Then 'spacing for distribution steel
If (Range("x29") / Range("v24")) * 1000 > 30 Then
Range("v32") = Round((Range("x29") / Range("v24")) * 1000) / 10) * 10)
Else
Range("v32") = 30
End If
ElseIf (5 * Range("v9")) < (Range("x29") / Range("v24")) * 1000 And (5 * Range("v9")) < 300 Then
Range("v32") = 5 * Range("v9")
Else
Range("v32") = 300
End If
```

Fig.11: Snapshot of VBA code

'STEP-8 CHECK FOR SHEAR

```
Range("v87") = (Range("v16") * Range("v10")) / 2 * Vu, (Wu*Le)/2
Range("v89") = (Range("v87") * 1000) / (1000 * Range("v9")) 'nominal shear stress, Nominal shear stress=(Vu/b*d), IS456:2000, page72
Range("v91") = (Range("v31") * 100) / (1000 * Range("v9"))
Range("v90") = Range("w91") 'design shear strength of concrete, page73, IS456:2000
Range("v92") = Range("w90") > Range("v89") 'slab is safe in shear, nominal shear stress < design shear strength of concrete, safe
```

'STEP-9 CHECK FOR DEFLECTION

```
Range("v38") = (0.58 * Range("b12") * Range("v26")) / Range("v31") 'fs steel stress of service loads, fs=(0.58*fy*Astrequired)/Astprovided, page37&38
Range("v39") = (Range("v31") / (1000 * Range("v9"))) * 100 'percentage tension reinforcement, percent tension r/f=(provided Ast/b*d)*100
Range("v113") = (0.87 * Range("b12") * Range("v31")) / (0.36 * 2 * Range("b11") * 1000) 'Xu, (0.87*fy*Ast/0.36*fck*b), page96, IS456:2000
Range("v114") = 0.87 * Range("b12") * (Range("v31") / 2) * (Range("v9") - 0.42 * Range("v113")) 'Ml, (0.87*fy*(Ast/2))*(d-0.42*xu)
Range("v116") = (1.3 * Range("v114")) / (Range("v117")) + (Range("v115")) 'Ld, (1.3*Ml/V)+Lo, page44, IS456:2000, for Lo=(d or 12*bar dia) whichever
Range("v117") = Range("v87") * 1000 'v
Range("v64") = Range("v10") * 1000 / (20 * Range("v44")) 'd, (Lx*1000/20*M.F.), page38 figure4 for M.F., IS456:2000
Range("v66") = Range("v9") > Range("v64") 'safe in deflection, dprovided > drequired, safe
```

'STEP-10 CHECK FOR DEVELOPMENT LENGTH

```
Dim T As String
T = Range("b11")
Select Case T
Case 20
Range("v118") = 1.2
Case 25
Range("v118") = 1.4
Case 30
Range("v118") = 1.5
Case 35
Range("v118") = 1.7
Case 40
Range("v118") = 1.9
End Select
```

Fig.12: Snapshot of VBA code

## VI. VALIDATION OF RESULTS

In any computational or design automation tool, ensuring the accuracy and reliability of the results is of paramount importance. The credibility of the developed system depends not only on its functionality or user interface but also on the validity of the output it produces. In the case of structural engineering applications, such as the design of reinforced concrete (RCC) slabs, this becomes even more critical, as any inaccuracy may directly affect the safety and serviceability of the structure. The results obtained from the spreadsheet tool are compared with those derived from manual calculations for selected slab design problems and from RCDC software results. Key design parameters such as bending moments, effective depth, required steel area (Ast), and reinforcement detailing is evaluated. The level of agreement between the manual, RCDC software and spreadsheet outputs serve as a measure of the tool's accuracy.

To validate the developed spreadsheet tool, manual design calculations were performed for a one-way simply supported RCC slab as per IS 456:2000. The slab had a span of 3m x 7m and was subjected to a live load of 2 kN/m<sup>2</sup>. Key design parameters including bending moment, effective depth, and reinforcement area were calculated manually and compared with the tool output.

Further validation was carried out by comparing the reinforcement detailing results from the developed tool with outputs from RCDC software for a slab of span 1.75m x 2.73m under 4 KN/m<sup>2</sup> Live load. The focus was on bar diameter and spacing of main and distribution reinforcement.

### VII. RESULTS AND DISCUSSIONS

The tool was evaluated in terms of design speed, user interface experience, implementation of IS 456:2000 provisions, and its support for advanced features such as torsional reinforcement. While the accuracy of the tool has already been validated in the using both manual methods and RCDC software. The developed tool effectively automates the RCC slab design process based on user-defined parameters such as slab span, support condition, imposed loads, and material properties. Key features of the tool include: Identification of slab type (one-way or two-way), Load calculation (DL + LL + FF), Moment calculation using IS 456 coefficients, Depth and reinforcement design, Corner torsion reinforcement provision (if required), Reinforcement spacing and bar selection. These features provide a comprehensive and compliant design solution for typical RCC slabs used in building construction.

Tables below compared the results-

Manual Vs VBA tool (Table -1)

SN	Type of Slab	Span	Bar dia.	Manual (Spacing) S/L	VBA tool (Spacing) S/L	Deviation S/L (%)
1.	One way Slab	3m x7m	8 mm	170 /240	170/240	0/0

RCDC vs VBA tool (Table – 2)

SN	Type of Slab	Span	Bar dia.	RCDC (Spacing) S/L	VBA tool (Spacing) S/L	Deviation S/L (%)
1.	One way Slab	1.14m x3.05m	8 mm	275 /300	300/300	9.09/0

### VIII. CONCLUSION

The objective was to develop a user-friendly, Excel-based spreadsheet tool for the design of RCC slabs using Visual Basic for Applications (VBA), in accordance with IS 456:2000. The developed tool successfully automates the design of one-way and two-way slabs by performing accurate calculations, reducing manual effort, and minimizing human errors. It allows users to input key design parameters and instantly obtain outputs such as required reinforcement and slab thickness, thereby saving time and improving productivity. The tool serves as a valuable resource for students, academicians, and practicing engineers by simplifying the slab design process. Although it currently focuses on basic slab types and does not consider lateral loads such as earthquake and wind forces, it lays a solid foundation for further development. Future enhancements can include additional structural components, graphical outputs, cost estimation, integration with analysis software, and consideration of seismic and wind loads. In conclusion, this work demonstrates the potential of combining engineering knowledge with programming tools like VBA to create efficient, practical design aids that can bridge the gap between theory and real-world applications.

### REFERENCES

- [1] Amalfitano, Amatucci Nicola, Simone Vincenzo De, Fasoline Anna Rita, Tramontana Portfirio “Toward Reverse Engineering of VBA based Excel Spreadsheets Applications” arXiv:1503.03401v1 [cs.SE] 11 Mar 2015
- [2] Choi Kang Kyu “Reinforced Concrete Structure Design Assistance Tool for Beginners” (2002)
- [3] Danavandi Varsha S.“Developing Civil Engineering Design Software using MS Excel ” ISSN (PRINT): 2393-8374, (ONLINE): 2394-0697, VOLUME-4, ISSUE-5, 2017



- [4] Din Essam Zanel "Using Spreadsheets and VBA for Teaching Civil Engineering Concepts" ICSIT 2010 - International Conference on Society and Information Technologies, Proceedings
- [5] Edstrom Linda "A Finite Element Tool for Beam Analysis" Method September 2015 International Review of Civil Engineering (IRECE) 6(5):124-132
- [6] Labadan Rimmon S., "Design of Post Tensioned Prestressed Concrete Beams using Excel Spreadsheet with Visual Basic Applications" International Journal of Advances in Mechanical and Civil Engineering, ISSN: 2394-2827 Volume-3, Issue-4, Aug.-2016
- [7] MJ Shree Lakshmi, Mnjunatha, Spandan, Ritesh "Development of IOS Application for Design of Flat Slabs" (IRJET) Volume: 04 Issue: 09 | Sep -2017
- [8] Suh Yong S. "Development of educational software for beam loading analysis using pen-based user interfaces" Volume 1, Issue 1, January 2014
- [9] Tiwari Suryam, Srivastava Vijay "Development of Design Spreadsheet Tool for R.C.C. Beam Design using V.B.A" IJRST, Volume 4, Issue 11, April 2018, ISSN (online): 2349-6010
- [10] Bajpai Shobhit, Grover R. K. "Earthquake Resistant Performance of a Multistorey RCC Frame Considering Two Different Positions of the Staircase" IJRASET ISSN: 2321-9653; IC Value: 45.98; Volume 10 Issue IX Sep 2022
- [11] Masatkar Varsha, Grover R. K. "Comparison of Low-Rise Open Ground Storey Framed Building in Different Earthquake Zone" 2022, IRJEdT Volume: 04 Issue: 04



10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)