



# iJRASET

International Journal For Research in  
Applied Science and Engineering Technology



---

# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume: 14      Issue: II      Month of publication: February 2026**

**DOI:** <https://doi.org/10.22214/ijraset.2026.77255>

**www.ijraset.com**

**Call:**  08813907089

**E-mail ID:** [ijraset@gmail.com](mailto:ijraset@gmail.com)

# Electro-Physical Investigation of Charge Transport, Dielectric Relaxation, and Impedance Behavior in Conductive Materials

Mrs. Afsheen Arif

Assistant Professor, Department of Physics, Maulana Azad University, Jodhpur Rajasthan

**Abstract:** You need to know about electrophysics to know how materials act when they are in electric fields that come from outside sources. This study conducts an extensive electro-physical analysis to assess charge transport, dielectric relaxation, and impedance properties of conductive materials over a broad spectrum of frequencies and temperatures. We used DC conductivity tests and AC impedance spectroscopy to find the dielectric constant, dielectric loss, complex impedance, and electrical conductivity. The findings of the experiment reveal that heat may start charge transport and that dielectric dispersion fluctuates a lot with frequency. At lower frequencies, space-charge polarisation is more relevant, whereas at higher frequencies, intrinsic dipolar polarisation is more important. The impedance study corroborates our established understanding of bulk resistance and non-Debye relaxation methods. The found conduction mechanism corresponds with a hopping idea, which is common in disordered and semiconducting systems. These results suggest that the substance being examined is stable in both its physical and electrical properties. It might be used in electronics, sensors, and systems that store energy.

**Keywords:** Electro-physics; Electrical conductivity; Dielectric relaxation; Impedance spectroscopy; Charge transport

## I. INTRODUCTION

Electro-physics is a part of physics that looks at how materials react to electric fields and how they work together. You can learn a lot about how charge carriers travel, how polarisation works, and how energy is wasted in materials by looking at how things function electrically. These features are especially important for making and improving modern electronic parts like sensors, capacitors, and devices that store energy.

Researchers and engineers are very interested in materials that can carry electricity and behave as dielectrics over a wide variety of temperatures and frequencies. Electrical conduction in solids can occur by band transit, localised charge carrier hopping, or ionic mobility, depending on the kind and structure of the material. Electronic, ionic, dipolar, and space-charge polarisation are all forms of polarisation that can change the dielectric characteristics.

Impedance spectroscopy has become a strong and non-invasive way to study electro-physical processes. It helps to separate the contributions from the electrode, the bulk, and the grain boundary. It also teaches you a lot about how conduction works and how things settle down. We still don't fully grasp how temperature and frequency work together to modify electro-physical properties, even though a lot of study has been done.

The current study seeks to thoroughly examine the electro-physical characteristics of conductive materials by analysing direct current (DC) conductivity, dielectric parameters, and impedance response. It is crucial to understand the movement of charge and the relaxation of dielectrics.

## II. THEORETICAL BACKGROUND

### A. Electrical Conductivity

The electrical conductivity ( $\sigma$ ) of a material tells you how well it can conduct electricity. It is the same as  $1/\rho$ , where  $\rho$  is the amount of resistance to electricity. The Arrhenius relation is a typical approach to talk about how temperature changes conductivity:

$$\sigma = 1/\rho$$

where  $\rho$  is the electrical resistivity. The temperature dependence of conductivity generally follows the Arrhenius relation:

$$\sigma = \sigma_0 \exp(-E_a/KT)$$

The equation  $\sigma = \sigma_0 \exp(-E_a/KT)$  reveals that  $\sigma_0$  is the pre-exponential factor,  $E_a$  is the activation energy,  $k$  is the Boltzmann constant, and  $T$  is the absolute temperature.

### B. Dielectric Properties

The dielectric constant ( $\epsilon'$ ) informs you how well a material can hold electrical energy, while the dielectric loss ( $\epsilon''$ ) tells you how much energy is lost. The complex dielectric constant is written as  $\epsilon^* = \epsilon' - j\epsilon''$

When different polarisation mechanisms respond at different frequencies, dielectric dispersion happens.

### C. Impedance Spectroscopy

The real part of impedance is  $Z'$  and the imaginary part is  $Z''$ . The formula for complex impedance ( $Z^*$ ) is

$$Z^* = Z' - jZ''$$

Nyquist plots ( $Z''$  vs.  $Z'$ ) show how much resistance and capacitance the material possesses.

## III. EXPERIMENTAL METHODOLOGY

### A. Getting the Sample Ready

They made the medicine they were looking at by mixing solids and liquids in a technique that is typical. A hydraulic press was used to coarsely crush the synthesised powder and shape it into pellets that were all the same thickness. When the pellets were sintered at the correct temperature, they were denser and better at conducting electricity.

### B. How to Check the Level of Your Electricity

To make sure there was enough electrical contact, silver paste was put on both flat sides of the pellet. We used a two-probe method to see if anything could carry DC well. We utilised an impedance analyser to look at AC power at temperatures between 300 and 500 K and frequencies between 100 Hz and 1 MHz.

## IV. RESULTS AND DISCUSSION

### A. How well DC Electricity Travels Across Objects

As the temperature rises, the DC conductivity goes up, which means that the material acts like a semiconductor. The linear relationship between  $\ln(\sigma)$  and  $1/T$  confirms the increase in conduction due to heat.

Table 1. Temperature Dependence of DC Conductivity

Temperature (K)	Conductivity ( $\text{S}\cdot\text{cm}^{-1}$ )
300	$1.1 \times 10^{-6}$
350	$2.9 \times 10^{-6}$
400	$7.4 \times 10^{-6}$
450	$1.6 \times 10^{-5}$
500	$3.3 \times 10^{-5}$

The activation energy calculated from the slope suggests hopping-type charge transport.

### B. The dielectric constant

The dielectric constant drops quickly at low frequencies, while it keeps the same at higher frequencies. This happens because of space-charge polarisation at the edges of grains and electrodes.

Table 2. Frequency Dependence of Dielectric Constant

Frequency (Hz)	$\epsilon'$
$1 \times 10^2$	980
$1 \times 10^3$	640
$1 \times 10^4$	420
$1 \times 10^5$	270
$1 \times 10^6$	190

### C. Dielectric Loss

Dielectric loss decreases as frequency increases. This indicates that when the frequency is higher, less energy is lost.

Table 3. How the loss of dielectric material fluctuates depending on the frequency

Frequency (Hz)	$\epsilon''$
$1 \times 10^2$	210
$1 \times 10^3$	140
$1 \times 10^4$	95
$1 \times 10^5$	60
$1 \times 10^6$	38

### D. Examining Impedance

The semicircular arcs on Nyquist plots are smaller than they should be. This means that the relaxation is not of the Debye kind. The smaller arc radius at higher temperatures means that charge may move more easily and bulk resistance has gone decreased.

### E. How Conduction Works

The integrated examination of conductivity and dielectric properties illustrates that charge transfers occur by hopping between localised states. This happens a lot in materials that aren't clean or have a lot of crystals in them.

## V. APPLICATIONS

We examined the material and concluded that it is suitable for use due to its stable electro-physical characteristics and favourable dielectric qualities.

- 1) Things that need power
- 2) Capacitors and other things that stop electricity from flowing
- 3) Sensors
- 4) How to keep energy safe

## VI. CONCLUSION


We did a full electro-physical study of conductive materials using both AC impedance and DC conductivity methods. The material conducts electricity due to heat and has a lot of dielectric dispersion that changes with frequency. Impedance spectroscopy verifies that conduction is primarily influenced by bulk characteristics and non-Debye relaxation events. A jumping model shows how charge moves. These results suggest that the material is very excellent for usage in advanced electronics and dielectrics.

## VII. ACKNOWLEDGMENTS

The author gratefully acknowledges the support and laboratory facilities provided by the Department of Physics, [Maulana Azad University Jodhpur], India.

## REFERENCES

- [1] Jonscher, A. K. Dielectric relaxation in solids. *J. Phys. D: Appl. Phys.*, 32, R57–R70 (1999).
- [2] Macdonald, J. R. Impedance spectroscopy. *Ann. Biomed. Eng.*, 20, 289–305 (1992).
- [3] Elliott, S. R. A.c. conduction in disordered solids. *Adv. Phys.*, 36, 135–217 (1987).
- [4] Barsoukov, E., Macdonald, J. R. *Impedance Spectroscopy: Theory, Experiment, and Applications*. Wiley (2005).
- [5] Mott, N. F., Davis, E. A. *Electronic Processes in Non-Crystalline Materials*. Oxford University Press (2012).

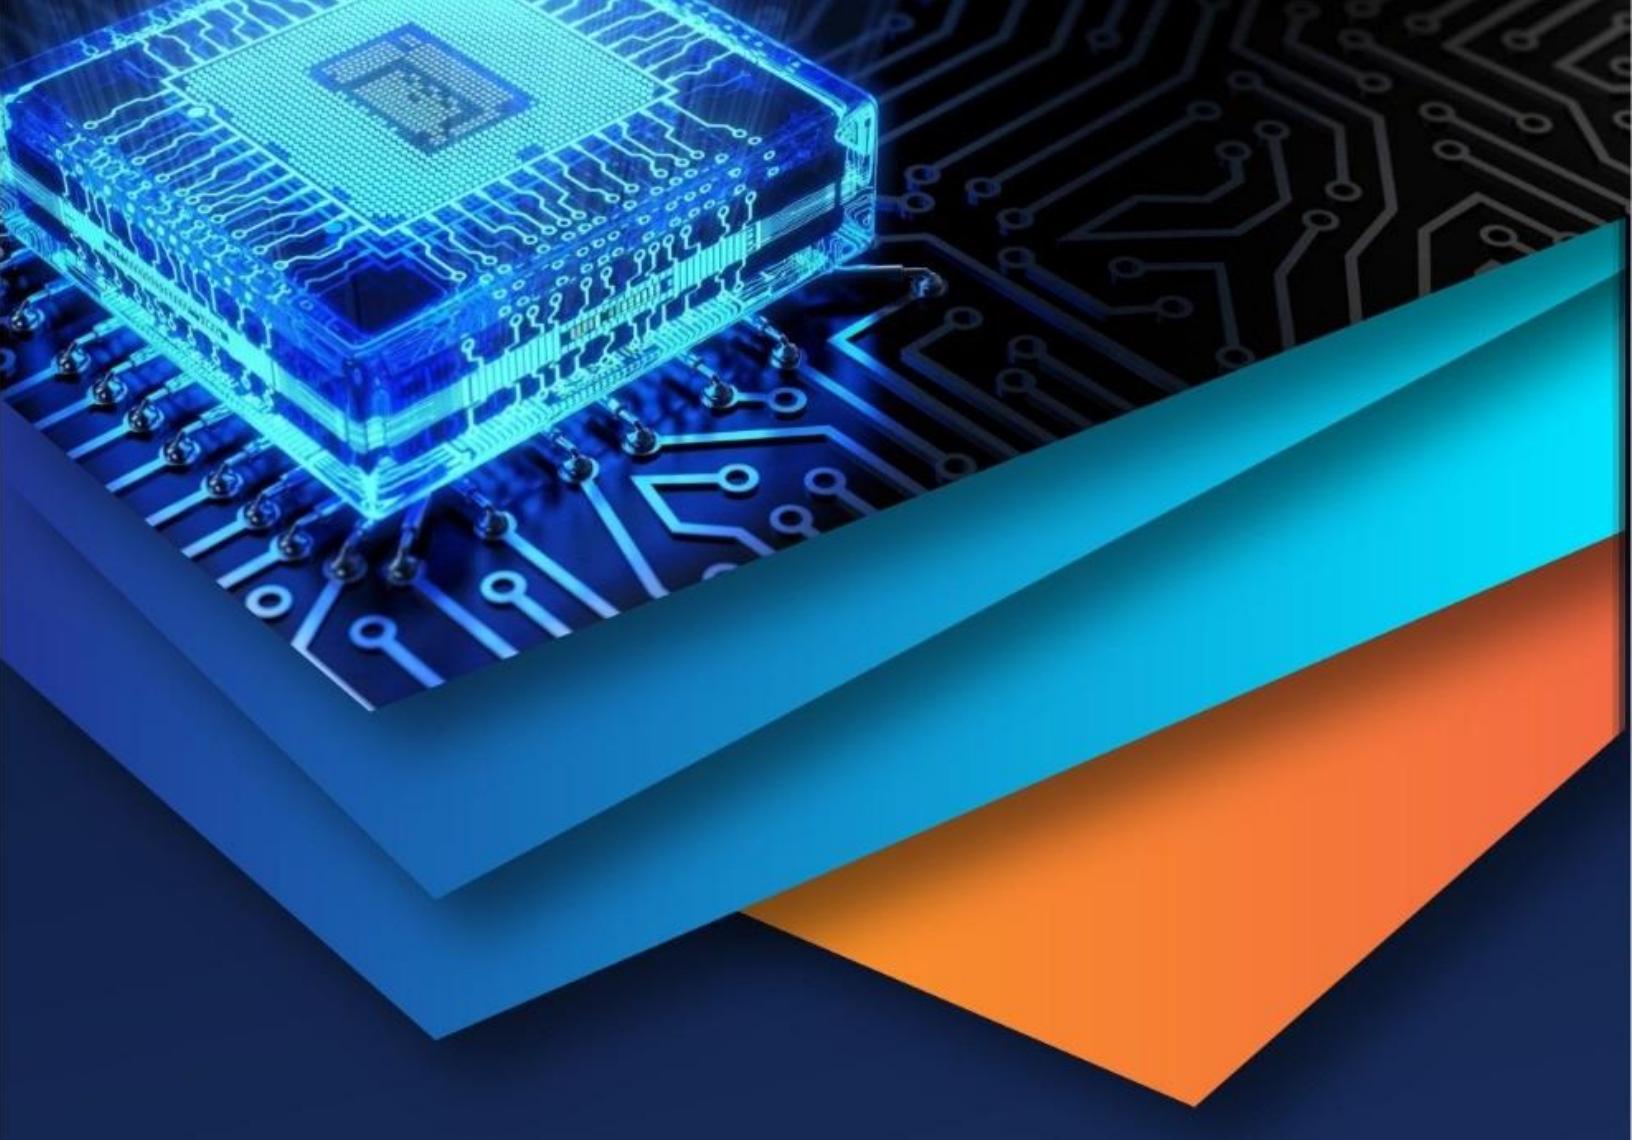

10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089 (24\*7 Support on Whatsapp)