



# IJRASET

International Journal For Research in  
Applied Science and Engineering Technology



---

# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume:** 13      **Issue:** III      **Month of publication:** March 2025

**DOI:** <https://doi.org/10.22214/ijraset.2025.67857>

[www.ijraset.com](http://www.ijraset.com)

Call:  08813907089

E-mail ID: [ijraset@gmail.com](mailto:ijraset@gmail.com)

# Energy Storage Systems for Electric Vehicles: A Performance Analysis of Batteries, Fuel Cells, and Alternative Storage Systems

S V Pratap Simha Reddy<sup>1</sup>, M. Vijaya Kumar<sup>2</sup>

<sup>1,2</sup>Department of Electrical and Electronics Engineering, JNTUA Anantapuramu

**Abstract:** *The transition to electric vehicles (EVs) as a sustainable transportation solution hinge on the performance and efficiency of energy storage systems (ESSs). This paper examines the landscape of ESS technologies for EVs, evaluating their respective strengths and limitations. It begins with an overview of traditional battery technologies, including lead-acid, nickel-metal hydride (NiMH), and lithium-ion batteries, highlighting the dominance of lithium-ion and its ongoing development. The paper then explores emerging battery technologies, such as solid-state, ZEBRA, metal-air, and flow batteries, assessing their potential to overcome the limitations of current battery systems. Fuel cells, supercapacitors, superconducting magnetic energy storage (SMES) systems, flywheels, mechanical springs and Compressed air systems are also discussed as alternative or complementary ESS options. Finally, the paper addresses the growing importance of hybrid energy storage systems (HESSs), which combine multiple technologies to optimize EV performance, range, and lifespan. By analysing the diverse range of ESS options, this paper provides insights into the future of sustainable transportation and the critical role of energy storage technology.*

**Keywords:** *Batteries, Fuel Cells, Super capacitor, Flywheel, HESS, Electric Vehicle*

## I. INTRODUCTION

The global transition towards sustainable energy solutions has intensified in recent years due to the pressing need to mitigate climate change and reduce greenhouse gas emissions. The concept of EVs is not new. In fact, they predated internal combustion engine vehicles, emerging in the 1800s. However, early EVs were hampered by limitations in battery technology, high costs, and limited range, leading to their eventual displacement by gasoline-powered cars. The resurgence of EVs in recent decades is driven by a renewed focus on environmental sustainability and advancements in energy storage technologies.

In this context, energy storage systems (ESSs) have become an integral component of the modern energy landscape, particularly in the transportation sector. One of the most promising applications of ESSs is in electric vehicles (EVs), which are widely regarded as a sustainable alternative to internal combustion engine (ICE) vehicles. By utilizing ESSs, EVs facilitate the shift from fossil fuel dependency, contributing significantly to reducing carbon emissions and enhancing energy efficiency in the automotive sector. The success of EVs hinges on the performance and capabilities of their onboard ESSs, which are responsible for providing the energy needed for propulsion and auxiliary functions. Within the realm of EVs, advanced ESSs are particularly vital, as they directly influence vehicle performance, range, charging efficiency, and overall environmental impact.

EVs represent a significant shift from conventional combustion engine vehicles, and their viability depends heavily on the ability of their ESSs to deliver the performance characteristics demanded by drivers. These characteristics include a long driving range, rapid charging times, and a long operational lifespan, all while maintaining safety and cost-effectiveness. To meet these demands, diverse energy storage technologies are being implemented, ranging from electrochemical batteries to chemical fuel cells, Super capacitors, Superconducting magnetic energy storage, Mechanical springs, Mechanical flywheels and Compressed Air Energy Storage System. To further enhance the performance and capabilities of EVs, hybrid energy storage systems (HESSs) are gaining traction. By integrating different technologies with complementary characteristics, HESSs can address the limitations of individual storage devices and create a more efficient and versatile energy storage solution. For example, a battery can provide the primary energy source for cruising, while a supercapacitor handles high-power demands during acceleration or regenerative braking. Fuel cells paired with hydrogen storage, can provide extended range and continuous power generation. Fig. 1 shows the available ESS for Electric Vehicle applications.

This paper delves into the realm of energy storage systems in electric vehicles, examining the various technologies, their advantages and limitations, and the role they play in shaping the future of sustainable transportation. It will explore the different types of ESSs, including batteries, fuel cells, ultracapacitors, Superconducting magnetic energy storage, Mechanical springs, mechanical flywheels and Compressed Air Energy Storage System, and discuss the integration of these technologies into hybrid energy storage systems.

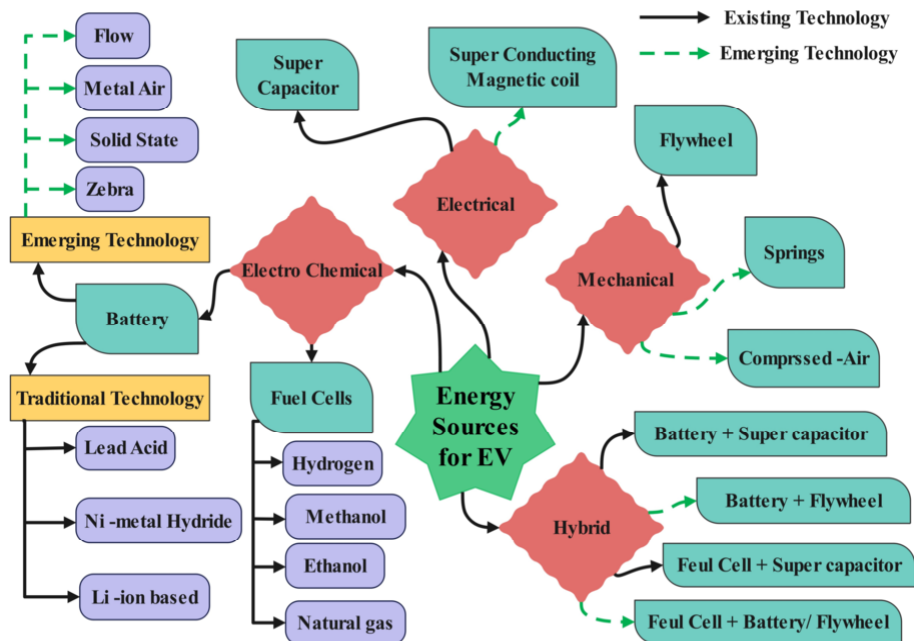


Fig. 1 Energy Storage Systems for Electric Vehicle applications

## II. BATTERIES AS ENERGY STORAGE SYSTEM (ESS) FOR ELECTRIC MOBILITY

Batteries function as energy reservoirs, transforming stored chemical energy into the electrical power that drives EVs. This happens via electrochemical processes. The core of a battery is one or more electrochemical cells. Each cell contains two electrodes – a positive (cathode) and a negative (anode) – submerged in a conductive electrolyte. The electrolyte's job is to facilitate ion movement between the electrodes, enabling the internal completion of an electrical circuit. When an EV is drawing power, a reaction at the anode generates electrons, leading to an electrical flow. This is known as discharging. These electrons travel through the vehicle's electrical system, powering the motor and other components, before reaching the cathode. Simultaneously with electron flow, ions migrate through the electrolyte, maintaining charge balance within the battery cell. Recharging the battery reverses this process. An external power source forces electrons back to the anode, restoring the original chemical composition and preparing the battery for the next use. A battery's voltage is dictated by the inherent properties of the electrode and electrolyte materials used in its construction. The battery's capacity defines its energy storage capability, dictating how long it can deliver power before needing a recharge. Efficient management systems are vital for ensuring battery safety, extending its operational life, and optimizing performance by carefully controlling charging, discharging, and temperature. Below is an overview of prevalent battery types employed in electric vehicles, accompanied by their approximate introduction timelines and notable EV models that showcased their usage.

### A. Traditional Technology Batteries

For the past two decades, lead-acid, nickel-metal hydride (NiMH), and lithium-ion batteries have been the dominant battery technologies, with lithium-ion emerging as the primary area of research and the most prevalent choice for electric vehicle (EV) applications. Lithium-ion batteries have become the dominant technology in EVs due to their high energy density, effective thermal management, and long lifespan. Sustainable recycling methods further reduce their environmental impact. However, limitations including lower energy density compared to gasoline/diesel or hydrogen, high production costs, performance degradation, and thermal runaway concerns drive ongoing research into alternative battery technologies. The composition and working principle of lithium-ion batteries is as follows:

In a lithium-ion battery, the anode is generally composed of graphite. The composition of the cathode can vary, influencing the battery's energy density, performance, and safety. Common cathode materials include lithium cobalt oxide (LiCoO<sub>2</sub>), lithium iron phosphate (LiFePO<sub>4</sub>), lithium manganese oxide (LiMn<sub>2</sub>O<sub>4</sub>), and nickel-cobalt-aluminum oxide (NCA), among others. The electrolyte serves as a conductive medium, facilitating the transport of lithium ions between the anode and cathode. Historically, liquid electrolytes, consisting of lithium salts dissolved in a solvent, have been employed. A separator membrane is positioned between the anode and cathode to prevent physical contact and short circuits, while still allowing lithium-ion passage. Rechargeable Lithium-ion battery operation relies on the reversible migration of lithium ions between the anode and cathode during charge and discharge cycles. Lithium-Ion Battery's Structure and its Working principle is shown in Fig. 2. A simplified description of this process follows:

**Discharge (Battery Operation):** Lithium ions migrate from the anode to the cathode through the electrolyte. The anode (graphite) undergoes oxidation, releasing electrons that flow through an external circuit, providing electrical energy to power the connected device.

**Charge (Battery Recharging):** An external voltage is applied, inducing lithium ions to move from the cathode back to the anode. Lithium ions are then intercalated within the graphite structure of the anode.

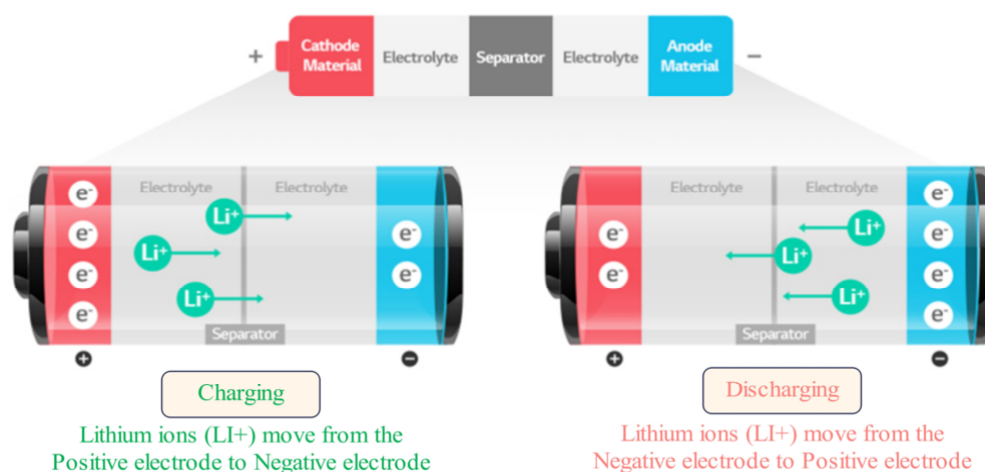


Fig. 2 Lithium-Ion Battery's Chemistry and Structure.

### B. Emerging Technology Batteries:

Current research endeavours are investigating alternative battery chemistries, such as metal-air (including lithium-air and zinc-air), flow, and zebra batteries, recognized for their potential to deliver higher energy densities. Flow batteries, characterized by their scalable energy storage capabilities and long lifecycles, and zebra batteries, known for their robust thermal stability, represent further avenues of exploration. The transition from liquid to solid electrolytes (Solid-state batteries) represents another promising advancement in electric vehicle (EV) battery technology. Solid-state batteries are anticipated to offer enhanced energy densities, accelerated charging capabilities, and substantially improved safety profiles through the mitigation of fire hazards. Successful integration of these advanced battery technologies, including solid-state, flow, Metal-Air and zebra batteries, into EVs hinges on overcoming challenges related to complex manufacturing processes and elevated production expenses

- 1) **Solid-State Batteries (An Advancement in Li-ion Technology):** Solid-state batteries replace traditional liquid electrolytes with solid materials such as ceramics, glass, or polymers, enabling superior electrochemical performance. Lithium-ion migration through the solid electrolyte facilitates charge and discharge cycles, ensuring stable energy transfer between the anode and cathode. This innovation enhances battery safety by eliminating flammable liquids while potentially increasing energy density and improving charging efficiency. The structural properties of solid electrolytes enable compact battery designs and higher voltage outputs, making them attractive for next-generation applications. Ongoing research focuses on optimizing ionic conductivity, improving electrode-electrolyte interfaces, and ensuring long-term electrochemical stability.
- 2) **ZEBRA (Sodium-Nickel Chloride) Batteries:** ZEBRA batteries operate using molten sodium as the anode, a sodium chloroaluminate electrolyte, and nickel chloride as the cathode material. At approximately 300°C, sodium ions migrate through a Beta-Alumina ceramic electrolyte, enabling efficient electrochemical reactions. During discharge, sodium undergoes oxidation, releasing electrons that travel through an external circuit while reacting with nickel chloride to generate energy.

This technology offers high energy density, extended cycle life, and cost-effective materials but requires effective thermal management. ZEBRA batteries are widely utilized in stationary energy storage and specialized vehicle applications due to their reliability and efficiency.

- 3) *Metal-Air Batteries:* Metal-air batteries utilize a reactive metal such as zinc, aluminium, or lithium as the anode and atmospheric oxygen as the cathode reactant. During discharge, the metal undergoes oxidation, releasing electrons that generate an electrical current to power external devices. Oxygen reduction at the cathode leads to the formation of metal oxides, completing the electrochemical cycle. These batteries offer exceptionally high energy density by leveraging oxygen from the atmosphere, reducing overall system weight. Challenges include limited rechargeability, cathode degradation, electrolyte instability, and controlling metal oxide formation.
- 4) *Flow Batteries:* Flow batteries store energy in liquid electrolytes containing dissolved redox-active species, which circulate through an electrochemical cell stack. Energy is generated through oxidation-reduction reactions at the electrodes as electrons move between the two electrolyte solutions. By storing electrolytes in separate reservoirs, these batteries allow independent scaling of energy capacity and power output. They offer advantages such as long cycle life, deep discharge capability, and enhanced safety but face challenges related to system complexity and energy density. Flow batteries are ideal for large-scale energy storage, enabling grid stability and renewable energy integration.

Various important parameters of Batteries as Energy Storage System (ESS) for Electric Mobility along with applications, advantages and disadvantages are shown in Table 1.

TABLE I  
SCIENTIFIC EVALUATION OF SEVERAL EV BATTERIES SPECIFICATIONS

Parameter	Present Technology Batteries			Emerging Technology Batteries			
	Lead-Acid	Nickel-based (NiCd, NiMH)	Lithium-based (Li-ion, Li-Po)	Solid-State (Li-ion)	ZEBRA (Na-NiCl <sub>2</sub> )	Metal-Air (Zinc-Air, Aluminum-Air)	Flow Batteries (VRFB)
Electrode Material	Pb, PbO <sub>2</sub> , H <sub>2</sub> SO <sub>4</sub>	Ni(OH) <sub>2</sub> , Cd/MH, KOH	100-300 (LFP ~160 Wh/kg, NMC/NCA up to 300 Wh/kg)	Li-metal oxide/Li-phosphate, Solid Electrolyte	Na, NiCl <sub>2</sub> , ceramic electrolyte	Metal (Zn, Al), Air, Electrolyte	Vanadium salts, H <sub>2</sub> SO <sub>4</sub>
Specific Energy (Wh/kg)	30-50	40-80 (NiCd lower, NiMH higher)	100-265 (Li-ion, Li-Po generally higher)	200-350+ (Potential)	90-120	100-400+ (Theoretical High)	20-80
Energy Density (Wh/L)	60-100	50-300	250-730+	400-800+ (Potential)	150-200	Up to 100 cycles (Rechargeable versions), 1000+ cycles theoretical	40-150
Specific Power (W/kg)	100-300	150-250	500-2000 (LFP can reach 3000-5000 cycles under ideal conditions)	500-1500+ (Potential)	100-200	50-150 (Usually Lower)	50-200
Cycle Life	200-500	500-2000+ (NiCd better)	500-2000+ (Can exceed 5000)	1000-5000+ (Potential)	1000-3000	100-500+ (Dependent on Zn/Al)	10,000-20000

Charge/Discharge Rate (C-rate)	0.1-1C	0.5-1C (NiCd up to 5C)	0.5-2C (Some >5C)	1-3C (Potential High)	0.1-0.5C	0.1-0.5C	0.1-1C
Operating Temperature (°C)	-20 to 50	-20 to 60	-20 to 60 (Varies significantly)	-20 to 60	270-350	-20 to 60	10 to 40
Self-Discharge	High (5-15%/month)	Moderate (1-5%/month)	Low (1-5%/month)	Very Low	Low (<1%/month)	Low	Low
Safety	Acid Spill, Lead	Cadmium Toxicity (NiCd), Hydrogen (NiMH)	Flammability, Thermal Runaway	Dendrite Formation (Potential)	Limited use in niche markets, less relevant in modern EVs	Corrosion/Electrolyte Leakage	Electrolyte Handling
Applications	Automotive, Backup Power	Portable Electronics, Power Tools	Portable Electronics, EV, Energy Storage	EVs, Energy Storage	Grid Storage, EVs	Portable Electronics, EVs	Grid Storage, Industrial
Key Advantages	Low Cost, Reliable	Good Cycle Life, High Power (NiCd), Environmentally Friendly (NiMH)	High Energy Density, Low Self-Discharge	High Energy Density, Improved Safety	High Energy Density, Long Life	High Energy Density (Theoretical), High Safety	Independent Scaling of Power & Energy
Key Disadvantages	Low Energy Density, Heavy, Environmental Concerns	Cadmium Toxicity (NiCd), Memory Effect (NiCd), Lower Energy Density	Safety Concerns, Cost	Solid Electrolyte Development Still Needed	High Operating Temperature	Limited Cycle Life, Requires Air Access	Low Energy Density, Electrolyte Management

The time line of important EV battery types with driving range is shown in Fig. 3.

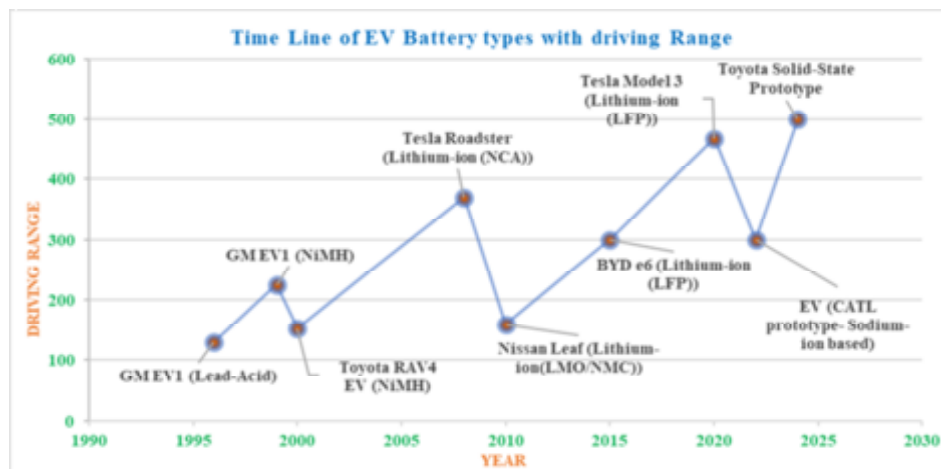


Fig. 3 Time line of EV Battery types with driving range.

### III. FUEL CELLS AS ENERGY STORAGE SYSTEM (ESS) FOR ELECTRIC MOBILITY

Unlike batteries, which store a finite number of reactive materials within their structure, fuel cells rely on a continuous supply of reactants from an external reservoir, often a tank in electric vehicles. This external supply allows the fuel cell to generate power as long as reactants are provided, a characteristic it shares with internal combustion engines (ICEs) that produce mechanical energy from a constant fuel source. Specifically, a hydrogen fuel cell creates electricity by electrochemically transforming the energy held within hydrogen gas. This occurs when hydrogen enters the fuel cell's anode, where a catalyst disassociates the hydrogen molecules into positively charged protons and negatively charged electrons. The protons traverse a specialized membrane to reach the cathode, while the electrons are channelled through an external circuit, thereby producing usable electrical power. At the cathode, oxygen is introduced and reacts with both the protons and electrons. This reaction yields water as its sole byproduct. The sustained provision of hydrogen and oxygen enables the uninterrupted production of electricity. Their efficiency and absence of polluting emissions position hydrogen fuel cells as a valuable technology for various applications, including vehicle propulsion, building power generation, and emergency backup systems. Structure and working of fuel cell is shown in Fig. 4 and Table 2 enumerates various important parameters of Fuel cells as Energy Storage System for Electric Mobility.

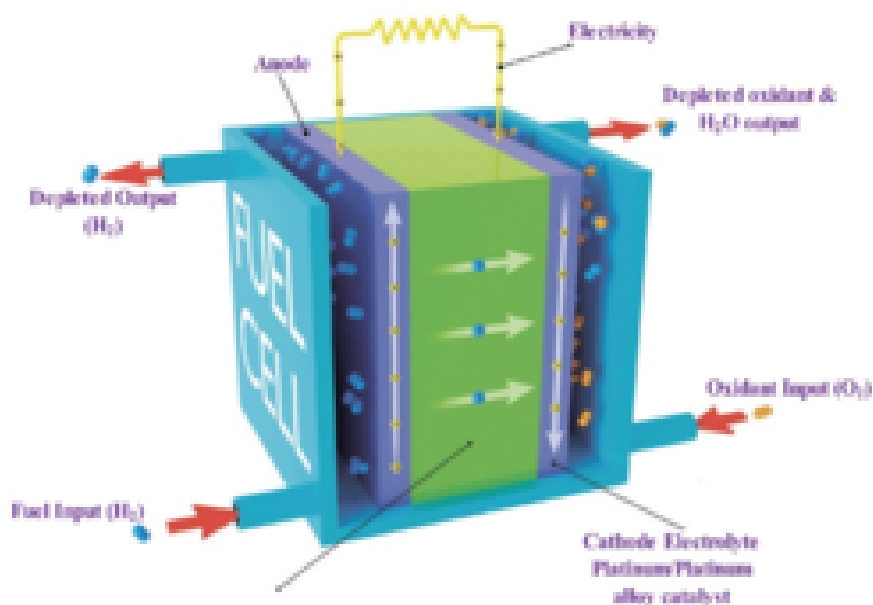


Fig. 4 Fuel Cell Chemistry and Structure

TABLE III

SCIENTIFIC EVALUATION OF SEVERAL FUEL CELL SPECIFICATIONS

Fuel Cell Class/Type	Fuel Employed	Operating Temp. (°C)	Cell Voltage (V)	Electrical Proficiency (%)	Energy Density (Wh/kg)	Power Density (W/kg)	Applications	First Used in Which EV (Publicly Known)
PEMFC (Proton Exchange Membrane Fuel Cell)	Hydrogen (H <sub>2</sub> )	60-80	0.6-0.8	40-60	1000-2000	500-1000	Light-duty vehicles, buses, forklifts	General Motors Electrovan (1966, experimental)
DMFC (Direct Methanol Fuel Cell)	Methanol (CH <sub>3</sub> OH)	60-130	0.4-0.6	30-40	100-400	50-200	Portable electronics, small vehicles	Renault Kangoo ZE H <sub>2</sub> (2010, range extender)

AFC (Alkaline Fuel Cell)	Hydrogen (H <sub>2</sub> )	60-90	0.8-0.9	60-70	100-200	100-200	Space applications (historically), specialized vehicles	Not commonly used in modern commercial EVs due to CO <sub>2</sub> sensitivity in the electrolyte
PAFC (Phosphoric Acid Fuel Cell)	Hydrogen (H <sub>2</sub> )	150-220	0.6-0.8	40-50	400 - 700	300 - 1,000	Stationary power generation, large vehicles	Not commonly used in modern commercial EVs
SOFC (Solid Oxide Fuel Cell)	Hydrogen, Natural Gas, Biogas	600-1000	0.7-0.9	50-65	200 - 400	100 - 500	Stationary power generation, combined heat & power	Research and development for auxiliary power units (APUs) in EVs
MCFC (Molten Carbonate Fuel Cell)	Hydrogen, Natural Gas, Biogas	600-700	0.7-0.8	45-55	200 - 300	100 - 400	Stationary power generation, industrial applications	Research and development for auxiliary power units (APUs) in EVs

#### IV. ELECTRICAL STORAGE TECHNOLOGY AS ESS FOR ELECTRIC MOBILITY

Electrical energy storage (EES) distinguishes itself from other energy storage systems through its direct manipulation of electrical quantities. Energy is stored by establishing either a circulating electrical current and associated magnetic flux or by creating an electric field through charge separation. This fundamental difference in storage mechanism is exemplified by technologies such as superconducting electromagnets and supercapacitors (SCs, sometimes referred to as ultracapacitors or UCs), which will be examined in the subsequent sections.

##### A. Supercapacitor or Ultracapacitor

Supercapacitors (SC), also known as ultracapacitors (UC), are energy storage devices that fill a unique niche between traditional capacitors and batteries. They are particularly valuable in electric vehicles (EVs) because of their ability to charge and discharge very quickly and maintain a long operational lifespan. Rather than replacing batteries, they are typically integrated as a supplementary system to boost EV capabilities. Supercapacitors can capture energy generated during braking (converting motion into electricity), deliver bursts of power for faster acceleration, and protect the battery from sudden current surges, ultimately improving battery lifespan and overall vehicle efficiency. Unlike batteries that store energy through chemical reactions, supercapacitors store energy through an electrostatic process. This involves accumulating ions at the boundary between an electrode and an electrolyte. When a voltage is applied, ions from the electrolyte migrate to the electrode's surface, creating an electrical double layer (EDL). This EDL acts like a large capacitor, allowing for significant energy storage. Because this process relies on physical principles rather than chemical reactions, supercapacitors can be charged and discharged much faster and withstand many more cycles than batteries. The three types of SCs are Electric Double-Layer Capacitors (EDLCs), Pseudo Capacitors and Hybrid capacitors. Chemistry and structure of three types of SCs are shown in Fig. 5.

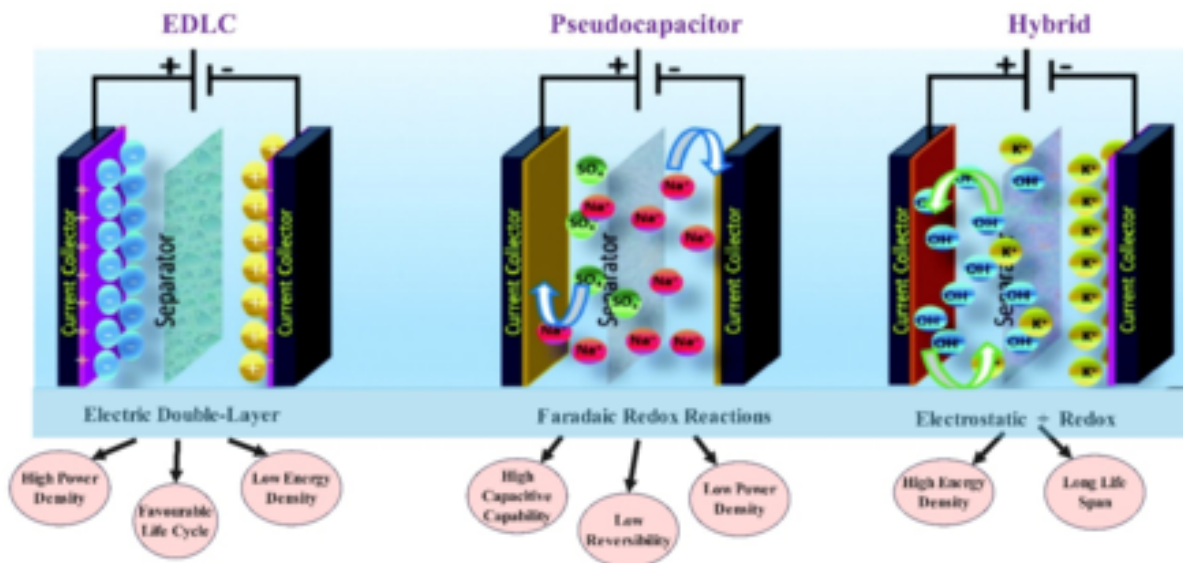


Fig. 5 Chemistry and structure of three types of SCs

EDLCs are the most common form of supercapacitor. They consist of two electrodes, usually made from a material with a high surface area like activated carbon, submerged in an electrolyte and separated by a porous material. Energy is stored by forming the EDL at the interface between the activated carbon and the electrolyte. EDLCs are known for their high-power output and long lifespan, making them ideal for applications requiring frequent charging and discharging, like regenerative braking systems in EVs. However, their energy storage capacity is typically lower than other supercapacitor types. EDLC is more expensive, has a lower specific energy and faster self-discharge rate when compared to conventional capacitors.

Pseudo capacitors enhance energy storage by using materials like transition metal oxides or conductive polymers as electrodes. These materials allow for additional charge storage through surface redox reactions (electron transfer reactions) in addition to the EDL formation. This results in a higher energy storage capacity compared to EDLCs. However, they typically have a lower power output and a shorter lifespan.

Hybrid supercapacitors are designed to combine the advantages of both EDLCs and pseudo capacitors. They aim to balance high energy storage, high power output, and long lifespan by using a combination of different materials. For example, they may use activated carbon for high power performance and a metal oxide for high energy storage. By carefully combining these components, hybrid supercapacitors can be optimized for various EV applications, offering a more versatile energy storage solution. Table 3 enumerates various important parameters of SCs as Energy Storage System for Electric Mobility.

TABLE III  
SCIENTIFIC EVALUATION OF SCs SPECIFICATIONS

Feature	Electric Double Layer Capacitors (EDLCs)	Pseudo-capacitors	Hybrid Capacitors
Energy Density (Wh/kg)	5-10	10-30	10-40
Power Density (W/kg)	10,000-20,000	2,000-10,000	3,000-15,000
Life Span (Cycles)	500,000+	100,000-300,000	200,000-500,000+
Cost	Relatively Low	Medium	Medium to High
Materials	Activated Carbon, Electrolyte	Metal Oxides, Conducting Polymers	Combination of EDLC and Pseudo-capacitor Materials
Working Principle	Charge accumulation at the interface between an	Faradaic redox reactions at the	Combination of electrical double layer and redox

	electrode and electrolyte	electrode surface	reactions
Voltage	Generally Lower (2.5-3V per cell)	Higher (3-4V)	Varies based on design
Example Vehicle/Application	Being implemented comercillay in Evs as Hybrid Energy Source only.	They are primarily in research and development.	Research and development, not widely implemented in commercial models.

**B. Superconducting Magnetic Energy Storage (SMES)**

Superconducting Magnetic Energy Storage (SMES) is a technology that stores electrical energy in the magnetic field generated by a superconducting coil. Because superconductors offer virtually no resistance to electrical current flow, energy can be stored with very high efficiency. While still under development for widespread EV use, SMES offers the potential for very rapid charging/discharging rates and high-power density, making it attractive for applications where quick bursts of energy are needed. Certain materials, when cooled to near absolute zero (typically using liquid helium or specialized cryocoolers), exhibit a phenomenon called superconductivity. In this state, the material offers virtually zero electrical resistance to the flow of direct current (DC). The superconducting material is formed into a large coil, much like the coil in an electromagnet. When electricity from an external source is supplied to the superconducting coil, a direct current begins to flow through it. As the current flows through the coil, it generates a strong magnetic field within and around the coil. This magnetic field is where the energy is stored. Because the superconducting coil has almost zero resistance, the current can flow continuously without significant energy loss. The magnetic field and the stored energy remain essentially constant as long as the coil remains superconducting. When energy is needed, the current flow in the coil is carefully controlled using power electronics (e.g., inverters). As the current decreases, the magnetic field collapses, and the stored magnetic energy is converted back into electrical energy. This electrical energy can then be discharged to power an electric motor. The schematic diagram of Superconducting Magnetic Energy Storage (SMES) is as shown in Fig. 6.

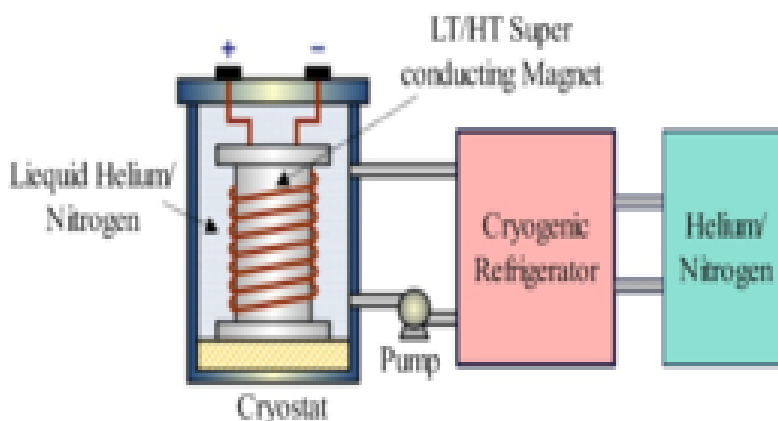


Fig. 6 Schematic Diagram of Superconducting Magnetic Energy Storage (SMES)

SMES systems can deliver and absorb power much faster than batteries, enabling ultra-fast charging and improved regenerative braking performance. Their ability to deliver large amounts of power quickly could provide significant acceleration boosts for EVs. The absence of chemical reactions during energy storage suggests potentially long cycle lives compared to batteries. EVs equipped with SMES could potentially contribute to grid stabilization by absorbing excess energy and releasing it when needed. Maintaining the superconducting state requires extremely low temperatures, necessitating expensive and energy-intensive cooling systems (e.g., liquid helium). This significantly impacts overall energy efficiency and cost. SMES systems can be bulky and heavy, presenting challenges for integration into vehicles. The materials and technology involved in building SMES systems are currently very expensive. Strong magnetic fields generated by SMES coils require effective shielding to prevent interference with vehicle electronics and potential health concerns.

## V. MECHANICAL STORAGE TECHNOLOGY AS ESS FOR ELECTRIC MOBILITY

Mechanical energy storage (MES) is employed for large-scale, long-duration energy storage. Current technologies within this category encompass pumped hydro energy storage (PHES) and compressed air energy storage (CAES). MES systems store energy by physically constraining movement or utilizing gravitational potential. For example, flywheels and mechanical springs store kinetic energy that can be quickly accessed. The concept of Flywheel, Mechanical Springs and Compressed Energy Storage Systems are discussed below:

### A. Flywheel

Flywheels offer a unique approach to energy storage in electric vehicles, utilizing the principle of rotational kinetic energy. An electric motor or braking operation accelerates a flywheel (rotor), often housed in a vacuum to minimize friction, to incredibly high speeds, thus storing energy. When the vehicle requires additional power, the spinning flywheel drives a generator, converting its rotational energy back into electricity to power the motor or supplement the battery. This system boasts advantages like high power density for quick bursts of acceleration and a long lifespan, as flywheels are less prone to degradation from repeated charge cycles when compared to batteries. Flywheels generally offer a lower energy density compared to lithium-ion batteries, meaning they store less total energy for a given size and weight. Schematic arrangement of Flywheel energy storage system is shown in Fig. 7.

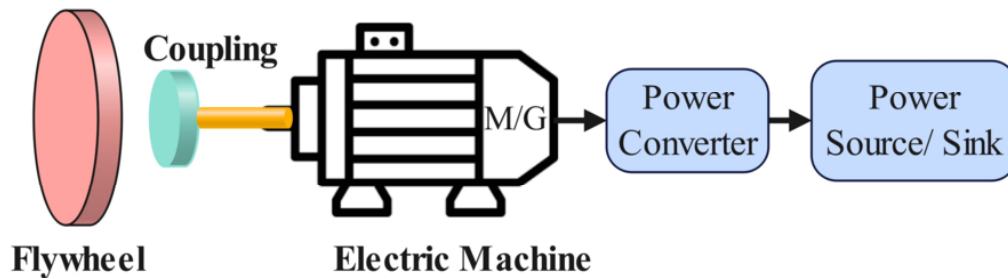


Fig. 7 Schematic arrangement of Flywheel energy storage system

While not yet mainstream, flywheels have found application in certain contexts, such as the Flybrid KERS (Kinetic Energy Recovery System) system in Formula 1 racing, which harnessed braking energy via a flywheel for brief acceleration boosts. Additionally, research and development initiatives have explored flywheel integration in various EV prototypes, particularly for urban transportation solutions. Despite facing challenges like cost, safety considerations associated with high-speed rotating components, and packaging constraints, flywheel energy storage remains a promising avenue for improving EV performance and efficiency.

### B. Mechanical Springs:

The concept of using mechanical springs to store energy for use in electric vehicles has seen some exploration, primarily at the research and prototype level. The idea revolves around compressing or extending a spring (or a system of springs) to store potential energy, which can then be released to assist the electric motor, especially during acceleration or hill climbing. The applications and prototypes are significantly less common and less developed compared to flywheel systems or battery technologies because of its seriously very low energy density.

### C. Compressed Air Energy Storage System:

Compressed Air Energy Storage (CAES) systems have been explored as a potential alternative to conventional batteries in electric vehicles, offering the promise of faster refuelling. The core concept involves using an electric motor to compress air into a high-pressure storage tank. When energy is needed, the compressed air is released to drive an air motor (turbine) connected to the wheels, effectively converting the stored energy back into mechanical power. The schematic arrangement of Compressed-air energy storage system is shown in Fig. 7.

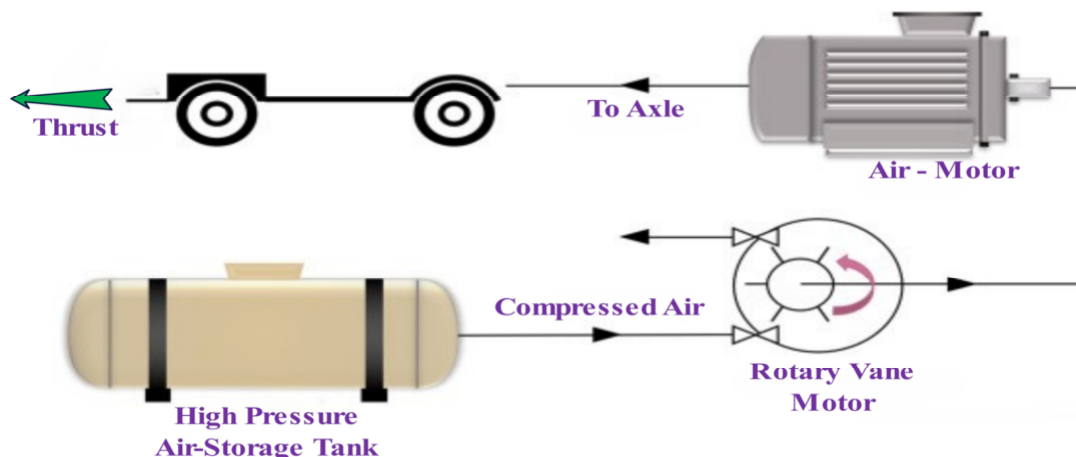


Fig. 7 Schematic arrangement of Compressed – air energy storage system

However, there are some practical challenges that need to be addressed with this technology. First is the weight and volume of the high-pressure tank which leads to low energy density. Another one is energy efficiency. Compressing air generates heat, and some CAES designs struggle to effectively recapture or utilize this heat, leading to efficiency losses.

Although no commercially available electric vehicle on the market currently uses a CAES system, several companies have explored the possibility of creating vehicles powered by compressed air. Notably, Motor Development International (MDI) of Luxembourg, in partnership with Tata Motors of India, has been working on the AirPod, envisioned as a commercially available vehicle designed to operate solely on compressed air. EngineAir Pty Ltd. is among other companies also actively engaged in developing engines driven by compressed air.

Table 4 enumerates the evaluation and comparative analysis of various energy storage systems available commercially for electric vehicles.

Parameter	Li-ion Batteries	Hydrogen Fuel Cells	Supercapacitors (Ultracapacitors)	Superconducting Magnetic Energy Storage (SMES)	Flywheels	Mechanical Springs	Compressed Air Energy Storage (CAES)
Energy Density (Wh/kg)	150-300	~3000 (H <sub>2</sub> , but system less)	05-10	05-10	50-130	0.01 - 0.05	05-10
Power Density (W/kg)	300-1000	500-1000	10,000-20,000	5,000-10,000	1,000-5,000	High (but short duration)	Low
Cycle Life	1,000-5,000+	3,000-7,000 hrs	500,000+	Virtually unlimited	100,000+	Virtually Unlimited	Limited by Compressor/Turbine wear
Efficiency (%)	85-95	40-60	90-98	95-99 (excluding refrigeration)	85-95	90-95	40-70
Self-Discharge	1-5% per month	Negligible	High (significant voltage drop)	Low (requires cryocooling)	Moderate	Negligible	Slow Leakage

Environmental Impact	Mining, Disposal	Hydrogen Production	Relatively low	High (cryogenic materials)	Manufacturing	Manufacturing	Large Footprint, Geological Impact
Safety	Thermal Runaway Risk	Flammability of H2	Generally safer	Quench issues, Magnetic field concerns	Containment failure	Mechanical Failure	Rupture of tank
Cost	Moderate to High	High	Moderate	Very High	Moderate	Low	Moderate
Scalability	Excellent	Moderate	Good	Limited	Good	Limited	Large scale only
Applications	Mainstream EVs	Long-range EVs, Buses	Hybrid Vehicles, Regenerative Braking	Grid Stabilization, Specialized Applications	Hybrid Vehicles, Racing	Suspension systems	Stationary Applications
Maturity	Mature	Developing	Developing	Niche	Developing	Mature	Developing
Energy Retention	Years at room temperature	Indefinite (if stored properly)	Days (requires trickle charge)	Days/Weeks (depending on system)	Weeks/Months	Indefinite	Days/Weeks

TABLE IVV

COMPARATIVE ANALYSIS OF CURRENT ENERGY STORAGE SYSTEMS FOR ELECTRIC VEHICLES

### VI. HYBRID ENERGY STORAGE SYSTEMS (HESS) FOR ELECTRIC MOBILITY

HESS in electric vehicles combine two or more different energy storage technologies to leverage the strengths of each, resulting in enhanced performance and efficiency. The primary reason for using HESS is that a single energy storage technology often struggles to simultaneously meet all the demands of an EV. For instance, Batteries and Fuel Cells offer good energy density for long range but can have limitations in power density for rapid acceleration and may degrade faster with frequent high-power demands. Ultracapacitors, Superconducting magnetic energy storage devices, Flywheels, Mechanical Springs and Compressed- Air energy storage system on the other hand, provide high power density for quick bursts of energy but have lower energy density, limiting their ability to store large amounts of energy. By combining these, a HESS can optimize energy management. The high-power component, like ultracapacitors, handles peak power demands during acceleration and regenerative braking, reducing stress on the battery and extending its lifespan. The high-energy component, like the battery, provides the sustained energy needed for cruising and long-range driving. This synergistic approach allows for improved acceleration, increased efficiency through better regenerative braking, extended battery life, and potentially reduced overall system cost and weight compared to relying solely on a large battery pack to meet all power and energy requirements. HESS allows EVs to achieve a better balance of performance, range, and longevity. Below table shows the detailed comparative analysis Current Energy Storage Systems available for Electric Vehicles.

### VII. CONCLUSION

The evolution of energy storage systems is central to the widespread adoption and improved performance of electric vehicles. While lithium-ion batteries have become the dominant technology, ongoing research and development efforts are paving the way for advanced solutions such as solid-state, ZEBRA, metal-air, and flow batteries, each with the potential to enhance energy density, safety, and lifespan. Furthermore, fuel cells, supercapacitors, SMES, flywheels, and mechanical springs offer unique advantages that can be leveraged in specific applications or combined in hybrid energy storage systems. HESSs represent a particularly promising approach, allowing EVs to overcome the limitations of individual storage technologies by synergistically integrating different systems to meet varying power and energy demands. As the demand for sustainable transportation continues to grow, innovation in ESS technology will be crucial for achieving longer driving ranges, faster charging times, improved overall efficiency, and reduced environmental impact. Future research should focus on optimizing the performance, cost-effectiveness, and scalability of both individual ESS components and integrated HESS architectures to accelerate the transition towards a fully electric and sustainable transportation future.



Based on the present available technology and feasibility, lithium-ion batteries and hydrogen fuel cells typically serve as the main energy storage systems and Supercapacitors are frequently used as supplementary power sources to deliver the high bursts of energy needed for acceleration and other demanding operations in Electric Vehicles.

#### REFERENCES

- [1] Celadon, Axel & Sun, Huaihu & Sun, Shuhui & Zhang, Gaixia. (2024). Batteries for electric vehicles: Technical advancements, environmental challenges, and market perspectives. *SusMat*. 4. 10.1002/sus2.234.
- [2] Hussein, H.M.; Ibrahim, A.M.; Taha, R.A.; Rafin, S.M.S.H.; Abdelrahman, M.S.; Kharchouf, I.; Mohammed, O.A. State-of-the-Art Electric Vehicle Modeling: Architectures, Control, and Regulations. *Electronics* 2024, 13, 3578. <https://doi.org/10.3390/electronics13173578>
- [3] <https://batteryuniversity.com>
- [4] US Department reports, Available: <https://afdc.energy.gov/vehicles/electric>
- [5] Fesakis, N.; Falekas, G.; Palaiologou, I.; Lazaridou, G.E.; Karlis, A. Integration and Optimization of Multisource Electric Vehicles: A Critical Review of Hybrid Energy Systems, Topologies, and Control Algorithms. *Energies* 2024, 17, 4364. <https://doi.org/10.3390/en17174364>
- [6] IEA (International Energy Agency) Reports, Available: [www.iea.org](http://www.iea.org)
- [7] Wang, Wei & Li, Yan & Shi, Man & Song, Yuling. (2021). Optimization and control of battery-flywheel compound energy storage system during an electric vehicle braking. *Energy*. 226. 120404. 10.1016/j.energy.2021.120404.
- [8] BloombergNEF (New Energy Finance) Reports, Available: <https://about.bnef.com/new-energy-outlook-series>



10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)