iJRASET
International Journal For Research in Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 14 **Issue:** VI **Month of publication:** June 2026

DOI: https://doi.org/10.22214/ijraset.2026.83641

www.ijraset.com

Call: 08813907089 | E-mail ID: ijraset@gmail.com

International Journal for Research in Applied Science & Engineering Technology (IJRASET)
ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538
Volume 14 Issue VI June 2026- Available at www.ijraset.com

Fault Detection and Protection of Induction Motor

Rutik Bhausaheb Padol[1], Krushna Vinod Hatkar[2], Shubham Balasaheb Aher[3]
[1, 2, 3]*Students, Department of Electronics & Telecommunication Engineering, Maratha Vidya Prasarak Samaj's Karmaveer Adv. Baburao Ganpatrao Thakare College of Engineering, Nashik-13, Maharashtra, India*

Abstract: ***Induction motors are extensively used in industrial and domestic applications due to their simplicity, reliability, and efficiency. However, these motors are vulnerable to faults such as over-voltage, under-voltage, over-current, and overheating, which can lead to severe damage and reduced lifespan if not detected promptly. This project presents a smart system for fault detection and protection of an induction motor using an ESP32-based IoT platform.***
The proposed system continuously monitors important parameters such as voltage, current, and temperature using sensors like ZMPT101B, ACS712, and DS18B20. The ESP32 microcontroller processes these parameters and compares them with predefined threshold limits to identify abnormal conditions. When a fault is detected, the system automatically disconnects the motor through a relay, thereby ensuring protection.
In addition, the system enables real-time monitoring and control using the Blynk IoT platform, allowing users to view data and receive alerts remotely. An LCD display is used for local monitoring of parameters and system status. The system is cost-effective, reliable, and enhances the safety and lifespan of the induction motor.
Keywords: Induction Motor, Motor Protection, ESP32, Internet of Things (IoT), ACS712, ZMPT101B, DS18B20, Blynk, Relay Control.

I. INTRODUCTION

Induction motors are one of the most widely used electrical machines in industrial, commercial, and domestic applications due to their simple construction, ruggedness, high efficiency, and low maintenance requirements. They are commonly used in pumps, fans, compressors, and various automated systems. Despite their advantages, induction motors are highly susceptible to faults such as over-voltage, under-voltage, over-current, overheating, and phase imbalances. These faults can lead to reduced efficiency, unexpected shutdowns, and even permanent damage to the motor if not detected and addressed in a timely manner.
Traditional motor protection methods rely on electromechanical relays and circuit breakers, which offer limited functionality and lack real-time monitoring capabilities. With the advancement of embedded systems and the Internet of Things (IoT), it has become possible to develop intelligent and automated protection systems that can monitor motor parameters continuously and respond instantly to abnormal conditions.
This research focuses on the design and implementation of a smart fault detection and protection system for an induction motor using the ESP32 microcontroller. The system utilizes sensors such as ACS712 for current measurement, ZMPT101B for voltage sensing, and DS18B20 for temperature monitoring. These parameters are continuously analyzed and compared against predefined threshold values to detect fault conditions.
Furthermore, the integration of IoT technology through the Blynk platform enables remote monitoring and control of the motor system. Users can view real-time data, receive alerts, and control the motor from anywhere. The proposed system enhances reliability, reduces maintenance costs, and ensures efficient and safe operation of induction motors.
Thus, this work aims to provide a cost-effective, real-time, and intelligent solution for fault detection and protection of induction motors, suitable for modern industrial and smart applications.

A. Motivation

Induction motors are widely used in industrial and domestic applications such as manufacturing, pumping systems, and automation. Despite their reliability, they are prone to faults like over-voltage, under-voltage, over-current, and overheating, which can cause serious damage, downtime, and increased maintenance costs if not detected early.
Traditional protection systems lack real-time monitoring and remote accessibility, often identifying faults only after significant damage. This project is motivated by the need to develop a smart, cost-effective system using ESP32 and IoT technology for real-time fault detection and protection, improving safety, efficiency, and motor lifespan.

©IJRASET: All Rights are Reserved

II. OBJECTIVES

The primary objective of this project is to design and implement an efficient system for fault detection and protection of an induction motor using an ESP32-based IoT platform. The specific objectives are as follows:

1) To continuously monitor key electrical parameters such as voltage, current, and temperature of the induction motor using appropriate sensors.
2) To detect abnormal operating conditions such as over-voltage, under-voltage, over-current, and overheating by comparing measured values with predefined threshold limits.
3) To develop an automatic protection mechanism that disconnects the motor using a relay when any fault condition is detected.
4) To implement real-time monitoring of motor parameters using an IoT platform (Blynk), enabling remote access and control.
5) To display real-time data locally using an LCD for easy visualization of system status.
6) To design a cost-effective, reliable, and user-friendly system suitable for industrial and domestic applications.
7) To enhance the safety, efficiency, and lifespan of the induction motor by preventing damage due to fault conditions.

The overall objective is to provide a smart and automated solution for reliable motor protection and monitoring in modern electrical systems.

III. LITERATURE REVIEW

The protection of induction motors is essential for improving reliability, efficiency, and lifespan of electrical systems. Various research works have been carried out on fault detection and protection of induction motors using conventional and modern techniques.

[1] Makwana A. and Patel R. presented a system for monitoring induction motor parameters using microcontroller-based techniques. The study focused on detecting faults such as over-current and overheating, improving the safety and reliability of motor operation.

[2] Vikas Gupta proposed a protection system using sensors for measuring voltage, current, and temperature of induction motors. The system compares real-time data with predefined limits to detect abnormal conditions and disconnect the motor during faults.

[3] S. Ramesh and P. Nagarajan developed an embedded system for induction motor protection using microcontrollers. Their work emphasizes continuous monitoring and automatic tripping mechanisms to prevent motor damage.


[4] Renu Sharma studied the performance of electrical systems under varying load conditions and highlighted the importance of load monitoring in preventing motor failures due to overloading and voltage fluctuations.

[5] Getachew Bekele implemented a monitoring system using simulation tools to analyze electrical parameters and improve system reliability. The study shows that real-time monitoring plays a crucial role in fault detection.

[6] Y.M. Irwan proposed advanced techniques integrating sensors and control systems to enhance system efficiency and protection. The research highlights the importance of modern technologies in improving fault detection accuracy.

From the above studies, it is observed that most systems focus on parameter monitoring and basic protection mechanisms. However, many lack real-time remote monitoring and user-friendly interfaces. Therefore, there is a need for an advanced system that integrates IoT technology with sensor-based monitoring to provide real-time data, remote control, and automatic protection. The proposed system addresses these limitations by using ESP32, sensors, and the Blynk platform for efficient fault detection and protection of induction motors.

IV. ANALYSIS AND DESIGN APPROACH

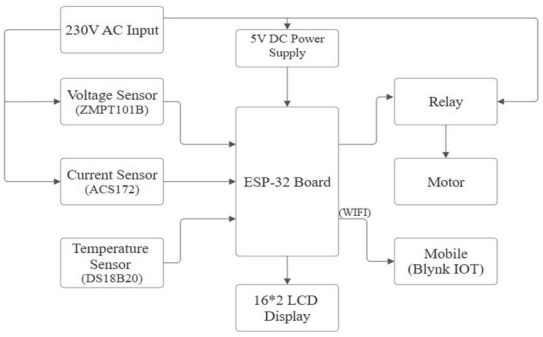

The proposed system for fault detection and protection of an induction motor is designed to continuously monitor key electrical parameters such as voltage, current, and temperature, and to take necessary protective actions under abnormal conditions. The system integrates sensors, a microcontroller, and an IoT platform to achieve real-time monitoring and control.

A. System Analysis

Induction motors are prone to various faults including over-voltage, under-voltage, over-current, and overheating. These faults can lead to insulation failure, reduced efficiency, and permanent damage if not detected in time. Therefore, it is essential to continuously monitor the operating parameters of the motor. In this system, voltage is measured using the ZMPT101B voltage sensor, current is measured using the ACS712 current sensor, and temperature is measured using the DS18B20 temperature sensor. The ESP32 microcontroller reads the sensor data and compares it with predefined threshold values. If any parameter exceeds safe limits, it is considered a fault condition.

B. System Design

The system is designed using the ESP32 microcontroller as the central processing unit responsible for data acquisition, processing, and communication. Sensors such as ZMPT101B, ACS712, and DS18B20 are used to measure voltage, current, and temperature respectively. A relay module is used to disconnect the motor during fault conditions. An LCD display is used to show real-time values of voltage, current, and temperature. The IoT platform Blynk is used for remote monitoring and control of the system.

C. Working Principle

The system operates by continuously measuring voltage, current, and temperature of the motor using sensors. The ESP32 processes the sensor data and compares it with predefined threshold values. If any parameter exceeds its limit, a fault is detected and the relay is turned OFF to disconnect the motor. If all parameters are within safe limits, the relay remains ON and the motor operates normally. The measured data is displayed on the LCD and transmitted to the Blynk application for remote monitoring. Users can also manually control the relay using the Blynk app.

D. Design Considerations

Accurate calibration of sensors is necessary for reliable measurement. Proper isolation and protection circuits are required to ensure safety. Real-time data transmission is implemented for quick response. The system is designed to be cost-effective, reliable, and easy to implement. Thus, the proposed design provides an efficient, reliable, and intelligent solution for fault detection and protection of induction motor using modern IoT technology.

V. PROPOSED CALCULATION

The proposed system monitors induction motor operating parameters such as voltage, current, and temperature using dedicated sensors interfaced with the ESP32 microcontroller. The acquired sensor data are processed to detect abnormal operating conditions and activate the protection mechanism.

A. Voltage Calculation

The AC supply voltage is measured using the ZMPT101B voltage sensor. The ESP32 acquires multiple analog samples from the sensor through its 12-bit ADC. Each ADC reading is converted into sensor voltage using:

$$V_s=\frac{\text{ADC Value}\times 3.3}{4095}$$

To determine the effective AC voltage, the Root Mean Square (RMS) value of the sampled sensor output is calculated as:

$$V_{RMS}=\sqrt{\frac{\sum_{i=1}^{N}V_{s_i}^{2}}{N}}$$

where (N) is the total number of samples (200 samples in this work).

The actual line voltage is obtained using a calibration factor:

$$V=V_{RMS}\times K_v$$

where (K_v) is the voltage calibration factor (95 in the proposed system). Voltages below 50 V are treated as zero to eliminate noise.

B. Current Calculation

The motor current is measured using the ACS712 Hall-effect current sensor. Current measurement is performed only when the motor is in the ON state.

First, the sensor offset is determined by averaging the ADC readings:

$$V_{offset}=\frac{\sum_{i=1}^{N}ADC_i}{N}$$
where (N=500) samples.
The sensor voltage corresponding to each sample is then obtained as:
$$V_i=(ADC_i-V_{offset})\times\frac{3.3}{4095}$$
The RMS sensor voltage is calculated using:
$$V_{RMS}=\sqrt{\frac{\sum_{i=1}^{N}V_i^2}{N}}$$
The motor current is finally obtained as:
$$I=\frac{V_{RMS}}{S}$$
where (S) is the sensitivity of the ACS712 sensor. For the ACS712-20A module, the sensitivity is 0.1 V/A (100 mV/A). Current values below 0.1 A are considered as noise and set to zero.

C. Temperature Calculation

The motor temperature is measured using the DS18B20 digital temperature sensor. The sensor directly provides the temperature value in degree Celsius through the One-Wire communication protocol:
$$T=T_{sensor}$$
where (T) represents the measured temperature in °C. Invalid temperature readings outside the range of 0–60 °C are discarded.

D. Fault Detection Logic

The measured parameters are continuously compared with predefined threshold limits. A fault condition is detected if any of the following conditions occur:


- Over-voltage condition:
  $V > 250,V$
- Under-voltage condition:
  $V < 180,V$
- Over-current condition:
  $I > 2,A$
- Over-temperature condition:
  $T > 60,°C$


When any fault is detected, the ESP32 deactivates the relay to disconnect the induction motor and updates the monitoring interface.


E. Averaging and Noise Reduction

To improve measurement stability and reduce the effect of noise, multiple sensor samples are acquired and processed using averaging and RMS techniques. The averaging operation is expressed as:
$$\text{Average}=\frac{\sum_{i=1}^{N}X_i}{N}$$
where (X_i) represents individual samples. The use of RMS calculations and offset compensation ensures accurate and reliable monitoring of voltage, current, and temperature for effective induction motor protection.

VI. RESULT

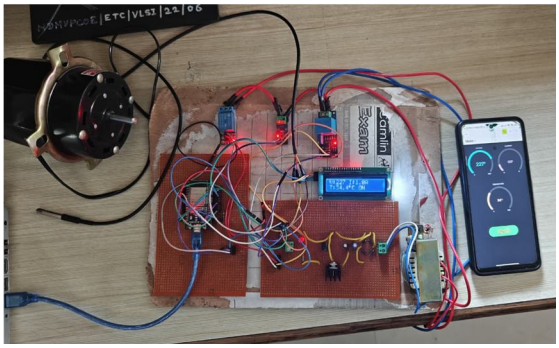

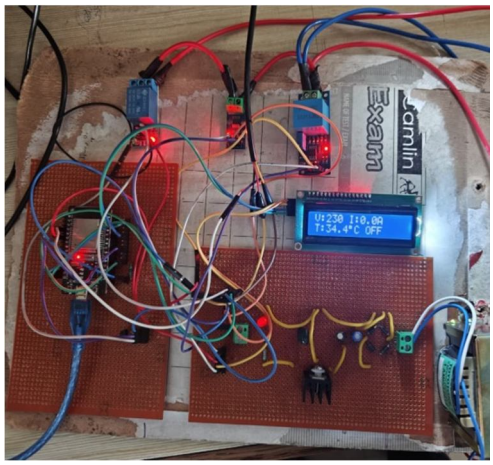

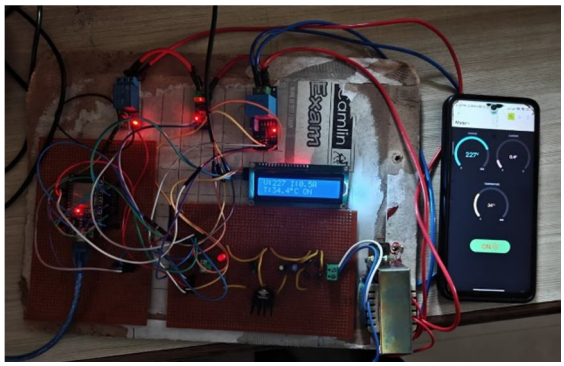

VII. ADVANTAGES

1) Provides real-time monitoring of voltage, current, and temperature.
2) Enables automatic fault detection and protection of the motor.
3) Prevents damage and increases the lifespan of the induction motor.
4) Supports remote monitoring and control using IoT (Blynk).
5) Offers fast response to abnormal conditions.

VIII. APPLICATIONS

1) Industrial motor protection in manufacturing plants.
2) Water pumping systems in agriculture and irrigation.
3) HVAC (heating, ventilation, and air conditioning) systems.
4) Automation and control systems in industries.
5) Domestic appliances using induction motors.

IX. CONCLUSION

The proposed system provides an efficient and reliable solution for fault detection and protection of induction motor by continuously monitoring key parameters such as voltage, current, and temperature. By integrating sensors with the ESP32 microcontroller and IoT technology, the system enables real-time monitoring, automatic fault detection, and remote control through the Blynk platform. The use of a relay ensures immediate disconnection of the motor during abnormal conditions, thereby preventing damage and enhancing safety. Overall, the system is cost-effective, easy to implement, and significantly improves the performance, reliability, and lifespan of induction motors.

X. ACKNOWLEDGEMENT

The authors would like to express their sincere gratitude to Prof. D. V. Patil for her valuable guidance, continuous support, and encouragement throughout the development of this research work. Her insightful suggestions and assistance played a significant role in the successful completion of this study.

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |


The authors are also grateful to Dr. B. N. Rajole, Head of the Department of Electronics and Telecommunication Engineering, Maratha Vidya Prasarak Samaj's Karmaveer Adv. Baburao Ganpatrao Thakare College of Engineering, Nashik, for providing the necessary facilities and academic support.

We extend our heartfelt thanks to all the faculty members of the Department of Electronics and Telecommunication Engineering for their cooperation and guidance. Finally, we express our sincere appreciation to our parents, friends, and well-wishers for their constant support, encouragement, and motivation throughout this work.

REFERENCES

[1] Makwana A., Patel R., "Induction Motor Protection System Using Microcontroller," International Journal of Engineering Research and Technology, vol. 4, no. 5, pp. 123–127, 2016.
[2] Gupta V., "Design of Induction Motor Protection System Using Sensors," International Journal of Advanced Research in Electrical Engineering, vol. 3, no. 4, pp. 45–50, 2017.
[3] Ramesh S., Nagarajan P., "Embedded System Based Induction Motor Protection," IEEE International Conference on Power Systems, pp. 210–215, 2018.
[4] Sharma R., "Analysis of Load Monitoring in Electrical Systems," International Journal of Electrical Engineering, vol. 5, no. 2, pp. 67–72, 2016.
[5] Bekele G., "Design and Simulation of Electrical Monitoring Systems Using HOMER," Renewable Energy Journal, vol. 9, no. 3, pp. 89–95, 2015.
[6] Irwan Y.M., "Advanced Techniques for Electrical System Monitoring and Protection," International Conference on Smart Energy Systems, pp. 150–155, 2019.
[7] Bhandari B., "Optimization of Hybrid Energy Systems and Monitoring Techniques," Renewable and Sustainable Energy Reviews, vol. 53, pp. 123–135, 2016.
[8] Khare V., "Hybrid Power Generation Systems: A Review," Renewable Energy Journal, vol. 32, no. 4, pp. 459–472, 2015.
[9] Singh A., "IoT Based Smart Motor Monitoring System," International Journal of Innovative Technology and Exploring Engineering, vol. 8, no. 6, pp. 102–107, 2019.
[10] Kumar P., "Real-Time Fault Detection in Induction Motors Using IoT," IEEE Conference on Smart Systems, pp. 89–94, 2020.
[11] Patel S., "Wireless Monitoring of Electrical Parameters Using ESP32," International Journal of Electronics and Communication Engineering, vol. 7, no. 3, pp. 55–60, 2021.
[12] Verma R., "Temperature and Current Based Protection System for Motors," International Journal of Power Electronics, vol. 6, no. 2, pp. 78–83, 2018.
[13] Sharma K., "Design of Smart Motor Protection Using Embedded Systems," International Journal of Engineering Science and Computing, vol. 9, no. 5, pp. 220–225, 2019.
[14] Reddy M., "IoT Enabled Industrial Automation and Monitoring System," International Journal of Advanced Technology, vol. 10, no. 1, pp. 34–39, 2020.
[15] Mehta D., "Fault Detection Techniques in Electrical Machines: A Review," International Journal of Electrical Power and Energy Systems, vol. 95, pp. 89–98, 2017.

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

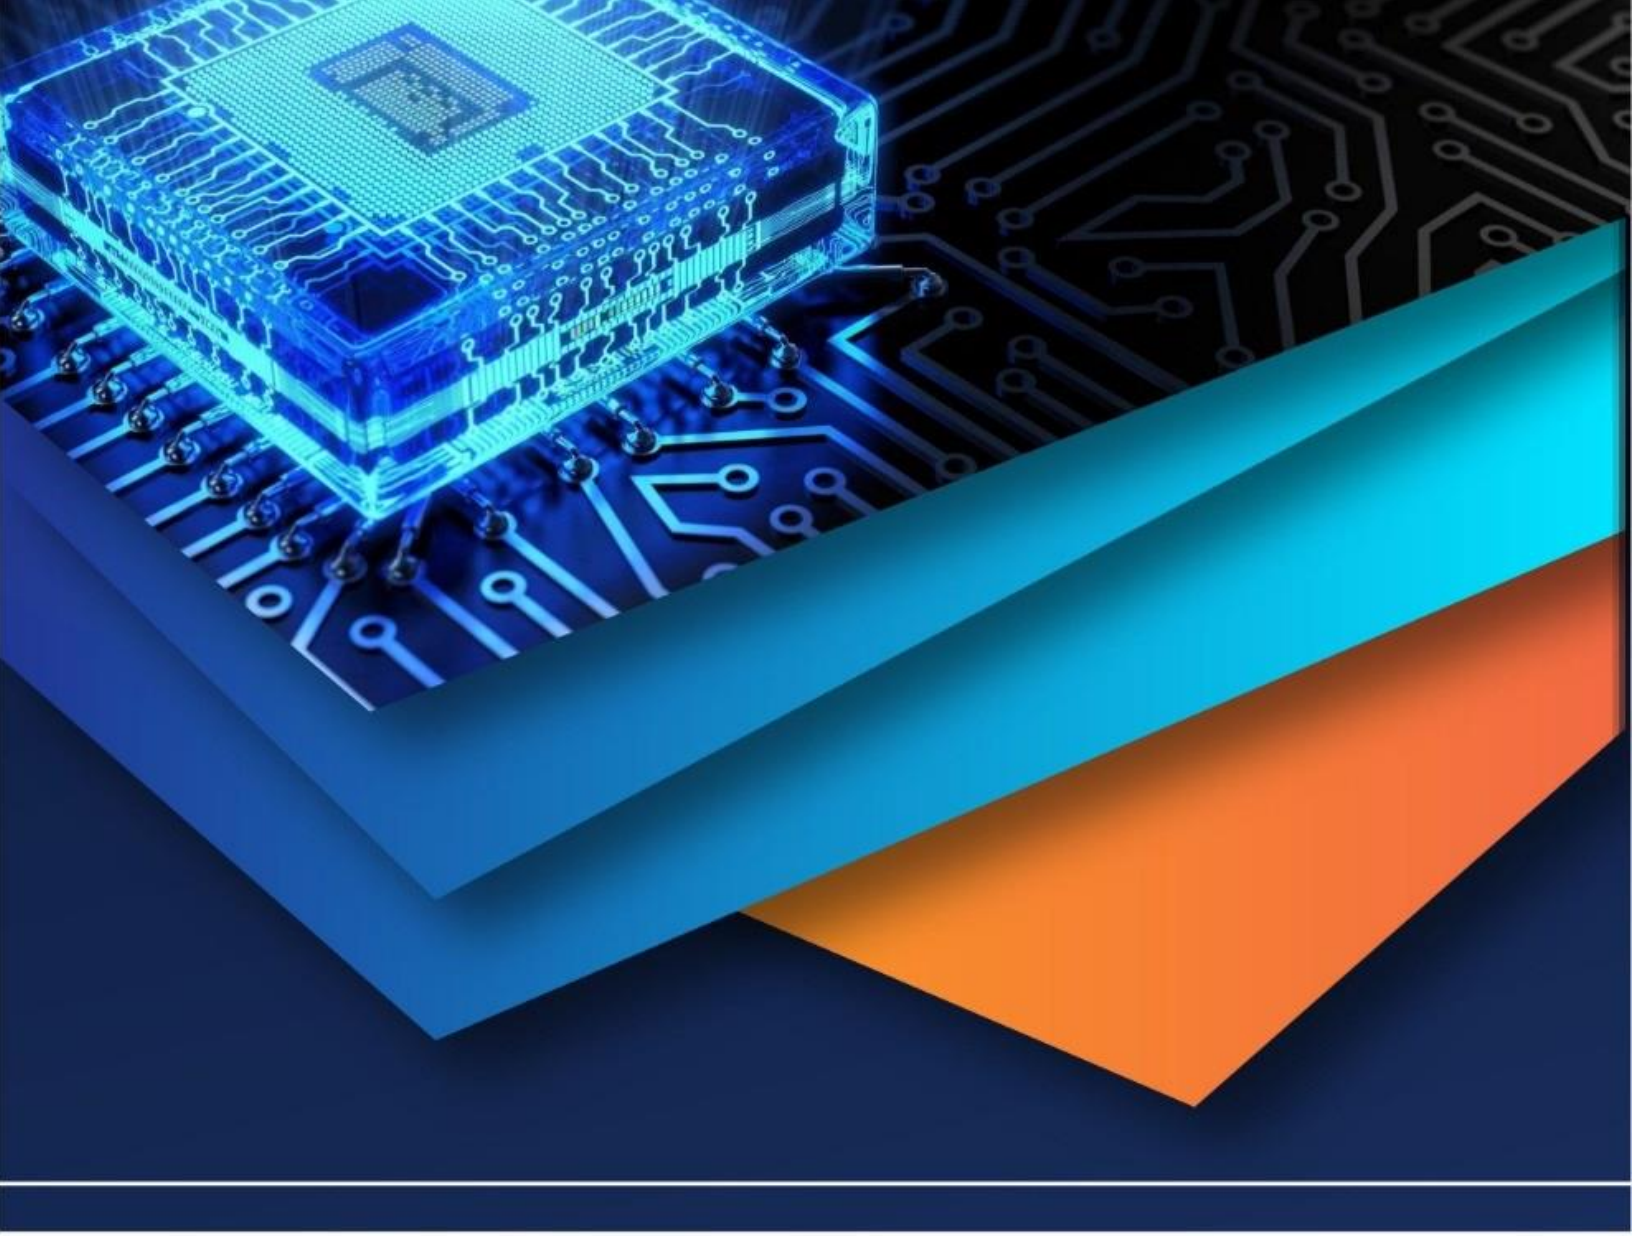

10.22214/IJRASET

45.98

IMPACT FACTOR: 7.129

IMPACT FACTOR: 7.429

INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089 (24*7 Support on Whatsapp)