



iJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 13 Issue: V Month of publication: May 2025

DOI: <https://doi.org/10.22214/ijraset.2025.71115>

www.ijraset.com

Call:  08813907089

E-mail ID: ijraset@gmail.com

Hand Gesture Controlled Robot for Multifunctional Operations

Rashika M E¹, Mamatha J²

Faculty, Government Tool Room and Training Centre, Bengaluru

Abstract: *This paper presents the design and implementation of a hand gesture-controlled robot capable of performing various tasks such as climbing poles, spraying pesticides, cutting grass, and monitoring temperature and humidity. The system leverages an accelerometer sensor to capture hand movements and communicates with a robotic system using Bluetooth technology. This approach offers a hands-free, intuitive interface for users, enhancing accessibility and operational efficiency in applications ranging from agriculture to assistive technology.*

Keywords: *Hand Gesture, Arduino UNO, Bluetooth HC-05, Accelerometer, Human-Robot Interaction, Wireless Communication*

I. INTRODUCTION

Hand gesture recognition system received great attention in the recent few years because of its manifoldness applications and the ability to interact with machine efficiently through human computer interaction. Gesture recognition is a supportive requirement of disables and many other robotics works. So, the researchers and companies try to implement an algorithm and make some gradates in this purpose. Hand gesture recognition is used in Human-Robot Interaction (HRI) to create user interfaces that are natural to use and easy to learn. Sensors used for hand gesture recognition include wearable sensors such as data gloves and external sensors such as video cameras. Data gloves can provide accurate measurements of hand pose and movement, but they require extensive calibration, restrict natural hand movement, and are often very expensive. Hand gesture robots are innovative machines designed to interpret and respond to human hand gestures, providing a natural and intuitive way for humans to interact with technology. These robots use advanced technologies such as computer vision, machine learning, and sensor-based systems to detect and analyze hand movements. Applications of hand gesture robots span various fields, including healthcare, where they assist individuals with disabilities, gaming and virtual reality for immersive experiences, and industrial automation to improve efficiency and safety. By bridging the gap between humans and machines, hand gesture robots represent a significant step toward more seamless human-computer interaction.

II. LITERATURE

Pranay Iyer, Sanjana Tarekar, Dr. Swati Dixit presented "Hand Gesture Controlled Robot". In this paper they have used RF433 wireless module, which can only be used in pairs, and only simplex communication is possible. They used Accelerometer ADXL355 for gesturing purpose. Arduino LilyPad is a development board for e-textile and wearable electronics. It uses ATmega168V, which is a low powered version of ATmega168. It has an Operating Voltage of 2.7 to 5.5 V and required a Voltage of 2.7 to 5.5 V. It has 14 Digital I/O Pins, 6 PWM Channels and 6 Analog Input Channels. ADXL355 is 3-axis sensing accelerometer. It is a small and low-profile package. It has a single-supply operation of 1.8V to 3.6V with 10,000 g shock survival. It has excellent thermal stability. Hand Gesture Controlled Robot can work in three parts. Arduino receives data from the ADXL355 Accelerometer Sensor. Data is acquired from ADXL355. Checking the predefined parameters, it is sent to the RF Transmitter. The data sent by the Arduino and received by the RF transmitter, is required to send to Receiver. Data Decoding is done and appropriate signals are sent to motor driver IC. [1]

Premangshu Chanda, Pallab Kanti Mukherjee, Subrata Modak, and Asoke Nath presented a groundbreaking paper titled "Gesture Controlled Robot using Arduino and Android", which showcases a innovative robotic system controlled by human gestures using a smartphone. The researchers leveraged the Arduino platform combined with a Bluetooth module to establish connectivity with an Android device. By utilizing the inbuilt sensor present in the smartphone, the system detects and interprets hand gestures, which are then transmitted to the Arduino via Bluetooth. The Arduino receives this data and sends signals to the motor driver, ultimately controlling the movement of the robot in the desired direction. This pioneering work demonstrates the potential for using smartphones as a means of controlling robots, paving the way for applications in fields such as robotics, assistive technology, and human-computer interaction. The study's findings highlight the feasibility and versatility of gesture-controlled robots, underscoring the vast possibilities for future research and development in this exciting area. [2]

Deepak, B & Soubhagya Nayak & Jalumuru Nalini, presented a paper titled "Development of Gesture Controlled Robot Using 3-Axis Accelerometer". In this paper they have used Arduino with Zigbee wireless module and ADXL345 accelerometer. The accelerometer is placed in the hands and the tilting to a respective side transmits the data to the Arduino which then sends the signal to motor driver to move the robot in the respective direction. Deepak, B & Soubhagya Nayak & Jalumuru Nalini, presented a paper titled "Development of Gesture Controlled Robot Using 3-Axis Accelerometer" in 2016. In this paper they have used Arduino with Zigbee wireless module and ADXL345 accelerometer. [3]

Prajwal Ashwin Jawalekar presented a pioneering paper titled "Robot Control by Using Human Hand Gestures", which showcases an innovative robotic system controlled by human hand gestures. The researcher employed an Arduino UNO microcontroller as the brain of the robot, which processes data from the ADXL 355 accelerometer sensor. This sensor detects and interprets hand movements, allowing the robot to respond accordingly. The system utilizes a 433 Hz RF module for wireless communication, enabling seamless interaction between the robot and hand gestures. By leveraging these technologies, Jawalekar successfully demonstrated the control of a robot using human hand gestures, paving the way for applications in fields such as robotics, assistive technology, and human-computer interaction. This research has significant implications for the development of intuitive and accessible human-robot interfaces, enabling individuals to control robots with simple hand movements. The study's findings demonstrate the feasibility and potential of gesture-controlled robots, highlighting the vast possibilities for future research and development in this exciting area. [4]

Setia, Archika, Mittal, Surbhi, Nigam, Padmini, Singh, Shalini, and Gangwar, Surendra presented a pioneering paper titled "Hand Gesture Recognition Based Robot Using Accelerometer Sensor". This innovative research showcases a robotic system that utilizes hand gestures as a means of control, leveraging the ADXL 335 accelerometer sensor to detect and interpret hand movements. The system's brain is the ATmega16 microcontroller, which processes the accelerometer data and translates it into commands for the robot. Furthermore, the researchers employed a 315 Hz RF module, facilitating wireless communication with an impressive operating range of 400-500 meters. This groundbreaking work has far-reaching implications for the development of intuitive and accessible human-robot interfaces, enabling individuals to control robots with simple hand gestures. The study's findings pave the way for potential applications in fields such as robotics, prosthetics, and assistive technology, underscoring the vast potential of hand gesture recognition technology. [5] Samanta, Argha, Kumar, Sangharsh, Saraswat, Deepak, Das, Bharnab, Kumar, Vibhuti, and Channi, Harpreet Kaur presented a seminal paper titled "Modeling and Designing of Gesture Control Robot", which showcases a cutting-edge robotic system controlled by hand gestures. The researchers employed an AT89C51 microcontroller as the brain of the robot, which processes data from the MMA7361L accelerometer sensor. This sensor detects and interprets hand movements, allowing the robot to respond accordingly. The system utilizes a 433 Hz RF module for wireless communication, along with an HT12E encoder and HT12D decoder to facilitate seamless interaction between the robot and hand gestures. This innovative design enables users to control the robot with simple hand movements, paving the way for applications in fields such as robotics, assistive technology, and human-computer interaction. The study's findings demonstrate the feasibility and potential of gesture-controlled robots, highlighting the vast possibilities for future research and development in this exciting area. [6]

In this project we have implemented a hand gesture-controlled robot using an accelerometer and Bluetooth is a type of robotic system designed to respond to specific hand movements for navigation and control. The core component, an accelerometer, is attached to the user's hand to detect changes in motion and orientation by measuring acceleration forces along different axes. These motion signals are processed by a microcontroller, which translates them into commands. The processed data is then transmitted wirelessly to the robot using Bluetooth technology, enabling real-time communication. The robot receives these commands through a Bluetooth module, allowing it to perform actions such as moving forward, backward, turning, or stopping based on the user's hand gestures.

III. METHODOLOGY


The Hand Gestures Robot utilizes a combination of hardware components to recognize and respond to hand gestures. The primary components include.

A. Block Diagrams

The hardware implementation of the Hand Gesture Recognition Robot involves a block diagram that comprises several key components. The block diagram includes a Power Supply unit, which provides the necessary voltage and current to the various components of the robot. Overall, the hardware implementation of the Hand Gesture Recognition Robot enables seamless interaction between the user and the robot, allowing for intuitive control and communication.

B. Transmitter Unit

The Transmitter Unit is a crucial component of the Hand Gestures Robot system, responsible for capturing and transmitting hand gesture data to the Receiver Unit.

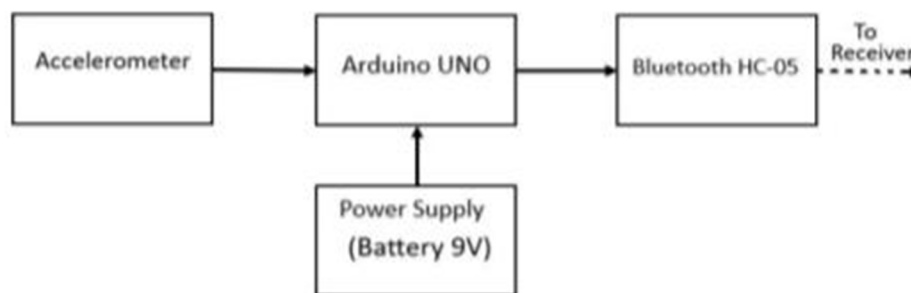


The given block diagram represents a transmitter system designed to collect and wirelessly transmit data. It consists of four main components: an Accelerometer, an Arduino UNO, a Bluetooth module (HC-05), and a Power Supply (9V Battery). The accelerometer is responsible for detecting motion or orientation changes and converting these physical movements into electrical signals. These signals are sent to the Arduino UNO, which processes the incoming data from the accelerometer. The Arduino UNO acts as the central controller, interpreting the sensor data and preparing it for transmission. To enable wireless communication, the Arduino UNO sends the processed data to the Bluetooth HC-05 module. This module facilitates the wireless transmission of data to a receiver, such as a smartphone or another Bluetooth-enabled device. The entire system is powered by a 9V battery connected to the Arduino UNO, ensuring continuous operation.

C. Receiver Unit

The Receiver Unit is a critical component of the Hand Gestures Robot, responsible for receiving and processing data from the camera module and sensors. This unit enables the robot to interpret hand gestures and respond accordingly.

The provided block diagram illustrates a receiver system designed to control multiple motors based on data received wirelessly from a transmitter. The system comprises key components: a Bluetooth HC-05 module, an Arduino UNO, a Motor Driver, and a Power Supply (12V Battery), connected to four motors (Motor 1 to Motor 4). The system begins with the Bluetooth HC-05 module, which receives wireless signals from the transmitter. These signals, typically control commands, are then passed to the Arduino UNO, which serves as the system's central processing unit. The Arduino interprets the received data and generates appropriate control signals to drive the motors. To handle the high current required by the motors, the Arduino outputs are connected to a Motor Driver. The Motor Driver acts as an interface between the low-power Arduino signals and the high-power motors, enabling precise control over their speed and direction.

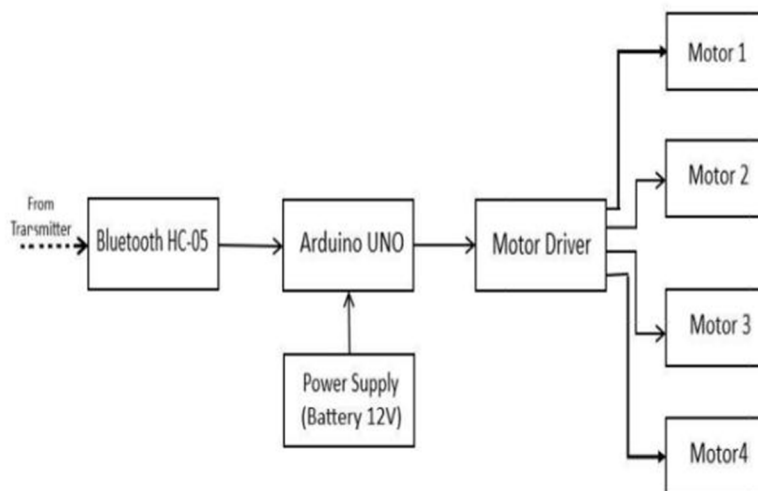

The four motors are connected to the Motor Driver, allowing simultaneous and independent operation based on the control logic. The entire receiver system is powered by a 12V battery, providing the necessary energy to both the Arduino UNO and the motors. This setup is commonly used in robotics, remote-controlled vehicles, and automation systems where wireless control of multiple motors is required.

D. Circuit Diagram

The hardware implementation of the Hand Gesture Recognition Robot involves a circuit diagram that integrates various components to enable gesture recognition and robotic control. The circuit diagram provides a detailed representation of the hardware implementation, enabling the development of a functional Hand Gesture Recognition Robot.

E. Transmitter Unit

The transmitter circuit diagram for the hand gestures robot consists of an accelerometer or gesture sensor, Arduino microcontroller, HC-05 Bluetooth module, and jumper wires.


The accelerometer or gesture sensor detects hand gestures and sends the data to the Arduino, which processes and transmits the data to the HC-05 Bluetooth module. The HC-05 module then transmits the data wirelessly to the receiver circuit. The transmitter circuit is powered by a power supply, and the Arduino is programmed to read gesture data from the sensor and transmit it to the receiver.

The given circuit diagram illustrates a motor control system using an Arduino Uno, an L298N motor driver, and a Bluetooth module. This setup is typically used for wireless robotic vehicle.

This setup allows wireless control of two DC motors using a Bluetooth module. The Arduino processes commands from a paired mobile device or transmitter, adjusting motor speed and direction through the L298N driver.

F. Receiver Unit

The provided schematic diagram illustrates the circuit connections for controlling multiple DC motors using an Arduino UNO, an L298N Motor Driver, and a Bluetooth Module (HC-05/HC-06). The system is powered by an external power supply connected to both the Arduino and the motor driver. Data from a remote device is sent wirelessly to the Bluetooth module, which forwards it to the Arduino UNO. The Arduino processes this data and generates control signals for the L298N motor driver. Based on these signals, the motor driver adjusts the speed and direction of the four connected DC motors. This circuit is commonly used in robotic car projects, automation systems, and Bluetooth-controlled devices.

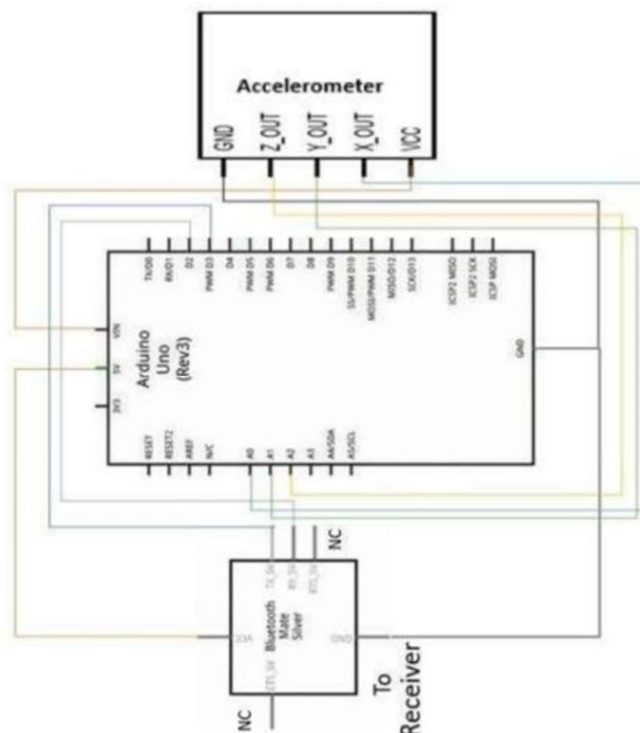



Gesture control can also improve safety in environments like driving or industrial settings by reducing distractions and allowing users to operate devices without taking their hands off crucial tasks. It fosters inclusivity by offering an alternative form of communication and interaction for those with physical impairments or limitations.

Gesture control it also helps maintain a cleaner environment, as there's no need to constantly touch shared surfaces, which can spread germs. The technology offers greater personalization, as gestures can be customized to fit individual preferences, enhancing the user experience. Gesture control can be more intuitive for tasks that require precise movements, like zooming in or rotating objects, which can be difficult with touchscreens or controllers. It also supports a more natural form of interaction, as humans are inherently accustomed to using their hands to communicate and interact with the world around them

V. CONCLUSION

The Hand Gestures Controlled Robot that enables users to control a robotic arm using simple hand gestures, thereby the field of human-robot interaction. This innovative system utilizes sensors, microcontrollers, and machine learning algorithms to recognize and interpret hand movements, providing a seamless and intuitive user experience. The robot's ability to learn and adapt to different hand gestures makes it an invaluable tool for various applications, including healthcare, education, and entertainment. For instance, it can be used to assist individuals with disabilities or limited mobility, allowing them to interact with their environment in a more meaningful way. This project demonstrates the possibilities of creating intuitive and interactive human-robot interfaces, which can have far-reaching implications for applications such as assistive technology, gaming, and education. With its impressive accuracy, responsiveness, and user-friendly interface, the hand gestures robot car is a significant step forward in the development of gesture-based robotics, and its potential applications are vast and exciting.

This project demonstrates the potential for robotics and to improve the quality of life for individuals with disabilities, and to enhance the overall human experience. The possibilities are endless, and it will be exciting to see how this technology evolves and improves in the future

VI. ACKNOWLEDGMENT

The authors would like to acknowledge the resources and support provided by Government Tool Room and Training Centre, Bengaluru.

REFERENCES

- [1] Pranay Iyer, Sanjana Tarekar and Dr. Swati Dixit, "Hand Gesture Controlled Robot" in IEEE Journal of Selected Topics in Quantum Electronics, vol. 25, no. 3, Nagpur, India, pp. 1-5, 2019
- [2] Premangshu Chanda, Pallab Kanti Mukherjee, Subrata Modak, Asoke Nath, "Gesture Controlled Robot using Arduino and Android", vol. 5, no. 6, pp. 6784-6791, 2016
- [3] Deepak, B & Soubagya Nayak and Jalumuru Nalini, "Development of Gesture Controlled Robot Using 3-Axis Accelerometer", vol. 9, no. 41, pp. 315-324, 2016
- [4] Prajwal Ashwin Jawalekar, "Robot Control by Using Human Hand Gestures", vol. 6, no. 4, pp. 661-665, 2018
- [5] Setia, Archika and Mittal, Surbhi and Nigam, Padmini and Singh, Shalini and Gangwar, Surendra, "Hand Gesture Recognition Based Robot Using Accelerometer Sensor", vol. 4, no. 5, pp. 1058-1063, 2015
- [6] Samanta, Argha & Kumar, Sangharsh and Saraswat, Deepak & Das, Bharnab & Kumar, Vibhuti and Channi, Harpreet Kaur, "Modeling and Designing of Gesture Control Robot" vol. 6, no. 7, pp. 723-729, 2017



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)