iJRASET
International Journal For Research in Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 11 **Issue:** IX **Month of publication:** September 2023

DOI: https://doi.org/10.22214/ijraset.2023.55648

www.ijraset.com

Call: 08813907089 | E-mail ID: ijraset@gmail.com

International Journal for Research in Applied Science & Engineering Technology (IJRASET)
ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538
Volume 11 Issue IX Sep 2023- Available at www.ijraset.com

Heat Transfer in Solid by Using Linear Differential Equation

Sunilkumar Kuwarlal Shende[1], Jayprakash Laxman Matlam[2], Dipak Govindrao Lanjewar[3]
[1, 2]*Assistant Professor Department of Mathematics J.M. Patel College, Bhandara*
[3]*Department of Mathematics M.B. Patel College Sakoli RTM Nagpur University, Nagpur*

Abstract: ***Differential equations are fundamental importance in engineering mathematics because any physical law s and relations appear mathematically in the form of such equations. . The rate of heat conduc- tion in a specified direction is proportional to the temperature gradient,which is the rate of change in temperature with distance in that direction.***
In this paper we discussed about first order linear homogeneous equations, first order linear non homogeneous and the application of first order differential equationto heat transfer analysis particularly in heat conduction in solids.
Keywords: Differential Equations, Heat TransferAnalysis, Heat conduction in solid, Radiation of heat in space

I. INTRODUCTION

In ―real-world, there are many physical quantities that can be represented by functions. Involving only one of the four variables e.g., (x, y, z, t).
Equations involving highest order derivatives of order one
= 1st order differential equations
Examples:
Function σ(x) = the stress in a uni – axial stretched tapered metal rod (Or)
Function v(x) = the velocity of fluid flowing a straightchannel with varying cross-section

A. Solution Method Of First Order Odes

1) Solution of Linear (Homogeneous equation)

Typical form of the equation:

$$\frac{du(x)}{dx} + p(x)u(x) = 0 \quad \text{-------(1)}$$

The solution $u(x)$ in Equation (1) is

$$u(x) = \frac{K}{F(x)} \quad \text{-------(2)}$$

Where K = constant to be determined by given condition and the function $F(x)$ has the form:

$$F(x) = e^{\int p(x)\,dx} \quad \text{-------(3)}$$

2) Solution of linear (Non-homogeneous equations)

$$\frac{du(x)}{dx} + p(x)u(x) = g(x) \quad \text{-------(4)}$$

The appearance of function $g(x)$ in Equation (4) makes the DE Non-homogeneous.
The solution of ODE in Equation (4) is similar by a little more complex than that for the homogeneous equation in (1):

$$u(x) = \frac{1}{F(x)}\int F(x)g(x)\,dx + \frac{K}{F(x)} \quad \text{----(5)}$$

Where function $F(x)$ can be obtained from Equation (3) as: $F(x) = e^{\int p(x)\,dx}$

©IJRASET: All Rights are Reserved

Example

Solve the following differential equation $\frac{du(x)}{dx} - (\sin x)u(x) = 0 \rightarrow$ (a), with condition $u(0) = 2$

Solution:

By comparing terms in Equation (a) and (4), we have:

$p(x) = -\sin x \;\&\; g(x) = 0$

Thus by using Equation (5), we have the solution

$$u(x) = \frac{K}{F(x)}$$

Where the function F(x) is: $F(x) = e^{\int p(x)\,dx} = e^{\cos x}$

leading to the solution

$u(x) = Ke^{-\cos x}$

Since the given condition is u (0) = 2, we have:

$$2 = Ke^{-\cos(0)} = K\left(e^{-1}\right) = \frac{K}{e} =$$

(Or) K = 5.4366.


Hence the solution of Equation (a) is

II. APPLICATION OF FIRST ORDER DIFFERENTIAL EQUATIONS TO HEAT TRANSFER ANALYSIS (HEAT CONDUCTION IN SOLID)

A. Heat transfer analysis

Heat transfer describes the exchange of thermal energy, between physical systems depending on the temperature and pressure, by dissipating heat. The fundamental modes of heat transfer are conduction or diffusion, convection and radiation.which is a mathematical expression for the temperature distribution of the medium initially. Complete mathemati- cal description of a heat conduction problem requires the specification of two boundary conditions for each dimension along which heat conduction is significant, and an initial con- dition when the problem is transient. The most common boundary conditions are the *specified temperature*, *specified heat flux*, *convection*, and *radiation* boundary conditions

Where A = the area to which heat flows; t = time allowing heatflow; and d = the distance of heat flow. Replacing the asign inthe above expression by an = sign and a constant k, leads to:

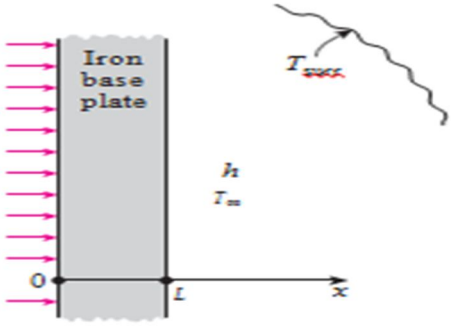

The Three Modes of Heat Transmission:

1) Heat conduction in solids
2) Heat convection in fluids
3) Radiation of heat in space

ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538
Volume 11 Issue IX Sep 2023- Available at www.ijraset.com

Fourier Law for Heat Conduction in Solids:

Heat flows in SOLIDS by conduction. Heat flows from the part of solid at high temperature to the part of low temperature- a situation similar to water flow from higher elevation to low elevation. Thus, there is definite relationshipbetween heat flow (Q) and the temperature difference (ΔT) in the solid. Relating the Q and ΔT is what the Fourier law ofheat conduction is all about.

Derivation of Fourier Law of Heat Conduction (A solidslab)

With the left surface maintained at temperature Ta and the right surface at Tb

Heat will flow from the left to the right surface if Ta> Tb

By observations, we can formulate the total amount of heat flow (Q). Through the thickness of the slab as:

$$Q \propto \frac{A(T_a - T_b)t}{d}$$

$$Q = k\frac{A(T_a - T_b)t}{d} \quad ---- (6)$$

The constant k in Equation (6) is ―thermal conductivity‖ – treated as a property of the solid material with aUnit Btu/in-s- of W/m-℃

The amount of total heat flow in a solid as expressed in Equation (6) is useful, but make less engineering sense without specifying the area A and time t in the heat transfer process.

Consequently, the ―Heat flux‖ (q) – a sense of the intensity of heat conduction is used more frequently in engineering analyses. From Equation (6), we may define the heat flux as:

$$q = \frac{Q}{At} = k\frac{(T_a - T_b)}{d} \quad ----- (7)$$

with a unit of: Btu/in2-s, or W/cm2

We realize Equation (7) is derived from a situation of heat flow through a thickness of a slab with distinct temperatures at both surfaces.

In a situation the temperature variation in the solid is CONTINUOUS, by function T(x), as illustrated below:

By following the expression in Equation (6), we will have:


$$q = k\frac{T(x) - T(x+\Delta x)}{\Delta x} = -k\frac{T(x+\Delta x) - T(x)}{\Delta x} \quad ----- (8)$$

If function T(x) is a CONTINUOUS varying function w.r.t variable x, (meaning Δx→0), we will have the following from Equation (8):

$$q(x) = \lim_{\Delta x \to 0}\left[-k\frac{T(x+\Delta x) - T(x)}{\Delta x}\right] = -k\frac{dT(x)}{dx} \quad ----- (9)$$


Equation (9) is the mathematical expression of Fourier Law of Heat Conduction in the x-direction.

©IJRASET: All Rights are Reserved

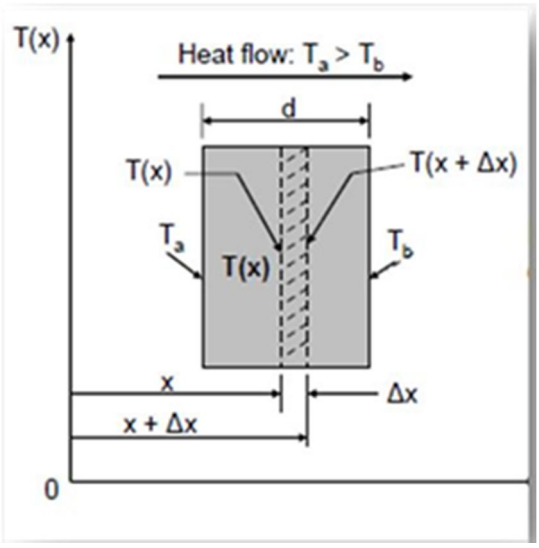

Example:

A metal rod has a cross-sectional area 1000 mm2 and 2m in length. It is thermally insulated in its circumference, with one end being in contact with a heat source supplying heat at 10 kW, and the other end maintained at 50℃. Determine the temperature distribution in the rod, if the thermal conductivity of the rod material is k = 100 kW/m-℃.

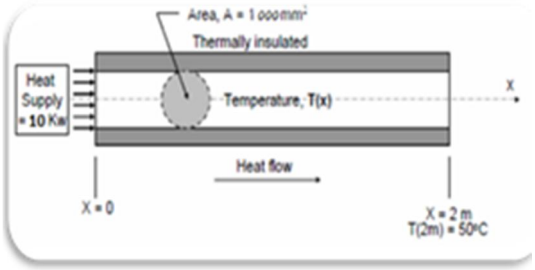

Solution:

The total heat flow Q per unit time t (Q/t) in the rod is given by the heat source to the left end, i.e. 10 kW.

Because heat flux is q = Q/(At) as shown in Equation (7), we have (Q/t) = qA = 10 kW . But the Fourier Law of heat conduction requires

$$q(x) = -k\frac{dT(X)}{dx} \quad \text{as the equation (9)}$$

$$Q = qA = -kA\frac{dT(X)}{dx}$$

$$\frac{dT(X)}{dx} = \frac{Q}{-kA}$$

$$T(x) = -94.97x + c$$

If we use the condition: T (2) = 50oC, we will find c = 216.67, which leads to the complete solution

T (x) =216.67 −94.97x

ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538
Volume 11 Issue IX Sep 2023- Available at www.ijraset.com


III. CONCLUSION

Finding the temperature distribution in the rod is $T(x) = 216.67 - 94.97x\ ^{o}C/m$ by the method of solution of first order ordinary differential equation. This same procedure is often utilized in Heat convection in fluids and Radiation of heat in space. This application is useful for solving several different types of Fluid Mechanics Analysis. Fundamentally, it consists of finding optimal solution of first order ordinary linear homogeneous equations and first order ordinary linear non homogeneous equations.

REFERENCES

[1] Ahmad, Shair, Ambrosetti –A textbook on Ordinary Differential Equations‖, Antonio 15th edition, 2014.
[2] Earl A. Coddington–An Introduction to Ordinary Differential Equations‖ 1st Edition.
[3] Victor Henner, Tatyana Belozerova,‖Ordinary and Partial Differential Equations‖ Mikhail Khenner January 29, 2013 by A K Peters/CRC Press.
[4] Yunus A. Cengel, "Heat Transfer A Practical Approach", TataMcGraw Hill, 2010.
[5] Frank P. Incropera and David P. Dewitt, "Fundamentals ofHeat and Mass Transfer", John Wiley & Sons, 1998.
[6] Venkateshan. S.P., "Heat Transfer", Ane Books, New Delhi,2004.
[7] Ghoshdastidar, P.S, "Heat Transfer", Oxford, 2004.
[8] Nag, P.K., "Heat Transfer", Tata McGraw Hill, New Delhi,2002.
[9] Holman, J.P., "Heat and Mass Transfer", Tata McGraw Hill,2000.

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

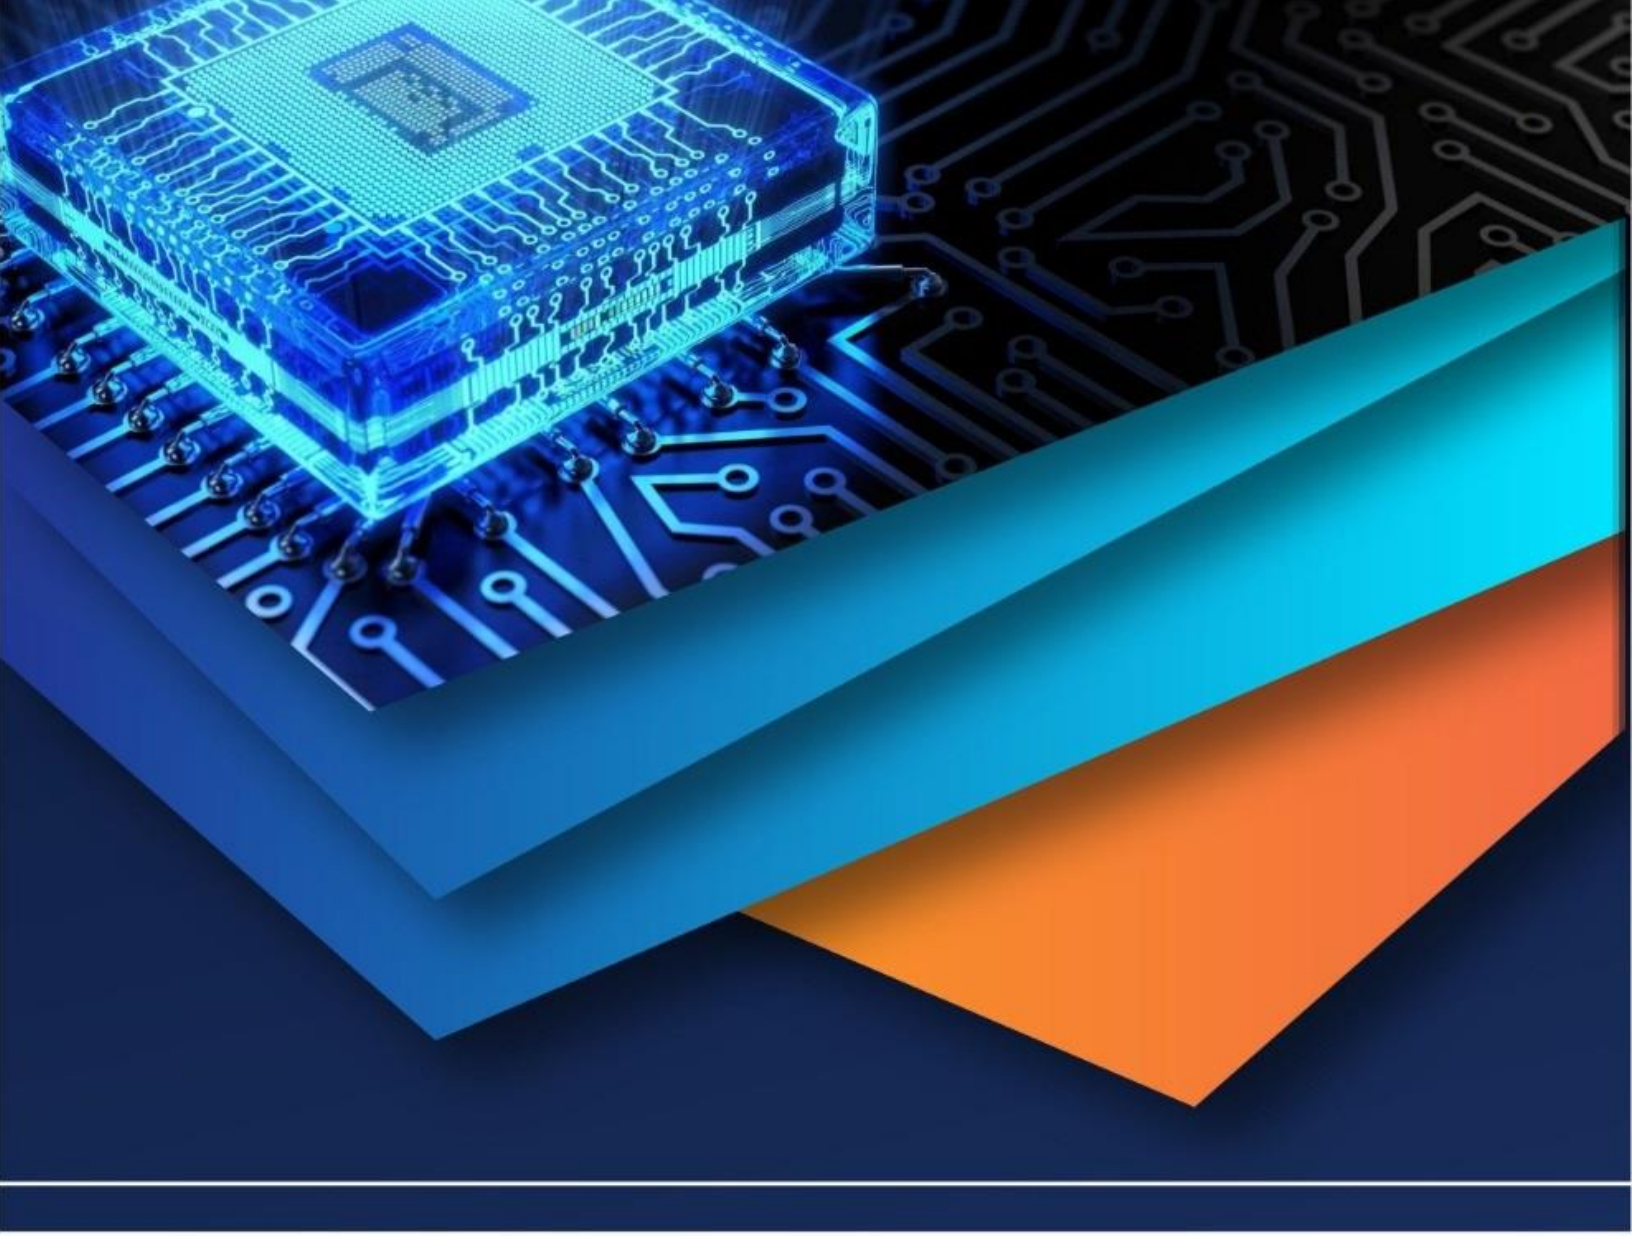

10.22214/IJRASET

45.98

IMPACT FACTOR: 7.129

IMPACT FACTOR: 7.429

INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089 (24*7 Support on Whatsapp)