iJRASET
International Journal For Research in Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 14 **Issue:** VI **Month of publication:** June 2026

DOI: https://doi.org/10.22214/ijraset.2026.83386

www.ijraset.com

Call: 08813907089 | E-mail ID: ijraset@gmail.com

International Journal for Research in Applied Science & Engineering Technology (IJRASET)
ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538
Volume 14 Issue VI June 2026- Available at www.ijraset.com

An Intelligent In-Cabin Health Monitoring and Automated Emergency Response System Using Real-Time Data Analysis

Sainath Borule[1], Prathamesh Borse[2], Vivek Godbole[3], Gaurav Lokhande[5], Kuldeep Waje[6], Prof. Nilesh Kuchekar[6]
PVG'S College of Engineering and Technology, Pune

Abstract: ***Road accidents caused by sudden health issues of drivers are a major concern in the world. Situations such as heart attack, abnormal body temperature, or low oxygen levels can cause loss of vehicle control. To solve this issue, this paper presents an in-cabin health monitoring and emergency response system using ESP32. The proposed system continuously monitors vital parameters of the driver, including heart rate, body temperature, and oxygen saturation (SpO_2). These parameters are measured and transmitted to an IoT platform-Blynk Iot for real-time observation. If any abnormal or emergency condition is detected, the system activates an emergency protocol that includes alert generation using a buzzer, activation of hazard lights through a relay module, and reduction of vehicle speed using a motor driver. Additionally, GPS and GSM modules are integrated to provide location tracking and alert communication. The system focuses on ensuring that the vehicle safely slows down and parks at the roadside, minimizing accident risk. Our proposed system is cost-effective and suitable for real-time applications in modern vehicles.***

Keywords: ESP32, IoT, Driver Health Monitoring, Emergency Response System, Blynk, GPS, GSM, Vehicle Safety

I. INTRODUCTION

In the last few years, road safety has become a critical issue due to the increasing number of accidents caused by driver health problems. Many drivers experience sudden medical emergencies such as cardiac arrest or respiratory issues during driving. These situations may result in loss of control over the vehicle, causing accidents.

Traditional vehicle safety systems mainly focus on external factors like collision detection and obstacle avoidance, and there is limited focus on monitoring the internal health condition of the driver. This shows a need for a smart system that continuously observes driver health and responds immediately during emergencies. Our paper proposes a real-time in-cabin health monitoring system integrated with an automatic emergency response mechanism. The system uses ESP32 as the main controller and combines multiple sensors and special modules such as GSM and GPS

II. LITERATURE REVIEW

Several research works have been carried out in the field of driver health monitoring and vehicle safety systems, with a major focus on integrating IoT and sensor-based technologies. The study in [1] provides a comprehensive overview of IoT applications in healthcare, highlighting how real-time data acquisition and remote monitoring can significantly improve patient safety and response time.

Existing systems primarily focus on monitoring physiological parameters using wearable or embedded sensors. For instance, [2] and [5] present IoT-based driver health monitoring systems that measure parameters such as heart rate and temperature and transmit the data to cloud platforms for real-time observation. Similarly, [11] and [12] demonstrate the use of ESP32-based systems for monitoring vital signs like heart rate and SpO_2, emphasizing low-cost and efficient implementation.

In the context of vehicle safety, [3] and [7] propose sensor-based systems that integrate IoT with embedded controllers to monitor vehicle conditions and provide alerts. Additionally, [10] focuses on driver drowsiness detection and alert mechanisms using GSM communication. More recent works such as [4], [8], and [17] explore advanced driver monitoring systems using multi-modal sensors and intelligent techniques to improve detection accuracy and reliability.

However, many of these systems are limited to monitoring and alert generation. As highlighted in [9] and [14], most existing solutions lack an integrated mechanism for automatic vehicle control during emergency situations. Although some studies, such as [6] and [15], attempt to incorporate safety features, they still have limited focus on complete automation of emergency response.

©IJRASET: All Rights are Reserved

Therefore, there is a clear need for a system that not only monitors driver health in real time but also takes immediate action to prevent accidents. The proposed system addresses this gap by integrating health monitoring, IoT-based communication, and automated vehicle control, ensuring a comprehensive and reliable emergency response mechanism.

III. PROBLEM STATEMENT

Road safety remains a significant global challenge, with a considerable number of accidents caused by sudden health issues experienced by drivers. Medical emergencies such as cardiac arrest, abnormal body temperature, or reduced oxygen levels can impair a driver's ability to control the vehicle. Most existing vehicle safety systems are designed to handle external risks, such as collisions and obstacles, but they do not address the internal health condition of the driver. Although some monitoring systems are available, they primarily focus on detection and alerting, without providing an integrated emergency response or vehicle control. This gap highlights the need for an intelligent system that can continuously monitor the driver's health, detect critical conditions in real time, and take immediate action to ensure safety.


IV. SCOPE OF THE PROJECT

This project focuses on improving road safety by addressing a problem that is often overlooked—driver health during driving. The system is designed to continuously monitor vital health parameters such as heart rate, body temperature, and oxygen levels using sensors connected to an ESP32 controller.

In case of any abnormal condition, the system does not just stop at generating alerts. It goes a step further by taking immediate action, such as slowing down the vehicle, activating hazard signals, and notifying emergency contacts with the driver's location using GPS and GSM modules.

The scope of this project mainly lies in developing a cost-effective, real-time solution that can be easily implemented in vehicles without major modifications. It is suitable for private cars as well as commercial vehicles where driver safety is critical.

While the current system focuses on basic health parameters, it can be further expanded in the future by integrating advanced sensors, AI-based prediction models, and cloud-based analytics to make it even more reliable and intelligent. Overall, this project aims to bridge the gap between health monitoring and active vehicle safety, making driving safer for everyone on the road.

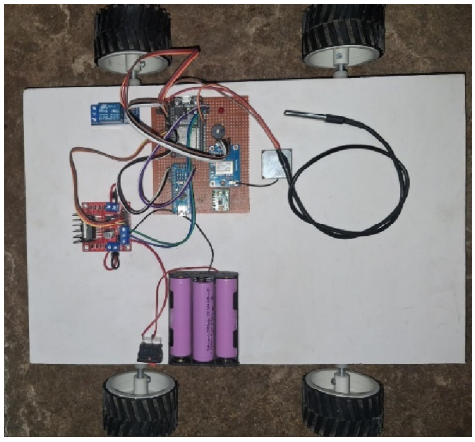

V. METHODOLOGY

1) Data Acquisition

- When the vehicle is turned ON, all sensors start collecting data continuously.
- The heart rate sensor measures the driver's pulse rate.
- The temperature sensor measures body temperature and may also capture ambient (room) temperature.
- The SpO_2 sensor measures the oxygen level in the blood.

2) Data Processing

- The collected data is sent to the ESP32 for processing.
- The values are compared with predefined threshold limits.
- These thresholds include normal ranges of heart rate, body temperature, and oxygen levels.

- This helps in identifying whether the driver's condition is normal or abnormal.

3) IoT Monitoring

- The processed data is transmitted to the Blynk IoT platform.
- Users can monitor real-time readings through the Blynk mobile application.


4) Emergency Detection

- If any health parameter crosses the safe limit, the system detects it as an emergency condition.
- The ESP32 immediately triggers the emergency response system.

5) Emergency Response Actions

- A buzzer is activated to alert nearby people.
- The relay module turns ON the hazard lights.
- The motor driver gradually reduces the vehicle speed from the initial set speed.
- The vehicle safely moves to the roadside and stops.
- The GPS module provides location data.
- The GSM module sends an alert message with the location details.

VI. SYSTEM ARCHITECTURE AND PROCESS

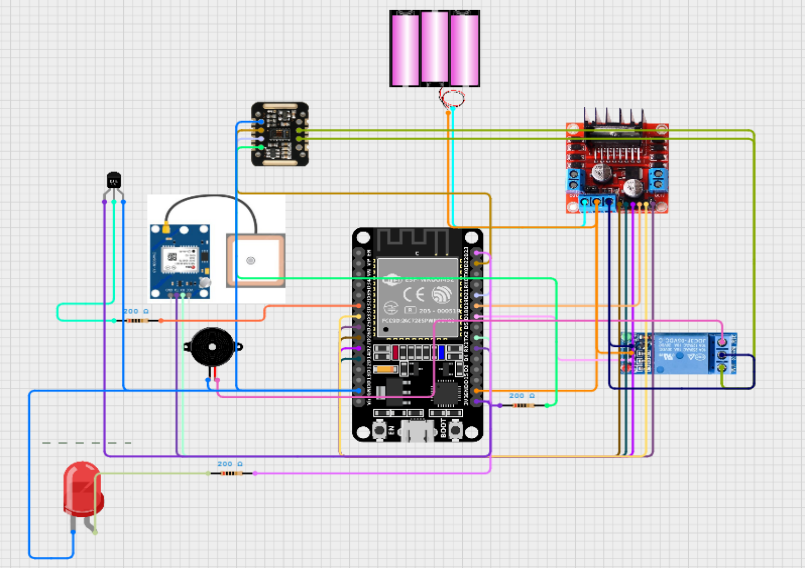

The proposed system is designed as an integrated in-cabin health monitoring and emergency response system centered around the ESP32 microcontroller. It combines multiple sensors, communication modules, and control units to ensure real-time monitoring and quick response during emergencies.

The system consists of three main layers: sensing, processing, and response.

In the sensing layer, sensors such as the heart rate sensor, temperature sensor, and SpO_2 sensor continuously collect the driver's vital health parameters. These sensors are responsible for capturing real-time physiological data.

In the processing layer, the ESP32 acts as the main controller. It receives data from all sensors and compares the values with predefined threshold limits. Based on this comparison, the system determines whether the driver's condition is normal or critical.

The communication layer enables remote monitoring and alerting. The ESP32 sends processed data to the Blynk IoT platform via Wi-Fi, allowing users to view real-time data on a mobile application. Additionally, the GPS module provides location information, and the GSM module is used to send alert messages during emergency situations.

In the response layer, once an abnormal condition is detected, the system activates multiple safety mechanisms. A buzzer is triggered to alert nearby people, the relay module turns on hazard lights, and the motor driver reduces the vehicle speed gradually to ensure safe stopping.

Overall, the system architecture ensures a seamless flow of data from sensing to action, enabling timely detection and automatic response to driver health emergencies.

Process:

1) When the vehicle is turned ON, the system gets activated and all sensors start functioning.
2) The heart rate sensor, temperature sensor, and SpO_2 sensor continuously monitor the driver's health parameters.
3) The collected data is sent to the ESP32 microcontroller for processing.
4) The ESP32 compares the sensor values with predefined threshold limits to check whether the condition is normal or abnormal.
5) The processed data is transmitted to the Blynk IoT platform for real-time monitoring through a mobile application.
6) If any parameter exceeds the safe limit, the system detects it as an emergency condition.
7) The ESP32 immediately triggers the emergency response system.
8) A buzzer is activated to alert nearby people.
9) The relay module turns ON the hazard lights of the vehicle.
10) The motor driver gradually reduces the vehicle speed to ensure safe control.
11) The GPS module retrieves the real-time location of the vehicle.
12) The GSM module sends an alert message along with the location details to predefined contacts.
13) Finally, the vehicle slows down and stops safely at the roadside, reducing the risk of accidents.

VII. RESULTS & APPLICATIONS

A. *Results:*

1) System Validation:

The proposed system is designed to operate effectively under both normal and emergency conditions by continuously monitoring the driver's health parameters and initiating appropriate actions when required.

2) Real-Time Data Monitoring:

Physiological parameters such as heart rate, body temperature, and SpO_2 are continuously acquired and transmitted to the IoT platform, enabling real-time monitoring and analysis.

3) Emergency Detection Performance:

The system identifies abnormal conditions using predefined threshold values, allowing timely detection of potential health risks.

4) Response Time:

The architecture ensures minimal delay between detection and response, enabling prompt activation of safety mechanisms.

5) Automated Control Response:

Upon detection of an emergency condition, the system initiates multiple control actions, including activation of a buzzer and hazard lights, gradual reduction of vehicle speed using PWM control, and safe stopping of the vehicle.

6) Communication Reliability:

The integration of GPS and GSM modules enables location tracking and transmission of alert messages to predefined contacts, ensuring effective communication during emergencies.

7) Overall Outcome:

The proposed system provides an efficient and reliable solution for enhancing driver safety by combining real-time health monitoring with automated emergency response mechanisms.

B. *Applications*

The proposed system can be applied in various real-world scenarios, including:

1) Real-time monitoring of driver health in personal and commercial vehicles.
2) Automatic emergency response in case of sudden medical conditions.
3) Integration with smart vehicles to enhance overall road safety.
4) Fleet management systems for monitoring driver well-being in logistics and transport companies.
5) Alert and location tracking for emergency services such as ambulances and roadside assistance.
6) Use in public transportation systems to ensure passenger safety by monitoring the driver's health.
7) Implementation in autonomous or semi-autonomous vehicles for proactive emergency handling

VIII. CONCLUSION


The proposed ESP32-based in-cabin health monitoring system provides continuous real-time monitoring of driver vital signs, including heart rate, body temperature, and SpO_2. In case of abnormal conditions, it automatically triggers emergency responses such as reducing vehicle speed, activating hazard lights, sounding an alert buzzer, and sending location-based notifications via GPS and GSM.

By combining IoT-based remote monitoring with automated vehicle control, the system significantly enhances driver safety, reduces the risk of accidents caused by sudden health issues, and demonstrates a cost-effective solution suitable for modern smart vehicles. Overall, this project showcases an integrated approach to proactive road safety and emergency management.

REFERENCES

[1] S. M. Riazul Islam, D. Kwak, M. H. Kabir, M. Hossain, and K. S. Kwak, "The Internet of Things for Health Care: A Comprehensive Survey," *IEEE Access*, vol. 3, pp. 678–708, 2015.
[2] A. A. Nada, M. A. Fakhr, and A. F. Seddik, "IoT-Based Smart Health Monitoring System for Driver Safety," *International Journal of Engineering Research & Technology (IJERT)*, vol. 8, no. 6, pp. 102–106, 2019.
[3] M. Ali, A. Alkhateeb, and A. A. Ahmad, "Smart Vehicle Safety System Using Embedded Sensors and IoT," *IEEE Sensors Journal*, vol. 21, no. 4, pp. 4567–4575, 2021.
[4] L. Melders, R. Smigins, and A. Birkavs, "Recent Advances in Vehicle Driver Health Monitoring Systems," *Sensors*, vol. 25, no. 6, p. 1812, 2025, doi:10.3390/s25061812.
[5] D. Y. Jaya, "IoT-Based Driver Health Monitoring System with Location-Based Service Feature," *International Journal of Health Engineering and Technology*, vol. 3, no. 6, 2025, doi:10.55227/ijhet.v3i6.263.
[6] K. R. Krupa Prasad *et al.*, "Smart Guard: IoT-Based Driver Health Monitoring and Safety System," *IRO Journal on Sustainable Wireless Systems*, vol. 6, no. 4, pp. 353–361, 2025, doi:10.36548/jsws.2024.4.006.
[7] "Sensor-Based Health Monitoring and Controlling of Vehicle Using IoT," *Materials Today: Proceedings*, vol. 45, pp. 2908–2911, 2021, doi:10.1016/j.matpr.2020.11.903.
[8] O. Alhousrya, A. Bennagi, P. A. Cotfas, and D. T. Cotfas, "IoT-Enabled Driver Health Monitoring System Using Multi-Modal Sensors," in *Proc. IEEE SIITME*, 2025, doi:10.1109/siitme67657.2025.11293652.
[9] S. F. A. Razak *et al.*, "Monitoring Physiological State of Drivers Using In-Vehicle Sensing of Non-Invasive Signals," *Civil Engineering Journal*, 2024, doi:10.28991/CEJ-2024-010-04-014.
[10] B. T. Petkar, C. Bhagya, T. K. Gagan, and K. Lokesha, "Automatic Driver Drowsiness Alert and Health Monitoring System Using GSM," in *IJERT Conference Proceedings*, 2018, doi:10.17577/IJERTCONV6IS13126.
[11] M. R. K. K. Rahman *et al.*, "IoT-Based Wireless Patient Monitor Using ESP32 Microcontroller," in *Proc. ACIT*, 2023, doi:10.1109/ACIT58888.2023.10453847.
[12] M. I. P. Pratama *et al.*, "Design and Evaluation of an IoT-Enabled ESP32 Photoplethysmography Monitor for Heart Rate and SpO_2," *Jurnal TRIAC*, doi:10.21107/triac.v12i2.31989.
[13] "IoT-Based Real-Time Health Monitoring System with ML-Driven Smart Insights Using ESP32," *ResearchGate Preprint*, 2025, doi:10.13140/RG.2.2.16825.89449.
[14] T. Rahman, "IoT-Based Smart Vehicle Monitoring System: A Systematic Literature Review," *IJSRSET*, vol. 8, no. 1, 2021, doi:10.32628/IJSRSET207647.
[15] "Autonomous Vehicle Health Monitoring and Driver Safety System," *IJRASET*, 2025, doi:10.22214/ijraset.2025.69444.
[16] "IoT-Based Patient Monitoring System," *IJRASET*, 2025, doi:10.22214/ijraset.2025.72050.
[17] "Innovative Driver Monitoring Systems in Smart Road Scenario," *Sensors (MDPI)*, vol. 25, no. 2, p. 562, 2025, doi:10.3390/s25020562.

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

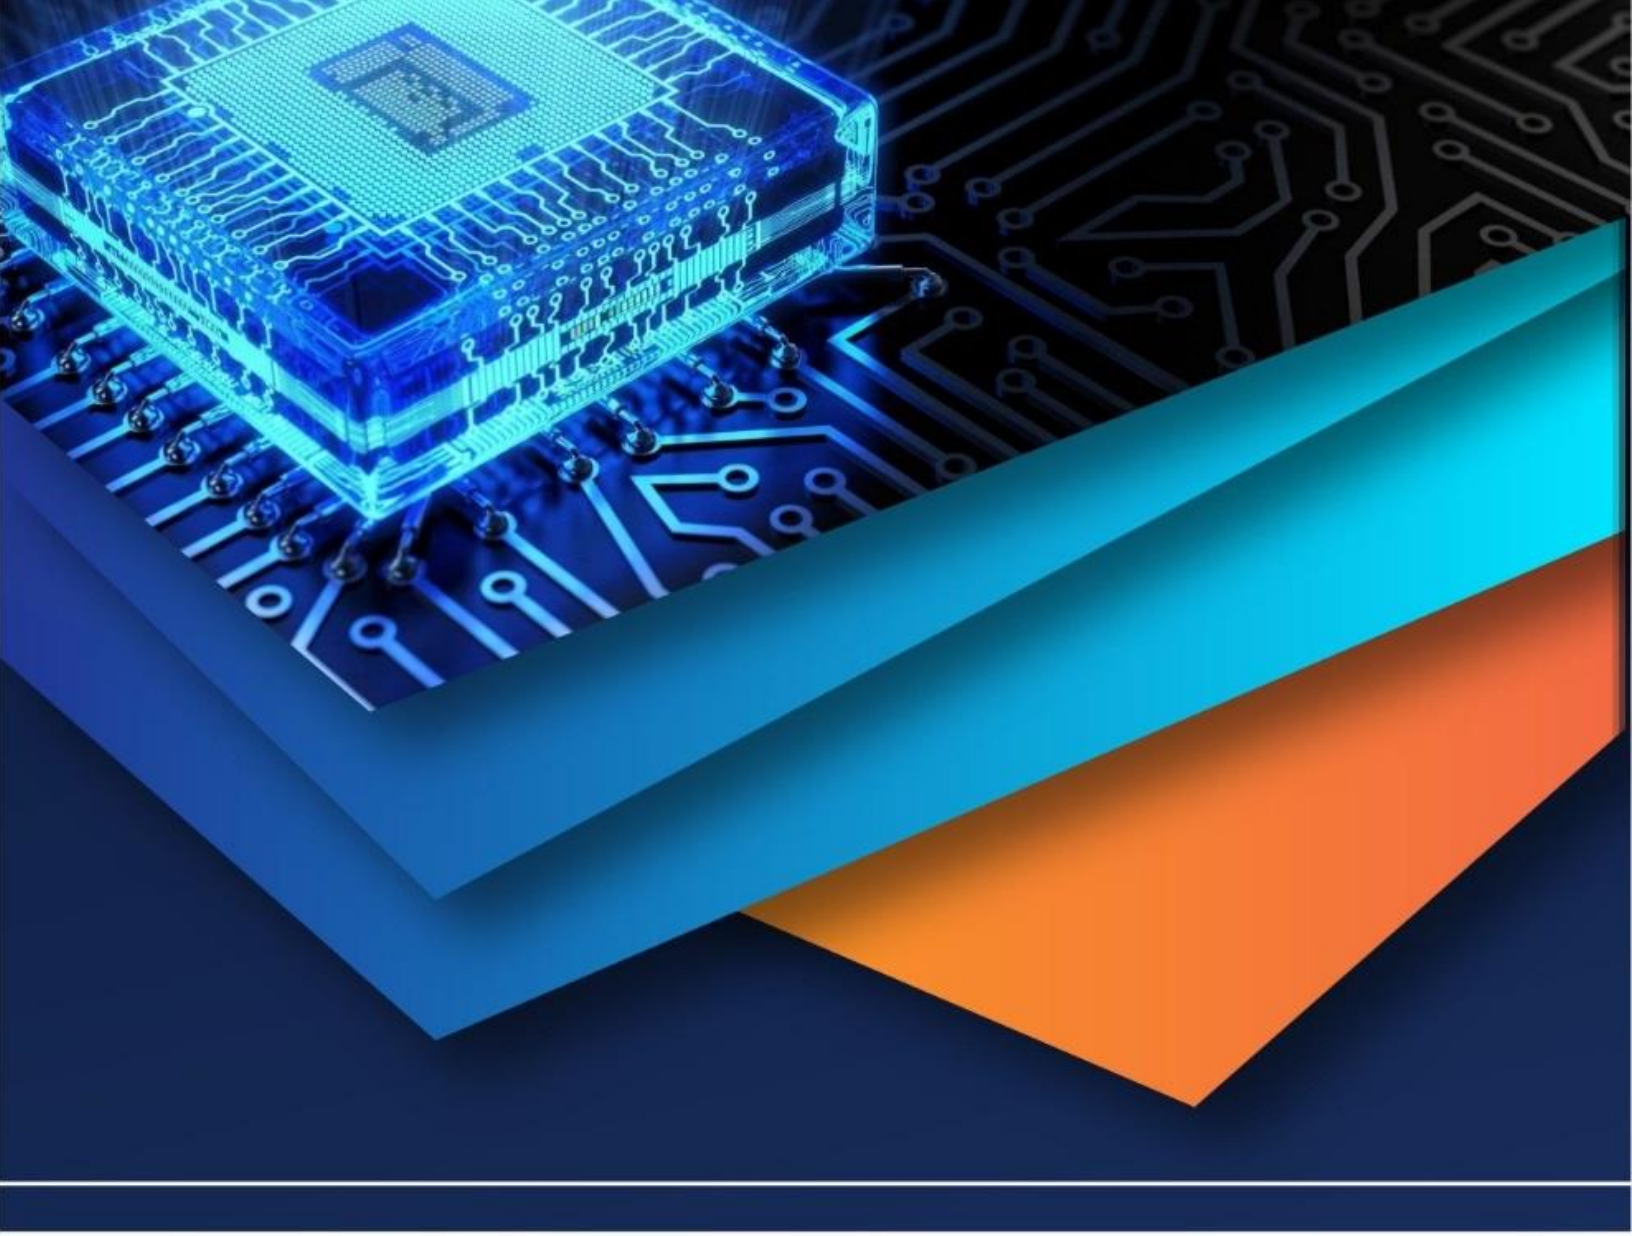

10.22214/IJRASET

45.98

IMPACT FACTOR: 7.129

IMPACT FACTOR: 7.429

INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089 (24*7 Support on Whatsapp)