iJRASET
International Journal For Research in Applied Science and Engineering Technology



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

**Volume:** 13 **Issue:** V **Month of publication:** May 2025

**DOI:** https://doi.org/10.22214/ijraset.2025.70526

www.ijraset.com

Call: 08813907089 | E-mail ID: ijraset@gmail.com

International Journal for Research in Applied Science & Engineering Technology (IJRASET)
*ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538*
*Volume 13 Issue V May 2025- Available at www.ijraset.com*

# IoT Based Smart Agriculture Monitoring System

Prof. M.D. Chavan[1], Akash Solankar[2], Irfan Mulla[3], Vikram Jadhav[4], Satvik Pandhare[5]
[1]*Professor, Dept. Of Electrical Engineering, Brahmdevdada Mane Institute of Technology, Dist Solapur, Maharashtra, India*
[2, 3, 4, 5]*Students, Dept. of Electrical Engineering, Brahmdevdada Mane Institute of Technology, Dist. Solapur, Maharashtra, India*

***Abstract:** The integration of Internet of Things (IoT) technologies in agriculture has the potential to revolutionize farming practices by enabling real-time monitoring and automation of essential processes. This project aims to develop an IoT-based system for monitoring key agricultural parameters such as soil pH, moisture levels, ambient light, rain detection, temperature, and humidity. The system will also include smart irrigation management, which automates the irrigation process based on real-time soil moisture and weather conditions, ensuring efficient water usage.By leveraging sensors, wireless communication, and cloud computing, the proposed system will collect and analyze environmental data, enabling farmers to remotely access and manage field conditions through a user-friendly interface. The project also focuses on improving crop health and productivity by maintaining optimal growth conditions, enhancing sustainability, and reducing resource wastage. The system aims to offer a cost-effective, scalable solution that supports sustainable farming practices, helping to meet the increasing demand for food in a resource-constrained world.The results of this project demonstrate the potential of IoT in optimizing agricultural processes, reducing manual intervention, and promoting precision farming, ultimately contributing to better yields and more efficient resource management.*

## I. INTRODUCTION

Agriculture is a critical industry, but traditional methods often result in inefficient resource usage, particularly water. The agricultural sector faces various challenges such as unpredictable weather conditions, water scarcity, and the need for continuous monitoring. With the increasing demand for sustainable agricultural practices, there is a growing need to integrate modern technology to increase productivity and reduce resource wastage. This project focuses on implementing an IoT-based smart agriculture system to automate and optimize irrigation processes. By using sensors to monitor critical environmental parameters like soil moisture, temperature, and humidity, the system automatically adjusts the irrigation schedule to ensure that crops receive the right amount of water at the right time. Additionally, it provides farmers with real-time data via a mobile application or web interface allowing for remote monitoring and control. The project highlights the potential of IoT technology to revolutionize farming practices, making agriculture more efficient, sustainable, and data-driven. It addresses the need for smart solutions in agriculture to cope with the growing challenges posed by climate change and the global food demand.

## II. LITERATURE REVIEW

The integration of Internet of Things (IoT) technologies in agriculture has gained significant attention in recent years due to its potential to revolutionize traditional farming practices. Several researchers have explored the application of IoT in monitoring key environmental parameters such as soil moisture, temperature, humidity, and light intensity to optimize agricultural productivity. Early studies highlighted the effectiveness of wireless sensor networks in collecting real-time data from the field, enabling informed decision-making and resource optimization. Researchers have proposed smart irrigation systems where water is supplied based on soil moisture levels, thereby reducing water wastage and improving crop yield. Additionally, the integration of cloud computing and mobile applications has enabled farmers to remotely access field data, monitor conditions, and control systems through smartphones. This has proven particularly beneficial in areas with limited manpower. However, studies also point out certain challenges such as network reliability, sensor calibration, energy efficiency, and scalability of the systems. To address these, newer systems incorporate solar-powered modules and advanced communication technologies like LoRa and Zigbee for reliable long-range data transmission. Overall, the literature strongly supports the adoption of IoT in agriculture for enhancing productivity, promoting sustainability, and reducing manual effort through automation and real-time monitoring.

## III. METHODOLOGY

The proposed IoT-based smart agriculture monitoring system is designed to collect real-time environmental data from agricultural fields using various sensors and transmit it to a cloud platform for monitoring and analysis. The system architecture consists of four major components: sensor units, microcontroller, communication module, and user interface.

©IJRASET: All Rights are Reserved 

In the first phase, sensors are deployed in the field to measure parameters such as soil moisture, temperature, humidity, and light intensity. These sensors are connected to a microcontroller, such as an Arduino or NodeMCU, which acts as the central processing unit. The microcontroller collects the data from all the connected sensors and processes it for transmission. In the second phase, the processed data is sent to a cloud server using a communication module like Wi-Fi (ESP8266), GSM, or LoRa, depending on the network availability in the deployment area. The cloud platform stores the data and makes it available for real-time access. In the third phase, a user-friendly interface such as a mobile app or web dashboard is used to display the sensor data. Farmers can monitor the field conditions remotely and receive alerts in case any parameter exceeds the critical thresholds. This enables timely decision-making, such as when to irrigate or apply fertilizers. In the final phase, the system can be extended to include automation features such as turning irrigation pumps on/off based on sensor readings, thus creating a closed-loop control system. The entire setup runs on solar power or battery to ensure uninterrupted operation in remote areas.

## IV. WORKING

The soil moisture sensor is connected to an analog pin of the microcontroller arduino A0. The sensor will be sending the moisture content in the form of analog. data. to the microcontroller. DHT11 Humidity and temperature sensor is connected to the digital pin of the microcontroller, as the data sent by the DHT11 sensor is in digital format. The motor pump is connected to the arduino through the l298n motor driver. The l298n motor driver is used so that the arduino board does not get damaged due to the back current of the motor.The sensors continuously monitor the data parameters and the microcontroller displays them after regular intervals. If the soil moisture is below a certain level which can affect the crops under consideration, the arduino will execute the condition mentioned in the if block of the code. As soon as the moisture level goes down, the motor pump will start and water will start flowing into the fields. The moisture content of the soil will start increasing. The new moisture content will be regularly monitored and will be displayed along with other parameters. As soon as the moisture content reaches the desired value, the if condition which was being executed will become false, and the motor pump will stop getting power and as result will be switched off, hence conserving the water and reducing the complexity.

## V. BLOCK DIAGRAM

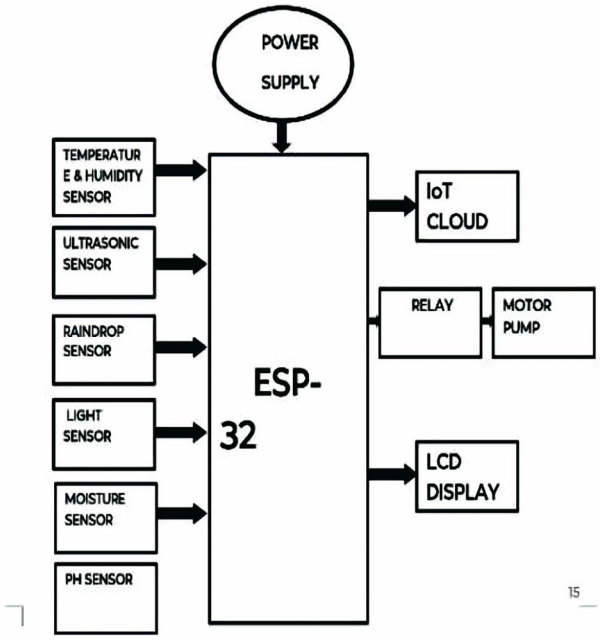



Figure1. Block Diagram of a system

*ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538*
*Volume 13 Issue V May 2025- Available at www.ijraset.com*


## VI. COMPONENT DESCRIPTION

### *A. ESP 32 Microcontroller Board*



ESP 32 is a series of low-cost, low-power system on a chip microcontroller with integrated WiFianddual-modeBluetooth.ESP32 is created and developed by Espressif Systems, a Shanghai-based Chinese company, and ismanufactured by TSMC.ESP32 can perform as a complete standalone system or as a slave device to a hostMCU, reducing communication stack overhead on the main application processor. ESP32 can interface withother systems to provide Wi-Fi and Bluetooth functionality through its SPI / SDIO or I2C / UART interfaces.

### *B. Soil Moisture Sensor*

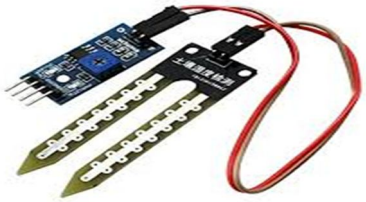

The soil moisture sensor measures the amount of water present in the soil, which is essential for determining whether irrigation is necessary. This sensor typically consists of two probes that measure the electrical resistance between them, which changes based on the moisture level. When the soil is dry, the resistance is high, and when it's wet, the resistance decreases. This data is sent to the microcontroller, which processes it and determines whether water needs to be added. By automating this process, the system can irrigate crops only when necessary, preventing overwatering or underwatering, which optimizes water usage and supports sustainable agriculture.

### *C. Temperature and Humidity Sensor*




The temperature and humidity sensor, such as the DHT11 or DHT22, is responsible for monitoring the ambient environmental conditions, specifically the temperature and humidity. These are key factors that influence plant health, growth, and development. Plants require specific temperature and humidity conditions to thrive. For example, high temperatures with low humidity can stress plants, while extreme humidity can encourage the growth of molds and mildew. By monitoring these parameters, farmers can optimize the environment for crops. Additionally, this sensor data can trigger certain actions, like adjusting ventilation or irrigation schedules, to maintain ideal growing conditions.

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

*ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538*
*Volume 13 Issue V May 2025- Available at www.ijraset.com*

*D. Light Sensor*

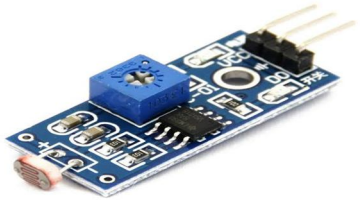

Light plays a vital role in plant growth as it drives photosynthesis. The light sensor, which can either be a Light Dependent Resistor (LDR) or a more precise sensor like the BH1750, measures the intensity of light in the environment. This data is essential in determining whether the plants are receiving sufficient light for photosynthesis. The sensor can detect both natural sunlight and artificial lighting in controlled environments like greenhouses. If light levels fall below a threshold, the system can trigger additional lighting or adjust the positioning of plants. By ensuring optimal light levels, the system supports the health and growth of plants.

*E. PH Sensor*



A pH sensor is used to measure the acidity or alkalinity of the soil, which is a crucial factor in determining soil health and nutrient availability. The pH value ranges from 0 to 14, where values below 7 indicate acidic soil, 7 is neutral, and values above 7 indicate alkaline soil. Most crops grow best in a slightly acidic to neutral range (pH 6.0–7.0).The pH sensor works by producing a small voltage depending on the hydrogen ion concentration in the soil. This voltage is read by the microcontroller, which then calculates the corresponding pH value. This sensor is often integrated with a probe that is inserted into the soil to measure pH in real-time. Maintaining the correct pH is important because it affects the availability of essential nutrients like nitrogen, phosphorus, and potassium. If the pH is too high or too low, plants may not be able to absorb these nutrients even if they are present in the soil.


*F. Rain Drop Sensor*



A Rain Drop Sensor is used to detect the presence and intensity of rainfall. It consists of a rain detection board and a control module. The detection board is typically a printed circuit with exposed conductive lines that change resistance when rainwater lands on them. When raindrops hit the board, the water bridges the conductive traces, causing a change in the voltage level, which is detected by the control module and then sent to the microcontroller. In a smart agriculture system, this sensor plays a critical role in preventing unnecessary irrigation. If rain is detected, the system can pause or stop the water pump, conserving water and preventing overwatering. It also helps in decision-making for covering crops, scheduling fieldwork, or applying fertilizers and pesticides, which should not be done during rain.

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

## VII. PROJECT IMAGE

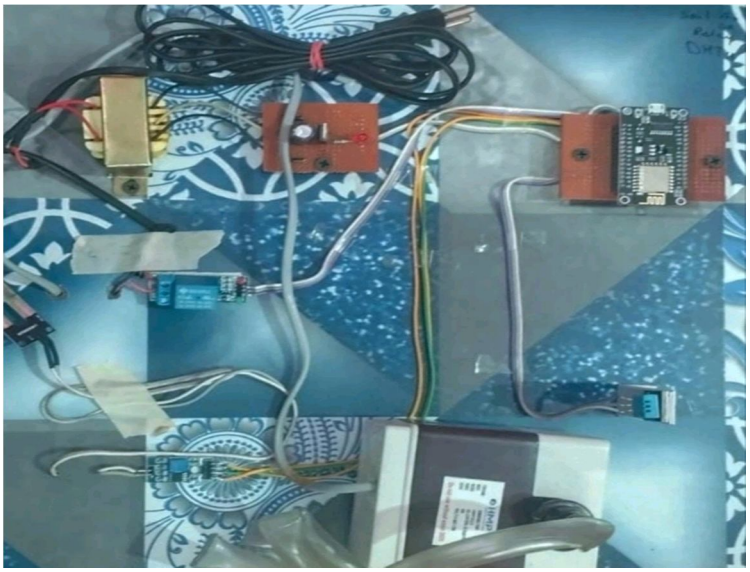

## VIII. RESULT



## IX. CONCLUSION

The IoT-Based Smart Agriculture Monitoring System provides an efficient and automated solution to traditional farming challenges. By integrating various sensors like soil moisture, temperature, humidity, light, pH, rain, and ultrasonic sensors with a microcontroller and cloud platform (like Blynk), this system enables real-time monitoring and remote control of farming conditions. The automated irrigation based on soil moisture and rain detection helps conserve water and ensures timely watering, while environmental data collection helps improve crop productivity and health. The cloud integration allows farmers to access data anytime, receive alerts, and make informed decisions, ultimately promoting precision agriculture, reducing manual effort, and contributing to sustainable farming practices.

## X. FUTURE SCOPE

*1)* Integration with AI and Machine Learning: By integrating AI and machine learning algorithms, future systems could predict crop diseases, yield patterns, and optimize resource allocation based on historical data, enabling even more precise and efficient farming practices.

*2)* Advanced Predictive Analytics: IoT systems could be enhanced to provide predictive analytics based on environmental trends and weather forecasts, allowing farmers to plan irrigation, planting, and harvesting more effectively. This would improve preparedness for climate change impacts and extreme weather conditions

*3)* Expansion to Multi-Crop Monitoring: Future developments could focus on expanding the system to monitor and optimize conditions for multiple types of crops simultaneously, offering more tailored recommendations based on individual crop needs.

## REFERENCES

[1] Shweta S. Patil, Ashwini V. Malviya , “Agricultural Field Monitoring System Using ARM”, International Journal of Advanced Research in Electrical, Electronics and Instrumentation Engineering, ISSN: 2320 – 3765, April 2014.


[2] Fang, S., Da Xu, L., Zhu, Y., Ahati, J., Pei, H., Yan, J., Liu, Z., 2014. An integrated system for regional environmental monitoring and management based on internet of things. IEEE Trans. Ind. Inform. 10, 1596–1605.

[3] Balaji Bhanu, Raghava Rao, J.V.N. Ramesh and Mohammed Ali hussain, “Agriculture Field Monitoring and Analysis using Wireless Sensor Networks for improving Crop Production”, Eleventh International Conference on Wireless and Optical Communications Networks (WOCN).2014.

[4] HarshalMeharkure, ParagYelore, SheetalIsrani, “Application of IOT Based System for Advance Agriculture in India”, International Journal of Innovative Research in Computer and Communication Engineering(IJIRCCE) Vol. 3, Issue 11, pp. 10831-10837, 2015.

[5] Mehdi Roopei, Paul Rad, Kim- Kwang Raymond Choo, “Cloud of Things in smart agriculture: Intelligent irrigation monitoring by Thermal Imaging” IEEE Cloud Computing, 2017.

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

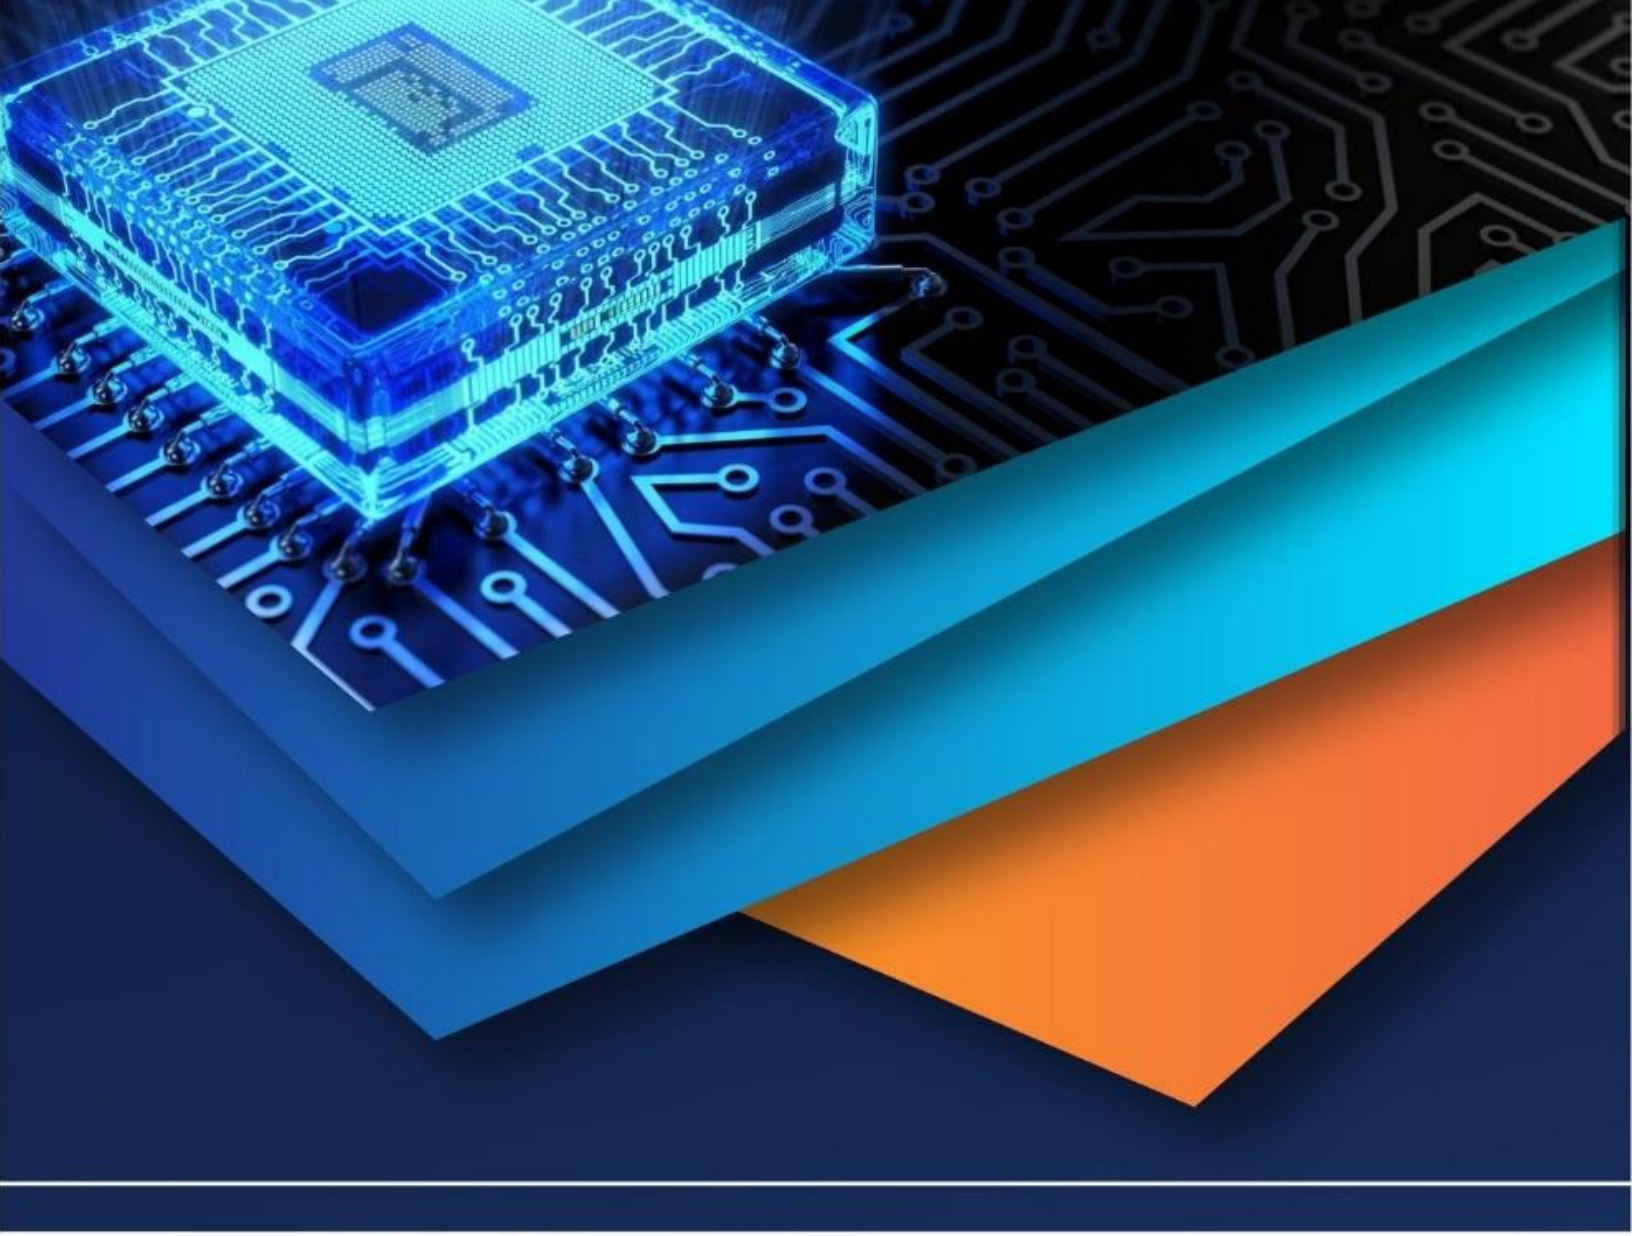

10.22214/IJRASET

45.98

IMPACT FACTOR: 7.129

IMPACT FACTOR: 7.429

# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089 (24*7 Support on Whatsapp)