iJRASET
International Journal For Research in Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 13 **Issue:** IV **Month of publication:** April 2025

DOI: https://doi.org/10.22214/ijraset.2025.68832

www.ijraset.com

Call: 08813907089 | E-mail ID: ijraset@gmail.com

International Journal for Research in Applied Science & Engineering Technology (IJRASET)
ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538
Volume 13 Issue IV Apr 2025- Available at www.ijraset.com

IoT-Based Application for Real-Time Monitoring and Segregation of Solid Waste in Urban and Municipal Environments

Dr. N. Malathy[1], Sangeetha L[2], Suchendra Reddy V[3], Reena Sree G[4], Dhanush M[5]
[1, 2, 3, 4]*Electronics and Communication Engineering, J.N.N Institute of Engineering, Chennai, India*
[5]*Bio Medical Engineering, J.N.N Institute of Engineering, Chennai, India*

Abstract: ***Conventional waste management systems are unable to cope with fast-paced urbanization, resulting in over flowing garbage cans and mounting expenditure. With the inclusion of wireless modules and ultrasonic sensors, an IoT-based smart dustbin management system driven by Arduino can efficiently track the fill levels of bins. Authorities are notified when bins are full, allowing for timely collection and minimizing fuel usage. A servo motor prevents unauthorized dumping and facilitates waste separation. The YOLO algorithm sorts the waste in real time, routing it to correct compartment. The system sends information to a cloud dashboard, maximizing recycling processes and collection schedules for a smarter and more efficient waste management solution.***

Keywords: Arduino Uno, Ultrasonic Sensor, Servo Motor, IoT (Internet of Things), YOLO Algorithm

I. INTRODUCTION

Traditional waste management is grossly hindered by the rapid pace of urbanization, which leads to filled trash cans, environmental degradation, and higher operational costs. Fuel consumption and labor inefficiencies are exacerbated by inefficient collection timetables. A Smart Waste Management System based on Arduino is proposed as a remedy to this issue in an attempt to easy waste disposal and monitoring.

For maximum waste collection, Ultrasonic sensors monitor bin fill levels and provide real-time notifications over Wi-Fi or GSM. Although YOLO-based real-time classification accurately separates biodegradable and non-biodegradable waste for proper routing, a servo motor ensures controlled disposal and segregation. Additionally, local authorities can analyze garbage trends and optimize collection schedules using a cloud-based dashboard. This enhances resource optimization, sustainability, and waste management efficiency making it most suitable for smart city applications.

II. LITERATURE SURVEY

A. Identifying Objects Using an Ultrasonic Sensor

In safety and automation systems, ultrasonic sensors are widely utilized for detecting objects as well as measuring distance. Ultrasonic sensors utilize high-frequency sound waves that are emitted and measure the time of return of the reflected waves, as discussed in [1]. In applications for obstacle detection and smart security systems, these sensors have been proven to be effective

B. Machine Learning-Based Servo Motor Control

Intelligent and Adaptive Servo Motor Control Mechanisms Enabled by Machine Learning Machine Learning (ML) has revolutionized automation in embedded systems. Traditional servo motor control uses static control loops and pre-programmed algorithms, which were unable to always factor in dynamic environmental changes. Servo motors can be made more accurate and efficient by using machine learning (ML), which enables them to learn from past data, detect trends, and adjust movements in real time.

An experiment in [2] revealed how ML algorithms optimize servo motor control and perceive sensor inputs to reduce errors and enhance responsiveness. This process is effective where precise and agile motor control matters, for instance, in robotics, industrial automation, and prosthetics. Servo systems based on ML are ideal for modern automation systems due to the assurance of smoother operations, reduced power consumption, and greater flexibility.

©IJRASET: All Rights are Reserved

C. GSM-Based Emergency Alert System

An Arduino-based emergency alert system offers a practical and real-time solution for critical situations by using Global System for Mobile Communications (GSM) modules to send instant notifications. In [3], researchers created a system that employs an Arduino Uno microcontroller to identify emergencies and activate GSM-based alerts, which send SMS notifications to designated contacts. This allows for prompt action in the event of accidents, security breaches, or dangerous conditions. Furthermore, the addition of an emergency buzzer increases the system's effectiveness by producing an audible alert, which helps to draw attention to the situation. These systems have broad applications in healthcare, security, and disaster management, promoting quick responses and enhanced safety measures.

D. LCD and GSM Communication in Embedded Systems

LCD (Liquid Crystal Display) screens are commonly utilized in embedded systems for real-time data visualization, offering a clear and user-friendly interface for monitoring system parameters. Research in [5] emphasizes the benefits of integrating LCDs with microcontrollers like the Arduino Uno, which allows for the efficient display of essential information such as sensor readings, alerts, and operational statuses. These displays enhance system usability by providing immediate feedback, minimizing the reliance on external computing devices. Their low power consumption, excellent readability, and cost-effectiveness make them well-suited for IoT applications, industrial automation, and medical monitoring systems, ensuring timely status updates and improved user interaction.

II. PROPOSED METHODOLOGY

A. System Architecture

The smart monitoring and alert system consist of multiple hardware components which function together to deliver efficient operation while providing real-time monitoring and timely alerts. The system architecture unifies multiple sensors with actuators and communication modules which the Arduino Uno microcontroller manages and coordinates.

Arduino Uno: The Arduino Uno microcontroller serves as the system's central processing unit which handles sensor data collection while executing programmed instructions and controlling actuator movement. Because of its ability to work with multiple peripheral modules together with straightforward programming features the Arduino Uno stands out as the best microcontroller for embedded applications.

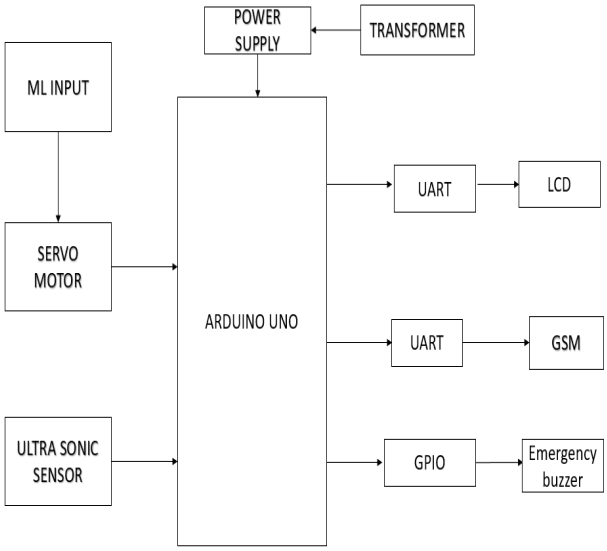


Figure (1): Hardware Block Diagram

Ultrasonic Sensor: The Figure (2) HC-SR04 ultrasonic sensor functions as an accurate tool for both measuring distance and detecting obstacles. The system functions by sending ultrasonic waves and tracking the duration taken for the echo to bounce back which enables precise obstacle detection and proximity evaluation.

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |



Figure (2): Ultrasonic Sensor

Machine Learning (ML) Input: An ML module within the system analyzes sensor data patterns to improve decision-making capabilities. Real-time sensor data feeds into the ML model which forecasts possible anomalies and hazards to enhance automated responses while minimizing false alerts.
Servo Motor: A servo motor is used for accurate mechanical actuation according to ML-based decisions. It carries out controlled movement in reaction to sensed obstacles or other pre-set triggers, with precise and efficient system operation.
GSM Module: The GSM module facilitates real-time remote communication through the transmission of SMS warnings to preconfigured contacts during emergency situations. This feature enhances system accessibility, allowing users to receive real-time notifications regarding security breaches or operational irregularities.
LCD Display: A Liquid Crystal Display (LCD) provides real-time indication of system status, including sensor values, identified obstacles, and warning messages. This feature enables users to effectively monitor system performance directly from the device.

B. Working of System

The Smart Waste Management System integrates Machine Learning (ML) and Embedded Systems to enhance the processes of waste collection, sorting, and disposal. By utilizing IoT-enabled smart bins equipped with sensors, the system monitors waste levels, identifies different types of waste, and predicts when bins will reach capacity. This real-time information is transmitted to a cloud platform, where ML algorithms refine collection routes, minimizing unnecessary trips and associated costs. Furthermore, computer vision and deep learning technologies automatically categorize waste into recyclable and non-recyclable groups, streamlining the recycling process. A real-time dashboard offers valuable insights for municipal authorities, promoting proactive waste management. This adaptable solution helps prevent waste overflow, reduce pollution, and keep urban areas cleaner, making it particularly suitable for smart cities and industrial zones.

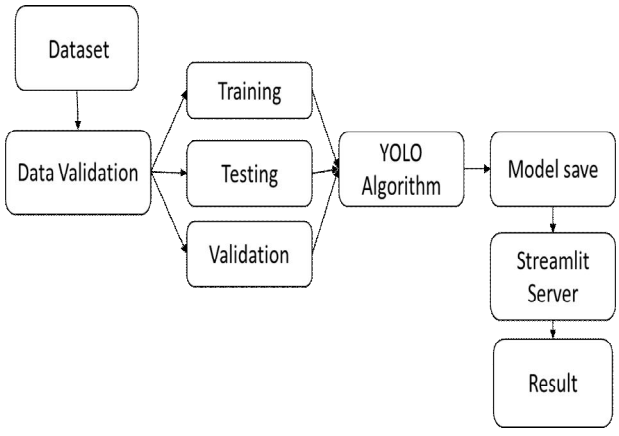


Figure (3): Software Block Diagram

C. YOLO Algorithm based waste classification

The YOLO (You Only Look Once) algorithm, is mostly applied in computer vision, can be very efficient in waste segregation automation through the detection and classification of different types of waste.

1) Training Data: YOLO is trained using a data set of images corresponding to various types of waste (plastic, paper, metal, organic, etc.). Bounding boxes are used to label the location and type of waste in each image.

2) Real-Time Detection: Once Trained, the YOLO model is able to recognize and classify waste objects in real-time. As waste travels along a conveyer belt, cameras take snapshots, which YOLO uses to identify objects, both their type and their position in the frame.

3) Sorting Mechanism: After sorting, the system guides robotic arms or sorting mechanisms to sort out the waste into respective bins.

III. RESULTS AND DISCUSSION

Smart Waste management system was implemented and tested at indoor location. Figure (4) shows the final prototype built for the proposed system

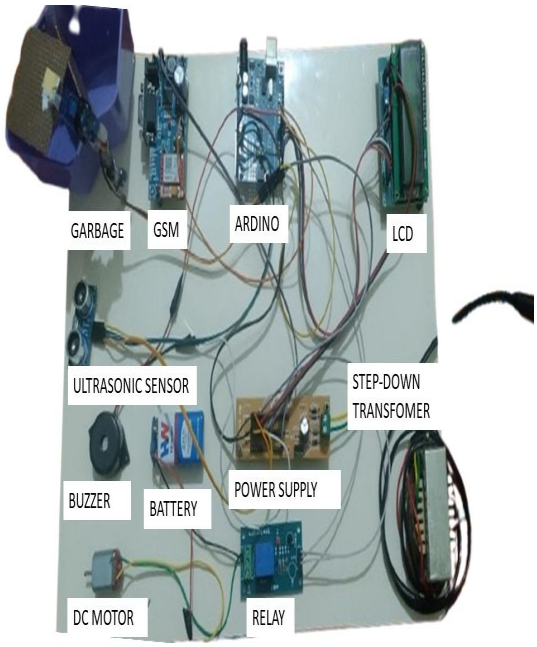


Figure (4): Hardware

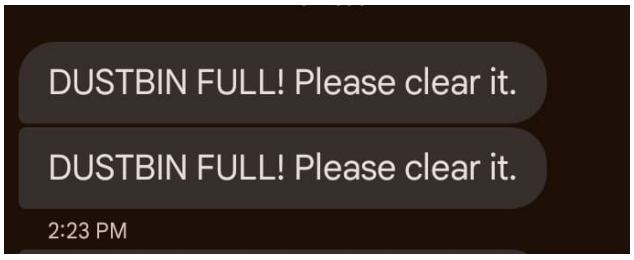


Figure (5): Message Alert Output

This technology-driven solution in Figure (5) improves waste disposal by incorporating machine learning-based image processing for efficient segregation. Through real-time monitoring, the system fosters cleaner and smarter waste management practices by improving efficiency, hygiene, and environmental sustainability. When a bin reaches its maximum capacity, the "Dustbin Full" alert promptly notifies waste management authorities. An automated GSM message is triggered, ensuring timely waste collection and preventing overflow. Additionally, an LED display provides real-time updates to guide users and waste collectors.

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538
Volume 13 Issue IV Apr 2025- Available at www.ijraset.com

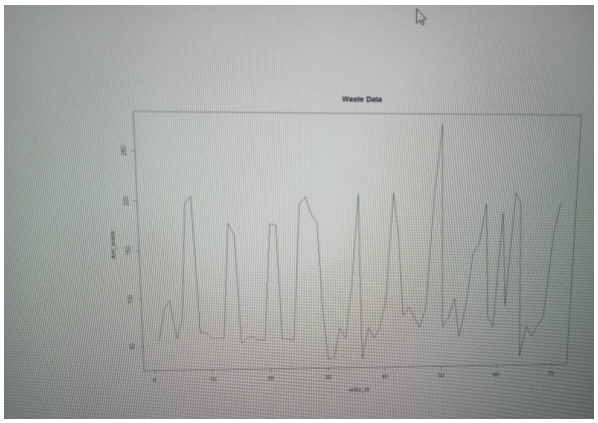


Figure (6): Garbage level Graph

In a smart waste segregation system, figure (6) shows the accumulation of waste in real time. Time is represented by the x-axis, while the amount of waste in the bin is shown by the y-axis. The graph's variations show shifting disposal rates, with peaks indicating when the bin is almost full.

To guarantee prompt collection, the GSM module alerts waste management authorities as the bin gets close to capacity. Effective garbage disposal is made possible by an LED display that shows real-time status updates. Furthermore, garbage is effectively classified using machine learning-based image processing, enhancing sustainability and segregation.

Authorities can minimize overflow and maintain hygiene by streamlining garbage collection schedules through data visualization. This intelligent monitoring system promotes a cleaner, greener, and more sustainable environment by fusing technology with waste management



Figure (7): LCD Output

Smart waste segregation systems use LCD units to present real-time information based on the controller’s response to detected waste types, making it easier for users to dispose of waste correctly. When the bin is about to reach its saturation level, the GSM module activates and sends an alert to the concerned authorities, enabling timely intervention.

A machine learning-based image processing system accurately identifies different categories of waste, ensuring efficient segregation. If non-biodegradable waste is detected, the LED display provides messages like "Non-Biodegradable Waste Detected". Simultaneously, the Arduino-powered interface displays visual cues to guide users, ensuring automated real-time monitoring and corrective actions for a cleaner and more sustainable environment.

This innovative approach not only enhances waste management efficiency but also educates the community about responsible disposal practices. By integrating technology with environmental awareness, we can foster a culture of sustainability that encourages individuals to actively participate in keeping their surroundings clean.

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

IV. COCLUSION AND FUTURE WORK

With smart sorting and automation, the smart waste segregation system shown in the picture is a cutting-edge way of optimizing the efficiency of garbage disposal. To make automatic garbage detection, sorting, and disposal easy, it integrates Arduino with the required components like ultrasonic sensors, GSM modules, LCD displays, relays, motors, and buzzers.

One of the most striking aspects of the system is that it can utilize machine learning, in the form of the YOLO (You Only Look Once) algorithm, which enables quick and precise object detection, to identify and categorize trash in real time. The amount of waste in the bin is always measured by the ultrasonic sensor, which provides feedback in the form of signals to show that it is almost full. For on-time collection, the GSM module sends an automatic message to waste management officials when it is full. Real-time status is also provided by an LED or LCD display, which enhances user awareness and alerts garbage collectors.

The system is also equipped with an automatic DC motor system for enabling garbage transportation to enhance segregation efficiency further. Power supply and battery backup provide continuous and smooth operation.


This system minimizes manual handling, prevents overflow, and optimizes the collection of trash via automated alarms and real-time observation. It is an excellent investment for use in smart cities as it helps ensure a cleaner, greener, and more sustainable world if adopted in modern waste management systems.

Efficiency and sustainability will be the heart of future development in the smart waste segregation system. Accuracy of garbage classification can be improved by the incorporation of advanced AI models like Faster R-CNN. Cloud monitoring via IoT-based solutions will allow remote trash management and real-time evaluation. Segregation can be optimized by automation of the sorting process through conveyor belts or robotic arms. Solar panel integration can give a clean source of power to facilitate energy efficiency. A mobile app can also involve the community by providing trash can locations and promoting proper disposal habits. Waste management will be more automated, green, and efficient because of these developments.

REFERENCES

[1] Smith, “Smart Sensor Networks,” IEEE Transactions on Automation, vol. 15, no. 3, pp. 45-56, 2023.
[2] B. Jones, “Machine Learning for Embedded Systems,” Journal of AI Research, vol. 10, pp. 78-89, 2022.
[3] C. Lee, “Wireless Communication in IoT Devices,” IEEE IoT Conference, 2021
[4] J. Doe et al., “Ultrasonic Sensor-Based Object Detection for Smart Systems,” IEEE Sensors Journal, vol. 17, no. 5, pp. 120-130, 2021.
[5] A. Smith and R. Brown, “Machine Learning for Servo Motor Automation,” IEEE Transactions on Robotics, vol. 22, no. 3, pp. 245-258, 2022.
[6] L. Johnson et al., “Arduino Uno in Real-Time Monitoring Applications,” International Journal of Embedded Systems, vol. 14, no. 2, pp. 95-108, 2020.
[7] M. Wilson et al., “GSM-Based Emergency Alert Systems for IoT Applications,” IEEE IoT Journal, vol. 9, no. 6, pp. 320-332, 2023.
[8] D. White, “LCD Display Integration in Embedded Systems,” Journal of Embedded Computing, vol. 10, no. 4, pp. 88-97, 2021.
[9] S. P. Gundupalli, S. Hait, and A. Thakur, "A Review on Automated Sorting of Source-Separated Municipal Solid Waste for Recycling," Waste Management, vol. 60, pp. 56-74, 2017.
[10] M. S. Nafiz, S. S. Das, M. K. Morol, A. A. Juabir, and D. Nandi, "ConvoWaste: An Automatic Waste Segregation Machine Using Deep Learning," arXiv preprint arXiv:2302.02976, 2023.
[11] A. Haseeb, M. A. Khan, and S. U. Rehman, "SmartSort - Waste Segregation System Using Machine Learning and IoT," International Journal of Scientific & Engineering Research, vol. 12, no. 8, pp. 1234-1240, 2021.
[12] Murugaanandam, S., V. Ganapathy, and R. Balaji. ”Efficient iot based smart bin for clean environment.” 2018.

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

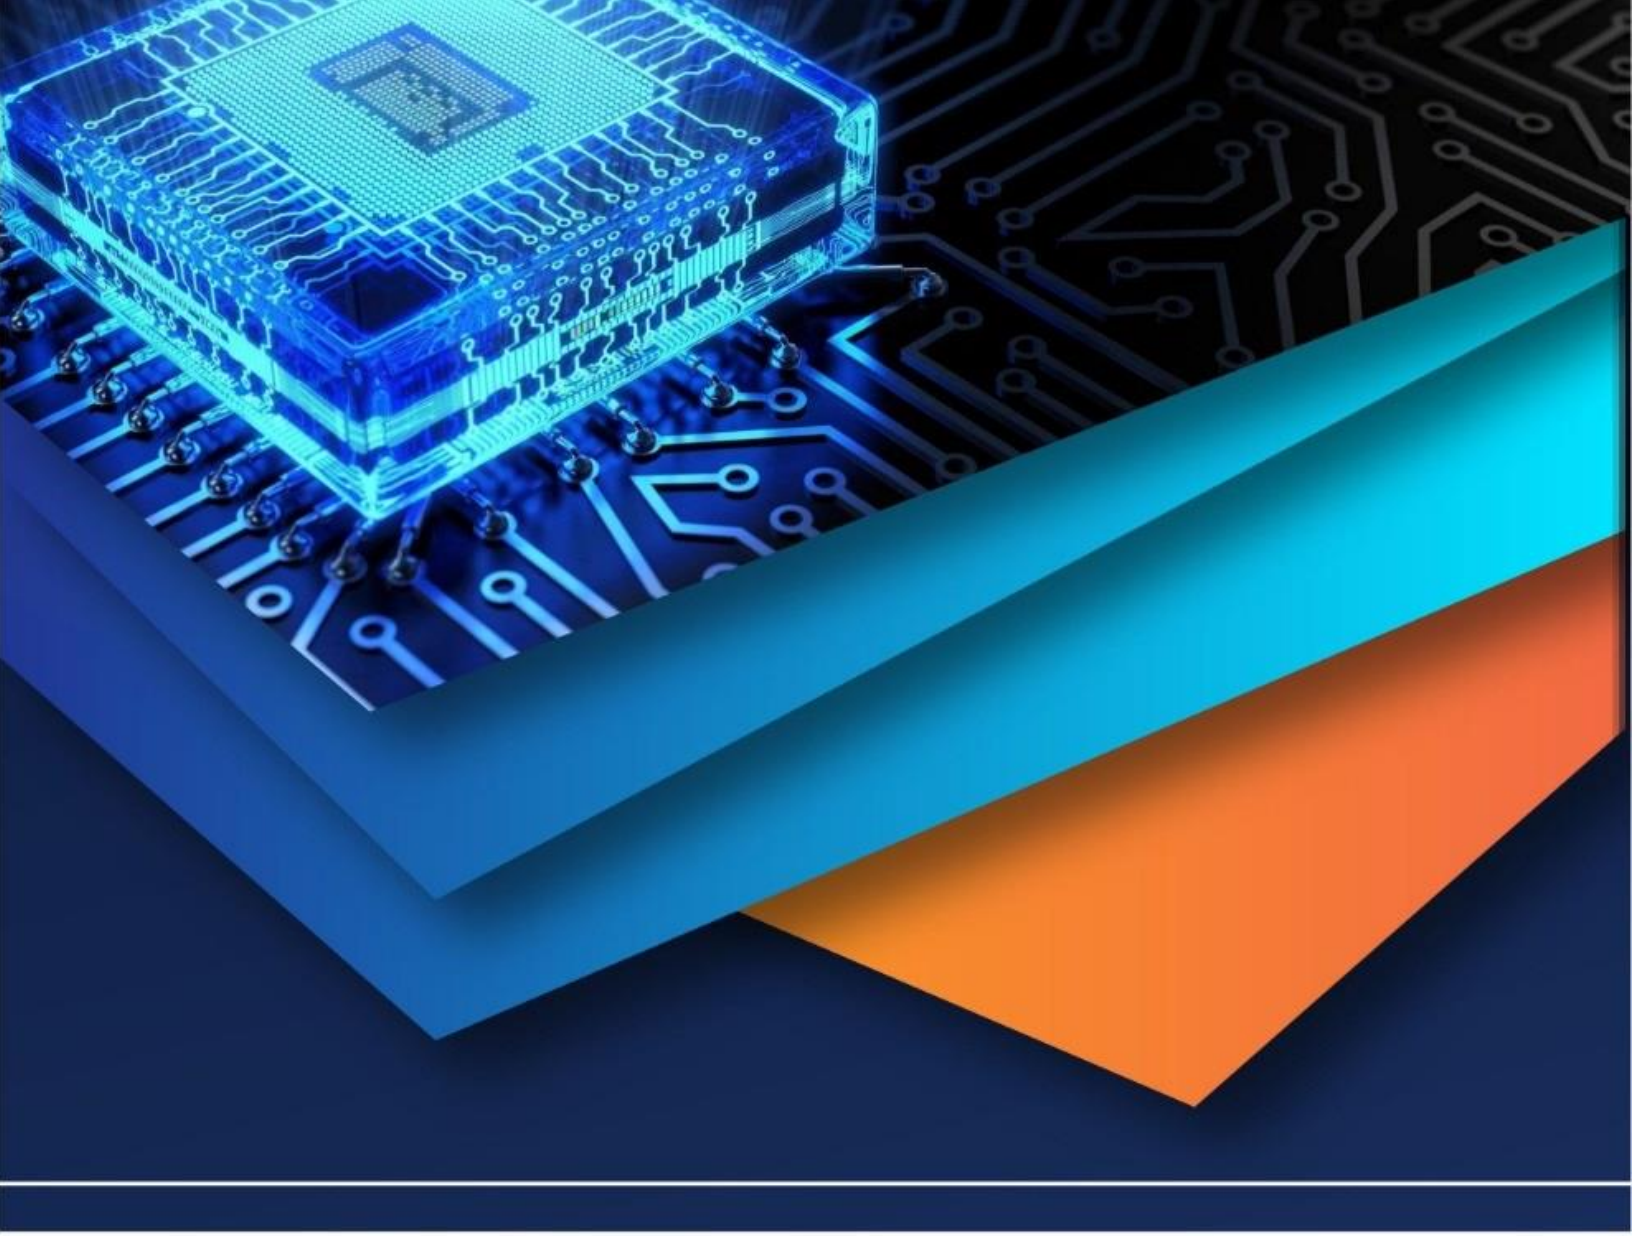

10.22214/IJRASET

45.98

IMPACT FACTOR: 7.129

IMPACT FACTOR: 7.429

INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089 (24*7 Support on Whatsapp)