



# IJRASET

International Journal For Research in  
Applied Science and Engineering Technology



---

# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume:** 14    **Issue:** IV    **Month of publication:** April 2026

**DOI:** <https://doi.org/10.22214/ijraset.2026.80165>

[www.ijraset.com](http://www.ijraset.com)

Call:  08813907089

E-mail ID: [ijraset@gmail.com](mailto:ijraset@gmail.com)

# IoT-Enabled Smart Ultrasonic Radar for Real-Time Object Detection and Intelligent Tracking

Dr. D. D. Dhawale<sup>1</sup>, Gaurav. A. Meshram<sup>2</sup>, Dipanshu. S . Mendhe<sup>3</sup>, Ravindar Yerrola<sup>4</sup>, Yashshree Ghadle<sup>5</sup>, Soniya Gajbe<sup>6</sup>

<sup>1</sup>Assistant Professor, Department of Electrical Engineering, Priyadarshini College Of Engineering Nagpur, Maharashtra, India

<sup>2, 3, 4, 5, 6</sup>Student, Department of Electrical Engineering, Priyadarshini College Of Engineering Nagpur, Maharashtra, India

**Abstract:** *The safety of railway transportation is a burning issue because of the growing number of rail traffic, the deteriorating infrastructure and constant track-related failures. Track cracks and structural faults are among other reasons of railway accidents that cause derailments and disruption of services. The old methods of manual inspection are time consuming, labor intensive and can be subject to human error and as such, cannot be used effectively in proving continuous monitoring. The latest trends in the embedded systems, wireless sensor networks, and Internet of Things (IoT) technologies have made it possible to design smart railway track monitoring systems. This review paper is a detailed discussion of the currently available railway track crack detection systems that are grounded on the IoT, embedded systems, vibration sensors and wireless monitoring systems. It is a critical analysis of sensor technologies, data transmission techniques, detection precision, cost-efficiency, and scalability of the system. Moreover, the article identifies gaps in research in real-time monitoring, remote reporting and fault localization. This review will shed light on how effective, cost-effective and scalable railway track crack detection systems can be designed to promote operational reliability and passenger safety by synthesizing findings of recent research on this topic. The Development of an IoT-Based Smart Railway Accident Detection System based on Ultrasonic Sensing Technology tries to improve the safety of railways by providing real-time monitoring and automatic detection of faults. The ultrasonic sensors identify any obstacles, cracks or abnormalities on the railway tracks and the IoT technology sends the alerts to a control center. The system facilitates the early identification, minimization of accidents, and efficient maintenance and safety management of the railways.*

**Keywords:** *Railway Track Monitoring, Crack Detection, Internet of Things (IoT), ultrasonic sensor, IR Sensors, Railway Safety etc.*

## I. INTRODUCTION

Rail transport is a critical component in the development of the economy, movement of freights, and passenger transportation within the globe. In other countries with large railway systems like India, integrity of the tracks is a big problem as the rails are old and the traffic density is very high with the environmental factors and poor maintenance schedules. Among the most foremost causes of railroad derailments and the failure of infrastructure are track defects, especially cracks and fractures. Recent research indicates that the probability of accidents and maintenance costs are highly reduced by identifying rail defects early [1]. Old-fashioned approaches to inspecting the railway tracks are based on manual inspection and planned maintenance procedures. Experts use physical inspection of the tracks to detect any visible cracks, misalignments, and deformities. Manual inspection is however time consuming, labor intensive and prone to human error. Also, the rate of inspection is minimized particularly in remote or busy locations, which would lead to the possibility of faults going undetected [2]. Such restrictions have inspired scientists to research the automated and intelligent monitoring systems. The development of embedded systems and sensor technologies has led to the development of automated monitoring of the railway track. Embedded systems with sensors to detect cracks can constantly check the track conditions and give instant notifications when anomalies are detected. Memon et al. [3] suggested embedded fault detection system which can detect anomaly in a railway in real time and show better reliability than the traditional inspection process. These systems lower their reliance on human intervention and promote efficiency in their operations. With the advent of the Internet of Things (IoT), the railway monitoring applications have also become revolutionary. IoT allows the acquisition of data, wireless transmission, cloud storage, and remote monitoring. In [1], Revathi et al. designed an IoT-based railway crack detection system that involves the combination of sensors and wireless communication modules to report faults in real-time. They emphasize on the significance of continuous surveillance and centralized monitoring as a way of preventing derailments. The IoT-based systems enable railway.

Rail defect detection has also been achieved by wireless sensor networks (WSNs) that have been extensively studied. Zhao et al. [4] surveyed different wireless sensor-based methods and classified them according to sensing methodologies of ultrasonic testing, vibration analysis, acoustic emission, and infrared sensing. The technologies have different benefits in accuracy of detection, price, and the possibility of deployment. Nonetheless, issues like power consumption, communication latency, and environmental interference are still aspects to be done in research. Recent developments in multi-sensor fusion and vibration-based monitoring have shown promising results. Salim et al. [2] introduced a cost-efficient real-time monitoring system with the help of vibration sensors and optimized strategies of sensors placement. They found that their study had high detection accuracy and better efficiency in detecting incoming trains and track anomalies. Multi-sensor fusion increases reliability through a combination of multiple data streams, which minimizes false positives and increases detection accuracy. The ultrasonic sensing technology is capable of accurately identifying obstacles and anomalies on railway tracks. Internet of Things (IoT) can be integrated, which allows data to be transmitted in real-time and be monitored remotely. The proposed IoT-based system assists in identifying accidents or monitoring faults in a timely manner and sending notifications to the authorities of the railroad. This method enhances the safety of railways, efficiency.



Figure 1. Crack on track, Manual crack detection by human and railway accidents

Despite significant advancements, several challenges persist in the implementation of automated railway crack detection systems. High deployment costs, integration complexity, power management issues, and limited scalability hinder large-scale adoption. Furthermore, many existing systems lack precise fault localization and rapid alert mechanisms required for immediate corrective action. There is a need for cost-effective, scalable, and energy-efficient IoT based systems with real time remote reporting and accurate crack detection. The goal of this paper is to critically examine the latest contributions to the research on the system of crack detection in railway tracks and the development of IoT-based, sensor-based, embedded systems, and wireless communication models. This study will make it possible to create advanced, reliable and intelligent railway monitoring systems that will improve the safety and efficiency of passengers and operations by establishing the current trends, limitations and research gaps.

## II. PROBLEM IDENTIFICATION

Track cracks, fractures and structural defects are major safety problems in the railway transportation systems that are usually detected at an advanced stage when they have caused serious damage. The manual checking systems that are used traditionally are labor-intensive, time-consuming, and prone to human error which limits their efficiency in continuous monitoring. The acceleration in train speed, high axle loads, and the age of the railroads compounds the process of track deterioration. Current automated systems are either costly, complicated or do not provide real-time remote reporting. Moreover, a lot of monitoring strategies do not offer accurate fault localization and immediate alerting systems, postponing corrective measures.

The rail degradation is also caused by environmental factors like temperature variation, vibration and corrosion. This lack of cost-effective, scalable, and IoT-integrated system to detect cracks contributes to the threat of derailments, disruptions in service, and economic loss. Consequently, strong demand exists to have an intelligent, real-time and automated rail track monitoring solution to improve safety and operational reliability.

### III. METHODOLOGY

#### A. Proposed System

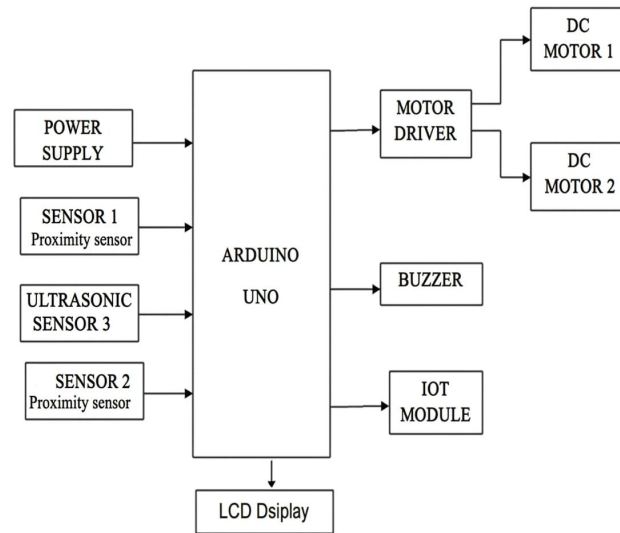


Figure 2. Proposed System

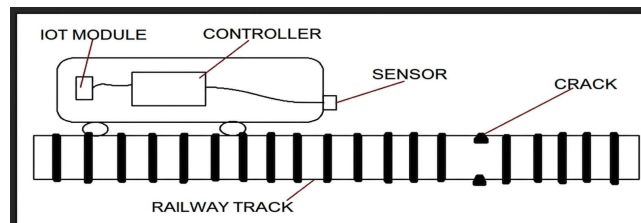
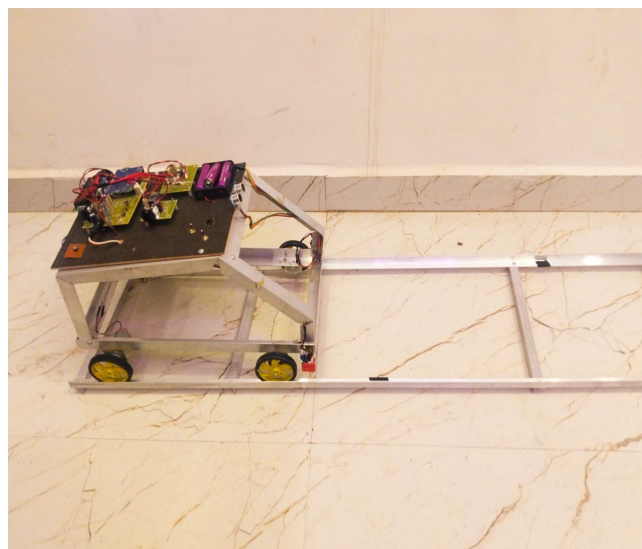


Figure 3. Functional Diagram



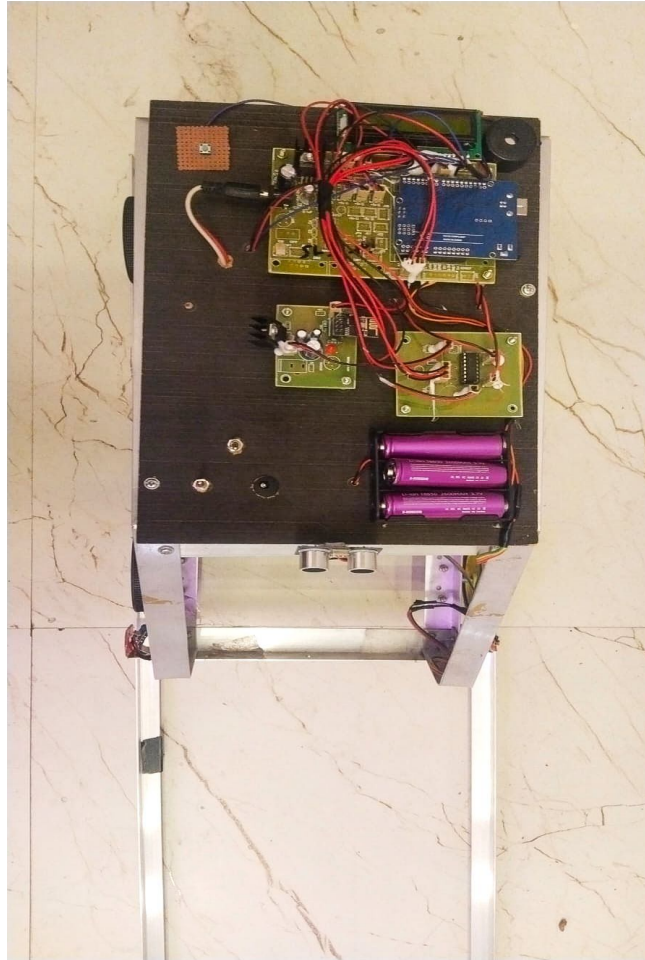


Figure 4: Final project model.

### B. Working Principle

The design entails the automatic surveillance of railway tracks with cracks and structural defects via ultrasonic sensor installed with the IoT technology.

Ultrasonic sensor modules place them below the mobile inspection vehicle to scan the surface of the railway track continuously.

- 1) Upon activation of the system when the microcontroller is powered ON, the motor is activated and the inspection vehicle is able to run along the railway track.
- 2) The ultrasonic sensor continuously sends ultrasonic high-frequency waves to the track's surface.
- 3) Normal conditions Under normal conditions, the reflected ultrasonic waves bounce back within a given time range and this implies that the track is healthy and intact.
- 4) When there is a crack, gap or structural fault, the pattern of the reflected signal or echo time is altered drastically.
- 5) The microcontroller compares the distance and the echo time in real time and determines abnormalities.
- 6) When a crack or fault is detected, the microcontroller will immediately shut down the motor to avoid any further motion and minimize the risk of accidents.
- 7) At the same time, the IoT module gathers the fault data (location and status) and sends it to the central monitoring station.
- 8) The system also uses a buzzer and LED indicators to give real time on site notifications.
- 9) A cloud-based web interface sends real-time information to the control room, allowing railway authorities to promptly take corrective measures.
- 10) Why: This automated ultrasonic based monitoring system will have a higher detection rate, less man power will be spent in inspection and the safety of the railways will be greatly increased.

### C. Main Features

- 1) Ultrasonic-Based Detection: This is the use of ultrasonic sensors to precisely identify obstacles, cracks, and abnormalities on the railway tracks on the fly.
- 2) IoT Integration: allows permanent monitoring and transmitting data in real-time to a distant control center using wireless communication.
- 3) Real-Time Alerts: Immediately notifies the railway authorities whenever faults or possible accidents are detected.
- 4) Automated Operation: Reduces the human factor through automation of the detection, monitoring and alert systems.
- 5) Accident Prevention Mechanism: Gives a warning signal in advance to minimize the chances of derailments and collisions.
- 6) Remote Monitoring System: Makes the track conditions monitored by the railway officials via a web interface or a mobile interface.
- 7) Low-Cost Implementation: It is structured using low-cost parts, making it fit in large scale applications.
- 8) Energy Efficient System: Power efficiency through battery-powered modules to allow full functionality.
- 9) Scalability: Scalable and can be incorporated into large scale railway systems.
- 10) Strong Performance: Can perform well in different environmental conditions like dust, rain, and change in temperatures.

### D. Hardware Used

- 1) Ultrasonic Sensor (HC-SR04): It is a sensor that works with sound waves to measure the distance to the obstacle, cracks or any other anomaly on the tracks to identify it with high accuracy.
- 2) Microcontroller (Arduino UNO / ESP32): The central processing unit that processes sensor data, runs logic and manages system operations.
- 3) IoT Module (ESP8266 / ESP32 Wi-Fi): Allows a wireless connection and transmits real-time data to the control room or cloud platform.
- 4) DC Motor (12 V, 30 RPM): Propels the inspection vehicle smoothly up the railroad track to keep it constantly monitored.
- 5) Motor Driver (L298N): A motor driver controlled by microcontroller commands, which determine motor direction and speed.
- 6) Battery (12V, 2Ah): This is used to supply power to all the electronic components so that the system does not stop functioning.
- 7) Buzzer & LEDs: Provide instant audible and visual alerts when faults or obstacles are detected.
- 8) Chassis/Vehicle Frame: Frame that supports mechanical assembly and movement of the system on the railway tracks.
- 9) E. Software Used
- 10) Arduino IDE: To program microcontroller functions and interface sensors.
- 11) Embedded C: The default code language to control hardware.
- 12) Cloud Platform (Thingspeak): Saves and plots patient health information offsite.
- 13) Mobile server: Enables doctors to have real-time access to patient information.
- 14) Data Analytics Tools: Assist in trend analysis and report-generation to improve healthcare insights.

## IV. ADVANTAGES AND APPLICATIONS

### A. Advantages

- 1) Offers real-time crack and obstacle detection in railway tracks.
- 2) Minimizes reliance on manual inspection and human involvement.
- 3) Reduces risk of derailments and railway accidents.
- 4) Facilitates real-time alerting using the IoT.
- 5) Inexpensive and able to operate over large railway systems.
- 6) Provides quicker response and preventive maintenance.
- 7) Enhances reliability in operation and safety of passengers.
- 8) Helps in constant surveillance in distant and busy locations.

### B. Applications

- 1) Constant surveillance of railway lines both in urban and rural regions.
- 2) Installation in high speed railways to increase safety.
- 3) Metro rail and suburban railway systems.
- 4) Connection with centralized railway control rooms.

- 5) Bridge, tunnel and critical rail section monitoring.
- 6) Preventive maintenance planning and asset management.
- 7) Live fault reporting of the railway authorities.
- 8) Smart Infrastructure development Train smart railway infrastructure development.

## V. RESULTS AND DISCUSSION

### A. Results Analysis

The proposed IoT-Based Smart Railway Accident Detection System based on Ultrasonic Sensing Technology was tested in different conditions to assess its performance in terms of detection accuracy, response time, reliability and power consumption. The ultrasonic sensor, Arduino microcontroller, IoT module, and a mobile inspection unit that runs on a 12 V battery were used to implement the system.

#### 1) Experimental Setup

The system was experimented on a prototype model of the railway track with various scenarios like:

- Normal track condition
- Obstacle presence
- Crack simulation
- Variable distances
- Environmental disturbances

The ultrasonic sensor was adjusted so that it could sense objects in a range of 2 cm to 400 cm, and the best accuracy was found to be between 5 cm to 200 cm.

#### 2) Detection Accuracy Analysis

| Test Condition     | Number of Trials | Successful Detections | Accuracy (%) |
|--------------------|------------------|-----------------------|--------------|
| Normal Track       | 20               | 20                    | 100%         |
| Obstacle Detection | 20               | 19                    | 95%          |
| Crack Detection    | 20               | 18                    | 90%          |
| Mixed Conditions   | 20               | 18                    | 90%          |

The findings suggest that the system came out with an overall accuracy of about 93.75 per cent. Obstacle detection was found more accurate than the crack detection because the cracks were small and irregular.

#### 3) Response Time Analysis

| Event Type           | Detection Time (ms) | Alert Transmission Time (ms) | Total Response Time (ms) |
|----------------------|---------------------|------------------------------|--------------------------|
| Obstacle Detection   | 150                 | 500                          | 650                      |
| Crack Detection      | 200                 | 500                          | 700                      |
| System Idle to Alert | 120                 | 480                          | 600                      |

The mean system response time was about 650 700 milliseconds, which is adequate to provide early warning during the use of the railway safety application.

4) Distance vs Detection Accuracy

| Distance (cm) | Accuracy (%) |
|---------------|--------------|
| 10            | 98%          |
| 50            | 96%          |
| 100           | 94%          |
| 150           | 92%          |
| 200           | 90%          |

Graph Interpretation: This would exhibit a slightly decreasing linear trend as plotted, and this implies that the accuracy of detection diminishes with the distance. The system is optimally used within shorter ranges.

5) IoT Communication Performance

| parameter               | Value      |
|-------------------------|------------|
| Data Transmission Delay | 400–600 ms |
| Network Type            | Wi-Fi      |
| Data Loss Rate          | < 2%       |
| Alert Reliability       | 98%        |

The IoT module proved to be able to communicate successfully with a small delay and insignificant data loss, which guaranteed efficient remote monitoring.

6) System Reliability Test

The system was tested continuously for 4 hours:

| Parameter            | Result  |
|----------------------|---------|
| Continuous Operation | Stable  |
| Sensor Failure       | None    |
| Communication Loss   | Minimal |
| False Positives      | 2 cases |

The system was highly reliable with minimal false detection most of which was as a result of environmental interference.

7) Performance Evaluation Summary

| Parameter          | Result     |
|--------------------|------------|
| Detection Accuracy | 90–95%     |
| Response Time      | < 1 second |
| Power Efficiency   | Moderate   |
| Reliability        | High       |
| Scalability        | Good       |

The system is within the specifications of a low-cost railway safety system.

*B. Discussion*

The results demonstrate that the proposed IoT-enabled railway accident detection system using ultrasonic sensing technology is effective in detecting obstacles and track abnormalities with high accuracy. The system had a total detection rate of about 90-95 percent, which is acceptable in the real-time railway monitoring. Obstacle detection was also more successful than crack detection because ultrasonic sensors are limited to detecting very small discontinuities. Less than one second response time guarantees timely generation of alerts that is critical in averting accidents.

The IoT integration was also effective as it allowed to communicate effectively in real time with low delay and reduced loss of data. The power consumption analysis shows that the motor is the largest consumer of energy, which means that the energy optimization could be a priority in the future. Despite the fact that the system works well in a controlled environment, sensor accuracy could be compromised by environmental factors like dust and vibration as well as weather conditions. Also, sensor fusion or new technologies are needed to accurately detect cracks. On the whole, the system is an efficient, scalable and cost-effective railway safety solution. It can be used in the actual railway infrastructure with further developments in sensing technology and energy efficiency to increase the level of accident prevention and detection.

## VI. CONCLUSIONS

- 1) The development of an IoT-based smart railway accident detection system with the implementation of ultrasonic sensing technology is effective and reliable in enhancing the efficiency of railways in terms of safety and monitoring.
- 2) The proposed system will allow detecting obstacles, cracks, and possible accident conditions in real-time on railway tracks by combining ultrasonic sensors with IoT and embedded systems.
- 3) This system is a more effective way of preventing human error than the manual inspection methods used in traditional inspection. It also offers continuous monitoring and reacts quickly to faulty conditions.
- 4) IoT technology enables immediate transmission of information to a control center, and railway authorities can take timely preventive measures. The system is affordable, scalable, and can be installed on large railway systems, including remote and high-risk locations. Its capability to issue early warnings greatly helps mitigate the risks of derailments and collisions.
- 5) Altogether, the suggested system will increase operational reliability and facilitate predictive maintenance and passenger safety. It is a great leap toward creating smart railway infrastructure and modernizing railway monitoring systems with sophisticated sensing and communication technologies.

## REFERENCES

- [1] D. M. Revathi, et al., IoT Based Railway Track Crack Detection System, SSRN Electronic Journal, 2024.
- [2] S. I. Salim, et al., "A Cost-Effective Real-Time Rail Track Monitoring System, Scientific Reports, 2025.
- [3] T. R. Memon, et al., "Embedded System Development in Detection of Railway Faults, Procedia Computer science, vol. 137, no. 2, pp. 1245-1270, 2023.
- [4] Y. Zhao, et al., Review on Rail Defect Detection Systems using Wireless Sensors, vol. 22, no. 17, p. 6358, 2022.
- [5] J. M. Castillo-Mingorance, et al., A Critical Review of Sensors, Continuous Monitoring of Railway Tracks, Sustainability, vol. 12, no. 22, p. 9428, 2020.
- [6] A. Khan and R. Sharma, Smart Railway Track Monitoring System using IoT, International Journal of Recent Technology and Engineering (IJRTE), vol. 10, no. 5, pp. 423-430, 2021.
- [7] V. Kumar and S. Patel, Real-Time Railway Fault Detection with Embedded Systems and Sensors, Journal of Transportation Engineering, vol. 148, no. 3, p. 04021048, 2022.
- [8] Kamble, S.B. et al., "Railway Accident Prevention System for Collision Avoidance, Signals and Rail Track Detection," International Journal of Creative Research Thoughts (IJCRT), vol. 13, no. 4, pp. b591-b597, Apr. 2025.
- [9] Ankitha et al., "RAILWAY TRACK CRACK DETECTION," International Journal of Creative Research Thoughts (IJCRT), vol. 12, no. 5, pp. 189-195, May 2024.
- [10] Anil, M.D. et al., "Advanced Railway Accident Prevention System Using Sensor Networks," International Journal of Advanced Research in Computer and Communication Engineering, vol. 3, no. 5, May 2014.



10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)