iJRASET
International Journal For Research in Applied Science and Engineering Technology



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

**Volume:** 13 **Issue:** XI **Month of publication:** November 2025

**DOI:** https://doi.org/10.22214/ijraset.2025.75239

www.ijraset.com

Call: 08813907089 | E-mail ID: ijraset@gmail.com

International Journal for Research in Applied Science & Engineering Technology (IJRASET)
*ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538*
*Volume 13 Issue XI Nov 2025- Available at www.ijraset.com*

# Laboratory Study on the Impact of Ferrochrome Slag and Zycobond for Stabilization of Marine Clay Subgrade

Dr. D. Koteswara Rao[1], J. Tejaswi[2]
[1]*Professor of Civil Engineering & OSD to Hon'ble Vice Chancellor, JNTUK, Kakinada, Andhra Pradesh, India*
[2]*Post Graduation Student, Dept. of Civil Engineering, University College of Engineering(A), JNTUK, Kakinada, Andhra Pradesh, India*

***Abstract:** India, with a coastline stretching over 7,516 kilometers, relies heavily on its coastal infrastructure to support import and export activities that are vital to the nation's economic growth.The subsoil in many of these regions predominantly consists of marine clay, which is highly compressible, weak in shear strength, and highly susceptible to moisture variations making it unsuitable for pavement subgrades.These unfavourable characteristics compromise the stability and load-bearing capacity of foundations and infrastructure built on such soils.This study investigates the effectiveness of ferrochrome slag, an industrial by-product, and Zycobond, a chemical soil stabilizer, in enhancing the properties of marine clay.Experimental results reveal that the addition of FCS and Zycobond significantly enhances the strength and stability of the clay.The optimum blend resulted in a substantial increase in CBR value, making the treated marine clay suitable for pavement subgrade layers.The study concludes that the combined use of ferrochrome slag and Zycobond provides a cost-effective and sustainable solution for stabilizing weak soils.*

***Keywords:** Marine Clay, Ferrochrome slag, Zycobond, CBR, Subgrade.*

## I. INTRODUCTION

India, with its long coastline and strategic maritime location, has witnessed rapid industrial and infrastructural growth.Over the centuries, these maritime connections have evolved from simple trade routes to major economic corridors, facilitating globalization and industrial growth.one of the major challenges faced along the Indian coastline is the presence of weak and compressible soils.These soft marine and coastal deposits often lack the strength and stability required to support heavy loads.Marine clay generally exhibits low bearing capacity, high plasticity, and excessive settlement under load, making it unsuitable for direct construction of heavy structures such as roads, ports, and industrial facilities.When large infrastructures such as ports, roads, and buildings are constructed on such soils without proper ground improvement, they may experience settlement or even structural failure.

Additionally, marine clays exhibit high sensitivity to stress variations, which makes them particularly problematic when used as pavement subgrades.Such soils possess high compressibility, low shear strength, poor drainage characteristics, and very low bearing capacity. As a result, pavements constructed on untreated marine clay often experience excessive deformation, settlement, and premature failure.Therefore, stabilization of marine clay becomes essential to improve its strength and performance as a suitable pavement subgrade material.

Stabilization techniques are essential to improve the engineering behaviour of marine clays, especially when they are used as pavement subgrades.The main objective is to enhance the strength, durability, and load-bearing capacity of the soil while reducing its compressibility, permeability, and plasticity.It provides a sustainable and cost-effective solution to improve soil performance, ensuring the long-term stability and serviceability of structures such as pavements, foundations, and embankments.

## II. OBJECTIVES OF THE STUDY

The Objectives of the present Laboratory study are:

*1)* To evaluate the geotechnical properties of untreated marine clay.
*2)* To investigate the effect of ferrochrome slag as an additive for stabilization of marine clay.
*3)* To assess the influence of Zycobond as a chemical binder in combination with ferrochrome slag.

©IJRASET: All Rights are Reserved 

*4)* To determine the suitability of the treated marine clay as a pavement subgrade

## III. MATERIALS AND METHODOLOGY

### *A. MATERIALS*

#### *1) MARINE CLAY*

The marine clay that is used for the research has been acquired from the dump area of Kakinada Seaports Limited, Kakinada, Andhra Pradesh, India. The marine clay was collected from a depth of 2m at various test pits. The index and engineering properties of marine clay are given below.

Table 1: Grain Size Distribution of the Marine Clay

| S.NO | Property | | Marine clay (%) |
|---|---|---|---|
| 1 | Gravel | | 0 |
| 2 | Sand | | 13.5 |
| 3 | Finess | Silt | 22 |
| | | Clay | 64.5 |

Table 2: Properties of untreated marine clay

| S.NO | Property | Symbol | Marine clay |
|---|---|---|---|
| 1 | Liquid Limit (%) | $W_L$ | 75.426 |
| 2 | Plastic Limit (%) | $W_P$ | 30.89 |
| 3 | Plasticity Index (%) | $I_P$ | 44.536 |
| 4 | Soil Classification | ----- | CH |
| 5 | Specific Gravity | G | 2.37 |
| 6 | Differential Free Swell (%) | DCDP | 90 |
| 7 | Optimum Moisture Content (%) | OMC | 30.69 |
| 8 | Maximum Dry Density (kN/m$^3$) | MDD | 13.92 |
| 9 | CBR (%) | CBR | 1.583 |
| 10 | Cohesion | c | 2.741 |
| 11 | Angle of Internal Friction ($^o$) | Φ | 120.624 |

#### *2) FERROCHROME SLAG*

Ferrochrome slag (FCS) is an industrial by-product generated during the production of ferrochrome alloy, which is primarily used in stainless steel manufacturing.It is formed when chromite ore ($FeCr_2O_4$) is smelted with coke, quartzite, and other fluxing materials in a submerged electric arc furnace. After the alloy is separated, the remaining molten material cools to form ferrochrome slag.

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

Table 3: Chemical Properties of Ferrochrome slag

| S. No | Content | Percentage |
|---|---|---|
| 1 | $SiO_2$ | 27.57 |
| 2 | $Al_2O_3$ | 24.73 |
| 3 | MgO | 22.78 |
| 4 | $Cr_2O_3$ | 9.35 |
| 5 | CaO | 9.23 |
| 6 | FeO / $Fe_2O_3$ | 3.91 |
| 7 | MnO | 2.43 |

*3) ZYCOBOND*

Zycobond is a polymer-based soil stabilizing chemical developed to improve the engineering properties of weak soils.When mixed with soil, Zycobond interacts with the clay minerals through ionic exchange and polymer bonding, reducing the repulsive forces between particles and promoting flocculation and aggregation.

Table 4: Chemical Properties of zycobond

| S. No | Components | Percentage |
|---|---|---|
| 1 | Quaternary Ammonium compounds | 1 to 5 |
| 2 | Methanol | 0.1-0.2 |
| 3 | Acetic acid | 0.2-1 |
| 4 | Acrylic Co polymer | 34-36 |
| 5 | Water | 62-65 |



Fig-1 High Carbon Ferrochrome slag




Fig-2 Zycobond

### *B. METHODOLOGY*

The tests such as Differential Free Swell, Atterberg Limits (i.e. Liquid Limit & Plastic Limit), Optimum Moisture Content & Maximum Dry Density, California Bearing Ratio, Triaxial test are conducted on the soil samples with different proportions of FCS and Zycobond to test their suitability as stabilizing agents for soil to use as subgrade.

## IV. RESULTS AND DISCUSSIONS

### *A. Treated with Ferrochrome slag*

The Marine clay was treated with FCS with varying percentages of 4%, 8%, 12%, 16%, and 20%. Laboratory tests have been conducted and the results have been displayed below.

#### *1) Liquid Limit, Plastic Limit, and Plasticity Index*

The respective liquid limit, plastic limit, and plasticity index of varying FCS percentages are shown below.

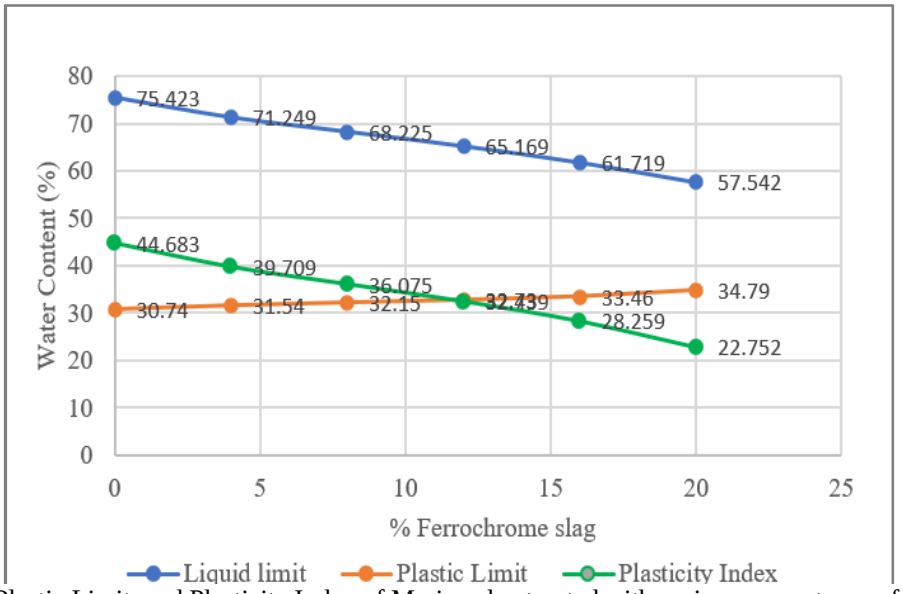



Plate 1: Liquid Limit, Plastic Limit, and Plasticity Index of Marine clay treated with various percentages of Ferrochrome slag

#### *2) Differential Free Swell*

The DFS values for the respective percentages are shown below.

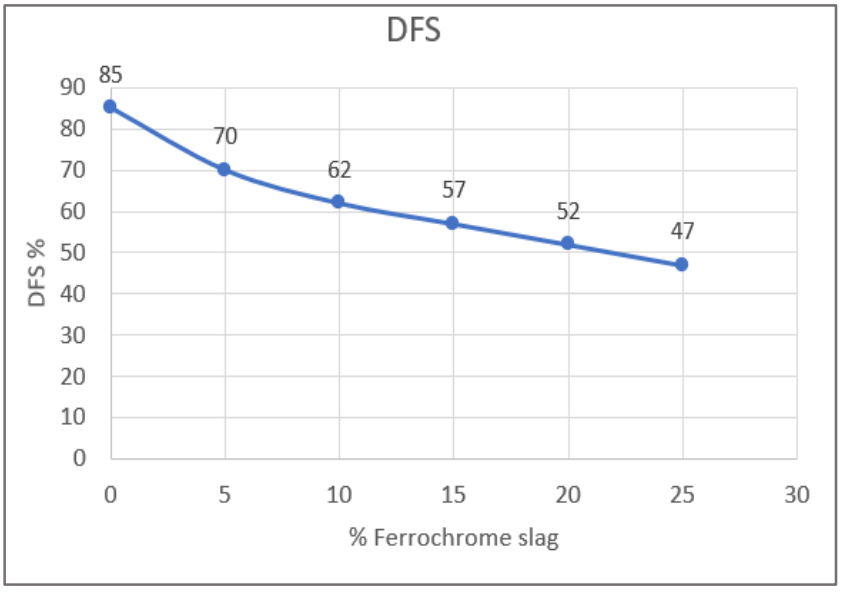



Plate 2: Differential Free Swell of Marine clay treated with various percentages of FCS.

*3) Optimum Moisture Content & Maximum Dry Density*

The MDD & OMC values for the marine clay treated with FCS are shown below.

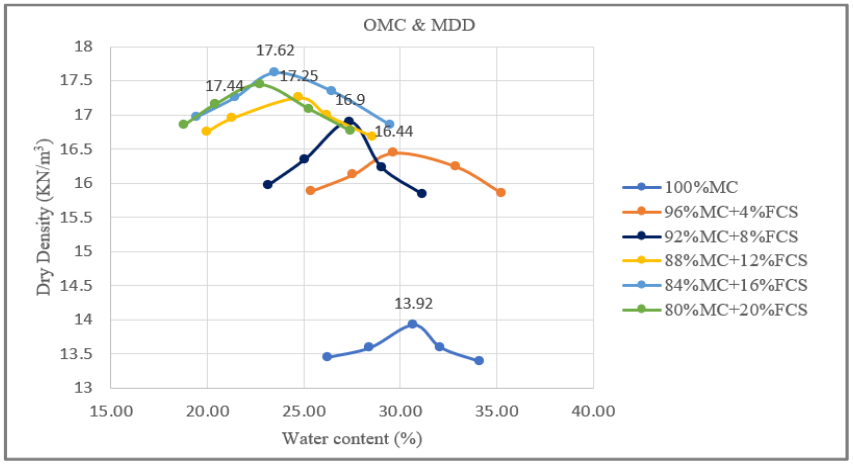



Plate 3: Optimum Moisture Content and Maximum Dry Density for Marine clay treated with various percentages of FCS.

*4) California Bearing Ratio*

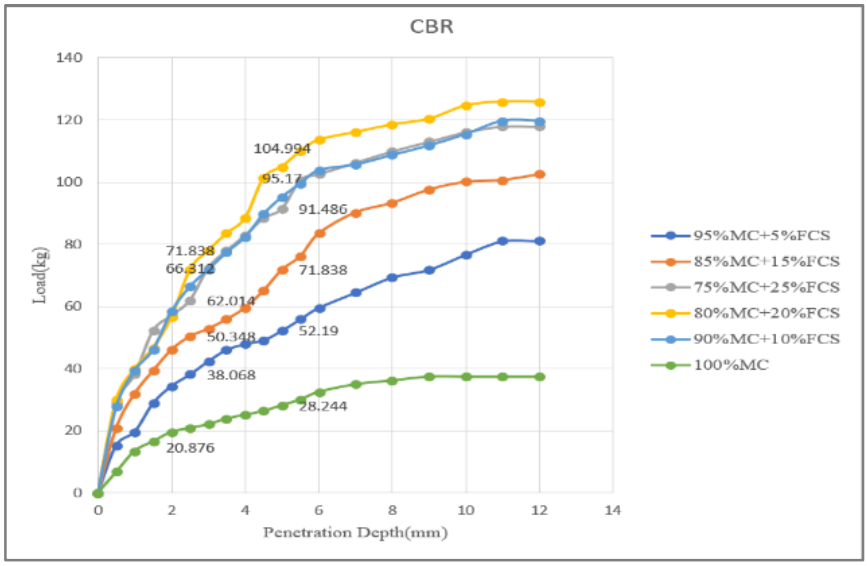



Plate4: Load vs Penetration curves of CBR tests conducted on Marine Clay treated with various percentages of FCS.

*Discussion 1*

The soil can be used as subgrade for flexible pavements should possess the minimum CBR value of 8% as per the IRC 37- 2012 codes of practice.

In the present study, the marine clay treated with an optimum of 16% Ferro chrome slag has exhibited a CBR value of 5.243%. Hence, this treated marine clay is not suitable as subgrade for flexible pavements as per the IRC 37- 2012 codes of practice.

Further, the present investigation has been continued by using Zycobond as a chemical admixture to improve the CBR value of Ferrochrome slag treated marine clay.

*B. Treated with Zycobond*

The marine clay is further treated with Zycobond in addition to the Ferrochrome slag to obtain more strength with varying percentages of 1%, 1.5%, 2%, 2.5% and 3%.

*1) Liquid Limit, Plastic Limit, and Plasticity Index*

The respective liquid limit, plastic limit, and plasticity index of varying Zycobond percentages are shown below.

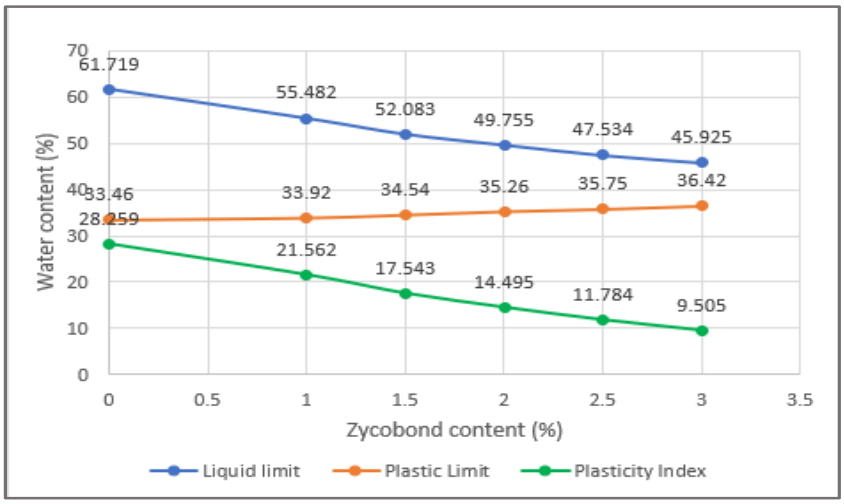



Plate5: Liquid Limit, Plastic Limit, and Plasticity Index of Marine clay treated with various percentages of Zycobond

*2) Differential Free Swell*

The DFS values for the respective percentages are shown below.

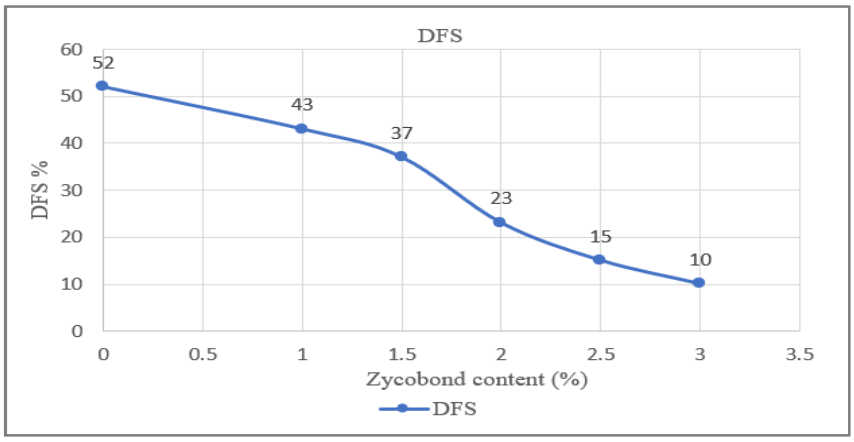



Plate6: Differential Free Swell of Marine clay treated with various percentages of Zycobond

*3) Optimum Moisture Content & Maximum Dry Density*

The MDD & OMC values for the marine clay treated with Zycobond are shown below.

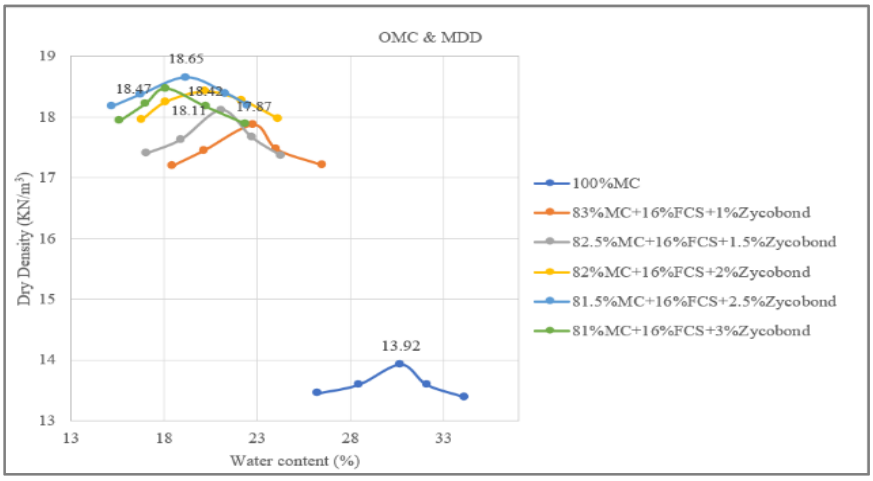



Plate7: Optimum Moisture Content and Maximum Dry Density for Marine clay treated with various percentages of Zycobond.

*4) California Bearing Ratio*

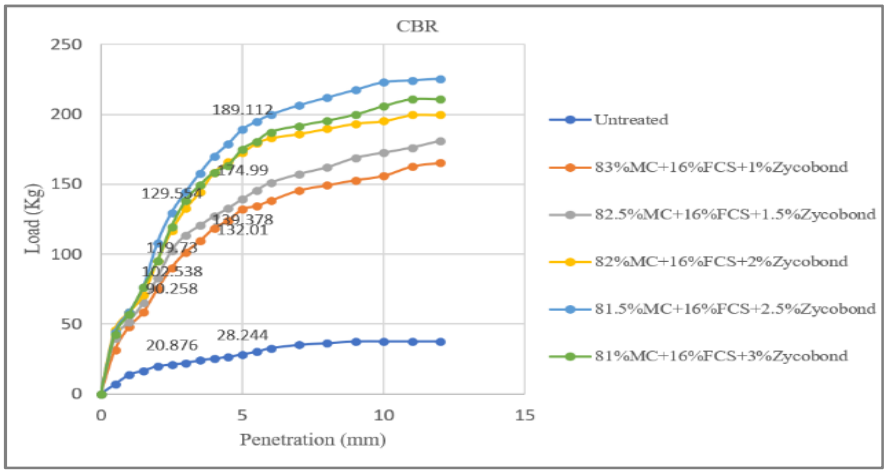



Plate8: Load vs Penetration curves of CBR tests conducted on Marine Clay treated with various percentages of Zycobond.

*Discussion 2*

The soil can be used as subgrade for flexible pavements should possess the minimum CBR value of 8% as per the IRC 37- 2012. In the present study, the marine clay treated with an optimum of 16% Ferrochrome slag and 2.5%Zycobond has exhibited a CBR value of 9.456%. Hence, this treated marine clay is suitable as subgrade for flexible pavements as per the IRC 37- 2012 codes of practice.

Table-5:Laboratory test results of The Untreated and Treated Marine Clay with 16% Ferrochrome slag along with 2.5% Zycobond

| S. No | Properties | Symbol | Marine clay | 84% MC + 16%FCS | 81.5%MC + 16% FCS +2.5 % Zycobond |
|---|---|---|---|---|---|
| 1 | Liquid Limit (%) | $W_L$ | 75.426 | 61.719 | 48.253 |
| 2 | Plastic Limit (%) | $W_P$ | 30.89 | 33.46 | 36.54 |
| 3 | Plasticity Index (%) | $I_P$ | 44.536 | 28.259 | 11.784 |
| 4 | Soil Classification | | CH | CH | CI |
| 5 | Differential Free Swell (%) | DFS | 85 | 52 | 15 |
| 6 | Optimum Moisture Content (%) | OMC | 30.69 | 23.52 | 19.17 |
| 7 | Maximum Dry Density (KN/m$^3$) | MDD | 13.92 | 17.62 | 18.65 |
| 8 | California Bearing Ratio (%) | CBR | 1.584 | 5.243 | 9.456 |
| 9 | Angle of internal friction ($^o$) | Φ | 2.741 | 5.547 | 6.952 |
| 10 | Cohesion (kN/m$^2$) | c | 120.62 | 91.25 | 82.95 |

## V. CONCLUSION

The following results were derived by stabilizing the marine clay using Ferrochrome slag and Zycobond.

1) It is observed from the laboratory test results that the Liquid limit of Marine Clay has been decreased by 18.16% on the addition of 16% FCS and it has been further decreased by 36.02% with an addition of 2.5% Zycobond.
2) It is observed from the laboratory test results that the Plastic limit has been increased by 8.84% on addition of 16% FCS and it has been further increased by 18.86% with an addition of 2.5% Zycobond.
3) It is noticed that the Plasticity Index has been decreased by 36.75% on addition of 16% FCS and it has been further decreased by 73.63% with addition of 2.5% Zycobond.

©IJRASET: All Rights are Reserved 

*4)* It is noticed from the laboratory test results that the Differential Free Swell of Marine Clay has been reduced by 35.29% on the addition of 16% FCS and it has been further reduced by 82.35% with an addition of 2.5% Zycobond when compared with untreated Marine Clay.

*5)* It is observed from the laboratory tests that the OMC of the Marine Clay has been decreased by 23.85% on the addition of 16% FCS and it has been further decreased by 37.54% with addition of 2.5% Zycobond.

*6)* It is observed from the laboratory tests that the MDD of the Marine Clay has been increased by 26.58% on the addition of 16% FCS and it has been further increased by 33.98% with addition of 2.5% Zycobond.

*7)* It is observed that the CBR of the Marine Clay has been increased by 230.99% on the addition of 16% FCS and it has been further increased by 496.96% with addition of 2.5% Zycobond.


## VI. VIABILITY

The addition of ferrochrome slag and Zycobond significantly enhanced the subgrade strength of marine clay by improving particle bonding and reducing plasticity. Laboratory results showed considerable increases in CBR strength compared to untreated soil. Therefore, the treated marine clay can be effectively used as a pavement subgrade material with improved load-bearing capacity and durability

## REFERENCES

[1] Amrullah Abdul Rahim Zai, et al., (2020). “Efficiency of Foundry sand and Glass Fiber on Stabilization of Clay Soil”. International Journal of Engineering Research & Technology (IJERT), Volume 9, Issue 1, January 2020.
[2] D S V Prasad, et al., (2018). “A Study on Geotechnical Properties of Marine Clay Stabilized with Lime and Recron-3s Fiber.” International Journal of Engineering & Technology, 2018.
[3] Dr. D. Koteswara Rao, et al., (2011). “Laboratory Studies on the Properties of Stabilized Marine Clay from Kakinada Sea Coast, India”. International Journal of Engineering Science and Technology (IJEST), Vol 3, January 2011.
[4] Dr. D. Koteswara Rao, et al., (2011). “The Effect of Reinforcement on the GBCDP and Lime Treated Marine Clay for Foundation Soil Beds”. International Journal of Engineering Science and Technology (IJEST), Vol 3, March 2011.
[5] Dr. D. Koteswara Rao, et.al., (2012). “A Laboratory Study of Cyclic Plate Load Test on Lime and Rice Husk Ash Treated Marine Clay Subgrade Flexible Pavements”. International Journal of Modern Engineering Research (IJMER), Vol. 2, Issue. 5, Sep.-Oct. 2012, pp-4465-4469.
[6] E. Ramanjaneya Raju, et al., (2018). “Improvement of CBR of Marine Clay Subgrade Stabilized with Lime and Rock Dust”. International Journal of Advanced in Management, Technology and Engineering Sciences, Volume 8, Issue 1, January 2018.
[7] Er. D. Venkateswarlu et al., (2014). “Laboratory Study on Lime and Cement Treated Marine Clay Subgrade Flexible Pavements”. IOSR Journal of Mechanics and Civil Engineering (IOSR-JMCE), Volume 11, Issue 1, January 2014.
[8] G. R. Ashwin Kumar, et al., (2015). “Stabilization of Marine Clay by Using Copper Slag”. International Journal of Engineering Research & Technology (IJERT), Volume 3, Issue 11, 2015.
[9] IS: 2720 (Part 3/ sec 1) - 1980. “Indian standards methods of tests for soils (Part 3/ sec1), Determination of Specific Gravity.”
[10] IS: 2720 (Part 4) - 1985. “Indian standards methods of tests for soils (Part 4), Grain Size Analysis.”
[11] IS: 2720 (Part 5) - 1985. “Indian standards methods of tests for soils (Part 5), Determination of liquid limit and plastic limit.”
[12] IS: 2720 (Part 8) - 1983. “Indian standards methods of tests for soils (Part 8), Determination of water content and dry density relation using heavy compaction.”
[13] IS: 2720 (Part 16) - 1987. “Indian standards methods of tests for soils (Part 16), Laboratory determination of CBR.”
[14] IS: 2720 (Part XL) - 1977. “Indian standards methods of tests for soils (Part XL), Determination of free swell index of the soils.”
[15] IS: 2720 (Part 12) - 1987. “Indian standards methods of tests for soils (Part 12), Determination of shear strength parameters of soil from consolidated undrained triaxial compression test with measurement of pore water pressure.”

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

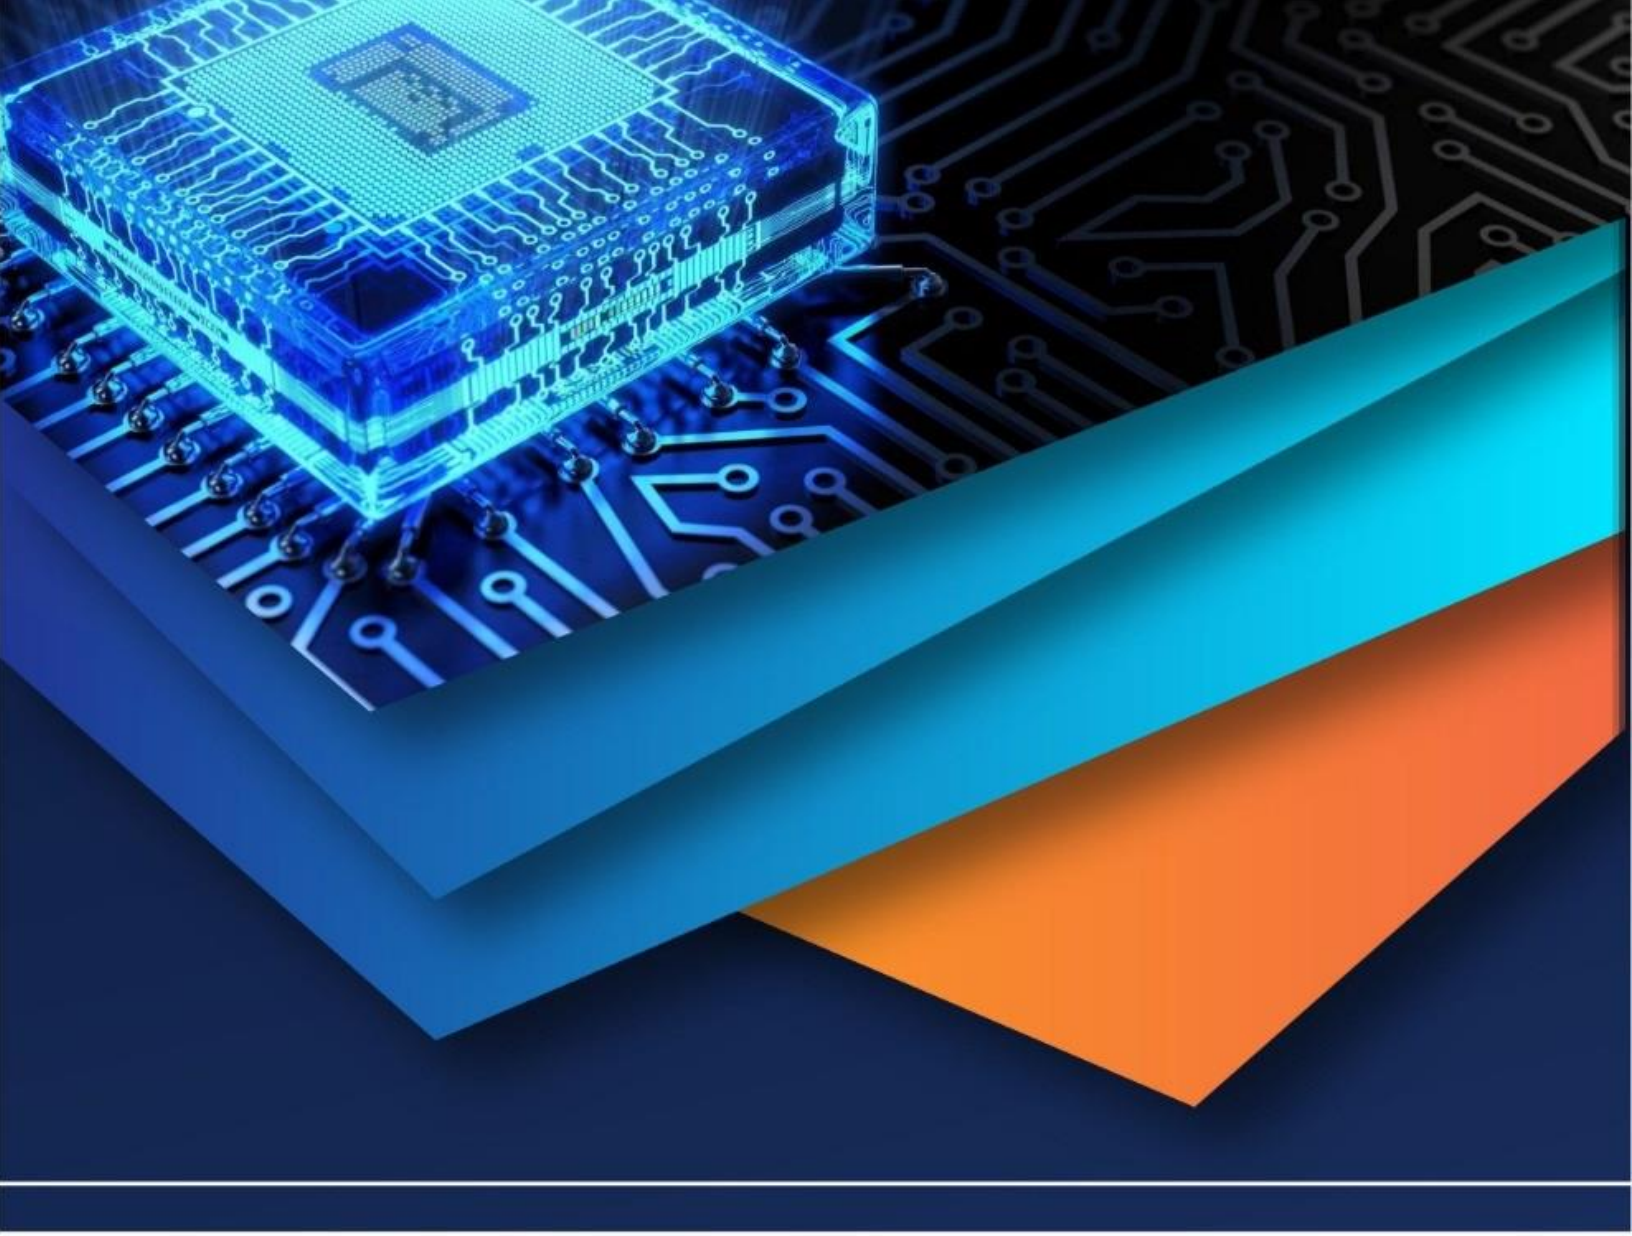

10.22214/IJRASET

45.98

IMPACT FACTOR: 7.129

IMPACT FACTOR: 7.429

# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089 (24*7 Support on Whatsapp)