iJRASET
International Journal For Research in Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 13 **Issue:** VIII **Month of publication:** August 2025

DOI: https://doi.org/10.22214/ijraset.2025.73584

www.ijraset.com

Call: 08813907089 | E-mail ID: ijraset@gmail.com

International Journal for Research in Applied Science & Engineering Technology (IJRASET)
ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538
Volume 13 Issue VIII Aug 2025- Available at www.ijraset.com

Li-Fi and VLC for Smart Environments

Ashvini S. Kolate[1], Jayesh N. Patil[2], Prayag S. Patil[3]
[1]*M.Sc Computer Science PO Nahata College Bhusawal, Maharashtra 425201*
[2]*B.E Electrical Engineering,Government Engineering College, Chandrapur, Maharashtra 442507*
[3]*M.Tech Mechatronics Engineering, Vellore Institute of Technology,Vellore, Tamil Nadu 632014*

Abstract: ***This research paper presents an in-depth review and analysis of Light Fidelity (Li-Fi) and Visible Light Communication (VLC), highlighting their increasing significance in next-generation smart environments. Unlike traditional radio frequency (RF) systems, these technologies utilize the visible light spectrum—primarily via LED infrastructure—for high-speed, energy-efficient, and secure wireless communication. By synthesizing findings from selected studies, the paper explores advancements in modulation techniques such as OFDM and WDM, system design improvements, and the integration of hybrid networks combining Li-Fi with RF or Wi-Fi. Key applications are discussed, including smart homes, indoor positioning systems, multimedia streaming, and underwater communication, where VLC offers advantages such as reduced electromagnetic interference, high data rates, and enhanced security. The paper also addresses critical deployment challenges like line-of-sight dependency, ambient light interference, and user mobility, along with potential mitigation strategies proposed in the literature. Finally, it outlines future research directions, including AI-driven optimization, energy-efficient receiver systems, and large-scale smart city deployment. The review confirms that Li-Fi and VLC hold strong potential to complement or, in some cases, replace RF-based communication in specific environments where conventional systems fall short.***

Keywords: Li-Fi, Visible Light Communication (VLC), Smart Homes, Hybrid Networks, Data Transmission, Optical Wireless Communication, Energy-Efficient Communication, High-Speed Transmission, Security and Privacy, Smart Environments, IoT

I. INTRODUCTION

The increasing demand for high-speed wireless communication, fueled by IoT devices, smart homes, and multimedia applications, has placed unprecedented pressure on the RF spectrum, leading to congestion and reduced reliability [1], [3]. Li-Fi and VLC technologies offer a viable alternative by utilizing the visible light spectrum to transmit data while providing illumination, thereby enhancing spectral efficiency and energy utilization [2], [6], [20]. Gupta et al. [1] highlighted Li-Fi's potential for high-speed indoor connectivity and energy-efficient operation, particularly in smart homes and office environments. Similarly, Karthik [3] demonstrated that Li-Fi can achieve significantly higher throughput compared to conventional Wi-Fi systems, although it remains limited by line-of-sight requirements and user mobility. Faulkner et al. [6] showed that Wavelength Division Multiplexing (WDM) techniques applied to LED-based VLC can achieve data rates up to 10 Gb/s, underlining the scalability of these systems, although real-world deployment faces challenges due to lighting constraints and interference. These studies collectively emphasize that Li-Fi and VLC are poised to complement existing wireless systems, particularly in densely connected indoor environments.

II. LITERATURE REVIEW

The development of Li-Fi and Visible Light Communication (VLC) technologies has attracted significant attention due to their potential in high-speed data transmission, smart environments, and energy-efficient communication. Early studies demonstrated the feasibility of using LEDs for data transfer. Gupta et al. presented a Li-Fi-based smart home system capable of controlling appliances while transmitting data, highlighting the dual function of illumination and communication [1]. This system demonstrated the integration of Li-Fi into daily life, showcasing its practicality for indoor smart environments. Indoor positioning, another key application of optical wireless communication, has been explored using hybrid technologies. Birsan et al. provided a comprehensive review of key technologies for indoor positioning systems, emphasizing the combination of VLC and other localization techniques to enhance accuracy and reliability in indoor environments [2]. These studies form the basis for developing Li-Fi-based indoor navigation systems. High-speed data transmission over visible light has been demonstrated using various modulation and multiplexing techniques. Karthik reported high-speed video and data transmission over Li-Fi, illustrating the potential for VLC in multimedia streaming applications [3]. Huang et al. achieved 1.6 Gbit/s transmission using a phosphorescent white LED with a cascaded pre-equalization circuit, establishing the viability of high-data-rate VLC systems with commercially available LEDs [8].

©IJRASET: All Rights are Reserved

Similarly, Ha et al. designed a 2.5 Gb/s real-time VLC system based on phosphorescent LEDs, demonstrating that Li-Fi can support bandwidth-intensive applications [9]. Faulkner et al. further extended the data rate to 10 Gb/s using wavelength division multiplexing, enabling multiuser VLC systems with high throughput [7]. Several studies have focused on audio and multimedia transmission via Li-Fi. Samudika et al. demonstrated stereo audio streaming using VLC, illustrating the capability of Li-Fi for high-quality audio applications [5]. Saranya et al. implemented audio transmission using Li-Fi technology, confirming its suitability for multimedia applications in indoor environments [16]. Madhuri et al. highlighted the role of materials and device engineering in enhancing VLC performance, addressing practical deployment challenges [4].

The integration of Li-Fi with other communication technologies has been explored to overcome coverage limitations. Faruq et al. analyzed a hybrid Free Space Optical (FSO)/RF communication system, demonstrating improved multiuser connectivity and reliability [11]. Putra et al. proposed a bidirectional DCO-OFDM VLC system, offering enhanced physical layer performance for two-way communication [12]. Hybrid networks combining Li-Fi and Power Line Communication have also been suggested as an effective approach for multiuser indoor scenarios [20]. Challenges such as limited coverage, sensitivity to ambient light, and energy efficiency remain central to Li-Fi research. Spagnolo et al. emphasized energy-efficient design in Li-Fi networks while maintaining high-speed data transmission [6]. Aman et al. extended Li-Fi research to underwater environments, exploring LED designs to achieve reliable communication in complex conditions [18]. Milovancev et al. demonstrated Gb/s VLC using a low-cost single-color LED receiver, showing that cost-effective solutions are possible for high-speed Li-Fi [17].

Additional studies have focused on practical LED technology for optical wireless communication. Krames et al. provided insights into high-efficiency LEDs, essential for energy-efficient Li-Fi deployment [19]. Mahendran explored integrated Li-Fi systems for smart communication through illumination, emphasizing real-world applicability in intelligent environments [20]. Chergui and Abdesselam investigated VLC system design for Li-Fi applications, contributing to the development of reliable indoor communication infrastructures [10]. Sharma and Sharma highlighted the relevance of IoT and big data analytics for integrating Li-Fi into smart environments [13]. Finally, deep learning techniques have been applied to improve Li-Fi performance. Arfaoui et al. used deep learning for joint estimation of indoor Li-Fi user position and orientation, achieving centimeter-level localization accuracy and reinforcing Li-Fi's potential in navigation and tracking applications [15]. These studies collectively illustrate that Li-Fi and VLC are not only feasible for high-speed data transmission but also adaptable for smart environments, multimedia, and indoor positioning applications.

III.METHODOLOGY

The methodology for reviewing and analyzing Li-Fi and VLC research employed a systematic approach to identify, select, and synthesize studies relevant to smart environment applications. Initially, a set of 20 key studies was selected based on their relevance to optical wireless communication, smart homes, indoor positioning, hybrid networks, and multimedia streaming. Selection criteria focused on high-impact journal or conference publications that provide experimental validation or significant theoretical contributions [1][5][7][9][15], recent advancements in Li-Fi and VLC technology from 2015 to 2022 [3][6][8], and studies demonstrating real-world feasibility or practical implementation [1][20]. This ensured inclusion of both foundational research on LEDs and modulation techniques [19] and recent experimental applications, including audio/video streaming and indoor positioning [5][15][16]. From each study, critical data parameters were systematically extracted to enable comprehensive comparison and analysis. Data transmission rates and modulation schemes were examined to evaluate high-speed VLC and Li-Fi capabilities [7][8][9]. Network architecture and hybrid integration approaches, including combinations of Li-Fi with RF, Wi-Fi, or FSO systems, were reviewed to assess reliability and coverage enhancements [11][12][18]. Application scenarios, such as smart home automation, indoor navigation, multimedia transmission, and industrial environments, were identified [1][5][15][16]. In addition, challenges reported in the studies—including coverage limitations, interference from ambient light, and energy efficiency concerns—were extracted along with proposed engineering solutions [6][17][18].

Each study was analyzed to identify trends, performance benchmarks, and practical implementation strategies. Comparative evaluation focused on multiple dimensions, including data rate and throughput, by examining transmission speeds achieved using different LED types, modulation techniques, and multiplexing methods [7][8][9][12]. Application efficiency was assessed to determine the suitability of Li-Fi and VLC systems for smart home automation, indoor positioning, and multimedia streaming [1][5][15][16]. Network integration strategies, especially hybrid approaches combining Li-Fi with RF or Wi-Fi networks, were evaluated to enhance coverage, reliability, and data throughput [11][12][18]. Additionally, reported limitations and solutions, such as interference mitigation and energy optimization strategies, were synthesized to highlight practical challenges and engineering considerations [6][17][18].

Performance evaluation metrics were derived from the extracted data to quantify the practical utility of Li-Fi and VLC systems. Bit rate (Gb/s) was analyzed to assess high-speed transmission potential and throughput [7][9][12]. Coverage area (m^2) was considered to evaluate the feasibility of indoor deployments and network reach [6][11][17]. Positioning accuracy (cm) was used to assess the effectiveness of indoor navigation and localization systems [2][15]. Energy efficiency was evaluated to determine the ability to provide simultaneous illumination and communication without excessive power consumption [1][6][20]. This structured methodology ensured a comprehensive review of Li-Fi and VLC research, emphasizing both technological advancements and practical applications in smart environments.

IV. FUNDAMENTALS OF LI-FI AND VLC

A. LED Technology

LEDs are the cornerstone of VLC systems due to their ability to switch at high frequencies while simultaneously providing illumination. Research indicates that phosphor-coated LEDs and micro-LEDs can achieve Gbps-level data rates, with techniques such as pre-equalization used to mitigate bandwidth limitations [7], [8], [17]. Huang et al. [7] demonstrated that pre-equalization of phosphorescent LEDs can significantly improve communication bandwidth without compromising illumination quality shown Fig.1. Chergui and Abdesselam [8] explored system-level designs for Li-Fi, highlighting the trade-off between data rate and light quality in practical deployments. Wu et al. [17] further emphasized the energy efficiency of LED-based communication, showing that hybrid Li-Fi/Wi-Fi systems can reduce power consumption while maintaining high-speed connectivity. These findings collectively indicate that LED technology is both an enabler and a limiting factor, requiring careful design considerations to optimize performance.

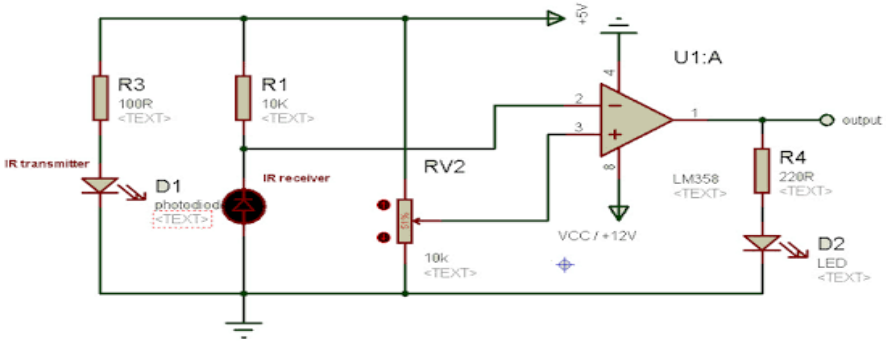


Fig.1 LED light source transmitting data and a photodiode or LED acting as a receiver.

B. Modulation Techniques

Effective modulation schemes shown Fig. 2 are critical for achieving high-speed VLC. Common techniques include On-Off Keying (OOK), Pulse Position Modulation (PPM), Orthogonal Frequency Division Multiplexing (OFDM), and Wavelength Division Multiplexing (WDM) [12], [22]. Milovancev et al. [12] demonstrated that OFDM provides high spectral efficiency and robustness against multipath reflections, making it suitable for indoor communication. Wang et al. [22] investigated WDM with multicolor LEDs, achieving data rates exceeding 10 Gb/s, though system complexity increases significantly. Bidirectional DCO-OFDM systems have also been explored for low-cost implementation while maintaining Gbps-level throughput [9]. Overall, advanced modulation techniques are crucial for maximizing data rates and reliability in VLC systems.

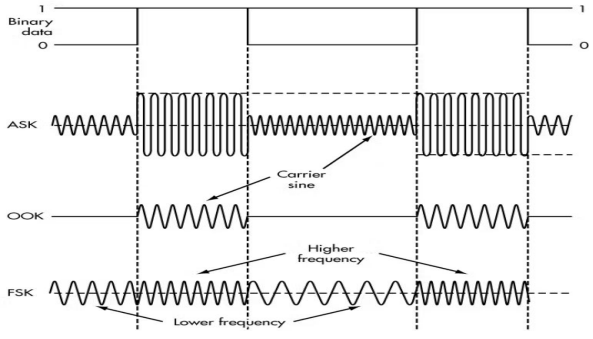


Fig. 2 Modulation Schemes

C. Receivers

Photodiodes (PDs) are the standard receivers in VLC systems due to their high sensitivity and linear response. However, recent studies have also investigated the use of LEDs as low-cost receivers in simplified designs [12], [17]. Milovancev et al. [12] demonstrated that low-cost PD-based systems can still achieve Gbps data rates, suggesting economic scalability for large-scale deployments. Wu et al. [17] explored hybrid networks integrating PDs with Wi-Fi receivers, addressing challenges related to mobility and coverage. These studies indicate that receiver design is a key factor in optimizing VLC system performance, balancing cost, sensitivity, and deployment feasibility.

V. APPLICATIONS IN SMART ENVIRONMENTS

A. Smart Homes and IoT

Li-Fi is increasingly being applied in smart homes and IoT environments due to its high data rates and energy efficiency [1], [15], [20]. Gupta et al. [1] described applications including real-time monitoring of sensors, secure indoor communication, and energy management systems. Wang et al. [20] demonstrated load balancing and user association strategies in hybrid Li-Fi/Wi-Fi networks, ensuring stable connectivity for IoT devices. Razzaq and Qamar [15] noted that Li-Fi performance is sensitive to ambient lighting, highlighting the need for adaptive modulation and power control mechanisms to maintain reliable communication.

B. Indoor Positioning Systems (IPS)

VLC enables precise indoor localization by using LED signal patterns for triangulation [2], [10]. Birsan et al. [2] achieved centimeter-level positioning accuracy in controlled environments, showing the potential for applications such as navigation in large buildings or asset tracking. Arfaoui et al. [10] integrated deep learning techniques for adaptive indoor positioning, effectively mitigating errors caused by reflections and complex room geometries. These studies indicate that VLC-based IPS can provide a complementary solution to RF-based positioning, particularly in environments where GPS is unreliable.

C. Audio and Video Streaming

VLC has been successfully applied to high-speed audio and video transmission, making it suitable for multimedia applications [4], [11], [16]. Samudika et al. [4] demonstrated stereo audio streaming using VLC, proving the feasibility of real-time applications. Saranya et al. [11] extended this concept to high-definition video transmission, while Jiang et al. [16] investigated joint power allocation and user association to optimize streaming quality in multi-user VLC networks. These findings indicate that VLC can support immersive media experiences, though careful system design is required to handle multi-user interference and bandwidth allocation.

D. Hybrid Li-Fi/Wi-Fi Networks

As Fig.3 Hybrid networks combine Li-Fi's high-speed communication with Wi-Fi's broad coverage to mitigate the limitations of each technology [17], [18]. Wu et al. [17] demonstrated seamless handover between Li-Fi and Wi-Fi, enabling mobility without interrupting connectivity. Badeel et al. [18] proposed load balancing strategies for hybrid networks, showing improved throughput and reduced congestion in dense office and industrial environments. These studies suggest that hybrid networks represent a practical path for deploying Li-Fi in real-world scenarios while addressing line-of-sight and mobility challenges.

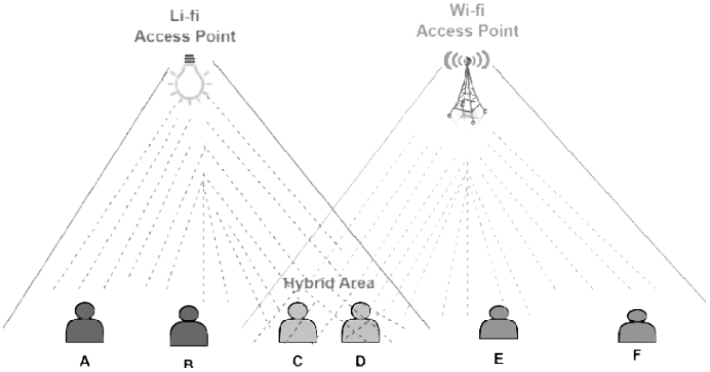


Fig.3 Hybrid Li-Fi/Wi-Fi Networks Arena

VI. PERFORMANCE ENHANCEMENTS AND CHALLENGES

High-speed transmission in Li-Fi and VLC is achieved through techniques such as OFDM, WDM, and pre-equalization, enabling multi-gigabit communication [6], [7], [22]. Faulkner et al. [6] demonstrated 10 Gb/s data rates using WDM, while Huang et al. [7] applied pre-equalization to overcome phosphor-induced bandwidth limitations. Wang et al. [22] optimized multicolor LED channels to further increase throughput, although system complexity and cost rise with advanced techniques. Security and privacy are inherent advantages of VLC due to its confined propagation, with Pathak et al. [19] highlighting its resilience to eavesdropping compared to RF systems. Wang et al. [20] further enhanced security through encryption and key management in hybrid networks. Despite these advantages, practical challenges remain, including line-of-sight dependency, interference from ambient light, and user mobility, as emphasized by Karthik [3] and Badeel et al. [18]. Addressing these challenges is essential for large-scale adoption.

A. Techniques for High-Speed Transmission

In the realm of Li-Fi and VLC systems, high-speed transmission is essential for meeting the growing demand for data communication. To achieve this, several advanced techniques, including Orthogonal Frequency Division Multiplexing (OFDM), Wavelength Division Multiplexing (WDM), and pre-equalization, are employed. These techniques optimize the available bandwidth and help achieve multi-gigabit communication. OFDM is a key method used in high-speed Li-Fi and VLC communication. This technique divides the available bandwidth into smaller sub-channels, each carrying its own signal. By using multiple sub-channels simultaneously, OFDM increases the system's overall data rate while minimizing the impact of interference from multiple sources. The technique is particularly effective in combating the distortions caused by multipath interference, a common issue in wireless communication. It also makes more efficient use of the available bandwidth, ensuring that more data can be transmitted over the same optical medium. Wavelength Division Multiplexing (WDM) further enhances throughput by allowing multiple optical signals, each at different wavelengths (or "colors"), to be transmitted simultaneously through the same optical fiber or LED. This effectively increases the system's capacity without the need for additional physical infrastructure. Faulkner et al. (2016) demonstrated how WDM can help achieve high data rates, such as 10 Gb/s, by exploiting the available spectral bands of LEDs [6]. Another important technique is pre-equalization, which compensates for the frequency response impairments that occur due to the limited bandwidth of certain light sources, such as phosphorescent LEDs. Huang et al. (2015) successfully applied pre-equalization to overcome the bandwidth limitations induced by phosphor-based LEDs, leading to higher data transmission speeds even with less advanced hardware [7]. Lastly, the use of multicolor LEDs, as demonstrated by Wang et al. (2022), provides an additional layer of performance enhancement. By utilizing LEDs of multiple colors, data can be transmitted simultaneously across different light channels, boosting throughput. However, this comes at the cost of increased system complexity and higher operational requirements [22]. Collectively, these techniques enable Li-Fi and VLC systems to achieve much higher data rates, although they also introduce certain challenges regarding system design and cost.

B. Security Benefits

One of the significant advantages of Visible Light Communication (VLC), compared to traditional Radio Frequency (RF) systems, is its inherent security. The confined propagation of light is a fundamental feature of VLC, which restricts the signal’s range to the area directly illuminated by the transmitter. This makes VLC systems much more secure than RF-based communication, as the signal cannot easily penetrate walls or other obstructions. As a result, eavesdropping becomes far more difficult in VLC systems. Pathak et al. (2019) emphasized this key advantage, noting that the confined nature of the VLC signal reduces the risk of interception and unauthorized access, making it ideal for secure communication in environments where privacy is a top concern [19]. Unlike RF signals, which can propagate through walls and be intercepted from outside the physical boundary, VLC signals are confined to the area illuminated by the light source, providing a natural security advantage. Additionally, VLC systems can be further enhanced by encryption and key management techniques. Wang et al. (2020) extended the security of VLC by integrating encryption protocols and key management schemes in hybrid systems that combine both VLC and RF communication technologies. This combination helps prevent unauthorized interception or manipulation of the data being transmitted, making the system more robust against potential cyber threats [20]. Such advancements ensure that VLC systems are not only resistant to passive eavesdropping but can also maintain secure data transmission even in environments where high-security levels are required. The ability to integrate security protocols such as encryption into VLC systems further strengthens their appeal for sensitive applications, such as financial transactions, military communication, and healthcare.

C. Line-of-Sight (LoS) Dependency

One of the primary challenges facing Visible Light Communication (VLC) is its line-of-sight (LoS) dependency. For the system to function optimally, the transmitter (usually an LED light source) and receiver (typically a photodetector) must be aligned in such a way that there is an unobstructed path between them. This presents significant limitations when it comes to the flexibility and versatility of VLC in real-world environments. For instance, if there are physical obstacles, such as walls, or if the user moves out of the direct line of sight of the transmitter, the signal quality can degrade or be completely lost. Unlike RF-based systems, which can penetrate obstacles like walls and ceilings, VLC relies heavily on the direct visual path between the transmitter and receiver, which makes it prone to interference from physical obstructions. As emphasized by Karthik (2022) and Badeel et al. (2020), this dependency limits VLC's mobility and usability in environments like homes, offices, or public spaces where users may move around freely, and where it may not always be possible to ensure an unobstructed line of sight between the light source and the receiver [3], [18]. To address this, researchers are exploring solutions such as multi-cell systems that use multiple light sources and receivers to ensure more stable and continuous coverage, even in cases where users move around or objects block the line of sight. Nevertheless, overcoming the LoS dependency remains one of the biggest challenges for the widespread adoption of VLC technologies.

D. User Mobility

As users move around, maintaining a stable and fast connection in VLC systems becomes increasingly difficult. User mobility is a critical challenge in practical environments, such as homes, offices, and public spaces, where people are constantly on the move. In these settings, the line-of-sight dependency of VLC systems exacerbates the issue of maintaining a continuous, high-quality connection. If the user moves out of the illuminated area or between light sources, the connection may drop or degrade, which can lead to interruptions in communication. Since VLC requires the transmitter and receiver to be aligned in direct line of sight, maintaining seamless connectivity as the user changes position or orientation becomes increasingly complex. As pointed out by Karthik (2022), in scenarios where users are mobile, such as in a smart office or while walking through a building, the inability to maintain a consistent signal as the user shifts location is a significant limitation for VLC technology [3]. Researchers are exploring various solutions to address this challenge, such as beamforming and adaptive handover mechanisms that allow the receiver to switch between different light sources seamlessly as the user moves through the environment. Furthermore, multi-cell architectures where several light sources are distributed across an area can help ensure that users remain within the coverage zone of at least one transmitter, providing more stable connections even with mobility.

E. Complexity and Cost

While techniques such as Wavelength Division Multiplexing (WDM) and multicolor LEDs enable significant improvements in throughput, they come with increased system complexity and cost. Advanced techniques like WDM require additional hardware components, such as multiplexers and demultiplexers, which increase the complexity of the system's design and operation. WDM also necessitates the use of multiple LEDs with different wavelengths, which further complicates the system's architecture. Similarly, the use of multicolor LEDs to increase throughput by transmitting data on different color channels introduces additional design complexities. These LEDs require specialized drivers and control systems, as well as advanced signal processing algorithms to ensure that each channel operates optimally. Wang et al. (2022) demonstrated how multicolor LEDs can increase throughput, but they also acknowledged that these systems introduce a significant amount of complexity, both in terms of hardware and software [22]. Moreover, the cost of implementing these advanced technologies is higher compared to simpler VLC systems. Specialized LEDs, high-performance photodetectors, and more advanced signal processing hardware all contribute to the increased cost. This presents a challenge for large-scale adoption, especially in cost-sensitive applications. For instance, while the performance improvements brought by WDM and multicolor LEDs are undeniable, their high cost and the associated increase in system complexity make scaling these systems more challenging. As such, there is a trade-off between achieving high data rates and managing the complexity and cost of the system. These factors will be crucial when determining the feasibility of VLC and Li-Fi technologies for mass deployment in consumer, business, and industrial environments.

VII. KEY FINDINGS

The future of Li-Fi (Light Fidelity) and VLC (Visible Light Communication) is exciting, with vast potential for advancing smart environments, IoT, and energy-efficient communication systems. However, several areas require significant research to address current challenges and realize the full promise of these technologies. Below, we outline several promising future research directions for Li-Fi and VLC, with a focus on innovations and integration in smart environments.

A. AI-Driven System Optimization

One of the most exciting prospects for the future of Li-Fi and VLC is the incorporation of artificial intelligence (AI) into the communication systems. AI can play a crucial role in optimizing several aspects of VLC, such as adaptive modulation, beamforming, and dynamic network management. For example, deep learning techniques could be used to automatically adjust modulation schemes based on environmental conditions like ambient light, network traffic, and user mobility, making the system more flexible and efficient. Additionally, AI-based algorithms could predict network congestion and adapt the power distribution in real time to maintain high throughput and minimize interference [10], [18]. AI-driven systems can also enhance indoor positioning systems by providing more accurate user location estimations in smart homes, offices, and hospitals [15]. Research on AI-enhanced VLC could revolutionize indoor networks by making them more responsive to real-time changes in both physical and network conditions.

B. Integration of VLC with Other Communication Technologies

A significant area of future research involves the integration of Li-Fi/VLC with existing wireless technologies such as Wi-Fi, 5G, and RF communication systems. Hybrid networks, which combine the strengths of RF-based and optical-based systems, can enhance the overall performance and reliability of communication systems. Li-Fi's high data rate and security can complement the broad coverage and established infrastructure of Wi-Fi and 5G networks, enabling more robust and efficient systems. For instance, hybrid systems can leverage Li-Fi for high-bandwidth applications like video streaming or cloud computing in areas with limited or no Wi-Fi coverage. Meanwhile, RF systems can handle low-bandwidth applications and large-scale coverage. The key challenge in hybrid systems is the seamless integration of both technologies. Future research should focus on load balancing, handover techniques, and dynamic resource allocation to ensure that the hybrid network remains efficient and user-friendly under varying environmental conditions [20], [6].

C. Li-Fi in Large-Scale Smart City Deployment

Smart cities represent a huge opportunity for Li-Fi and VLC technologies to demonstrate their potential. Future research should focus on the large-scale integration of Li-Fi into smart city infrastructures, including LED streetlights, traffic signals, and autonomous vehicles. Smart lighting systems that use Li-Fi for communication could replace traditional Wi-Fi hotspots, offering higher speeds and energy efficiency. By using public infrastructure like streetlights as communication nodes, cities could enhance connectivity while reducing the need for additional wireless towers and routers. Additionally, autonomous vehicles could benefit from Li-Fi for high-speed data exchange between cars, traffic signals, and pedestrians, allowing real-time updates on road conditions, accidents, and traffic patterns, thereby improving safety and efficiency [17]. Research into the scalability of Li-Fi networks and smart city integration will be crucial in ensuring that these systems can operate across large urban environments without sacrificing performance.

D. Energy-Efficient VLC System Design

As with many modern communication systems, energy efficiency is a primary concern for the widespread adoption of Li-Fi and VLC. Although Li-Fi offers the potential to reduce the energy consumption associated with traditional RF-based communication systems, there are still challenges in achieving optimal power utilization. Future research should focus on the development of energy-efficient LEDs and optical receivers, as well as strategies to reduce the power consumption of the overall system. The use of low-power modulation techniques like DCO-OFDM (Direct Current Optimum Frequency Division Multiplexing) could help reduce energy usage while maintaining high data rates [12]. Additionally, more advanced power management algorithms that can adjust the power of light sources depending on the data rate and user activity are needed to optimize energy consumption in real-time. Research into green Li-Fi technologies, which can make use of existing lighting infrastructure while minimizing environmental impact, should also be prioritized.

E. Enhanced Positioning and Navigation Systems

The role of indoor positioning and navigation is critical in smart environments such as hospitals, malls, and warehouses, where real-time location tracking can improve operational efficiency and safety. Li-Fi-based positioning systems have demonstrated potential for achieving sub-meter accuracy in indoor environments, and future research should work towards improving this positioning accuracy to even centimeter-level precision. Such high accuracy would be beneficial in applications such as autonomous robots, smart homes, and personalized services.

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

Combining Li-Fi with machine learning algorithms could further enhance these systems by continuously adjusting for dynamic environmental factors like obstacles, light interference, and user movement. Research into improving the accuracy, scalability, and reliability of these systems will make them more suitable for widespread adoption in commercial and industrial settings [15], [18].

F. Overcoming Line-of-Sight and Interference Issues

One of the most significant technical challenges that Li-Fi and VLC face is their dependence on line-of-sight (LoS) for stable communication. While VLC offers inherent advantages in terms of security and data rates, the reliance on direct visibility between the transmitter (LED) and receiver can limit its performance, particularly in dynamic environments where objects may obstruct the light path. Future research must address methods for improving communication through non-line-of-sight (NLoS) scenarios, such as through reflective surfaces or multi-path communication strategies. Moreover, ambient light interference remains a concern, particularly in environments with fluctuating or high levels of natural sunlight. Developing adaptive interference mitigation techniques that can handle variable lighting conditions will be crucial in making VLC a more robust and reliable communication medium in real-world environments. Research on light-absorbing coatings or narrowband filters to reduce external light interference could also contribute to more stable VLC performance in challenging conditions [3], [6], [18].

G. Multi-User Systems and Network Optimization

Finally, with the increasing deployment of VLC systems in high-density environments such as offices, stadiums, and shopping centers, there is a need for efficient multi-user systems. As more devices become connected, network congestion could become a bottleneck for high-speed transmission. Future research should focus on the development of multi-user access strategies, such as multi-input multi-output (MIMO) for VLC systems, to allow simultaneous communication with multiple users without sacrificing data rates or quality of service. Optimizing resource allocation, frequency management, and signal processing techniques will be crucial to ensure that VLC systems can handle a growing number of devices in crowded environments. Multi-user interference management will also play an essential role in maintaining system performance as the number of connected devices continues to rise in modern smart cities [20], [6].

VIII. CONCLUSION


Li-Fi (Light Fidelity) and VLC (Visible Light Communication) technologies have emerged as powerful alternatives to traditional RF-based wireless communication systems, particularly in the context of smart environments. The comprehensive review of current research, spanning high-speed data transmission, multimedia applications, hybrid network integration, and energy-efficient designs, highlights the transformative potential of these optical wireless technologies. The findings demonstrate that Li-Fi and VLC offer significant advantages in terms of data rates, security, and energy efficiency, which are crucial for the development of smart homes, IoT applications, indoor positioning systems, and multimedia streaming. However, despite these advantages, several challenges persist. The line-of-sight dependency, ambient light interference, user mobility, and scalability in large environments remain significant obstacles to widespread adoption. As a result, ongoing research must continue to address these limitations, particularly through the integration of AI-based optimization techniques, the development of hybrid Li-Fi/RF networks, and the improvement of positioning accuracy for indoor navigation systems.

Looking ahead, the future of Li-Fi and VLC technologies in smart cities, autonomous vehicles, and large-scale industrial environments is promising. Research in multi-user network optimization, energy-efficient designs, and dynamic positioning systems will drive the practical implementation of these technologies. Moreover, the integration with 5G, Wi-Fi, and other communication technologies will pave the way for seamless, high-speed communication networks, ensuring that Li-Fi becomes an essential part of the global wireless communication ecosystem. In conclusion, while technical challenges remain, Li-Fi and VLC technologies offer a compelling vision for the future of wireless communication. The continuous evolution of these technologies, driven by innovative research, will significantly enhance communication systems in smart environments, providing higher data rates, enhanced security, and greater energy efficiency. As research advances, Li-Fi and VLC are poised to play a central role in the evolution of smart cities, IoT networks, and next-generation communication systems.

REFERENCES

[1] S. Gupta, M. Sarkar, H. Kaur, M. Agrebi, and A. Roy, “An efficient data transferring through Li-Fi technology: a smart home appliance,” in Multimedia Technologies in the Internet of Things Environment, vol. 108, Springer, 2022.
[2] C. R. Birsan, F. Moldoveanu, A. Moldoveanu, M.-I. Dascalu, and A. Morar, “Key technologies for indoor positioning systems,” in 2019 18th RoEduNet Conference, 2019, pp. 1–7.

[3] Karthik, B. K. A. S, "High-speed transmission of data or video over visible light using Li-Fi," in 2022 ICACTA, pp. 1–6.
[4] G. Madhuri, et al., "IOP conference series: materials science and engineering, volume 872," IOP Conf. Ser.: Mater. Sci. Eng., vol. 872, 2020.
[5] L. Samudika, K. Jayasinghe, E. Gunathilaka, et al., "Stereo audio streaming via visible light," in 2016 MERCon, 2016, pp. 132–136.
[6] S. Spagnolo, L. Cozzella, F. Leccese, et al., "Optical wireless communication and Li-Fi: a new infrastructure for wireless communication in the energy-saving era," in 2020 IEEE International Workshop on Metrology for Industry 4.0 & IoT, 2020, pp. 674–678.
[7] D. Faulkner, D. Tsonev, E. Xie, et al., "LED-based wavelength division multiplexed 10 Gb/s visible light communications," J. Lightwave Technol., vol. 34, pp. 3047–3052, 2016.
[8] Z. W. Huang, J. Shi, Y. Wang, and N. Chi, "1.6 Gbit/s phosphorescent white LED based VLC transmission using a cascaded pre-equalization circuit," Opt. Express, vol. 23, pp. 22034–22042, 2015.
[9] S. Ha, S. Han, C. Wang, et al., "A 2.5 Gb/s real-time visible-light communication system based on phosphorescent white LED," in 2019 ICICN, pp. 140–145.
[10] Chergui and S. Abdesselam, "Design and realization of a visible light communication system for Li-Fi application," in 2020 CCSSP, pp. 30–35.
[11] Omar Faruq, et al., "Performance evaluation and design of a hybrid FSO/RF communication antenna," IOSR J. Electr. Electron. Eng., vol. 17, no. 3, pp. 1–9, 2022.
[12] V. W. Putra, W. A. Cahyadi, T. Adiono, et al., "Physical layer design with analog front end for bidirectional DCO-OFDM visible light communications," Optik, vol. 138, pp. 103–118, 2017.
[13] R. Sharma, and D. Sharma, New Trends and Applications in IoT and Big Data Analytics, vol. XIV, p. 271.
[14] R. Conti, A. Gambardella, and E. Novelli, "Specializing in generality: firm strategies when intermediate markets work," Organ. Sci., vol. 30, no. 1, pp. 126–150, 2019.
[15] A. Arfaoui, et al., "Invoking deep learning for joint estimation of indoor Li-Fi user position and orientation," IEEE J. Selected Areas Commun., vol. 39, no. 9, pp. 2890–2905, Sept. 2021.
[16] S. Saranya, B. Ragavi, L. Pavithra, et al., "Audio transmission using visible light communication and Li-Fi technology," in 2021 ICICT, pp. 19–24.
[17] N. Milovancev, N. Vokic, H. Hübel, and B. Schrenk, "Gb/s visible light communication with low-cost receiver based on single-color LED," J. Lightwave Technol., vol. 38, no. 12, pp. 3305–3314, 2020.
[18] Aman, G. Qiao, and M. Muzzammil, "Design and analysis of Li-Fi underwater wireless communication system," in 2021 COA, pp. 1100–1103.
[19] R. Krames, H. Amano, J. J. Brown, and P. L. Heremans, "Introduction to the issue on high-efficiency light-emitting diodes," IEEE J. Selected Top. Quan. Electron., vol. 8, no. 2, pp. 185–188, 2002.
[20] Mahendran, "Integrated LiFi for smart communication through illumination," in 2016 ICACCCT, pp. 53–56.

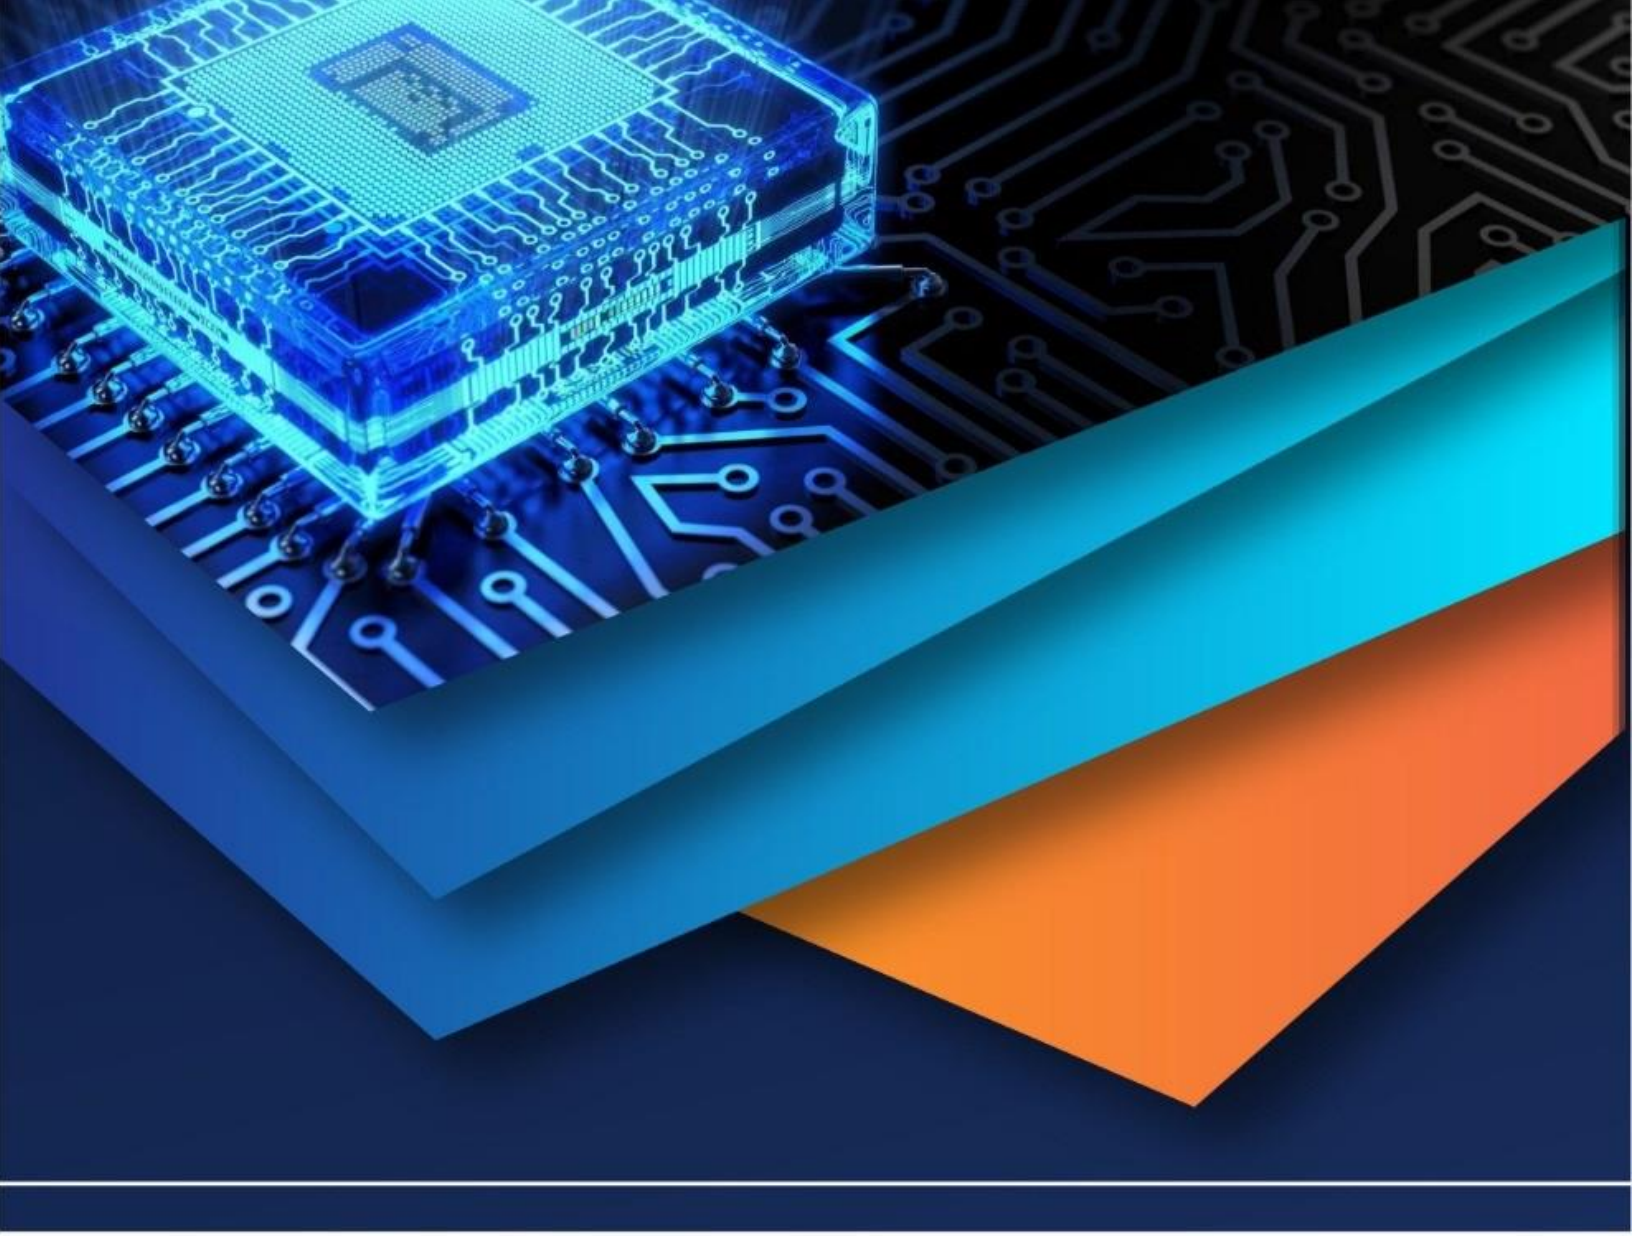

10.22214/IJRASET

45.98

IMPACT FACTOR: 7.129

IMPACT FACTOR: 7.429

INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089 (24*7 Support on Whatsapp)