iJRASET
International Journal For Research in Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 14 **Issue:** IV **Month of publication:** April 2026

DOI: https://doi.org/10.22214/ijraset.2026.80338

www.ijraset.com

Call: 08813907089 | E-mail ID: ijraset@gmail.com

International Journal for Research in Applied Science & Engineering Technology (IJRASET)
ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538
Volume 14 Issue IV Apr 2026- Available at www.ijraset.com

Lo-Ra Based Remote Environmental Monitoring System

Lavanya Pathem[1], Shivani Charagondla[2], Krishnaveni Rapolu[3], Anu Polaboina[4], Srivalli Akula[5]
Department of ECE, G. Narayanamma Institute of Technology and Science (for Women), Hyderabad, India

Abstract: ***Environmental monitoring plays a vital role in ensuring safety, sustainability, and efficient resource management, especially in remote and industrial areas where continuous supervision is challenging. The proposed system utilizes a LoRa-based communication framework to monitor environmental parameters such as temperature, humidity, and gas concentration in real time. The system integrates multiple sensors with a microcontroller to collect data, which is then transmitted over long distances using low-power LoRa modules. The received data is processed and displayed on an IoT platform, enabling continuous monitoring and analysis. An alert mechanism is incorporated to notify users when environmental conditions exceed predefined safety thresholds. The system is designed to operate efficiently in low-network coverage areas with minimal power consumption. Experimental evaluation demonstrated reliable data transmission over distances up to several kilometers, with low latency and high accuracy in sensor readings. The proposed solution highlights the effectiveness of LoRa technology in building scalable, cost-efficient, and real-time environmental monitoring systems for applications such as smart agriculture, industrial safety, and smart city infrastructure.***

Keywords: LoRa, Environmental Monitoring, IoT, Gas Sensor, Temperature and Humidity, Smart Agriculture, Wireless Communication, Alert System

I. INTRODUCTION

Environmental monitoring is a critical requirement in modern society to ensure public safety, ecological balance, and efficient resource utilization. Continuous observation of parameters such as temperature, humidity, and air quality is essential in applications including agriculture, industrial environments, and urban infrastructure. However, in many remote or large-scale areas, maintaining reliable monitoring systems remains a significant challenge due to limited communication range and high power consumption of conventional technologies.

Traditional monitoring systems often rely on short-range communication methods such as Wi-Fi, Bluetooth, or ZigBee, which restrict their deployment in wide-area applications. In scenarios such as industrial hazard detection, gas leakage monitoring, or environmental pollution tracking, delayed data transmission can lead to serious consequences. Therefore, there is a need for a robust system capable of long-range communication with minimal energy usage.

Recent advancements in Internet of Things (IoT) technologies have enabled the development of smart monitoring systems that integrate sensors, microcontrollers, and cloud platforms. Among various communication technologies, LoRa (Long Range) has emerged as an effective solution due to its ability to transmit data over several kilometers while consuming very low power. This makes it highly suitable for remote environmental monitoring applications.

Although several IoT-based monitoring systems have been proposed, many existing solutions primarily focus on data collection and visualization, with limited emphasis on long-range communication reliability and real-time alert mechanisms. Additionally, challenges such as power efficiency, scalability, and deployment in low-network coverage areas are still not fully addressed.

Various research works have explored environmental monitoring using wireless sensor networks and IoT technologies. Early systems were primarily based on short-range communication protocols and microcontroller-based sensor networks, which provided basic monitoring capabilities but lacked scalability and long-distance communication support.

Several studies have utilized Wi-Fi and ZigBee-based systems for environmental data collection. While these approaches offer high data rates, they suffer from limited coverage range and higher energy consumption, making them unsuitable for remote or large-scale applications.

Recent research has focused on the adoption of LoRa technology for environmental monitoring due to its long-range communication capabilities and low power requirements. These systems demonstrate improved coverage and energy efficiency, enabling deployment in rural and geographically dispersed areas. However, many of these implementations are limited to basic data transmission without incorporating intelligent alert mechanisms.

©IJRASET: All Rights are Reserved

Some works have integrated IoT platforms with environmental monitoring systems to enable real-time data visualization and remote access. These systems allow users to monitor environmental parameters through cloud dashboards. Despite this advancement, issues such as latency, reliability of communication, and handling of critical conditions remain areas of concern.

Additionally, sensor-based gas detection systems have been developed for industrial safety applications. These systems effectively detect hazardous gases but often rely on local alarms without remote notification capabilities, reducing their effectiveness in large environments.

Recent developments also include hybrid systems combining multiple sensors with wireless communication technologies. While these systems improve monitoring accuracy, they often face challenges related to power consumption and communication range.

Section II describes the proposed system architecture including mathematical formulation; Section III implementation details and Section IV discusses experimental results and challenges; Section V concludes and outlines future work.

II. PROPOSED SYSTEM ARCHITECTURE

The proposed LoRa-Based Remote Environmental Monitoring System is designed as an efficient, low-power, and long-range monitoring framework for real-time environmental data collection and analysis. The system comprises a four-layered architecture.

1) Sensing Layer: Environmental parameters are captured using sensors, where readings such as temperature, humidity, and gas levels are measured at time *t* and represented as *S(t)*.

2) Processing Layer: The sensed data is processed by a microcontroller, where noise is reduced, features are refined, and the data is converted into a structured format represented as P(t).

3) Communication Layer: The processed data is transmitted using LoRa modules, where long-range wireless communication sends the data packet D(t) to the receiver unit with minimal power consumption.

4) Monitoring & Alter Layer: If P(t) □ P threshold (predefined safety limits), then an alert message is generated and transmitted through the IoT platform to notify the user along with relevant environmental information.

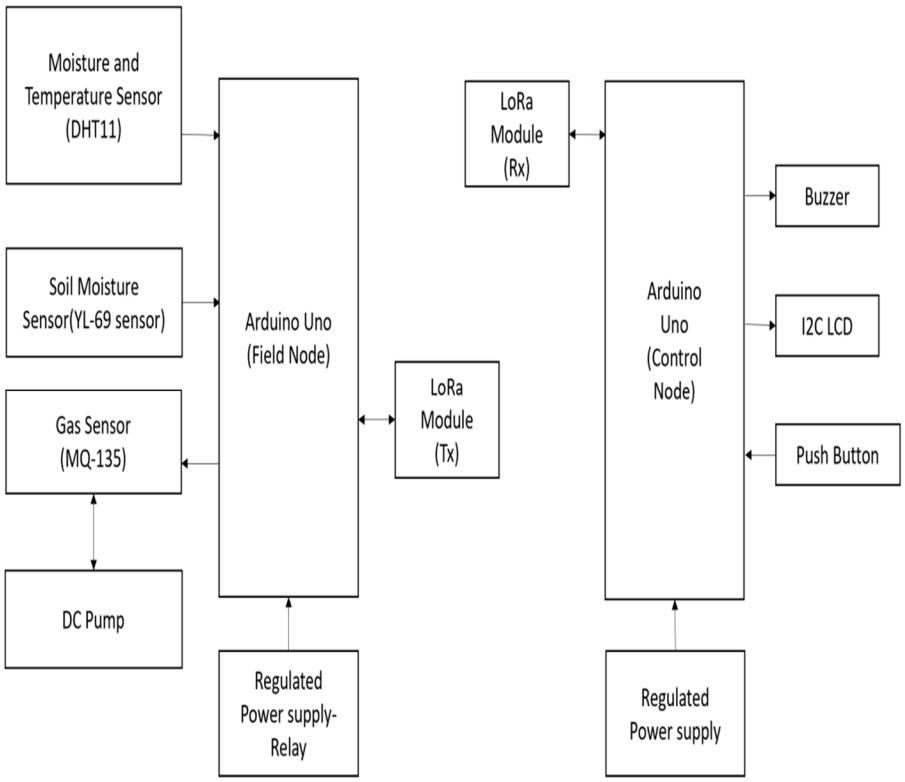


Fig 1. Proposed system block diagram

The overall system works by continuously collecting environmental data, processing it, and sending it through LoRa communication to a remote location. The user can monitor the data through a cloud platform, which makes the system suitable for real-time applications. The complete architecture is shown in Figure 1.

ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538
Volume 14 Issue IV Apr 2026- Available at www.ijraset.com

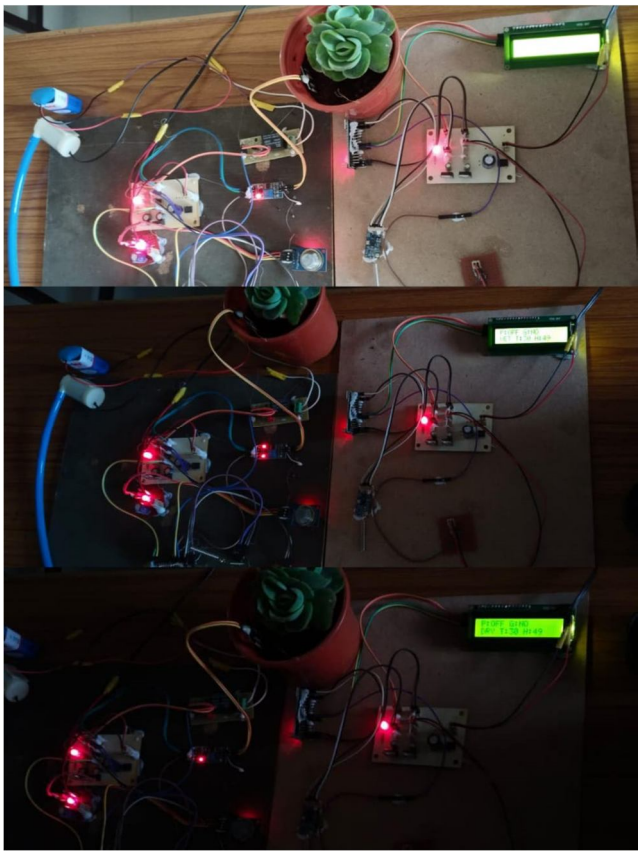


Fig 2. System output display

The system operates using real-time data acquired from connected sensor modules, and the processed output is presented on the LCD display, as illustrated in Figure 2.

Table 1. Modules used in the System

Sensor	Description	Details	Application
DHT11 Module	Used to measure temperature and humidity of the surrounding environment.	0–50°C, 20–90% RH	Environment monitoring
Gas Sensor Module (MQ-135)	Detects harmful gases such as smoke and air pollutant.	Sensitive to LPG, CO, smoke, etc.	Air quality and safety monitoring
Soil Moisture Module	Measures the water content in soil based on conductivity.	Analog output (dry to wet levels)	Smart irrigation and agriculture
LoRa Module (SX1278)	Enables long-range wireless communication between transmitter and receiver.	Frequency: 433 MHz, Low power, Long range	Data transmission over large distances

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

The proposed system operates by continuously monitoring environmental conditions using multiple sensor modules. Initially, the sensing layer collects real-time data from the surroundings through the DHT11 sensor for temperature and humidity, the gas sensor for detecting harmful gases, and the soil moisture sensor for identifying the moisture level in the soil. These sensors generate analog or digital signals based on environmental variations, which are then forwarded to the microcontroller for further processing.

In the processing stage, the microcontroller receives the raw sensor data and converts it into meaningful values. Any minor fluctuations or noise present in the sensor readings are minimized to ensure accurate results. The processed data is then formatted into a structured form so that it can be easily transmitted and displayed. This step plays a key role in maintaining the reliability and consistency of the monitoring system.

Once the data is processed, it is transmitted to the receiver unit using the LoRa communication module. LoRa technology enables long-range wireless transmission with very low power consumption, making it highly suitable for remote environmental monitoring applications. The transmitter sends the data packet, and the receiver captures it without significant delay, ensuring efficient communication even over large distances.

At the receiver side, the received data is displayed on an LCD screen for user observation. The system shows environmental parameters such as temperature, gas presence, and soil condition in a clear and understandable format. For example, the soil moisture level is indicated as dry or wet, which helps in quick decision-making for applications like irrigation. Additionally, if any parameter exceeds predefined safe limits, the system provides an alert indication, allowing the user to take immediate action.

The total system response latency T_{total} can be modeled as:

$$T_{total} = T_{sense} + T_{process} + T_{trasmit} + T_{receive} + T_{display}$$

III. IMPLEMENTATION & EXPERIMENTAL RESULTS

The development of the LoRa-based remote environmental monitoring system involves the integration of sensor modules, embedded processing, and long-range wireless communication. The system is designed to continuously monitor environmental parameters such as temperature, humidity, gas concentration, and soil moisture using appropriate sensors. These sensors are interfaced with a microcontroller, which plays a central role in processing and managing the collected data.

The hardware setup is designed to provide reliable performance with low power consumption and efficient data transmission. The microcontroller processes the data received from sensors and communicates with the LoRa module to enable long-distance wireless transmission. At the receiver side, the transmitted data is collected and displayed on an LCD screen for real-time monitoring. The use of LoRa technology ensures stable communication even in remote areas where conventional networks are not available. Overall, the system is compact, cost-effective, and well-suited for real-time environmental monitoring applications, with the integration of multiple sensors and LoRa communication allowing accurate operation over large distances, making it useful for smart agriculture, environmental monitoring, and safety-related applications.

Table 2. System Parameters

Parameter	Value / Component
Microcontroller	Arduino Uno/ESP32
Communication Module	LoRa (SX1278)
Frequency	433 MHz
Display Unit	16x2 LCD
Communication Range	Up to 10 km
Power Supply	5V DC/ Battery
Data Type	Temperature, Humidity, Gas Level, Soil Moisture
Alter System	LCD indication for abnormal conditions

ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538
Volume 14 Issue IV Apr 2026- Available at www.ijraset.com

IV. RESULTS AND DISCUSSION

The proposed LoRa-based remote environmental monitoring system was developed to evaluate its performance in real-time data acquisition and long-range communication. The system was tested under different environmental conditions to observe its ability to measure and transmit parameters such as temperature, humidity, gas concentration, and soil moisture. The overall performance of the system was found to be stable and consistent during continuous operation

The sensing modules used in the system responded effectively to environmental changes. The DHT11 sensor provided reliable readings for temperature and humidity within its operating range. The gas sensor successfully detected the presence of smoke and harmful gases, showing noticeable variation in readings when exposed to different conditions. Similarly, the soil moisture sensor accurately identified the moisture content in the soil, clearly distinguishing between dry and wet states.

The microcontroller played a crucial role in processing the sensor data and ensuring smooth operation of the system. It efficiently handled multiple sensor inputs, performed necessary data conversions, and prepared the information for transmission. The processed data was displayed in a user-friendly format, allowing easy interpretation of environmental conditions without requiring additional analysis.

The communication performance of the LoRa module was one of the key strengths of the system. It enabled reliable data transmission over long distances with minimal power consumption. During testing, the system maintained stable communication between the transmitter and receiver units without significant data loss. This makes the system highly suitable for applications in remote locations where conventional communication technologies are not feasible.

The output of the system was displayed on an LCD screen, which provided clear and real-time information to the user. The display included environmental parameters such as temperature, gas level, and soil moisture condition. The soil moisture status was particularly useful, as it was indicated in simple terms such as dry or wet, making it easy for users to make quick decisions in applications like irrigation management.

When the gas sensor detects the presence of smoke or harmful gases in the surrounding environment, the system immediately responds by updating the output display. The sensor output increases proportionally with the concentration of gas, which is then processed by the microcontroller. Based on the sensed values, the system identifies the condition as unsafe and triggers an alert indication.

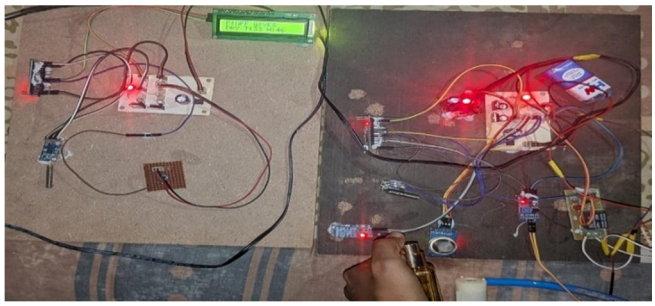


Fig 3. Output Display When Gas Sensor Detects Gases

The processed data is transmitted through the LoRa module to the receiver unit without delay. Simultaneously, the LCD screen displays the gas status as “Gas Detected” or “Alert,” along with other environmental parameters such as temperature and humidity. This real-time notification enables users to quickly recognize hazardous conditions and take necessary safety measures.

The system maintains stable communication even during continuous gas detection, ensuring that alerts are reliably delivered over long distances. This feature enhances the effectiveness of the system in safety-critical applications such as industrial monitoring and pollution detection.

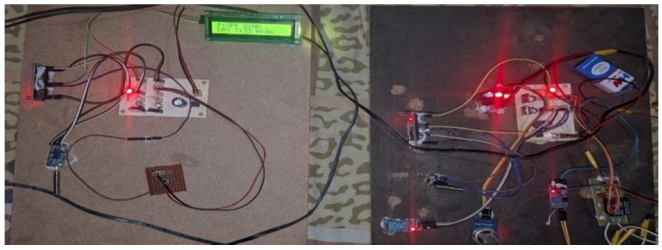


Fig 4. Output Display When Gas sensor Detects No Gases

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

When the gas sensor does not detect any presence of smoke or harmful gases, the system operates under normal environmental conditions. The sensor readings remain within the predefined safe threshold, indicating that the surrounding air quality is stable. In this state, the system continuously monitors the environment without triggering any warning signals, ensuring uninterrupted observation of parameters.

The microcontroller processes the sensor output and classifies the condition as safe. The collected data is then transmitted through the LoRa module to the receiver unit in real time. The LCD display presents the gas status as "No Gas Detected" or "Safe," along with other environmental readings such as temperature, humidity, and soil moisture levels. This clear representation allows users to easily understand that there is no immediate environmental risk.

The communication between transmitter and receiver remains stable and efficient even when no gas is detected. The system continues to function with low power consumption while maintaining accurate and consistent data transmission. This ensures reliable long-term monitoring and makes the system suitable for applications where continuous environmental safety assessment is required.

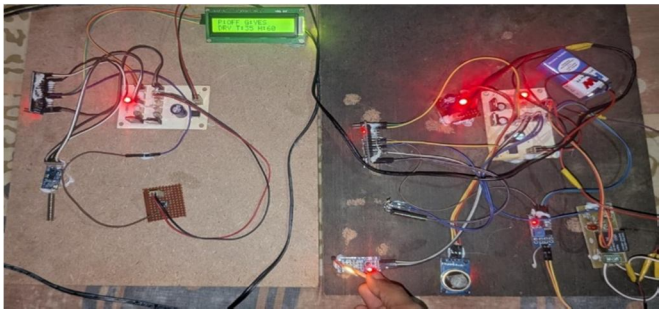


Fig 5. Temperature Increase Detected Using Matchstick (HIGH Condition)

To evaluate the response of the temperature and humidity sensor under varying conditions, an artificial heat source was introduced using a matchstick. When the matchstick was ignited and brought near the sensor, a noticeable rise in temperature was observed. The sensor effectively captured this change, demonstrating its ability to respond quickly to sudden increases in environmental temperature.

As the temperature increased, the humidity readings showed a corresponding variation due to the influence of heat on the surrounding air. The microcontroller processed these updated values and transmitted them through the LoRa module to the receiver unit in real time. The LCD display reflected the increased temperature levels clearly, indicating a "HIGH" temperature condition along with the updated humidity values.

The system maintained stable performance during this test, accurately detecting and communicating the changes without delay or data loss. This experiment confirms the reliability of the sensor in monitoring temperature fluctuations and highlights the system's capability to handle real-time environmental variations, making it suitable for applications such as climate monitoring and fire risk detection.

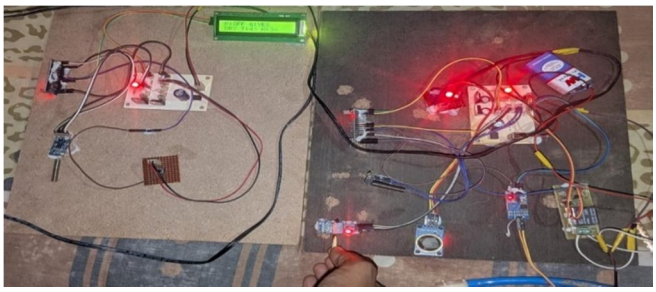


Fig 6. Temperature Output Under Low Condition

To analyze the behavior of the temperature and humidity sensor under low-temperature conditions, the sensor was exposed to a relatively cooler environment. A decrease in temperature was observed as the surrounding conditions were altered, and the sensor successfully captured this variation. The readings indicated a drop in temperature values, confirming the sensor's sensitivity to environmental changes.

As the temperature decreased, the humidity levels showed a slight variation in response to the cooler air conditions. The microcontroller processed these sensor readings and categorized the state as "LOW" temperature. The updated data was transmitted through the LoRa module to the receiver unit, ensuring real-time communication. The LCD display clearly indicated the reduced temperature along with the corresponding humidity values, allowing easy monitoring by the user.

Throughout the testing process, the system demonstrated stable and consistent performance. The communication link remained reliable, and the data was transmitted without interruption. This confirms that the system is capable of accurately detecting low-temperature conditions and continuously monitoring environmental parameters, making it suitable for applications such as weather observation and controlled environment monitoring.

Overall, the system demonstrated reliable performance, low power consumption, and ease of use. The integration of sensor modules with LoRa communication ensured efficient monitoring and data transmission. The system can be effectively applied in areas such as smart agriculture, environmental monitoring, and safety systems. Its simplicity, cost-effectiveness, and scalability make it a practical solution for real-world deployment.

V. CONCLUSION

This paper presented a LoRa-based remote environmental monitoring system designed to collect and transmit real-time environmental data efficiently. The system integrates multiple sensor modules to monitor parameters such as temperature, humidity, gas concentration, and soil moisture, providing a practical solution for continuous environmental observation. The use of LoRa communication enables reliable long-range data transmission, making the system suitable for deployment in remote and large-scale environments.

The proposed system successfully demonstrates performance with low power consumption and minimal delay in data transmission. The integration of sensor modules with a microcontroller ensures accurate data processing, while the LCD display provides a simple and effective way to monitor environmental conditions in real time. The system effectively identifies variations in environmental parameters, such as changes in soil moisture (dry/wet) and gas presence, confirming its capability for real-world applications.

The developed system can be further enhanced by incorporating advanced features such as cloud-based data storage, mobile application support, and automated control mechanisms for smart irrigation. Expanding the system with additional sensors and improving communication range can further increase its applicability in smart agriculture, environmental monitoring, and safety systems, making it a scalable and future-ready solution.

Furthermore, the system architecture is designed with simplicity and flexibility, allowing easy integration of additional hardware components without major modifications. This modular approach ensures that the system can be adapted to different environmental conditions and user requirements. The use of cost-effective components makes the overall system affordable, which is an important factor for large-scale deployment, especially in rural and resource-limited areas.

Another significant advantage of the proposed system is its ability to operate efficiently with minimal maintenance. The sensors continuously collect data and the communication module ensures uninterrupted transmission, reducing the need for frequent human intervention. This makes the system highly suitable for long-term monitoring applications where manual supervision is difficult or impractical. The reliability and consistency observed during testing further strengthen its suitability for continuous operation.


In addition, the system provides a strong foundation for the development of intelligent monitoring solutions by integrating emerging technologies. With further improvements, such as data analytics and predictive algorithms, the system can be used not only for monitoring but also for forecasting environmental changes. This can help in taking proactive decisions in areas like agriculture management, pollution control, and disaster prevention, thereby increasing the overall efficiency and effectiveness of environmental monitoring systems.

REFERENCES

[1] S. Raza, P. Misra, Z. He, and T. Voigt, "Design and applications of LoRa-based communication in IoT networks," IEEE Communications Magazine, vol. 55, no. 9, pp. 80–87, 2017.
[2] A. Augustin, J. Yi, T. Clausen, and W. M. Townsley, "An overview of LoRa technology for long-range low-power wireless systems," Sensors, vol. 16, no. 9, pp. 1–18, 2016.
[3] U. Raza, P. Kulkarni, and M. Sooriyabandara, "Low power wide area networks for IoT: A review," IEEE Communications Surveys & Tutorials, vol. 19, no. 2, pp. 855–873, 2017.
[4] D. Patel and S. Shah, "Wireless sensor-based environmental monitoring system using IoT technologies," International Journal of Engineering Research & Technology, vol. 6, no. 5, pp. 45–49, 2017.
[5] M. Ali, A. Zafar, and S. Ahmed, "Implementation of real-time environmental monitoring using IoT platforms," International Journal of Advanced Computer Science and Applications, vol. 9, no. 3, pp. 72–77, 2018.

[6] K. Mekki, E. Bajic, F. Chaxel, and F. Meyer, "Performance comparison of LPWAN technologies for large-scale IoT applications," ICT Express, vol. 5, no. 1, pp. 1–7, 2019.
[7] P. S. Thakur and R. K. Singh, "IoT-based smart agriculture monitoring system," International Journal of Scientific Research in Computer Science, vol. 8, no. 4, pp. 120–125, 2020.
[8] H. Sharma and A. Kumar, "Air quality monitoring using wireless sensor networks," International Journal of Engineering and Advanced Technology, vol. 9, no. 2, pp. 345–350, 2020.

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

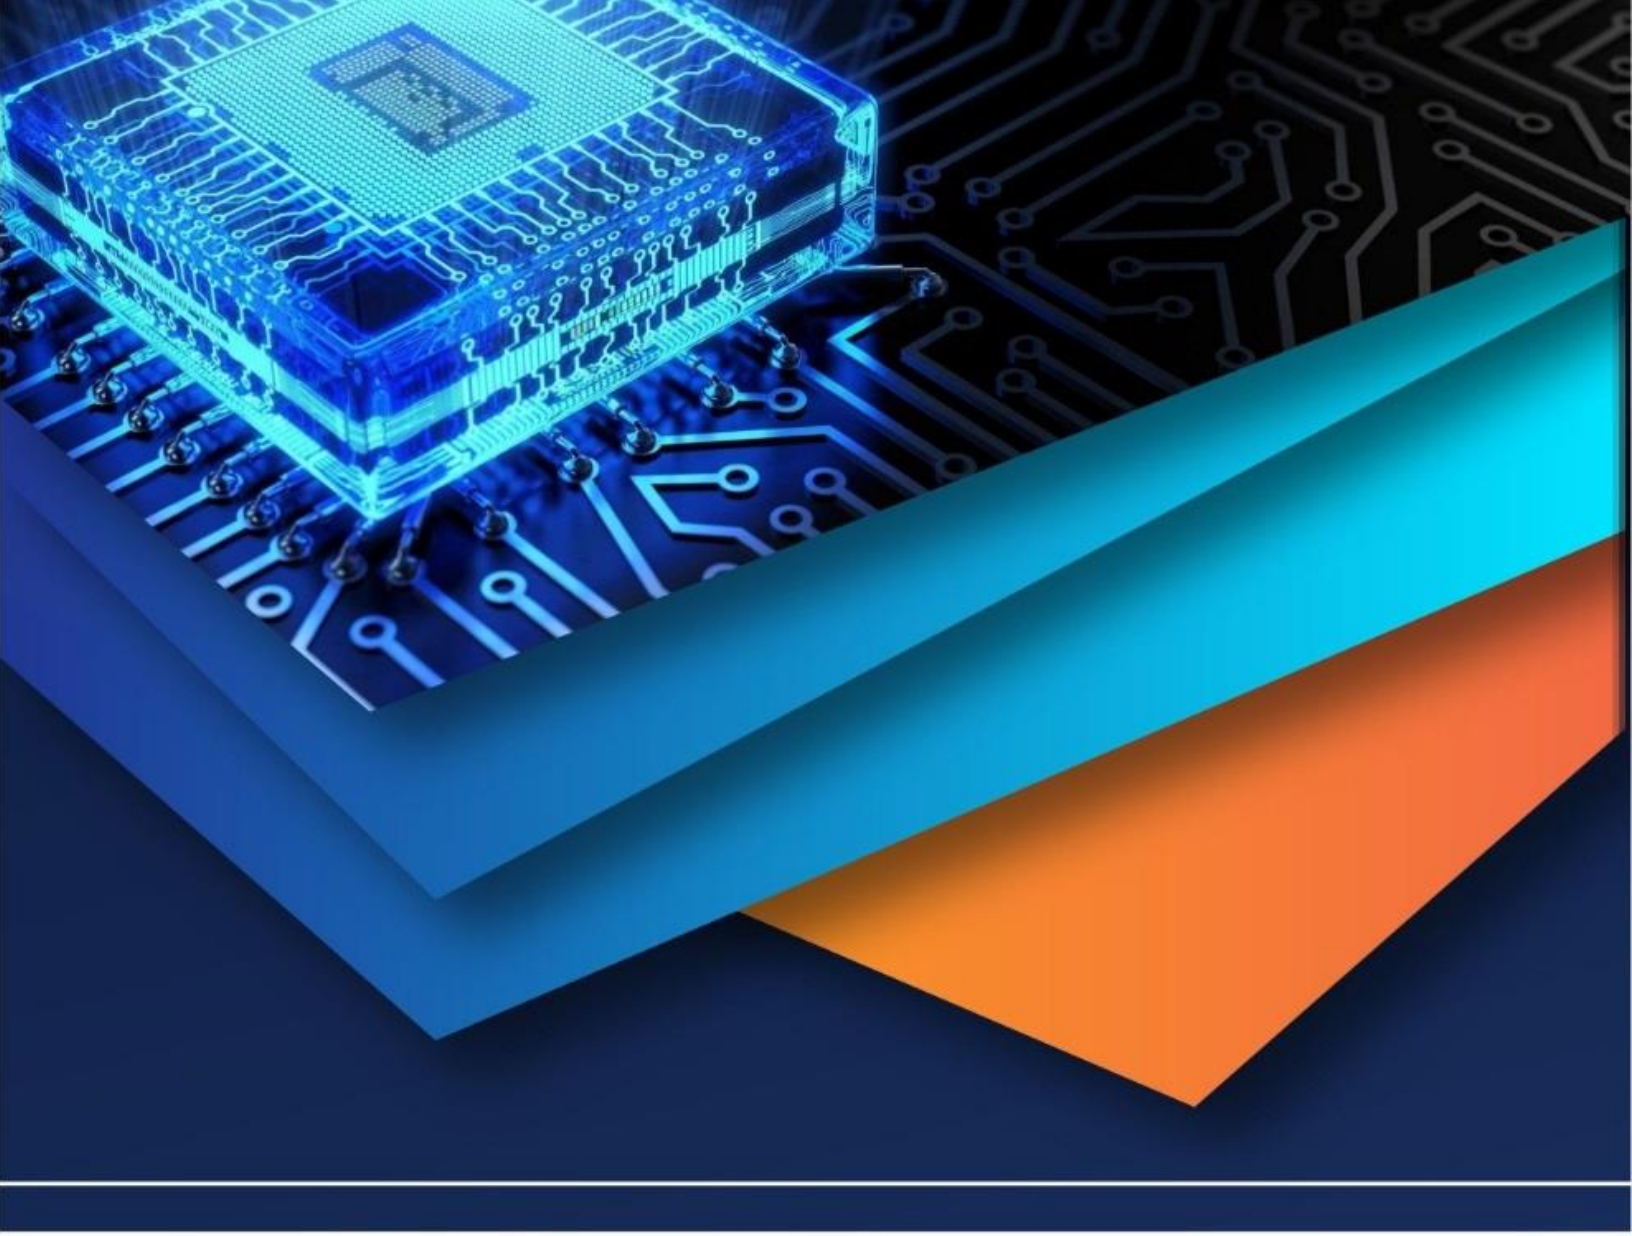

10.22214/IJRASET

45.98

IMPACT FACTOR: 7.129

IMPACT FACTOR: 7.429

INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089 (24*7 Support on Whatsapp)