



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 13 Issue: X Month of publication: October 2025

DOI: https://doi.org/10.22214/ijraset.2025.74513

www.ijraset.com

Call: © 08813907089 E-mail ID: ijraset@gmail.com



ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538

Volume 13 Issue X Oct 2025- Available at www.ijraset.com

Major Ion Chemistry and Quality Assessment of Groundwater in Maiduguri and Jere

Abdulsalam Muhammad¹, Musa Mallam Aji², Dede Lawan Dahiru³, Muhammad M. K⁴, Yakubu Mohammed⁵, Boyoma A. M⁶, Abdullahi Banjaba Lawan⁷

¹Department of Geology, University of Maiduguri, Nigeria

³Department of Oil and Gas Well Engineering, School of Petroleum Engineering, Liaoning petrochemical University, Fushun 113001, China

⁶Department of Environmental Science, Integral University Lucknow, India

Abstract: Hydro-chemical conditions of groundwater in the upper aquifer system around Maiduguri and Jere local government area of Borno state were investigated. The geochemical processes controlling the concentrations and evolutions of the major ions in the aquifer indicates that water rock interaction is the major control. The concentrations of CA, Mg, SO4, and HCO3 are likely resulting from resolution of gypsum (CaSO4. 2H2), dolomite (CaMg(CO3)2), halite (NaCl) and magnesium sulphate (MgSO4) occurring in the aquifer matrix. However, other possible sources such as respiration or oxidation of organic matter and reduction of sulfate are attributed to higher concentration of HCO3 observed in some samples. The relatively higher concentration of Na, and Cl in the groundwater are most likely due to dissolution of halite (NaCl) which are probably occurring in the aquifer matrix. The plot of Na versus Cl was used to understand the overall Salinity in the groundwater, which is identified to be due primarily to the buildup of two major constituents (Na and Cl). Na excess relative to Cl in the samples is probably as a result of ion exchange of Ca or Mg for Na in the water and clay minerals which may probably be present in the aquifer materials. The relative high concentration of magnesium and calcium in the groundwater are most likely due to dissolution of dolomite (CaMg(CO3)2) which could be most likely source of these ions in the groundwater, since the mineral has ions as it's constituent. The relative concentration of calcium and sulphate in the groundwater are most likely due to dissolution of dolomite (CaMg(CO3)2) which could be most likely source of these ions in the groundwater, since the mineral has ions as it's constituent. The relative concentration of calcium and sulphate in the groundwater is most likely due to dissolution of gypsum (CaSO4.2H2) which could be most likely source of these ions in the groundwater. Various classifications of groundwater in the aquifer (Ca-Na-HCO3, Na-Ca-HCO3 and Na-HCO3 are important for regional hydrogeochemical studies. The assessment of water quality for domestic consumption shows that all the samples two or more of the ions above the WHO recommended limit. TDS values were used to understand the suitability of the groundwater for domestic consumption. The groundwater is considered good for consumption.

Keywords: Groundwater chemistry; Hydrogeochemical processes; Water-rock interaction; Maiduguri; Jere; Major ions; Aquifer system; Ion exchange; Mineral dissolution; Water quality assessment; Salinity; TDS; Domestic consumption; Borno State; Nigeria.

I. INTRODUCTION

Water sustains life and its importance for the socio-economic growth can hardly be over-emphasized. Portable and safe drinking water is essential for the health and well-being of the community. Groundwater is the most important source of water supply. During recent years much of the emphasis is given at the considerations of its quality. As a consumptive way of human life, growing, urbanization, industrialization without adequate measures of waste disposal, agricultural activities, etc., the ground water environment is beingpollutedwithanever-increasing number of pollutants.

Withthepassage oftime, the vast subsurface reservoir of freshwater, which a few decades ago was relatively clean, is gradually being degraded.

In Maiduguri, groundwater quality is being seriously polluted due to unplanned disposal of liquid and solid wastes. In the area selected for study, groundwater serves one of the major sources of drinking water. Hence its quality is of great importance as it significantly affect the human health. Concentrationofvariouselementswhenpresentinmorethancertainspecified limits have considerable health hazard.





ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538

Volume 13 Issue X Oct 2025- Available at www.ijraset.com

The recommended limits for concentrations of inorganic constituents in drinking water for human beings have been in use for many years. Acceptable standards vary from country to country.

Present study was undertaken for investigating chemical composition of groundwater, identifying the chemical evolution of groundwater, delineating the processes controlling the groundwater chemistry and assessing the groundwater quality for human uses.


II. AIM AND OBJECTIVES

The study was conducted to determine the element present in the groundwater and their implication on human environment and als of orthedetermination of quality of water consumed by people living within the city. The study is carried out by taking samples of water from shallow boreholes in the study area for laboratory analysis, with the objectives of;

- Toanalyzetheevolutionofthehydro-chemicalparametersin groundwater.
- Todelineatetheprocessescontrollingthegroundwaterchemistry
- Toassessthequalityofgroundwaterfordomesticuse.

III. LOCATION AND ACCESSIBILITY

Maiduguri,theareaofstudyisthecapitalofBornostate,anditsituatedattheNorth- Eastern end of the country. It falls within sheet 90° NE of the Federal Survey of Nigeria. Thecityhaswithinlatitudes 11° 48'Nto 11° 55'Nandlongitudes 13° 04'E to 13° 14'E.

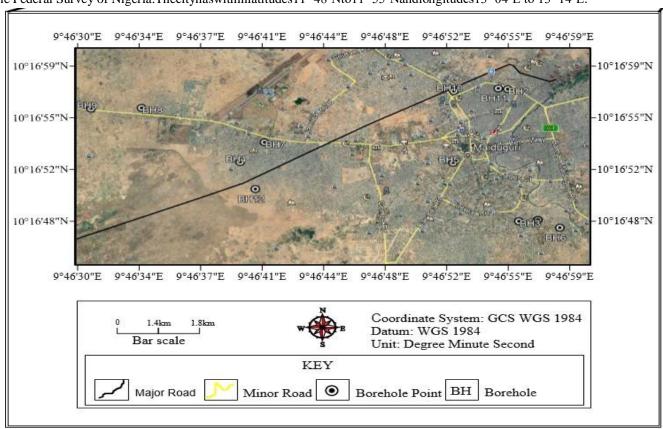

Geologicmapofthestudyarea.

A. Relief and Vegetation

The Maiduguri metropolis is located within the semi-arid region of Nigeria. The surface Geology consists of fine-grained sand, silt and clay. They are neither cemented norlithified. These diments belong to quaternaryage and may have been deposited under transitional environment conditions (Thambyapilley 1982). The vegetation can be described as Sahel Savannah (Thambyapillay G.G.R1988). This simply means that it has a scanty vegetation cover. The trees present are Acasia S.P. Neeme (mostly Xerophytes e.g., desert plants).



ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538

Volume 13 Issue X Oct 2025- Available at www.ijraset.com

B. Geomorphology and Drainage

Maiduguri metropolis is generally flat or plain with slight variation in relief. The Southern part around the airport rises up to 340mabovesea level and appears to be thehighestelevationofthewholeareas. Theselectedareameasures 320mabovesea level. The area is generally float without any remarkable topographical features.

The only major river in the area is River Ngadda passing through Maiduguri metropolis and empties into Lake Chad. The River Ngadda is the major drainage pattern. This runs in a northern direction striking the Bama Bridge passing through Maiduguri North-East towards Lake Chad. RiverNgaddaflowsthroughasedimentary lowland and has a lot of meanders that has been cut byflowing streams, which are then filled by alluvial deposits.


IV. LITERATURE REVIEW

A. THE BORNO BASIN

TheBornoBasinoccupiestheNorth-EasterncornerofNigeriaandislocated within latitude 10° 20-13° 14'N and longitude 9° 40'- 14° 50'E (Fig. 1). The Nigerian sector occupies about 900,000km2 and the Lake Chad is located at its centre. The Chad basin is the largest entra cratonic basin Africa. It is located to the East of the West African craton and lies between two other intracratonic basins, KufratotheNorth-EastandCharitotheSouth.ItextendsintopartsoftheRepublic of Niger, Chad, Cameroon, Nigeria and Central Africa. The Southern boundary of the Chad basin is the Zambuk ridge which separates the basin from the adjacent upper Benue Valley. The Zambuk ridge stretches North East wards from Gombe through Biu (Borno State).

B. GEOLOGY OF CHADBASIN

The Borno basin is a broad sediment refilled depression, initiated by a strong epeirogenic movement during the mid-Mesozoic time when continental sedimentation commenced. The geological history started during the upper cretaceous (Albian) when an over 600m thick of Marine sediments were deposited on the pre-Cambrian basement, known as the pre-Bima formation. Matheisis 1974 in Kogbe (1976) Geology of Nigeria. Reyment (1965) describes the stratigraphy and and the stratigraphyofthedifferent depositional sediment in the Bornobasin. The stratigraphic sequence is shown in the Table below and the litho-stratigraphy is also outlined accordingly.

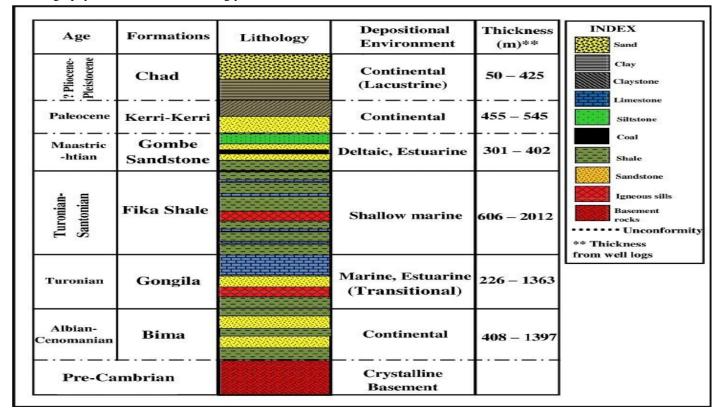

Stratigrapic Sequence

The state of the s

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538 Volume 13 Issue X Oct 2025- Available at www.ijraset.com

C. BIMAS AND STONE

ThelateJurassic-earlyCretaceousperiodismarkedbymainlyfluviatesedimentsas represented by the Bima sandstone. This pre-lift sequence has not been adequately dated due general lack of fossil evidence. It is probably upper Albian to lower Turonian.

TheBimasandstoneoverliesthecrystallineBasementcomplexunconformably. Theformationvaries in thickness and thinsalong the Zambukri dge. These diments range from poorlys orted and thickly be ded felds pathics and stones and conglomerates, to fluviatile and deltic deposits. The thickness is about 3000m.

D. GONGILA FORMATION

This formation is a transitional sequence between the continental Bima sandstones and the Marine Fika shales. The base of the formation is distinguished by the appearance of marine limestone overlying the Bima sandstone alternates with shale and sandshale. The formation is lower Turonian in ageas indicated by the presence of Turonian Ammonites, Regments (1965). Its thickness is about 420 mB arber and Jones (1960).

E. FIKASHALES

These are marine shales of upper Turonian to Senonian in age. The formation thickness towards the Centre of the basin and varies laterally and vertically in thickness from 100m in Potiskum to 50 around Maiduguri. Fika shales overlie the Gongila formation and consist of the blue-black shales, occasionally gypsiferous with thin limestone intercalations. This formation is exposed around Fika town in Yobe State.

F. GOMBE SANDSTONE

The Gombe sandstone is a sequence of estuarine and deltaic sandstone, shales, siltstones and iron stone. It is slightly inclined west wards dipping at less than 10°, but the overlying Kerri-Kerri formation is horizontal. Therefore, there is a distinct angular unconformity. This sandstone unit was deposited as a result of regressive phase. The formation has a thickness of about 320m and its trichian in age.

G. KERRI-KERRI FORMATION

The kerri-kerri formation resets unconformable on the cretaceous sediments. It is a continental sequence composed of quartz, poorly sorted sandstone, sandy clay and silt (Kogbe1976). Ooliticinterites are observed at the base of the Chad formation and this marks the top ofthe Kerri-kerri formation. These dimentation was followed by a period of uplift and erosion (Matheis 1976). The sediments are barren of fossils, its thickness is about 130m and age is Paleocene to Miocene.

H. CHAD FORMATION

Thisistheyoungestlithostratigraphicunit. Itisavariables equence that includes all quaternary sediments underlying the surface deposits. This formation is sequence in which are naceous horizons occur. The Chad formation is thus as equence of lacustrine and fluviatile clays and sands of quaternary/Pleistocene age. The Bama ridge consist part of this formation. It overlies the country North and East part Abakire and extend across the plain of Borno province to Lake Chad and beyond. Barber (1965), it has an average thickness of 500m. The formation varies lithologically both laterally and vertically and the clay units depict deposition under turbulent conditions. The Chad formation is further sub-divided into the following members.

- 1) Uppersandstonemember S1
- 2) Upperclaymember CL1
- 3) Middlesandmember S2
- 4) Lowerclaymember CL2
- 5) LowersandstonememberS3

• Lowersandstonemember(S3)

It is composed of about 85-125m of light brown gravels, medium to coarse sandstone, sandyclayandclays, wellsorted, sub-rounded to sub-angular quartz. The transitions to the underlying formation Kerri-kerri are difficult to define with precision. It may be assumed that the boundary with the Kerri-kerri formation is refined by the presence of ironstone and sandstone.

TOTAL WAS A STANDARD OF THE ST

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538 Volume 13 Issue X Oct 2025- Available at www.ijraset.com

Lowerclaymember(C12)

This clay member is present between the lower sand member (S3) and the middle sand member (S2). It is encountered at depth 245-438m. Besides the unit is composed of clayey sand, with few gravel grains and some fragments of dark grey to blue-grey clay. Some ironstone-stained sand grains are also present, sometimes the clay fragments are varied.

• *Middlesandstonemember (S2)*

Itisencounteredfromdepthof226mandcanbeupto103mthick. This unit consist of alternating beds of sands, sandy-clay and clay. The unit is composed of gravel, medium to coarse sand, yellowish, reddish, well sorted to moderately sorted, sub-rounded to sub-angular quartz. Few clays and silty-clay beds with shale fragments, grains of feldspars, iron ore and mica are probably present with fragments of granites.

• *Theupperclaymember(Cl1)*

This claymemberseparates theuppersand memberfromthe middlesand member. Itisencounteredatdepth of 18mandcomposedofgravellysilt, lightgreywithsome shale fragments. Sand grains with lateritic fragments, dark-grey clay with few carbonaceous plates.

• Theuppersandstonemember (S1)

ThisisthetopmostsandhorizonintheChadformation.Itisencounteredatdepthof 30m-90m and occurs as encountered lenses within the clay and clay silt. The sand of this member varies from fine to very coarse and may contain gravel. They are poorlygradedandfragmentsoffeldsparsarecommonatsomehorizon,butthebulk constituents are quartz. The grains are angular to subangular and may be iron stained.

I. ALLUVIALDEPOSITS

The youngest deposits are the river alluvium, deltaic and lagoonal clay-flats that blankets vast areas. With respect to supply of water, this formation is of great economicimportance. Ithasathickness of over 700 min Maiduguriandzones where the fluvio-lacustrine deposits are complete. Water bearing levels consisting mostly of sands and clayey sands are concentrated in three well defined horizons called AQUIFER.

J. STRUCTURALSTYLES

SeismicreflectiondataintheNigeriansectoroftheChadbasininvolvethebasement and results in horsts, grabens and related features. Movement along basement fault is translated into high angle faults within the overlying sediments. Detached faults whichprobablydevelopedinresponsestobasinaldeformationalsoboundwithinthe basin, such that there is an overall upward increase in fault. Frequently from the basement, there is a notable preponderance of high angel normal fault and paucity of reverse faults. This is indicativeofthedominance oftensional movement within the basin.

In cross sectional view, most of the faults can be seen to terminate beneath the regional angular Tertiary sedimentation. Inplaceview, two majorfaults ystems are recognised with the Nigerian sector of the Chad basin. These systems are: -

- 1) Laterally persistent, northeast-southwest trending faults that is numerically subordinate to the north-east-South tending faults.
- 2) Whereastheformersystems affect both the basement and the overlying sediments, the later system is restricted to the sediments.
- 3) The Northwest- Southeast trending faults in response to changes in the stress system after the santonian deformation.

K. PREVIOUS WORK

TheareaunderstudycomprisesoftheChadformationofBornoBasin. Thegeology of the Borno Basin has been extensively studied by the distinguished scholars (Federal Ministry of Mines and Power) Nigeria. Most of the research works in this formation has been centred on the geology, hydrogeology and hydrology of the Borno basin respectively. Some of the previous works include those of Matheis(1976)tittled"AshortReviewofthegeologyoftheChadBasininNigeria",Kogbe(1076),"GeologyofNigeria"Reyment(1965),"Asp ectsofthegeologyofNigeria"Canned(Nig)Ltd(1976).





ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538 Volume 13 Issue X Oct 2025- Available at www.ijraset.com

"AnnualreportfromboreholedrilledatFika"BarberandJones(1963)"WelllithologicalunitofboreholesdrilledatMaiduguri",andanessay submittedtotheDepartmentofGeologyUniversityofMaiduguri,byBashir(1982) captioned "The Geology of the Chad formation in Nigeria (unpublished).

The Chad formation is subdivided into several stratigraphic units, three which are water bearing (Aquifers). These are the upper, middle and lower sandstones members. The underground waterin the upper sandstones occur the phreaticand confined state, while in the middle and lower sands it is wholly confined. The upper member aquifer appears to be poorly permeable and the artesian aquifer of the middle member is not connected with the phreatic zone. It is paramount to note that it is middle aquifer sediment logical characteristic that forms the work of this volume. For Lithological log of these aquifers see the table below:

Table1:Welllithologiclogoftheupperaquifer

Depth	(m)	- interioristicio gorini cupper aquitor
From	То	Description
111	144	Clay, yellowish-greywithironstainsslightlysandy. Clay, yellowish-grey shale, inter beds
144	240	Clay,yellowish-greyverysandy
240	247	Sand,brown-whitefinetomediumslightlyclayed Sand, brown coarse sub rounded, Feld spathic Sand, brown, coarse sub rounded.
247	299	Sand,brown,mediumtocoarseslightlyclayey.
299	286	Sandbrown, medium to coarsevery clayey and shaley. Clay, yellowish grey, very sandy.
286	294	Clay, yellowish, sandyslightly shaley.
294	309	
309	316	
316	399	
399	349	

V. METHODOLOGY

Groundwater samples were collected from thirty-two (32) boreholes within Maiduguri metropolis and some part of Jere and analyzed to reveal their physical and chemical characteristics. Purposive sampling was employed for obtaining data in the study area. This sampling technique was employed to sample and some specifically targeted boreholesin areas with characteristics such as population densityand proximity to some activities perceived by pollute groundwater. Based on the aim of the study, which is understand the qualityof groundwater especially its physicochemicalasrelates todepth, population density, activities perceived to causegroundwaterpollution and analyzed the evolution of hydro-chemical parameters in groundwater, the samples of the study area (32 locations). Prior to collection of the water sample, the 75ml plastic containers that were used for collecting and storage of samples for physicochemical analysis were washed with de-ionized water, and then three times with the sample water in order to avoid anycontamination. Then, the water samples were collected fromboreholes after 5 to 10 minutes of pumping to ensure the sample were through representatives of the aquifer. Field parameters such as PH, TDS and EC were measured with potable digital HANNA conductivity meters (model HI 98129). The water samples were analyzed for Ca, Mg, Na, K, Mn, Cl, SO4 and HCO3 were analyzed using UV/VIS spectrometer (lamder 35) and Cl, using titrimetric method according to APHA (1998).



ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538 Volume 13 Issue X Oct 2025- Available at www.ijraset.com

A. Samplepreservation

The borehole water samples were preserved immediately after collection with concentrated nitricacid. This was done by adding 10 mlnitricacid to 1 literof water sample. The resultant solutions were kept in a refrigerator for further analysis.

B. DeterminationofmajorionscontentbyAAS

Preparation of calibration curve

Calibration curve were prepared to determine the evolution and concentration of the instrument was calibrated using series of working standard. The working standard solutions of each major ion were prepared for standard solutions of their respective ions and their absorbance were taken using the AAS. Calibration curve for each major ion to be analyzed was prepared by plotting the absorbance as a function of major ion standard concentration.

C. Determinationofmajorioncontentofeachsample

Concentration of the major ions present in the sample was determined by reading their absorbanceusing AAS (Buckscientific model 210 GP) and comparing it on the respective standard calibration curve. The major ion determination by absorption/concentration mode and the instrument readout was recorded for each solution manually. The same procedure was employed for the determination of elements in digested blank (soil only) solutions and for the spiked samples.

D. materials

The equipment's and instruments used in the study were all calibrated to check their status before and in the middle of the experiment. Apparatus such as volumetric flasks, measuring cylinder and digestion flasks were thoroughly washed with detergents and tap water and the rinsed with deionized water. All glass wares were cleaned with 10% concentrated nitric acid (HNO $_3$) in order to clear out any major ion on their surfaces and then rinsed with distilled-deionized water. The digestion tubed were soaked with 1% (w/v) potassium dichromatein 98% (v/v) H $_2$ SO $_4$ and volumetric flask in 10% (v/v) HNO $_3$ for 24 hours followed by rinsing with deionized water and then dried in oven and kept in dust free place until analysis began. Prior to each use, the apparatus was soaked and rinsed in deionized water.

E. ReagentsandChemicals

Reagents and chemicals used for the laboratory works were all analytical grade: deionizedwater(chemicallypurewithconductivity 1.5μ s/cmandbelowwas prepared in the laboratory) was used for dilution of samples and intermediate metal standard solutions prior to analysis and rinsing glassware and bottles.

F. softwareused

Microsoftexcelwasusedfortheplottinganddistribution of the various elements in the study areas.

VI. RESULTS AND DISCUSSION

A. FIELD RESULTS

AtotalnumberofThirty-two(32)sampleswerecollectedatdifferentlocationsfrom water bearing formation on various boreholes.

SampleDescriptionandlocationofthesamples (table 2):

	Sumpres esemptismum	aro camo morane sampre	s (tale10 =).	
LOCATION	SAMPLE	LATITUDE	LONGITUDE	ELEVATION
NAME	NO			
MAIRI	SP1	11°49'17"	13 ⁰ 11 45"	320M
	SP2	11 ⁰ 49 ['] 18"	11'41"13 ⁰	320M
	SP3	11 ⁰ 49 ['] 24 ["]	13 ⁰ 11'42"	320M
	SP4	11 ⁰ 48'47"	13 ⁰ 11 18"	320M
	SP5	11 ⁰ 49 ['] 15 ["]	13 ⁰ 11'21"	320M



ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538 Volume 13 Issue X Oct 2025- Available at www.ijraset.com

KALEDI				
KALERI (TORA BORA)	SP1	11°49 ['] 52 ["]	13 ⁰ 11 ['] 37 ["]	320M
	SP2	11 ⁰ 49 ['] 53 ["]	13 ⁰ 11 ['] 48 ["]	320M
	SP3	11°49′54″	13 ⁰ 11 ['] 56 ["]	320M
LONDON CIKI	SP1	11°50′21″	13 ⁰ 11 ['] 12 ["]	320M
	SP2	11 ⁰ 50 ['] 27 ["]	13 ⁰ 11 ['] 13 ^{''}	320M
	SP3	11050'33"	13 ⁰ 11'07"	320M
COSTOM	SP1	11 ⁰ 51'21"	13 ⁰ 10'05"	320M
	SP2	11 ⁰ 51'25"	13°10'8"	320M
GWANGE	SP1	11°49'43"	13 ⁰ 10'35"	320M
	SP2	11 ⁰ 49'55"	13°10'34"	320M
	SP3	11 ⁰ 49'52"	13 ⁰ 10'30"	320M
	SP4	11°49'42"	13 ⁰ 10'15"	320M
	SP5	11°49'43"	13 ⁰ 10'11"	320M
	SP6	11 ⁰ 49'54"	13 ⁰ 10'10"	320M
	SP7	11 ⁰ 49'44"	13°10'07"	320M
	SP8	11°49′55"	13°10'06"	320M
	SP9	110 49' 45"	130 09' 58"	330M
	SP10	110 49' 37"	130 10' 19"	320M
BOLORI	SP1	110 51' 26"	130 08' 04"	320M
	SP2	110 51' 25"	130 07' 57"	320M
	SP3	110 51' 20"	130 07' 51"	320M
	SP4	110 51' 38"	130 07' 37"	330M
	SP5	110 51' 30"	130 07' 46"	320M
	SP6	110 51' 25"	130 26' 40"	320M
	SP7	110 51' 24"	130 07' 47"	320M
	SP8	110 51' 16"	130 07' 41"	320M
	SP9	110 51' 24"	130 08' 02"	320M
i	1		i	I

B. LABORATORY RESULTS

AtotalnumberofThirty-two(32)sampleswereanalyzedfordifferentlocations from water bearing formation on various boreholes.

		Table3:phy	s10-chem1calan	alyseso	otground	iwaters	amples	saround	Maid	ugurianc	iJere(n	1g/1)		
S/	Sample	Latitude	Longitude	pН	TDS	EC	Na	Ca	K	Mg	Mn	Cl	SO4	HCO3
N	ID													
1	MR 1	110°49'17"	130°11'45"	7.1	107	290	24	79	17	171.	0.0	40.0	11	129.98
										0				
2	MR 2	110°49'18"	130°11'41"	7.3	90	240	28	48	17	2.25	0.1	26.0	12	207.4
3	MR 3	110°49'24"	130°11'42"	6.8	57	180	9	71	13	2.59	0.1	38.0	10	116.25
4	MR 4	110°48'47"	130°11'18"	6.8	66	200	14	64	14	1.71	0.0	30.0	8	123.43
5	MR 5	110°49'15"	130°11'21"	6.8	113	330	19	110	17	2.03	0.0	46.0	11	109.84
6	KLR 1	110°49'52"	130°11'37"	7.5	202	220	24	45	20	2.53	0.1	28.0	110	179.12
7	KLR 2	110°49'53"	130°11'48"	7.3	225	700	41	180	32	157.	0.0	60.0	8	168.09



ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538

Volume 13 Issue X Oct 2025- Available at www.ijraset.com

										0				
8	KLR 3	110°49'54"	130°11'56"	7.2	97	280	22	67	16	1.99	0.1	34.0	10	141.54
9	LDC 1	110°50'21"	130°11'12"	7.6	657	240	17	57	23	1.58	0.0	40.0	11	165.93
10	LDC 2	110°50'27"	130°11'13"	6.8	672	910	24	280	30	1.53	0.0	114.	13	152.87
												0		
11	LDC 3	110°50'33"	130°11'07"	6.7	1453	293	56	540	49	0.33	5.5	37.2	14	188.82
						0								
12	CTM 1	110°51'21"	130°10'05"	7.4	97	231	28	42	11	2.8	0.1	30.0	6	158.87
13	CTM 2	110°51'25"	130°10'08"	7.8	86	324	14	99	14	1.87	0.1	18.0	8	511.43
14	GWG 1	110°49'43"	130°10'35"	7.5	163	420	48	110	33	1.7	0.0	50.0	10	138.87
15	GWG 2	110°49'55"	130°10'34"	7.3	352	760	70	140	44	1.3	0.1	84.0	12	222.87
16	GWG 3	110°49'52"	130°10'30"	7.1	169	360	42	57	22	1.42	0.0	42.0	30	154.65
17	GWG 4	110°49'42"	130°10'15"	7.2	143	390	31	95	20	1.12	0.1	54.0	15	190.49
18	GWG 5	110°49'43"	130°10'11"	1.2	412	890	66	170	27	0.88	9.5	45.0	11	190.67
19	GWG 6	110°49'54"	130°10'10"	7.3	967	304	25	270	14	0.69	0.1	102.	9	183.91
												0		
20	GWG 7	110°49'44"	130°10'07"	7.1	675	280	44	23	16	2.19	0.0	38.0	12	161.39
21	GWG 8	110°49'55"	130°10'06"	7.1	342	400	60	30	23	2.5	0.1	48.0	8	173.83
22	GWG 9	110°49'45"	130°09'58"	7.8	765	910	62	95	16	1.33	0.1	80.0	7	354.67
23	GWG	110°49'37"	130°10'19"	7.6	657	240	17	57	23	1.58	0.0	40.0	11	165.93
	10													
24	BLR 1	110°51'26"	130°08'04"	7.8	69	190	28	23	17	2.78	0.1	22.0	5	243.45
25	BLR 2	110°51'25"	130°07'57"	7.2	79	220	29	39	15	2.52	0.1	32.0	7	185.74
26	BLR 3	110°51'20"	130°07'51"	7.4	98	220	28	42	11	2.8	0.1	30.0	6	158.87
27	BLR 4	110°51'38"	130°07'37"	7.8	76	260	13	100	12	1.87	0.1	18.0	8	511.43
28	BLR 5	110°51'30"	130°07'46"	7.5	211	240	16	86	12	1.93	0.0	30.0	7	180.56
29	BLR 6	110°51'25"	130°26'40"	7.3	243	220	12	97	12	1.45	0.1	28.0	8	211.56
30	BLR 7	110°51'24"	130°07'47"	7.8	322	190	28	23	17	2.78	0.1	22.0	5	243.45
31	BLR 8	110°51'16"	130°07'41"	7.2	417	210	22	37	18	1.82	0.1	22.0	11	209.78
32	BLR 9	110°51'24"	130°08'02"	7.5	94	250	24	50	21	2.95	0.1	26.0	10	211.46

Thetableabove, shows the results of the chemical analyses of the groundwater in the studyarea. The results show that the PH value of the water sample ranges from 1.2 to 7.8mg/l, TDS ranges from 57 to 1453mg/l, and EC ranges from 180 to 2930mg/l. these parameters fall within the optimum required range.

The major ions analyzed in the samples includes sodium (Na), potassium (K), calcium ((Ca), magnesium (mg), manganese (Mn), chloride (cl), sulphate (SO4), bicarbonate (HCO3). The concentrations of each of the major ions have ranges. Sodium ranges from 9 to 70mg/l, calcium ranges from 23 to 540mg/l, potassium ranges from11 to 49mg/l, manganese ranges from0 to 9.5mg/l, magnesiumranges from 0.33 chloride from18 114mg/l, to171mg/l, ranges to sulfate ranges from5 110mg/landbicarbonaterangesfrom109.84to511.43mg/l.almostalltheionsfall within the required range.


C. EVOLUTIONANDCHARACTERISTICSOFTHEHYDROCHEMICAL PARAMETERS.


The compositions of groundwater are controlled by the chemistry of the medium through which it passes the composition of groundwater furtherawaychangesduetorushingbyrepeatedinfiltrationevents(freezeandcherry, 1979)andwaterrockinteraction(Edmundsetal., 1982).T herefore, it's important to note that the discussion will be insuch a way that the behavior of each ion will be traced as it travels along the flow paths and suggestions will also be given as to the geochemical processes controlling such behavior.

1) Sodiumversus chloride

Sodium(Na)andchloride(Cl)concentrationsshowvaluesrangingfrom9to70mg/l and 18 to 114mg/l respectivelyin samples collected in (Table3). The plot of Na vs Clconcurrent increase and decrease concentration and along flow paths (figure below). The relationship between sodium and chloride is suggesting common source and most likely due to dissolution of the (NaCl).

ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538 Volume 13 Issue X Oct 2025- Available at www.ijraset.com

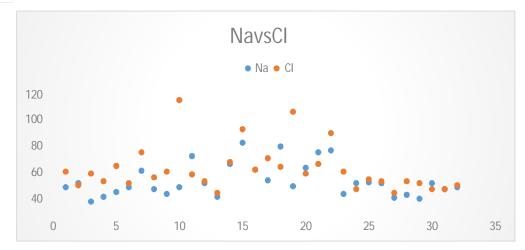

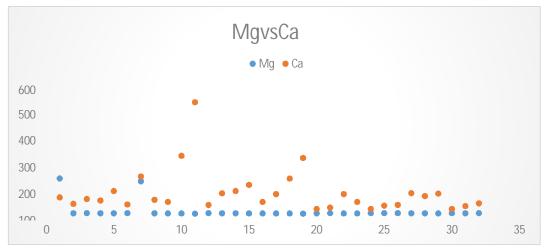


2) Magnesiumver Suscalcium


Magnesium (Mg) and calcium (Ca) concentrations show values ranging from 0.33 to 171mg/l and 23 to 540mg/l respectively in samples collected in (Table 3). The plot of Mg vs Ca has concurrent linear increment and linear increase and decrease with littlescatterpoints for calcium along flow paths (fig. 4). The possible source of these ions in groundwater could be explained by the dissolution of dolomite CaMg(CO3)2). The plot of Mg and Ca (fig. above) show a progressive increase with each other. The linear relationship observed suggesting common evolution for Mg and Ca ions. Therefore, the dissolution of dolomite could be most likely source of these ions in the groundwater, since the mineral has the ions as its constituents.

3) Calcium (Ca) and sulfate (SO₄)

Calcium (Ca) and sulfate (SO_4) concentrations show values ranging from 23 to 540mg/land5to110mg/l respectivelyinsamplescollectedin(Table3). The plot of Ca vs SO_4 has a linear increment and concurrent linear increase and decrease with little scatter points for sulfate along flow paths. This shows some evolution characteristics between them (fig. below). The possible source of these ions in groundwater could be explained by the dissolution of gypsum $CaSO_4.2H_2O$.




ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538 Volume 13 Issue X Oct 2025- Available at www.ijraset.com

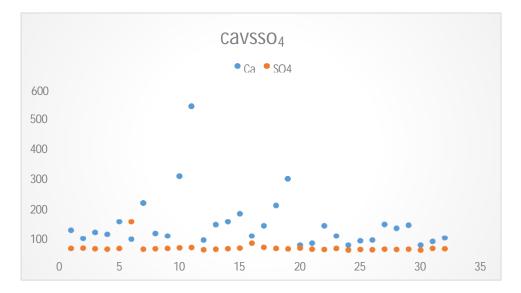


4) Totaldissolvedsolid(TDS).

concentrations Total dissolved show values from 57 1453mg/l solid ranging to in samplescollectedin(Table3). TheplotofTDS has a concurrent linear increase and decrease with little scatter points along flow paths. The variability in the TDS observed in the plot could be explained relative to the area of recharge and discharge. The high TDS value observed in the plot of presumed discharge zone could be due to water rock interaction and increase residence time, whereas, the lower values of the plot could probably be explained by the fact that the water is in initial stage of flow and might not have enough time to dissolve the mineral occurring along the flow path.

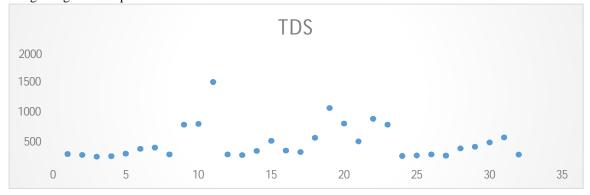

5) magnesiumversus sulfate.

Magnesium (mg) and sulfate (SO₄) concentrations show values ranging from 0.33 to 171 mg/land 5 to 110 mg/lrespectively in samples collected in (Table 3). The plot of Mg vs SO₄ concurrent linear increase in concentration along flow paths (fig. below). The relationship between magnesium and sulfate is suggesting common source and most likely obtained from sea water.

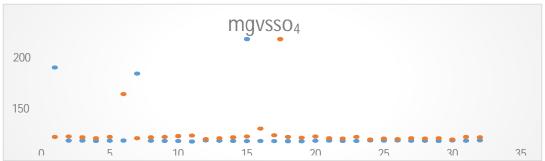



ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538 Volume 13 Issue X Oct 2025- Available at www.ijraset.com

D. QUALITYOFGROUNDWATERFORDOMESTIC USE

In this study, the quality of the quality analysis of borehole water from various locations in Maiduguri metropolitan and some part of jere was investigated to determine the condition of groundwater in the council following recent reflux of people with resulting increase in human activities.

WHODrinkingWaterStandardTable:

Parameters	units	WHOStandards
PH	-	6.5-8.5
EC	95μs/cm	400
TDS	mg/l	500-1000
Na	mg/l	200
K	mg/l	20
Ca	mg/l	100
Mg	mg/l	50
Mn	mg/l	0.1-0.5
Cl	mg/l	250
S0 ₄	mg/l	250
HCO3	mg/l	125-350

The result shows that the PH values of groundwater in all the locations ranges between 1.2 to 7.8 mg/l whichwas within worldhealthorganization (WHO) standard for drinking water. Electrical conductivity (EC) of the sample ranges from 180 to 2930 mg/l95 µs/cm and was within the world health organization (WHO) standard for drinking water, while the total dissolved solid (TDS) was ranged from 57 to 1453 mg/l and where all within the stipulated limit. The major ions analyzed in the samples includes sodium (Na), potassium (K), calcium ((Ca), magnesium (mg), manganese (Mn), chloride (cl), sulphate (SO4), bicarbonate (HCO3). The concentrations of each of the major ions have ranges. Sodium ranges from 9 to 70 mg/l, calcium ranges from 23 to 540 mg/l, potassium ranges from 11 to 49 mg/l, manganese ranges from 0 to 9.5 mg/l, magnesium ranges from 0.33 to 171 mg/l, chloride ranges from 18 to 114 mg/l, sulfate ranges from 5 to 110 mg/l and bicarbonate ranges from 109.84 to 511.43 mg/l. almost all the ions fall within the required range.

VII.SUMMARY AND CONCLUSION

The study area is of Borno state. The geology of the area is sedimentary, the study was conducted to determine the element present in the groundwater and their implication on human environmentand also for the determination of quality of water consumed by people living within the city.

The physical and chemical analyses carried out on the water samples where to determine the PH, total dissolved solid (TDS), electrical conductivity (EC), calcium, magnesium, potassium, sodium, sulphate, bicarbonate, manganese, chloride. The result of the physical and chemical quality of the groundwater from the study area were obtained. The data obtained from the chemical analysis were presented in form of scatter (X, Y) or bubble chart to show relationship between two different parameters.

Theanalysisoftheresultshowsthatthedissolutionofhalite,dolomite,gypsumandcalcitethatmayoccurwithintheaquifermatrixcouldberesponsiblefortherelease of some of the majorion observed. The relatively high concentration of some major ions in some samples could be attributed to ion-exchange processes.

VIII. RECOMMENDATION

The issue of supplying safe and reliable water is very serious issue because no development can be achieved without its provision. As such, it is important to note that each individual has a role to play most especially in the affected areas by not disposing water pollutants that are capable of infiltrating down to the groundwater level with resultant pollution.

Care has to be taken in unplanned digging of pits (latrines) and dumping of refuse or waste near boreholes and other water sources. All these inject toxic chemicals into the water source.



ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538 Volume 13 Issue X Oct 2025- Available at www.ijraset.com

REFERENCES

- [1] Amaral, E.J. and Pryor, W.A., (1977). Depositional environment of St. Peters sandstone deduced by textural Jour Sed. Pet. Vol. 47, pp. 32-52.
- [2] Avbovbo, A.A.E.O., Ayoolaand G.AOsahon (1986). Depositional and structural styles in Chad basin of North-eastern Nigeria. AAPG Bull. Vol. 70, pp. 787-1798.
- [3] Bakari, A. 2014. Hydrochemical assessment of groundwater quality in chad basin around Maiduguri, Nigeria. J. geology and mining resources. 6(1): 1-12.
- [4] Barber, WD., and D.G Jones., (1960). The Geology and Hydrology of Maiduguri, Borno Province Rec. of Geology Survey of Nig. 1965 pp. 5-20
- [5] Carter, J.D. Barber, WD., and Tait, E.A., (1963). The geology of parts of Adamawa, Bauchi and Borno province in North-eastern Nigeria. Bull of Geology survey of Nig. No. 30 ppl2010
- [6] Collingson, J.D. and Thompson, D.B., (1982). Sedimentary structures, London.
- [7] GeorgeAllenandUnwin.194p.
- [8] EdmundsW.M.,BathA.H.andMilesD.L.,1982;Hydrochemicalevolutionofthe East Midland Triassic Sandstone aquifer, England. Geochem. Cosmochem. Acta (46) pp2069-2082.
- [9] FreezeR.A.andCherryJ.A.,1979;Groundwater.Prentice-Hall,Inc.EnglandNew Jersey.
- [10] Friedman,GM.,(1961).Distinctionbetweendune,beachandriversandsfromtheir textural characteristics. Journal of Sedimentary Petrology, 30: 514-529.
- [11] Freidman,GM.,(1967).Dynamicprocessesandstatistical parameters compared for size frequency distribution of beach and river sands. Journal of Sedimentary Petrology, 37: 327-354.
- [12] Folk, R.L. and Ward W.C., (1957). Brazos River Bar. A study of significance of Grain-size Parameters. Jour. Sed. Pet. Vol. 27, pp. 3-26.
- [13] Folk, R.L., (1974). Petrology of sedimentary rocks Hemphills Book store, Austin, Texas 159p.
- [14] Jimme, MA, Bukar, WM., and Monguno, AK. 2016. Contamination level of domesticwaterinMaidugurimetropolisbornostateNigerian. Ethopianjounal of environmental studies and management, 9(6): 760-768.
- [15] Kogbe, C.A., (1976). Palaeogeographic History of Nigeria from Albian time. In geologyof Nigeria (ED) bykogbe C.A (1976). Elizabeth publ.Co. Lagos, pp. 237-257.
- [16] Kolo, B., Dibal, JM., and Ndakawa, II. 2009. Elemental Analysis of Tab and BoreholeWatersinMaiduguri,Semi-AridRegion,Nigeria,EuropeanJounal of Applied Sciences, 1(2): 26-29.
- [17] Krumbein, W.E. and Sloss, L.L., (1956). Stratigraphy and sedimentation W. H. Freeman and Co. San Francisco 497p.
- [18] Petijohn, F.J., Potter, P.E., and Siever, R., (1972). Sand and sandstones, springer verlag, New-York 618p.
- [19] Powers, M.A., (1953). A new roundness scale for sedimentary particles, jor.sed.petro Vol.23, pp. 117-119.
- [20] Reyement, R.A., (1964). Areview of Nigerian cretaceous cenezoic stratigraphy.
- [21] Jour.min.geolandmetall.soc.Vol.pp.61-80.
- [22] Siller, R.C., (1978). Ancient sedimentary environment, 2nd edition. Chapman and Hall. London 287p.
- [23] Short, K.C., and Stauble, A.J., (1967). Outline of Geology of Niger Delta Bull.
- [24] American Association of petroleum geologist. Vol. 51, pp. 761-779.
- [25] Todd,T.W.,(1968).PaleoclimatologyandtherelativestabilityofFeldsparminerals under atmospheric conditions, jour.sed.petrol Vol.38, pp. 832-844.
- [26] Visher, G.B., (1969). Grain size distribution and depostional processes. jour.sed.petrol Vol.39, pp. 832-844.
- [27] WHO. 2007. Chemical Safety of Drinking Water: Assessing Priorities for Risk Management. World Health Organisation Geneva, Switzerland, http://apps.who.int/iris/bitstream/10665/254637/1/9789241549950.eng.
- [28] WHO. 2015. Progress on Sanitation and Drinking Water: 2015 Update and MDG Assessment Geneva, Switzerland: world health organization. http://www.who.int/water_sanitation_health/diseases.





10.22214/IJRASET



45.98



IMPACT FACTOR: 7.129



IMPACT FACTOR: 7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call: 08813907089 🕓 (24*7 Support on Whatsapp)