



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 10 Issue: IV Month of publication: April 2022

DOI: https://doi.org/10.22214/ijraset.2022.41905

www.ijraset.com

Call: © 08813907089 E-mail ID: ijraset@gmail.com

ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538

Volume 10 Issue IV Apr 2022- Available at www.ijraset.com

Matlab Simulation for Power Factor Correction

Vishwanath Chalawadi¹, Sanjeeth P. Amminabhavi²

¹Student, Electrical and Electronics Department SDMCET, Dharwada, India

²Assistant Prof., Electrical and Electronics Department SDMCET Dharwad, India

Abstract: Lower in Power Factor of electrical equipments will draws high current from supply power. The effect of this is affected by impedance of electrical equipment. Therefore, the main consideration of this study is how impedance of electrical equipment affects the power factor of electrical loads, and then distributed power as the whole. This study is important to verify the right action to increase low power factor effectively for electrical energy efficiency concern.

I. INTRODUCTION

Power factor (PF) is the ratio of Real power, measured in kilowatts (kW), to apparent power, measured in kilovolt amperes (kVA) or also known as demand. It will get by multiplying [kVA=V*A]. The result will be in kVA units.

A. Power factor basics

Power quality will efficient for equipment operation, it is one of the advantage of power factor. Power factor will gives the detail about how efficiently input power is used in an electrical installation. It is the ratio of Real power to apparent power,

When,

Active Power (P) = the power required for useful work, SI unit is Watt or KiloWatt (kW).

Reactive Power (Q) = It is the stored energy effected to the source, SI unit is var or Kilovar (kVAR)

Apparent Power (S) = the vector sum of active and reactive power, SI unit is Volt Amperes or in KiloVolt Amperes (kVA)

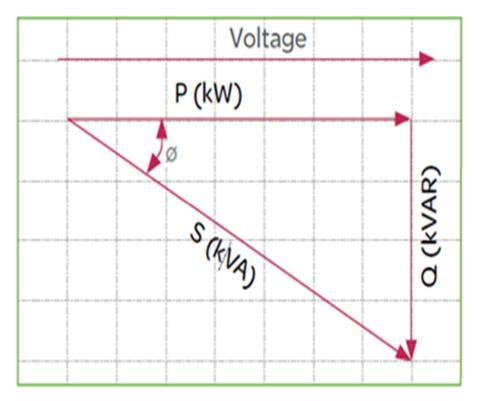


Fig.1.The power triangle


ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538

Volume 10 Issue IV Apr 2022- Available at www.ijraset.com

B. Correction of Power Factor

The main aim of Power factor correction (PFC) is to improve power factor, and also reduces the load acts on the distribution system, increases energy efficiency and reduces costs of electricity. It also decreases the instability and failure of system components.

Power factor correction is nothing but connecting the capacitors which produce reactive. Electrical Energy in opposition to the Electrical Energy absorbed by loads like motors, nearly close to the load. It improves the power factor where the reactive power source is connected.

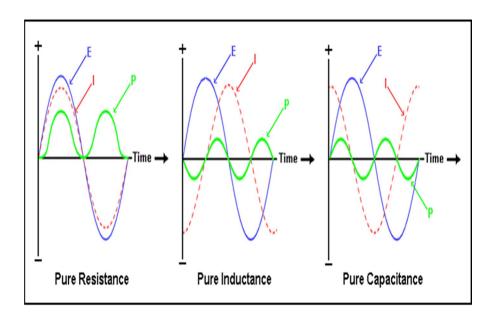

1) Example Problem For Power Factor Correction

(Question)A three phase static load takes real power of 10kWand reactive power of 5kVAR from a three phase two winding transformer (11/0.415kV,25MVA). The HV side of transformer connected to 11kV ,50Hz three phase supply .[1].Calculated power factor of the load? [2].Calculate the capacitor bank (capacitive VAR) required to maintain the power factor of 0.95 at load side?

2) Solution

Power Factor =
$$\frac{\text{Real Power (P)}}{\text{Apparent power (S)}} = \frac{P}{\sqrt{P^2 + Q^2}}$$

Power Factor =
$$\frac{10}{\sqrt{10^2 + 5^2}} = 0.8944$$

3) Capacitor bank required to maintain 0.95p.f

Q rating of capacitor bank at load sisde =

P tan(actual pf angle–required pf angle)

=10*tan(Acos(0.8944) - cos(0.95))

 $=10*\tan(26.5685 - 18.1949)$

Q rating of capacitor bank at load side =1.472 kVAR.

Q rating of capacitor bank at load side =1.472 kVAR.

C. System Parameters

1) Three phase source:11kV,50Hz

2) Transformer :11kV /0.415kV ,25MVA

3) Load details 10KW,5 kVAR

4) Line length:10m

ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538

Volume 10 Issue IV Apr 2022- Available at www.ijraset.com

II. MATLAB SIMULATION MODEL

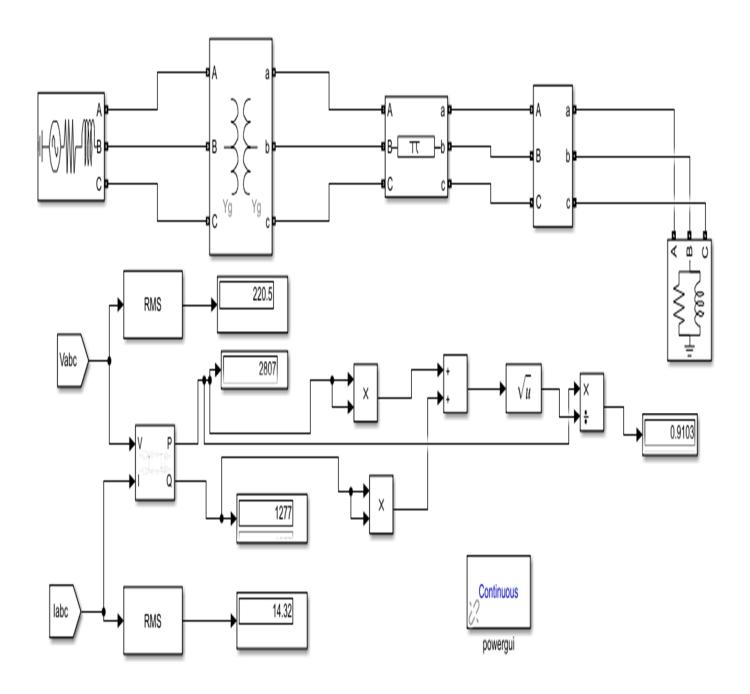


Fig.2.Simulation model without capacitor bank

The above figure shows the practical MATLAB simulation of the model. It contains generation system and output of the generator is connected to the 11kV/415v, 25MVA and the secondary of the transformer is transmitted through the transmission line and the output supply is connected the R-L load of 10kw,5 kvar which drawing the power factor the 0.8944 to improve the power factor of the system the calculation the capacitor bank should be required. In the above system there is no capacitor bank in between load and transmission line

ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538 Volume 10 Issue IV Apr 2022- Available at www.ijraset.com


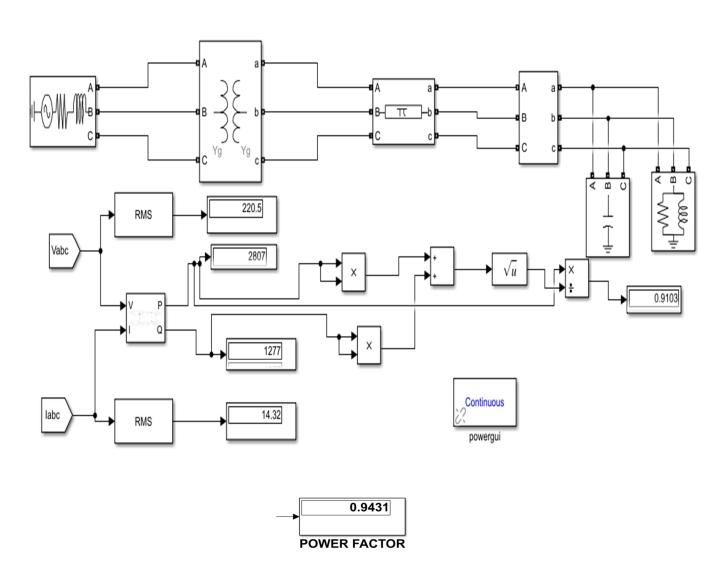


Fig.3.Simulation model with capacitor bank

After calculating the capacitor value it will be inserted in between the line and load the power factor of the system will improved to 0.9pf. The below figures of wave forms will gives the values of terminal voltage and current.



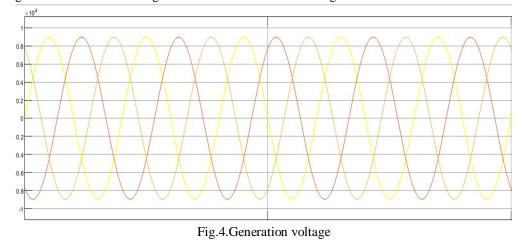

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538 Volume 10 Issue IV Apr 2022- Available at www.ijraset.com

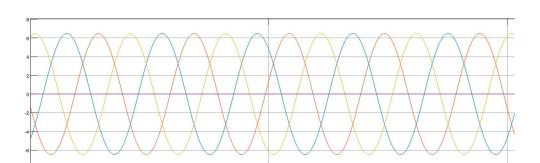


Fig.4.Input current

III. CONCLUSION

In this paper author will discussed about the basic introduction about the power factor and also short description about the power factor correction. For the power factor correction author will taking the real time problem as a problem statement and also calculated the theoretical calculation as well as simulated the practical model in the mat lab simulation and the values of capacitor bank(kVar) will be verified and observed the with capacitor and without capacitor condition of the power factor.

REFERENCES

- [1] Osama A. Al-Naseem and Ahmad Kh. Adi, Impact of Power Factor Correction on the Electrical Distribution Networkof Kuwait –A Case Study, OJPEE Volume (2), Number (1), Reference Number: W10-0030, Page 173-176, January 2011
- [2] Gagari Deb, Partha Sarathi Saha and Prasenjit Das, A Method of Finding Capacitor Value for Power Factor Improvement, International Journal of Electrical Engineering, ISSN 0974-2158 Volume 4, Number 8 (2011), pp. 913-922, © International Research Publication House, 2011
- [3] B. Sharifipour, J. S. Huang, P. Liao, L. Huber, and M. M. Jovanovic, Manufacturing and Cost Analysis of Power-Factor-Correction Circuit, IEEE Applied Power Electronics Conf. (APEC) Proc., Anaheim, CA, Feb. 15-19, 1998, pp. 490-494, 1998









45.98



IMPACT FACTOR: 7.129



IMPACT FACTOR: 7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call: 08813907089 🕓 (24*7 Support on Whatsapp)