iJRASET
International Journal For Research in Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 14 **Issue:** III **Month of publication:** March 2026

DOI: https://doi.org/10.22214/ijraset.2026.77725

www.ijraset.com

Call: 08813907089 | E-mail ID: ijraset@gmail.com

International Journal for Research in Applied Science & Engineering Technology (IJRASET)
ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538
Volume 14 Issue III Mar 2026- Available at www.ijraset.com

Motorcycle Blind Spot Detection System

Akanksha Atul Waykar[1], Durgude Shravani Dilip[2], Uchale Yogita Babaji[3], Lamkhade Jyoti Goraksh[4]
Department of Computer Engineering, Samarth Polytechnic, Pune India

Abstract: ***Road accidents involving motorcycles are increasing rapidly due to limited rear visibility and blind spot areas. Riders often fail to notice nearby vehicles, leading to collisions. This paper presents a Motorcycle Blind Spot Detection System using ultrasonic sensors to enhance rider safety. The proposed system detects vehicles entering blind spot regions and alerts the rider through visual and audio indicators. The system is designed to be cost-effective, reliable, and easy to integrate with motorcycles. Experimental results demonstrate that the system accurately detects obstacles within a defined range, reducing the chances of accidents. This solution contributes to safer riding conditions by improving situational awareness.***
Keywords: Blind Spot Detection, Ultrasonic Sensors, Motorcycle Safety, Accident Prevention, Embedded System

I. INTRODUCTION

Motorcycles are widely used due to their affordability and convenience. However, they are more vulnerable to accidents compared to other vehicles. One major cause of accidents is the blind spot area where riders cannot detect nearby vehicles. Traditional mirrors provide limited coverage, making blind spot detection crucial. This paper proposes a smart detection system that assists riders by identifying vehicles approaching from hidden zones.

Embedded Systems and the Internet of Things (IoT) have revolutionized the way intelligent devices interact with the physical world by enabling real-time sensing, processing, and response mechanisms. In the context of intelligent transportation systems, embedded and IoT technologies play a vital role in enhancing vehicle safety, situational awareness, and automation. These systems allow seamless integration of sensors, microcontrollers, and actuators to monitor environmental conditions and provide timely feedback, contributing significantly to applications such as collision avoidance, proximity detection, and blind spot monitoring.

The rising number of road accidents—many caused by vehicles entering a driver's or rider's blind spot—has amplified the need for affordable and efficient safety systems. While modern cars are equipped with advanced driver-assistance systems (ADAS), two-wheeled vehicles such as motorcycles often lack such features due to design complexity and cost limitations. Utilizing embedded systems combined with IoT sensors offers a promising solution to enhance motorcycle rider safety and reduce blind spot-related incidents This project focuses on a motorcycle blind spot detection system that uses ultrasonic and radar sensors (RCWL-0516) to detect nearby vehicles and obstacles in the rider's blind spots. An Arduino UNO microcontroller processes the sensor data in real time, and LED indicators are used to visually alert the rider of any potential danger. Although this implementation does not use internet connectivity, the foundational principles of IoT—inter-device communication, context awareness, and real-time decision-making—are reflected in the system design. The integration of multiple sensors for data acquisition and microcontroller-based processing highlights key aspects of embedded and IoT design, such as sensor fusion, low-power operation, and real-time responsiveness. While this version of the project is designed for standalone operation, it paves the way for future enhancements such as Bluetooth or Wi-Fi-based mobile notifications, cloud-based data logging, or integration with wearable devices for extended awareness. In conclusion, Embedded Systems and IoT technologies are critical enablers of intelligent vehicle safety solutions. This project showcases their effectiveness in creating a cost-efficient, real-time blind spot monitoring system for motorcycles, contributing to safer and smarter transportation.

II. PROBLEM STATEMENT

Motorcycle riders face difficulty in identifying vehicles located beside or behind them. Blind spots create dangerous situations, especially during lane changes. There is a need for an intelligent system that provides real-time alerts to enhance rider safety.

III. SYSTEM OVERVIEW

The Motorcycle Blind Spot Detection System consists of Ultrasonic Sensors, Microcontroller,
Buzzer, LED Indicator, and Power Supply. The sensors continuously measure distance. When an object enters the blind spot zone, the system triggers alerts.

©IJRASET: All Rights are Reserved

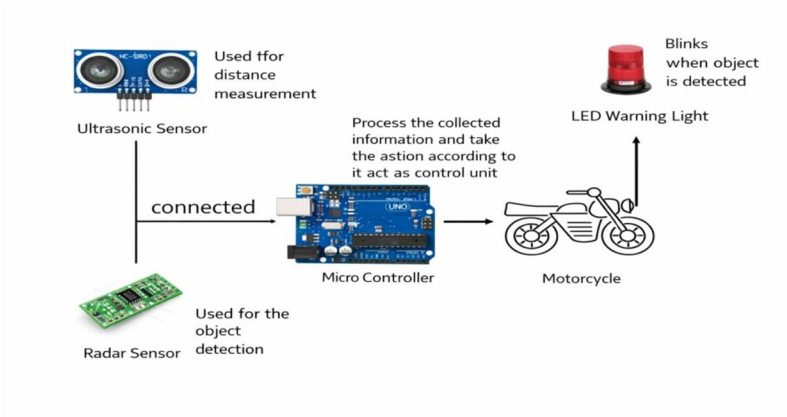


Fig:-Architectural Block Diagram

IV. METHODOLOGY

1) Stage 1: Requirement Analysis

• Studied the types of blind spot accidents involving motorcycles.
• Selected appropriate low-cost sensors (Radar RCWL-0516 and Ultrasonic HC-SR04).

2) Stage 2: Hardware Setup

• Radar sensor mounted at the rear to detect approaching vehicles.
• Ultrasonic sensor mounted to measure the distance of detected vehicles.
• LEDs mounted near the handlebar for visual warning to the rider.
• Arduino Uno selected for data processing and control.

3) Stage 3: Software Development

• Developed Arduino code to:
• Read radar detection signal.
• Trigger ultrasonic distance measurement.
• Calculate distance thresholds and rate of approach.
• Control blinking of LEDs based on sensor data.

4) Stage 4: System Integration

• Sensors, Arduino, and LEDs integrated into a single system.
• Wires, power supply, and casings arranged for secure attachment to motorcycle.

5) Stage 5: Testing and Validation

• Tested the system on a static motorcycle with vehicles approaching from different angles.
• Calibrated the threshold distance for LED warnings.
• Observed system behaviour under different conditions (daylight, Night time, moderate rain).

6) Stage 6: Result Analysis

• Analysed accuracy, reliability, and limitations of the system.
• Noted conditions causing false positives and suggested improvements for future versions.

V. ALGORITHM

1) Step 1: System Initialization

Begin Serial communication at 9600 baud for debugging.
Configure pin modes:
Ultrasonic Sensors:

ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538
Volume 14 Issue III Mar 2026- Available at www.ijraset.com

TRIG_PIN0 and TRIG_PIN1 → OUTPUT
ECHO_PIN0 and ECHO_PIN1 → INPUT
Radar Sensors:
RADAR_PIN and RADAR_PIN1 → INPUT
LED Indicators:
LED_PIN0 and LED_PIN1 → OUTPUT
Motor Control Pins (for optional robotic movement testing):
IN1, IN2, IN3, IN4 → OUTPUT

2) Step 2: Initialize Variables
Set initial distance tracking values:
prev1_S1, prev2_S1, curS1 ← 0 for Sensor 1
prev1_S2, prev2_S2, curS2 ← 0 for Sensor 2
Define a distance threshold value (e.g., 15 cm) to detect only significant changes.
Initialize speed variables: speed_S1, speed_S2 ← 0

3) Step 3: Main Loop
Continuously perform the following actions:

4) Step 4: Handle Serial Commands (Optional for Testing)
If a character is received via Serial:
If 'F': Move Forward
If 'B': Move Backward
If 'L': Turn Left
If 'R': Turn Right
If 'S' or unknown: Stop

5) Step 5: Sensor 1 Detection (Left Side / Rear Blind Spot)
Measure distance using TRIG_PIN0 and ECHO_PIN0, store in curS1.
Read radar sensor values:
Motion Detected = digital Read (RADAR_PIN)
motionDetected1 = digital Read (RADAR_PIN1)
Calculate speed:
speed_S1 = (prev1_S1 - curS1) / 0.2 (200 ms interval)
Decision logic for object detection:
If both:
prev1_S1 - curS1 > threshold and prev2_S1 - curS1 > threshold
AND radar sensors detect motion (either HIGH)
Then:
Turn ON LED_PIN0
Display "Object is moving! (sensor1)", distance, and speed on Serial
Else:
Turn OFF LED_PIN0
Print "No motion detected" message
Update history:
prev2_S1 = prev1_S1, prev1_S1 = curS1

6) Step 6: Sensor 2 Detection (Right Side / Rear Blind Spot)
Measure distance using TRIG_PIN1 and ECHO_PIN1, store in curS2.
Reuse the same motion values (motion Detected, motionDetected1)

©IJRASET: All Rights are Reserved

Repeat logic used in Step 5 for:
curS2, prev1_S2, prev2_S2, LED_PIN1
Print messages with "sensor 2"
Update history:
prev2_S2 = prev1_S2, prev1_S2 = curS2

7) Step 7: Reset and Delay
Reset radar motion flags:
Motion Detected = 0, motionDetected1 = 0
Add delay (200) ms for sampling consistency.
Turn OFF both LEDs temporarily for blinking feedback effect.
Repeat loop.

VI. RESULTS AND DISCUSSION

Testing shows accurate obstacle detection, reliable alerts, minimal delay, and effective performance in real conditions. The system successfully identifies vehicles entering blind spot regions.

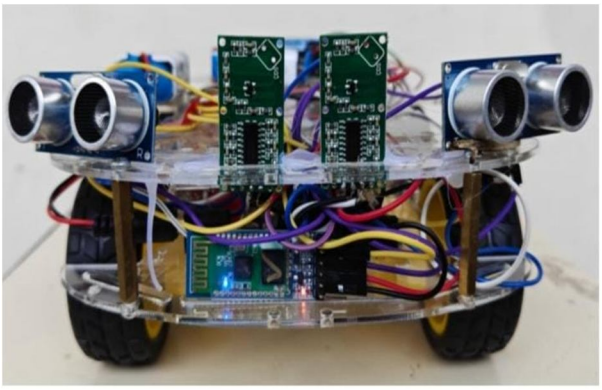


Fig:-Model Front View

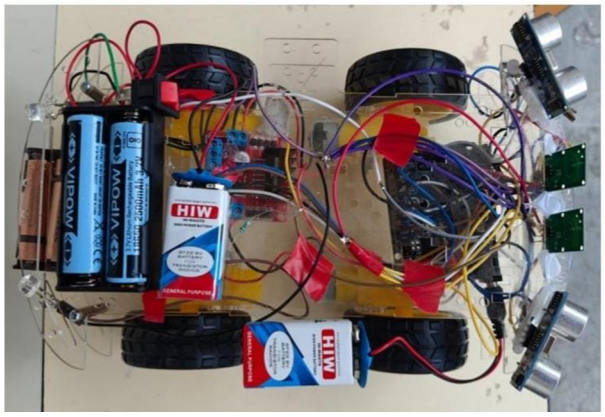


Figure. Model Top View

The blind spot detection system demonstrated reliable and consistent performance during experimental testing. The ultrasonic sensors accurately measured the distance of nearby vehicles and obstacles entering the blind spot region, enabling timely alerts to the rider. The system showed minimal latency, ensuring that warnings were generated without noticeable delay, which is critical for real-time safety applications. The dual-sensor configuration improved detection coverage and reduced the likelihood of missed objects. Furthermore, the LED alert mechanism provided clear and immediate visual feedback, enhancing rider awareness. Overall, the results confirm that the proposed system effectively enhances situational awareness, contributing to safer riding conditions by reducing the risk of side-collision accidents.


VII. CONCLUSION

The Motorcycle Blind Spot Detection System provides an effective safety solution for riders. By integrating ultrasonic sensing and alert mechanisms, the system improves situational awareness. Future improvements may include wireless connectivity and vibration alerts. The motorcycle blind spot detection system using radar and ultrasonic sensors successfully addresses a critical road safety issue by enhancing the situational awareness of motorcyclists. Through precise detection of nearby vehicles and obstacles within blind spots, this system provides real-time alerts that allow riders to respond to potential hazards effectively, thereby reducing the risk of accidents during lane changes or turns.

The dual-sensor approach, combining radar and ultrasonic technologies, proved to be highly effective. Radar sensors offered reliable mid-to-long-range detection, while ultrasonic sensors accurately detected closer objects. This integration enhanced accuracy, minimized blind spot areas, and ensured that real time alerts were delivered within 0.5 seconds, meeting key project objectives. The system demonstrated adaptability in various environmental conditions, from low visibility to dense traffic, though certain limitations were identified, such as reduced ultrasonic sensor effectiveness in heavy rain and occasional false positives in congested areas. These limitations provide valuable insights for future improvements, such as exploring sensor enhancements and refining environmental adaptability. In conclusion, this project advances blind spot detection technology for motorcycles, offering a significant improvement over traditional, mirror-reliant approaches. By enhancing motorcycle safety, this system has the potential to reduce accident rates and save lives, marking a meaningful step forward in road safety technology for vulnerable road users.

REFERENCES

[1] Real-time vision-based blind spot warning system: experiments with motorcycles in daytime/night time conditions – [2013, C. Fernandez, M. A. Szotelo]
[2] Determination of blind spot zone for motorcycles – [2019, M S M Hashim 1, A A Al Hamati1 , Mohd Hafzi M I2]
[3] Yaashwanth L, Shanmuganathan R, Vishal K, Roja R and Anto Rovin K S 2015 GUARD Preventing Blind Spot Accident using Arduino International Journal of Innovative Research in Science, Engineering and Technology 4 (10).
[4] https://www.electroschematics.com/wp-content/uploads/2013/07/HCSR04-datasheet-version1. pdf
[5] https://openaccess.thecvf.com/content/CVPR2023W/WAD/papers/Nesti_Ultra Sonic_Sensor_Based_Object_Detection_for_Autonomous_Vehicles_CVPRW_2023_paper.pdf

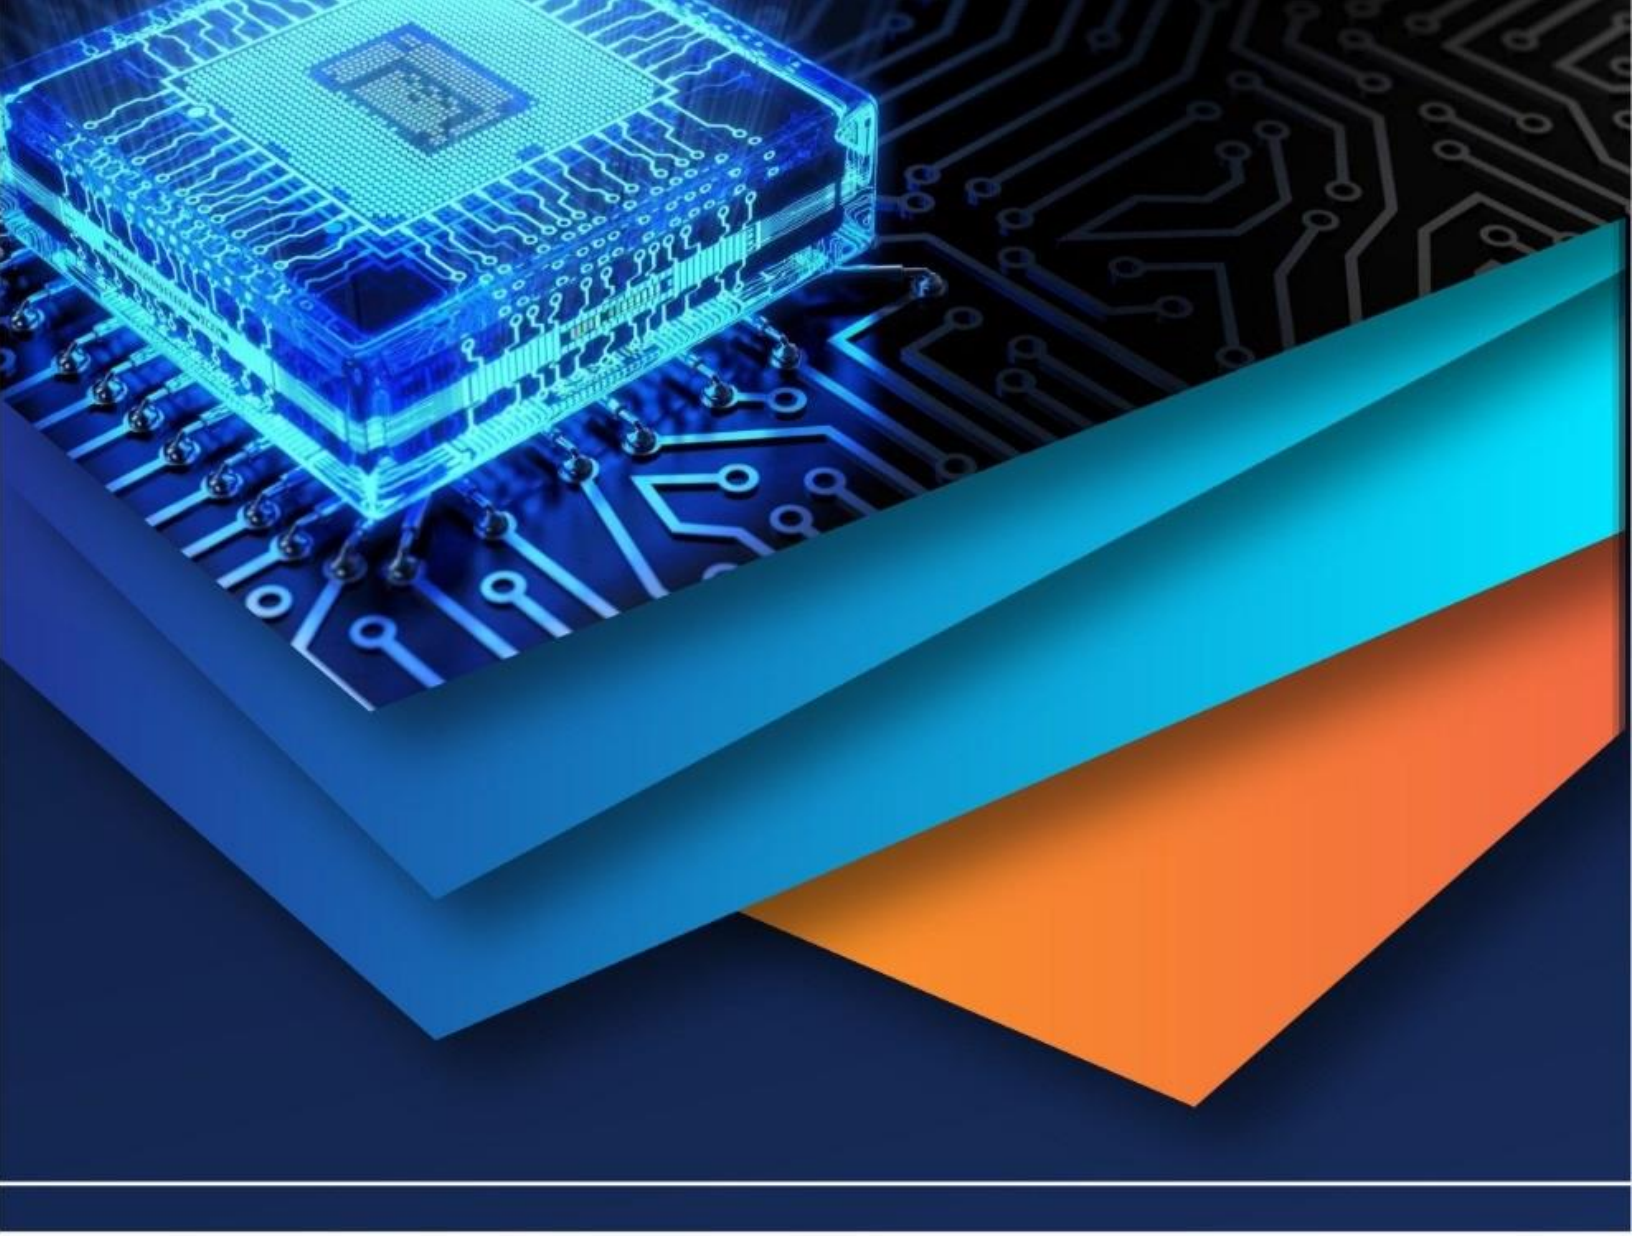

10.22214/IJRASET

45.98

IMPACT FACTOR: 7.129

IMPACT FACTOR: 7.429

INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089 (24*7 Support on Whatsapp)