iJRASET
International Journal For Research in Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 10 **Issue:** V **Month of publication:** May 2022

DOI: https://doi.org/10.22214/ijraset.2022.43531

www.ijraset.com

Call: 08813907089 | E-mail ID: ijraset@gmail.com

International Journal for Research in Applied Science & Engineering Technology (IJRASET)
ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538
Volume 10 Issue V May 2022- Available at www.ijraset.com

Optimal Design of Leaf Springs Using Composite Materials

Prof. Ritesh Banpurkar[1], Pravin Vasram Jadhav[2], Bhushan Funde[3]
[1]HOD, [2]Managing Director of F6DTS, [3]PG Student
Department of Mechanical Engineering, Abha gaikwad Patil College of Engineering, Nagpur

Abstract: ***The present work is to emphasizing the reduction in weight of suspension system by using composite materials instead of customary leaf springs. Also improve the level of suspension by using of composite materials. The leaf spring is one of the potential items for weight reduction in automobiles as it accounts for 10% - 20% of the unsprang weight. The process is beginning with the selection of composite materials. The selection process is focused to the checking of property of the material be chosen. After the verification, the manufacturing is done by the proper methods. Then the design calculation is done for both ordinary and novel spring system. Based on the results, the design calculation for deflection and weight of springs is compared.***
Keywords: Suspension Systems, Leaf Spring, Unsprung weight, Composite, Weight Reduction.

I. INTRODUCTION

In order to conserve natural resources and economizeenergy, weight reduction has been the main focus of automobile manufacturers in the present scenario. This achieves the vehicle with more fuel efficiency and improved riding qualities. The introduction of composite materials was made it possible to reduce the weight of leaf spring without any reduction on load carrying capacity and stiffness. Since, the composite materials have more elastic strain energy storage capacity and high strength to weight ratio as compared with those of steel, multi-leaf steel springs are being replaced by mono-leaf composite springs. In every automobile, i.e. four wheelers and railways, the leaf spring is one of the main components and it provides a good suspension and it plays a vital role inautomobile application. It carries lateral loads, brake torque, driving torque in addition to shock absorbing.The advantage of leaf spring over helical spring is that the ends of the spring may be guided along a definite path as it deflects to act as a structural member in addition to energy absorbing device. Investigation of composite leaf spring in the early 60's failed to yield the production facility because of inconsistent fatigue performance and absence of strong need for mass reduction. Researches in the area of automobile components have been receiving considerable attention now. Particularly theautomobile manufacturers and parts makers have been attempting to reduce the weight of the vehicles in recent years. Emphasis of vehicles weight reduction in 1978 justified taking a new look at composite springs have made it possible to reduce the weight of leaf springwithout any reduction in load carrying capacity and stiffness. Composite materials are now used extensively in place ofmetal parts. Several papers were devoted to the application of composite materials for automobiles.

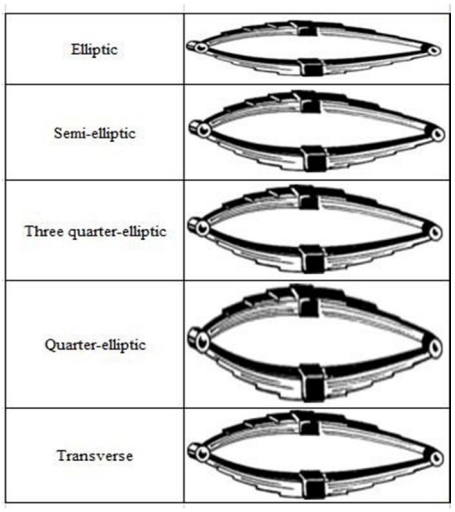


Figure1.1 Types of leaf spring

©IJRASET: All Rights are Reserved

II. LITERATURE REVIEW

Investigation of composite leaf spring in the early 60's failed to yield the production facility because of inconsistent fatigue performance and absence of strong need for mass reduction. Researches in the area of automobile components have been receiving considerable attention now. Several papers were devoted to the application of composite materials for automobiles I.RAJENDRAN (2006) studied the application of composite structures for automobiles and design optimization of a composite leaf spring. Great effort has been made by the automotive industries in the application of leaf springs made from composite materials. S. VIJAYARANGAN (2006) showed the introduction of fiber reinforced plastics (FRP) made it possible to reduce the weight of a machine element without any reduction of the load carrying capacity. The introduction of plastics makes massive changes in manufacturing sectors. Mr. Ballinger (1995) gives a new approach to manufacturing of metals by using derivatives of plastics. And he was the first man to introduce reinforced plastics in metal manufacturing. A.P. Ghodake and K.N. Patil (2013) are taken into the next level. They tried to manufacture spring on polymer resins. Achamyeleh A Kassie, R Reji Kumar (2014) are design the leaf spring using compositematerials for light weight vehicles with adequate fatigue life.

III. MATERIALS AND METHODS

Materials constitute nearly 60%-70% of the vehicle cost and contribute to the quality and theperformance of the vehicle. Even a small amount in weight reduction of the vehicle, may have a wider economic impact. Composite materials are proved as suitable substitutes for steel in connection with weight reduction of the vehicle. Hence, the compositematerials have been selected for leaf spring design.

A. Fiber Selection

The commonly used fibers are carbon, glass, Kevlar, etc. Among these, the glass fiber has been selected as the core leaf based on the cost factor and strength andthe carbon fiber is selected as the laminate over the core leaf. The types of glass fibers are C-glass, S-glass and E-glass. The C-glass fiber is designed to give improved surface finish. S-glass fiber is design to give very high modular, which is used particularly in aeronautic industries. The E-glass fiber is a high quality glass, which is used as standard reinforcement fiber for all the present systems well complying with mechanical property requirements. Thus, E-glass fiber was found appropriate for this application. And for carbon fiber there are several type of fibers based on properties, on precursors and on heat treatment temperature. After a long analysis and study TYPE II intermediate heat treatment carbon fiber is taken, where final heat treatment temperature should be around 1500 degrees Celsius and can be associated with high strength type fiber.



Fig 1: E-glass fiber

B. Resin Selection

Many thermo set resins such as polyester, vinyl ester,epoxy resin are being used for Fiber Reinforcement Plastics (FRP) fabrication. Among these resin systems, epoxies show better inter laminar shear strength and good mechanical properties. Hence, epoxide is found to be the best resins that would suit this application. Different grades of epoxy resins and hardener combinations are classifieds based on the mechanical properties. Among these grades, the grade of epoxy resin selected is Dobeckot 520 F and the grade of hardener used for this application is 758. Dobeckot 520 F is a solvent less epoxy resin. This in combination with hardener 758 cures into hard resin. Hardener 758 is a low viscosity polyamine. Dobeckot520 F, hardener 758 combinations is characterized by

1) Good mechanical and electrical properties.
2) Faster curing at room temperature.
3) Good chemical resistanceproperties.



Fig 2: Epoxy resin and hardener

C. E-Glass Fiber

E-Glass or electrical grade glass was originally developed for standoff insulators for electrical wiring. It was later found to have excellent fiber forming capabilities and is now used almost exclusively as the reinforcing phase in the material commonly known as fiberglass. Carbon fiber is ahigh tensile fibers alternatively called as graphite fiber. It has superior properties than any other fiber or equivalent material. The carbon atoms in the fiber arebonded together in crystals that are more or less aligned parallel to the axis of the fiber

D. Fiber Manufacture

Glass fibers are generally produced using melt spinning techniques. These involve melting the glass composition into a platinum crown which has small holes for the molten glass to flow. Continuous fibers can be drawn out through the holes and wound onto spindles, while short fibers may be produced by spinning the crown, which forces molten glass out through the holes centrifugally. Fibers are cut to length using mechanical means or air jets. Each carbon fiber is produced from a precursor polymer such as poly-acrylonitrile, rayon or petroleum pitch. The precursor is first spun into filament yarns, using chemical and mechanical processes to initially align the polymer atoms in a way to enhance the physical properties

.

SPECIFICATION	VALUES
Material selected	Steel 55Si2Mn90
Tensile strength	1962 N/mm^2
Yield strength	1470 N/mm^2
Young's modulus(E)	$2.1x10^5$ N/mm^2
Total length (2L)	960 mm
Static loading (P)	1820 N
spring width (w)	60 mm
Spring weight	2.95 kg
Density (ρ)	7.8 kg/mm^3
Thickness (t)	6mm

E. Composition


E-Glass is a low alkali glass with a typical nominal composition of SiO_2 54wt%, Al_2O_3 14wt%, CaO + MgO 22wt%, B_2O_3 10wt% and Na_2O+K_2O less than 2wt%. Some other materials may also be present at impurity levels. Carbon fiber is composition of (i) about 90 to 99.9% by weight carbon fiber,(ii) a total of 0.1% to 10% by weight at least one vinyl additional polymer having at least one oxidant ring , said vinyl additional polymer being prepared by polymering one or more ethylene unsaturated compounds.

Table 1: Properties of E-Glass / Epoxy

SPECIFICATION	VALUES
Material selected	E-glass/Epoxy
Tensile strength	800 N/mm^2
Young's modulus(E)	$3.86x10^4$ N/mm^2
Design stress (σ_b)	328 N/mm^2
Total length (2L)	960 mm
Static loading (P)	2050 N
spring width (w)	60 mm
Spring weight	0.8 kg
Density (ρ)	2.6 kg/mm^3
Thickness (t)	8 mm

Table 2 Properties of carbon Fiber

SPECIFICATION	VALUES
Material selected	Carbon fiber
Tensile strength	110 N/mm^2
Young's modulus(E)	$7.0x10^4$ N/mm^2
Total length (2L)	960mm
spring width (w)	60mm
Density (ρ)	1600 kg/m^3

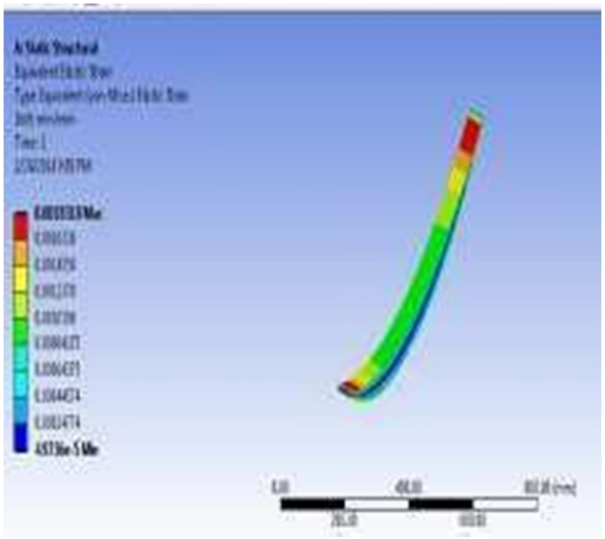

IV. CONCLUSIONS

The results of a calculation part is concluded are,

1) That the specific weight of the normal spring is 2.95kg and the new system havingonly 0.8kg.

2) The normal leaf spring is 3.6 times weights than composite leaf spring. And also the deflection of the normal spring is 110. 8mm.nevertheless the new system having 146.83mm.

3) So, the composite spring system is lightweight and also it has better suspension level compared to the Steel type.

V. RESULTS AND DISCUSSION

The above values are expressing the properties of composite leaf spring after the manufacturing. The accessible leaf spring's calculation results are listed above. Among the two values of existing and new model there is a significant change in the specific weight and deflection of the springs. It shows that the deflection and weight of the newsuspension system is well again than existing type.

REFERENCES


[1] Rajendran. I., Vijayarangan. S., "Optimal Design of a Composite Leaf Spring using Genetic Algorithms, Int. J of Computer and Structures", 2001: p.no 1121 – 1129.
[2] Rajendran. I., Vijayarangan. S., "Design and Analysis of a Composite Leaf Spring Journal of Institute of Engineers India", 2002: p.no 180 – 187
[3] Achamyeleh A Kassie, R Reji Kumar., Design of Single Composite Leaf Spring For Light Weight Vehicle, ISSN 2278 – 0149 Vol. 3, No. 1, January 2014.
[4] Ghodake A. P., Patil K.N. Analysis of Steel and Composite Leaf Spring for Vehicle, IOSR Journal of Mechanical and Civil Engineering (IOSR- JMCE) e-ISSN: 2278-1684 Volume 5, Issue 4 (Jan. - Feb. 2013), PP 68-76.
[5] Daugherty. R. L., "Composite Leaf Springs in Heavy Truck Applications. K. Kawata, T.Akasaka (Eds). Composite Materials Proceedings of Japan- US Conference Tokyo", 1981: p.no 529 – 538.
[6] Dharam. C. K., "Composite Materials Design and Processes for Automotive Applications", December, 1978: p.no 19 – 30.
[7] Vijayarangan. S. Ganesan. N "Static Stress Analysis of a Composite Bevel Gear using a Three-dimensional Finite Element Method Computer Structures", 1994: p.no 771 – 783.

Auther 1 Prof .Ritesh Banpurkar



Auther 2 Managing Director of F6DTS
Pravin Vasram Jadhav

Auther 3: Bhushan Funde

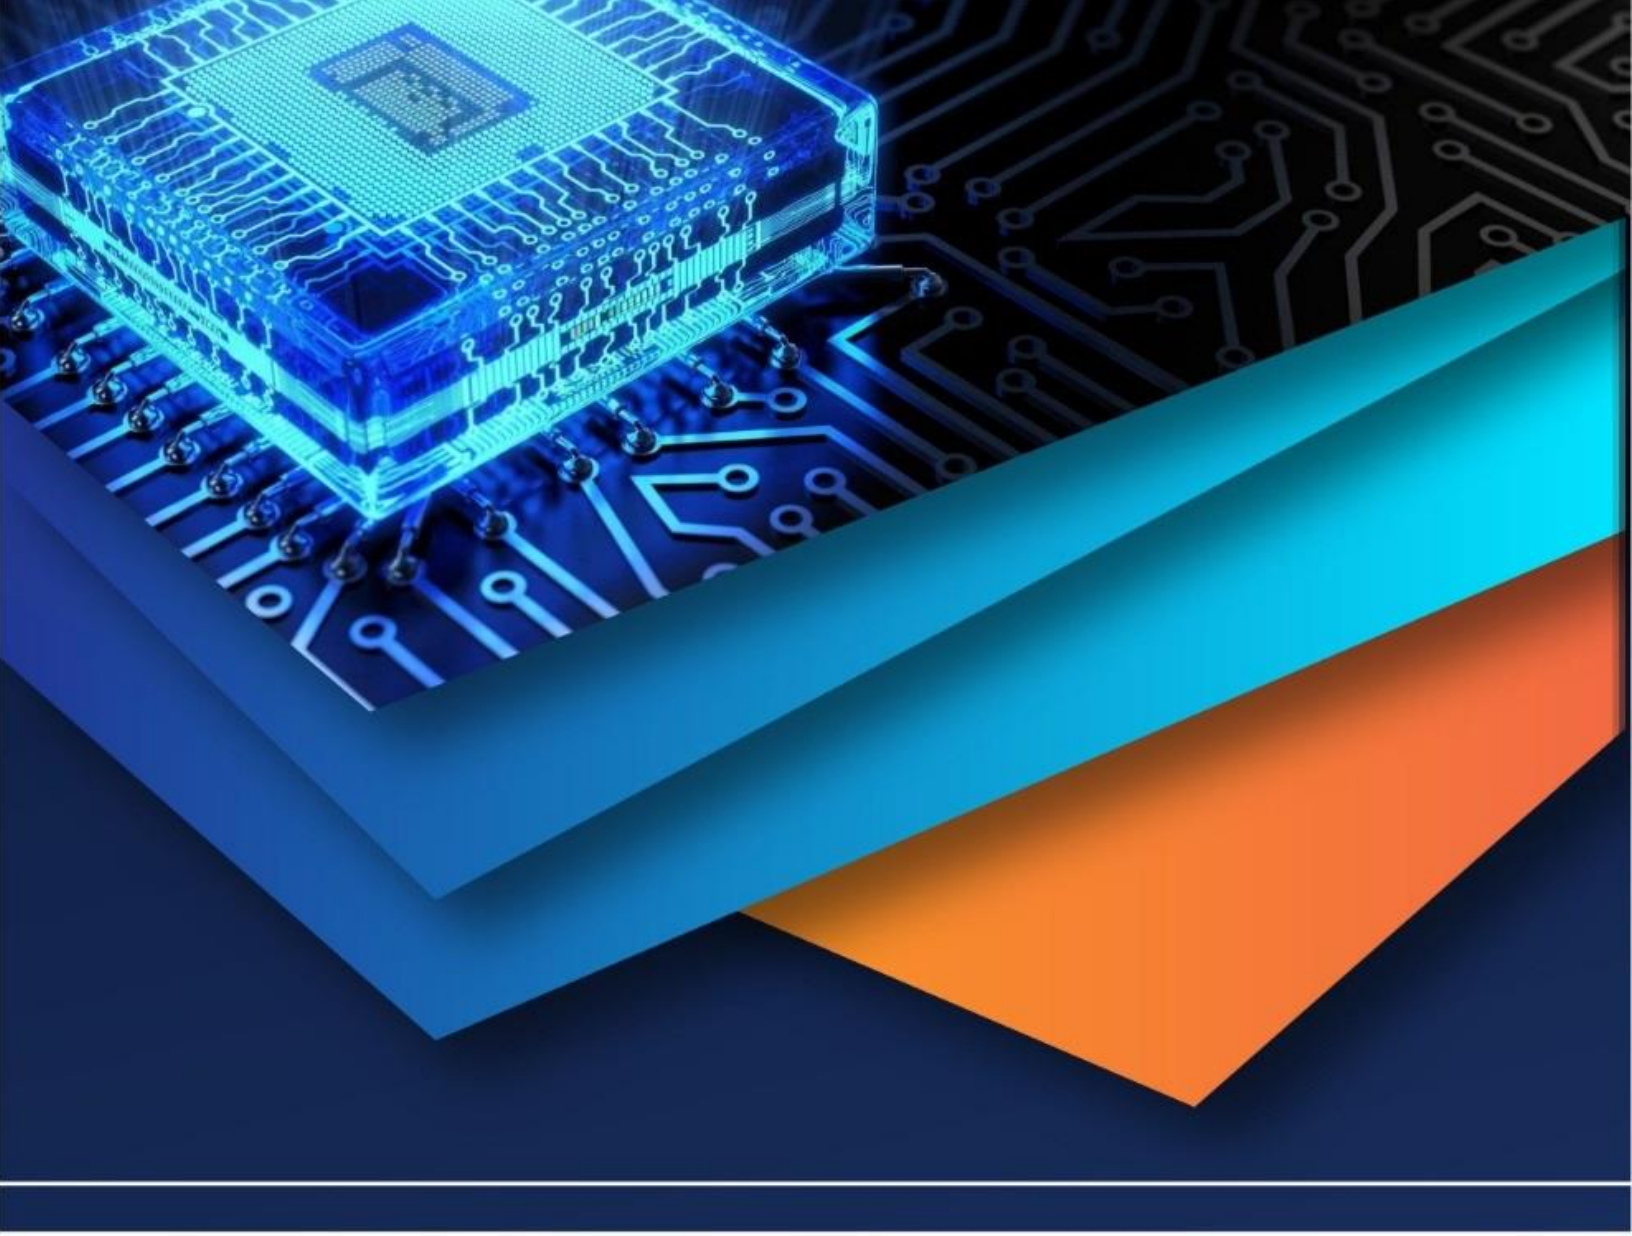

10.22214/IJRASET

45.98

IMPACT FACTOR: 7.129

IMPACT FACTOR: 7.429

INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089 (24*7 Support on Whatsapp)