iJRASET
International Journal For Research in Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 12 **Issue:** IV **Month of publication:** April 2024

DOI: https://doi.org/10.22214/ijraset.2024.60623

www.ijraset.com

Call: 08813907089 | E-mail ID: ijraset@gmail.com

International Journal for Research in Applied Science & Engineering Technology (IJRASET)
ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538
Volume 12 Issue IV Apr 2024- Available at www.ijraset.com

Preparing Design Aids for Fe550 Steel for M25 Grade of using Concrete from SP-16

Prof. Kiran Ghodke[1], Mr. Prathamesh Kamble[2], Ms. Sakshi Patil[3], Mr. Zorengpuia Liantluang[4], Mr. Omkar Erandole[5]
[1]*Zorengpuia Liantluang, Dr. J.J. Magdum College of Engineering, Jaysingpur*
[2]*Sakshi Patil, Dr. J.J. Magdum College of Engineering, Jaysingpur*
[3]*Prathamesh Kamble , Dr. J.J. Magdum College of Engineering, Jaysingpur*
[4]*Omkar Erandole, Dr. J.J. Magdum College of Engineering, Jaysingpur*
[5]*Prof .Kiran Ghodke Dr. J.J. Magdum College of Engineering, Jaysingpur*

Abstract: ***The main purpose of this paper presentation is to develop design aids for Fe 550 grade of steel from sp 16 handbook. The design aids prepared will be in the form of tables which will benefit in the calculations of various components of concrete structures. To prepare design aids for FE550, you would need to focus on creating resources that cover various aspects related to structural design, specifically for materials like Fe550. Design aids typically include information on material strength, stress-strain relationships, flexural members, compression members, shear and torsion, development length, anchorage, deflection calculation, and general tables, explanations of the basis of preparation, and worked examples illustrating the use of the design aids.***


I. INTRODUCTION

SP 16 is a Handbook consisting of various tables to assist the Concrete Designers to find the data and results quickly and some examples how to use those tables. The sp 16:1980 has tables and charts that help structural engineers to design simple sections rapidly for Fe 250, Fe 415 and Fe 500 but do not include grade of steel higher than Fe 500.
IS 456:2000 is a statutory authority to a designer who has to follow the clauses in every letter and spirit.
IS 456 contains complete set of guidelines & information regarding Reinforced Concrete while SP 16 is aid to IS 456 i.e., SP16 assists in designing reinforced concrete structures according to IS456.
The paper presentation focus on the steel of grade Fe 550 which is not available in the sp16 handbook.

II. LITERATURE REVIEW

[1] These design aids have been prepared on the basis of work done by Shri P. Padmanabhan, Officer on Special Duty, ISI. Shri B. R. Narayanappa, Assistant Director, IS1 was also associated with the work. The draft Handbook was circulated for review to Central Public Works Department, New Delhi; Cement Research Institute of India, New Delhi; Metallurgical and Engineering Consultants (India) Limited, Ranchi, Central Building Research Institute, Roorkee; Structural Engineering Research Centre, Madras; M/s C. R. Narayana Rao, Madras; and Shri K. K. Nambiar, Madras and the views received have been taken into consideration while finalizing the Design Aids.
[2] IS 456:2000

III. METHODOLOGY

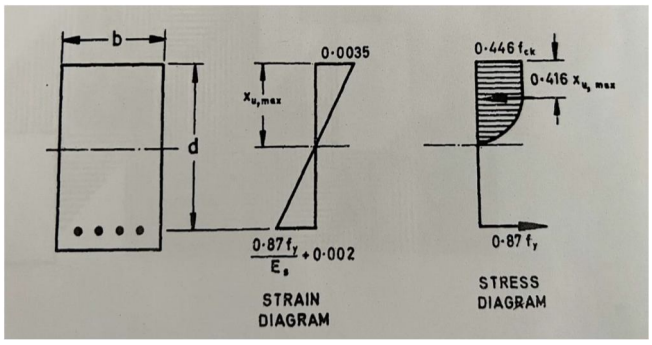

©IJRASET: All Rights are Reserved

Fig 1.Stress - strain Diagram

In the figure,

b = effective width of beam

D = overall depth

d = effective depth of beam

xu = depth of neutral axis from compressive phase od section

Ecu = ultimate compressive strength in concrete

Esu = ultimate tensile strength of steel

Cu = ultimate compressive force

Tu = ultimate tensile force

z = lever arm

A. Total Ultimate Compressive Force

Cu = area of stress block x width of beam

From strain diagram, using similar triangle property

xu = 0.0035

a = 0.002

a x 0.0035 = xu x 0.002

a = xu x 0.002/0.0035

= 0.57 xu

Area of stress block = area of rectangle + area of parabola

= (0.43 xu + 0.45 fck) + (2/3 x 0.45 fck x 0.57 xu)

= 0.193 xu fck + 0.171 xu fck

= 0.364 xu fck

Compressive Force(Cu):

Cu = 0.364 xu fck b

B. Tensile Force (Tu)

Tu = stress in steel x area of steel

= fy/ 1.15 x Ast

= 0.87 fy Ast

Depth of Neutral Axis (xu):

Cu = Tu

0.36 x fck x xu x b = 0.87 x fy x Ast

xu = 0.87 fy Ast / 0.36 fck xu b

C. Limiting or Maximum Depth of Neutral Axis

(xu lim or xu max)

Based on Assumption on Theory of Bending, the xu max can be obtain

For Fe 550, fy = 550

Esu = (fy/ 1.15 Es) + 0.002

= (550/ 1.15 x 2 x105) + 0.002

= 4.39 x 10-3

From similar triangle property:

xu = 0.0035

d-xu = 4.39 x 10-3

4.39 x 10-3 xu = 0.0035 x (d-xu)

4.39 x 10-3 xu = 0.0035d - 0.0035xu

0.0035d = 4.39x10-3 xu + 0.0035d

0.0035d = 7.89x10-3xu

xu = (0.0035/7.89x10-3) d
xu = 0.44d
xu max or xu lim = 0.44d

D. Limiting or Maximum Percentage of Steel

(Pt lim or Pt max)
xu < xu max
0.87 fy Ast / 0.36 fck b < xu max
Pt = (Ast / b x d) 100
For Fe 550, fy = 550
(0.87 fy Ast / 0.36 fck b) = xu max
For Fe 550, xu max = 0.44d
(0.87 fy Ast / 0.36 fck b) = 0.44d
(Ast / b x d) = 0.44 x 0.36 x fck / 0.87 x fy
Multiplying both sides by 100
(Ast / b x d) x 100 = (0.44 x 0.36 x fck / 0.87 x fy) x 100
(Ast / b x d) x 100 = 0.033 fck
Pt lim or Pt max = 0.033 fck

E. Limiting or Maximum Moment of Resistance

Mu = Cu x z
Mu max or Mu lim = 0.36 fck b xu (d – 0.42xu)
For Mu lim , xu = xu lim
For Fe 550, xu max = 0.44d
Mu max or Mu lim = 0.36 fck b xu max (d – 0.42 xu max)
= 0.36 x fck x b x 0.44d x (d – 0.42 x 0.44d)
= 0.158 fck b d (d – 0.148d)
= 0.158 fck b d (0.86d)
= 0.128 fck b d2
Mu max or Mu lim = 0.128 fck b d2

F. Moment of Resistance of Slab

Data: fck = 25 N/mm2
fy = 550 N/mm2
d = 100 mm
For Fe 550,
Ptlim = 0.033 fck
= 0.033 x 25
= 0.825%
Ast = (area of 1 bar/ spacing) x 1000
For 6 mm diameter bar at 50 mm centre to centre spacing
Ast = $\{(\pi/4 \times 6^2)/ 50\} \times 1000$
= 565.54 mm2
From IS 456:2000 ANNEX:G
Mu = 0.87 fy Ast d {1- (Ast fy / fck b d)}
= 0.87 x 550 x 565.54 x 100 {1- (565.54 x 550/ 25 x 100 x 1000)}
= 23.69×10^6 N.mm
= 23.69 KN.m

G. Percentage of Steel for Singly Reinforced Section

Ast = (0.5 fck / fy) (1 - $\sqrt{1- (4.6 \times Mu / fck \times b \times d^2)}$ b x d

Ast / b x d = (0.5 fck / fy) (1 - $\sqrt{1- (4.6 \times Mu / fck \times b \times d^2)}$

Multiplying both sides by 100

(Ast / bxd)100 = (0.5 fck / fy) (1- $\sqrt{1-(4.6xMu /fck \times bxd^2)}$100

Here, Pt = (Ast / b x d) 100

Hence ,

Pt = (0.5 fck / fy) (1- $\sqrt{1- (4.6 \times Mu /fck \times bx d^2)}$ 100

Sample Calculation :

For fck = 25 N/mm^2 and fy = 550 N/mm^2

For (Mu / b x d) = 0.30

Pt = (0.5 x 25 / 550) (1- $\sqrt{1- (4.6 \times 0.30 / 25)}$ 100

Pt = 0.064

H. Table For Moment Of Resistance

TABLE NO.1.1

For Fy = 550 N/mm^2 Fck = 25 N/mm^2 d = 100 mm

Bar Spacing (cm)	Bar Diameter 6	8	10	12
5	23.69	37.46	49.19	54.37
7.5	16.54	27.34	38.56	48.22
10	12.68	21.39	31.09	40.65
12.5	10.28	17.53	25.91	34.68
15	8.64	14.85	22.17	30.09
17.5	7.45	12.87	19.35	26.53
20	6.55	11.36	17.17	23.69
22.5	5.84	10.16	15.42	21.39
25	5.27	9.19	13.99	19.49
27.5	4.80	8.39	12.42	17.19
30	4.41	7.72	11.80	16.54

TABLE NO 1.2

For Fy = 550 N/mm^2 Fck = 25 N/mm^2 d = 125 mm

Bar Spacing (cm)	Bar Diameter 6	8	10	12
5	30.45	49.99	67.98	81.43
7.5	21.05	35.38	51.09	66.26
10	16.06	27.40	40.48	54.18
12.5	12.99	22.34	33.42	45.50
15	10.90	18.86	28.43	39.11
17.5	9.38	16.31	27.72	34.26
20	8.24	14.36	21.86	30.40
22.5	7.34	12.83	19.59	27.40
25	6.62	11.60	17.72	24.90
27.5	6.03	10.58	16.24	22.82
30	5.54	9.72	14.94	21.0

©IJRASET: All Rights are Reserved

TABLE NO 1.3

For Fy = 550 N/mm^2 Fck = 25 N/mm^2 d = 150 mm

Bar Spacing (cm)	Bar Diameter			
	6	8	10	12
5	37.22	61.51	86.71	108.37
7.5	25.56	43.37	63.59	84.24
10	19.45	33.47	49.86	67.68
12.5	15.69	27.15	40.93	56.30
15	13.15	22.86	34.69	48.12
17.5	11.15	19.74	30.09	41.98
20	9.93	17.37	26.86	37.21
22.5	8.85	15.50	23.77	33.41
25	7.98	14.00	21.51	30.31
27.5	7.26	12.76	19.66	27.77
30	6.67	11.73	18.07	25.56

TABLE NO.1.4

For Fy = 550 N/mm^2 Fck = 25 N/mm^2 d = 175 mm

Bar Spacing (cm)	Bar Diameter			
	6	8	10	12
5	43.98	73.54	105.50	135.43
7.5	30.07	51.39	76.12	102.28
10	22.83	39.43	59.26	81.21
12.5	18.40	31.97	48.45	67.13
15	15.40	26.87	40.95	57.14
17.5	13.25	23.18	35.45	49.71
20	11.62	20.38	31.25	43.98
22.5	10.35	18.18	27.94	39.42
25	9.33	16.41	25.26	35.72
27.5	8.49	14.95	23.08	32.65
30	7.79	13.73	21.20	30.07

TABLE NO.1.5

For Fy = 550 N/mm^2 Fck = 25 N/mm^2 d = 200 mm

Bar Spacing (cm)	Bar Diameter			
	6	8	10	12
5	50.75	85.56	124.34	162.61
7.5	34.58	59.41	88.67	120.37
10	26.21	45.44	68.67	94.77
12.5	21.10	36.78	55.97	77.97
15	17.66	30.88	47.22	66.17
17.5	15.18	26.61	40.83	57.54
20	13.31	23.38	35.96	50.75
22.5	11.85	20.85	32.12	45.44
25	10.68	18.81	29.03	41.14
27.5	9.728	17.14	26.51	37.58
30	8.924	15.73	24.33	34.58

©IJRASET: All Rights are Reserved

I. Table For Percentage Of Steel

TABLE NO 1.6

For Fy = 550 N/mm^2 Fck = 25 N/mm^2

Mu/bd^2	Pt	Mu/bd^2	Pt
0.30	0.064	2.50	0.610
0.35	0.075	2.55	0.624
0.40	0.086	2.60	0.639
0.45	0.097	2.65	0.654
0.50	0.108	2.70	0.668
0.55	0.119	2.75	0.683
0.60	0.131	2.80	0.699
0.65	0.142	2.85	0.714
0.70	0.153	2.90	0.729
0.75	0.165	2.95	0.745
0.80	0.176	3.00	0.761
0.85	0.188	3.05	0.776
0.90	0.199	3.10	0.792
0.95	0.211	3.15	0.809
1.00	0.222	3.20	0.825
1.05	0.234	3.25	0.842
1.10	0.246	3.30	0.859
1.15	0.258	3.32	0.865
1.20	0.270	3.34	0.872
1.25	0.282	3.36	0.879
1.30	0.294	3.38	0.886
1.35	0.306	3.40	0.893
1.40	0.318	3.42	0.900
1.45	0.331	3.44	0.907
1.50	0.343	3.46	0.914
1.55	0.355	3.48	0.921
1.60	0.368	3.50	0.928
1.65	0.381	3.52	0.935
1.70	0.393	3.54	0.942
1.75	0.406	3.56	0.949
1.80	0.419	3.58	0.956
1.85	0.432	3.60	0.964
1.90	0.445	3.62	0.971
1.95	0.458	3.64	0.978
2.00	0.472	3.66	0.986
2.05	0.485	3.68	0.993
2.10	0.498	3.70	1.001
2.15	0.512	3.72	1.008
2.20	0.526	3.74	1.016
2.25	0.539		
2.30	0.553		
2.35	0.567		
2.40	0.581		
2.45	0.596		

©IJRASET: All Rights are Reserved

J. Slab Design by Manual Calculation

Roof Slab = 4m x5 m

Thickness = 125mm

Live Load = 3 KN/m^2

Floor Finish = 1 KN/m^2

fck = 25 N/mm^2

fy = 550 N/mm^2

Step 1: Check the type of Slab

ly/lx = 5/4

= 1.25 < 2

Design as Two Way Slab

Step 2: Provide D = 125 mm

Eff. cover d'= 25 mm

Eff. depth d = 125 – 25 = 100 mm

Step 3: Calculation of effective span (l_{eff})

As per IS 456: 2000 Clause no 22.2

l_{eff} is lesser of :

1) lx + d = 4 + 0.1 = 4.1m

2) lx + 0.3/2 +0.3/2 = 4.3m

Take l_{eff} = 4.1m

Step 4: Load Calculation

Consider 1m width of strip

1) Self Weight = b x D x 25

= 1 x 0.125 x 25

= 3.125 KN/m

2) Live Load = 3 KN/m

3) Floor Finish = 1 KN/m

Total Load (W) = 3.125 +3 +1

= 7.125 KN/m

Step 5: Calculation of Moment

As per IS 456:2000 ANNEX D

Mux = 1.5 x αx x W x l_{eff}^2

Muy = 1.5 x αy x W x l_{eff}^2

For ly/lx = 1.25

αx = 0.075

αy = 0.056

Mux = 1.5 x 0.075 x 7.125 x 4.1^2

= 13.47 x 10^6 N.mm

Muy = 1.5 x 0.056 x 7.125 x 4.1^2

= 10.06 x 10^6 N.mm

Step 6: Equate Mux with Mulim

As per grade of Steel Fe 500

Mu lim = 0.129 x fck x b x d^2

= 0.129 x 25 x 1000 x 100^2

= 32.25 KNm

Mux < Mu lim

Hence provided depth is sufficient

Step 7: Calculation of Steel in both direction

Along Shorter Span

$Ast_x = (0.5\ fck / fy)\ (1-\sqrt{1- (4.6 \times Mu / fck \times b \times d^2)}\ bx\ d$

$= (0.5x25/550)\ (1 - \sqrt{1-(4.6x13.47x10^6/25x1000x100^2)}$

$1000x100$

$= 301.66\ mm^2$

As per IS 456:2000 Clause no 26.5.2.1

$Ast_{min} = 0.12\% \times b \times D$

$= 0.12/100 \times 1000 \times 125$

$= 150\ mm^2$

Provide 10mm dia. bars

Max dia. = 1/8 x D

= 1/8 x 125

= 15.625 > 10

Hence the diameter is safe.

Spacing = $\{(\pi/4 \times 10^2)/ 301.66\} \times 1000$

= 260.36 mm

~ 260 mm

Check for Spacing:

1) Calculated Spacing = 260 mm

2) 3 x d = 3 x 100 = 300 mm

3) 300 mm

Provide 10mm dia. bars at 260 mm c/c

Along longer span:

$Ast_y = (0.5\ fck / fy)\ (1 - \sqrt{1- (4.6 \times Mu / fck \times b \times d^2)}\ b\ xd$

$= (0.5x25/550)\ (1 - \sqrt{(4.6x10.06x10^6/20x1000x100^2)}$

$1000x100$

$= 221.10\ mm^2$

Provide 10 mm dia. bars

Spacing = $\{(\pi/4 \times 10^2)/ 221.10\} \times 1000$

= 355.22 mm ~ 350mm

Check for Spacing:

1) Calculated Spacing = 350 mm

2) 3 x d = 3 x 100 = 300 mm

3) 300 mm

Provide 10mm dia. bars at 300 mm c/c

Step 8: Check for Shear

As per IS 456:2000 Clause 40.1

$\tau_v < k \times \tau_c$

Here $\tau_v = Vu / b \times d$

$Vu = Wu \times l_{eff} / 2$

= 1.5 x 7.125 x 4.1 / 2

= 21.90 KN

So, $\tau_v = 21.90 \times 10^3 / 1000 \times 100$

$= 0.21\ N / mm^2$

As per IS 456:2000 clause no 40.2.1.1

For D = 125, k = 1.30 mm

Pt = (Ast / b x d) x 100

= (301.66 / 1000 x 100) x 100
= 0.30%
As per IS 456:2000 Table 19
Using Interpolation Method
For Pt = 0.30% , τ_c = 0.38 N/mm^2
k x τ_c = 1.30 x 0.38
= 0.49 N/mm^2
Here, τ_v < k x τ_c
Safe in Shear

K. Slab Design By SP-16 Chart

Roof Slab = 4m x5 m
Thickness = 125mm
fck = 25 N/mm2
fy = 550 N/mm2
Here, Mux = 13.47 KN.m
Muy = 10.06KN.m
Providing 10 mm dia. bars
From sp 16 chart
Spacing along shorter span = 250 mm c/c
Spacing along longer span = 300 mm c/c

L. Beam Design By Manual Calculation

Given: fck = 25 N/mm^2
fy = 550 N/mm^2
Slab Size = 5 x 4 m
Slab Thickness = 125 mm
l = 4 m
Assume: b = 230 mm
Live Load = 3 KN/m^2
Floor Finish = 1 KN/m^2
Step 1: Calculation of Eff. Depth
l/d = 10
4/d = 10
d = 0.4 m = 400 mm
Step 2: Calculation of Total Depth
Assume: Clear cover = 20 mm
Main bar = 25 mm
Stirrups = 8 mm
D = 400 + 20 + 8 + 12.5
= 440.5 ~ 445 mm
Here, d = 400 mm & D = 445 mm
Step 3: Load Calculation
a) Slab Load
i) D.L = D x 25 = 0.125 x 25 = 3.125 KN/m^2
ii) L.L = 3 KN/m^2
iii) F.F = 1 KN/m^2
Total (w) = 3.125 + 3 + 1 = 7.125 KN/m^2
Load on Beam = ½ x b x h x w
(w_1) = ½ x 4.46 x 2.23 x 7.125

= 35.43/ 4.46
= 7.94 KN/m
b) Wall Load
(w_2) = b x d x 20
= 0.23 x 2.65 x 20
= 12.19 KN/m
c) Self Weight of Beam
(w_3) = b x D x 25
= 0.23 x 0.445 x 25
= 2.56 KN/m
Total load = $w_1 + w_2 + w_3$
= 7.94 + 12.19 + 2.56
= 22.69 KN/m
Step 4: Calculation of Eff. Sp
l_{eff} is lesser of:
i) l + d = 4 + 0.4 = 4.4 m
ii) c/c between support = 4.23 m
Here, l_{eff} = 4.23 m
Step 5: Moment Calculation
Mu = 1.5 x w x l_{eff}^2 / 8
= 1.5 x 22.69 x 4.23^2 / 8
= 76.12 KN/m
Step 6: Calculation of Mu lim
Mu lim = 0.129 x fck x b x d^2
= 0.129 x 25 x 230 x 400^2
= 118.68 KN/m
Mu < Mu lim
The section is under reinforced and d_{prov} is sufficient
Step 7: Calculation of Steel
Ast = (0.5 fck / fy) (1 - $\sqrt{1- (4.6 \times Mu / fck \times b \times d^2)}$ b x d
= (0.5x25/550) (1 - $\sqrt{1- (4.6x76.12x10^6/25 x230x400^2)}$ 230 x 400
= 445.32 mm^2
Step 8: Calculation of Ast min
Ast min = 0.85/fy x b x d
= 0.85/550 x 230 x 400
= 142.18 mm^2
Ast > Ast min hence safe
Step 9: Calculation of no of bars
Assume 16 mm dia. bars
No of Bars = Ast / (π/4 x 16^2)
= 445.32 / 201.06
= 2.21 nos
Provide 3 # 16 mm dia. bars for the main bars
Provide 2 # 12 mm dia. bars for the anchor bars
Step 10: Check for Shear
Vu = Wu x l_{eff} / 2
= 1.5 x 22.69 x 4.23 / 2
= 71.98 KN
τ_v = Vu / b x d
τ_v = 71.98x 10^3 / 230 x 400

= 0.78 N/mm^2

Pt = (Ast$_{prov}$ / b x d) x 100

= {(π/4 x 3 x 16^2)/ 230 x 400}x 100

= 0.65%

As per IS 456:2000 Table 19

Using Interpolation Method

For Pt = 0.65% , τ_c = 0.54 N/mm^2

As per IS 456:2000 Table 20

τ_{cmax} = 3.1 N/mm^2

$\tau_{cmax} > \tau_v > \tau_c$

Shear Reinforcement is required

Step 11: Calculation of Vus

Vus = Vu – Vuc

= 71.98 x 10^3 – (τ_c x b x d)

= 71.78 x 10^3 – (0.54 x 230 x 400)

= 22.3 KN

Provide 2 legged 8 mm dia. bars

Asv = (π/4 x 2 x 8^2) = 100.53 mm^2

Spacing = 0.87 x fy x Asv x d/ Vus

= 0.87 x 550 x 100.53 x 400/ 22.3 x 10^3

= 862.84 mm

Step 12: Check for Spacing

i) Calculated = 862.84 mm

ii) 0.735 d = 0.75 x 400 = 300 mm

iii) 300 mm

Provide 2 legged 8 mm dia. bars at 300 mm c/c

M. Beam Design By sp-16 Chart

Mu = 76.12 KN.m

b = 239 mm

d = 400 mm

fck = 25 N/mm^2

fy = 550 N/mm^2

Step 1: Mu / b x d^2 = 76.12 x 10^6/ 230 x 400^2

= 2.07 N/mm^2

Step 2: From sp 16 chart for Pt

Using Interpolation Technique

Pt for Mu/b x d^2 = 2.07, <u>Pt = 0.490%</u>

Step 3: Steel Calculation

Ast = (Pt/100) x b x d

= (0.490/100) x 230 x 400

= 450.8 mm^2

Ast min = (0.87/fy) b x d

= (0.87/550) x 230 x 400

= 142.18 mm^2

Ast > Ast min hence safe

Assume 16 mm dia. bars

No of bars = Ast/ area of 1 bar

= 450.8 / (π/4 x 16^2)

= 2.24 ~ 3 Bars

ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538
Volume 12 Issue IV Apr 2024- Available at www.ijraset.com

IV. RESULT

Comparision of Slab Design		
Slab	Manual Calculation	Sp 16 chart
Slab Design	Spacing in longer span = 300 mm c/c	Spacing in longer span = 300 mm c/c
	Spacing in shorter span = 260 mm c/c	Spacing in shorter span = 250 mm c/c

Beam	Manual cal.	Sp-16 chart
Beam	Ast = 445.32 mm^2	Ast = 450.8 mm^2
	Steel provided = 3 # 16 mm dia. bars	Steel provided = 3 # 16 mm dia. bars


V. CONCLUSION

Studying design aids for FE 550 grade of steel can lead to conclusions regarding its structural properties, suitability for various applications, and the effectiveness of design guidelines in optimizing performance and safety. These conclusions can inform engineers and designers about the best practices for utilizing FE 550 grade steel in their projects, considering factors such as strength, ductility, and cost-effectiveness.

REFERENCES

[1] sp 16:1980
[2] IS 456:2000
[3] Gorgolewski, Mark. "The implications of reuse and recycling for the design of steel buildings." Can J Civ Eng 33 (2006): 489-49
[4] Rossi, Barbara. "Discussion on the use of stainless steel in constructions in view of sustainability." Thin-Walled Struct 83 (2014): 182-189.
[5] Wang, R.; Shenoi, R.A. Experimental and numerical study on ultimate strength of steel tubular members with pitting corrosion damage. Mar. Struct. 2019, 64, 124–137
[6] EN 1993−1−1; Eurocode 3: Design of Steel Structures—Part 1-1: General Rules and Rules for Buildings. European Committee for Standardisation: Brussels, Belgium, 2004.

©IJRASET: All Rights are Reserved

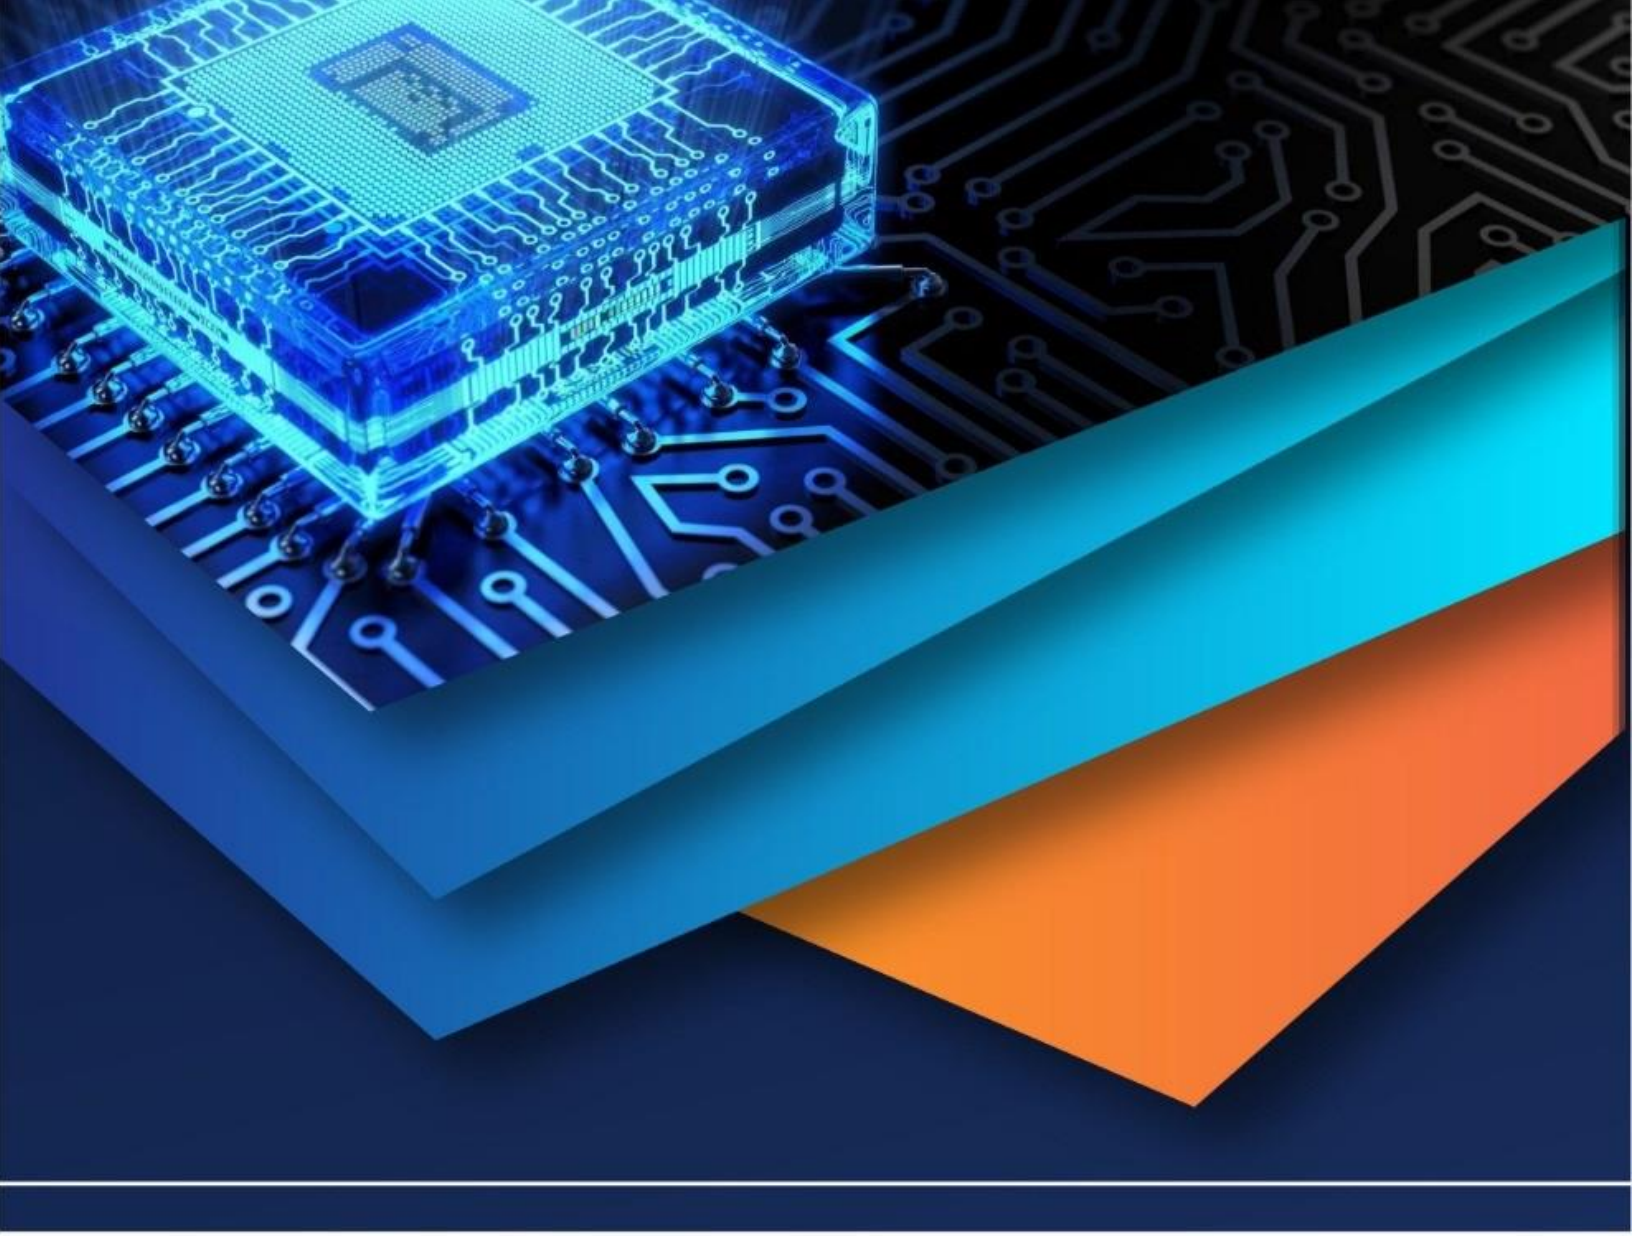

10.22214/IJRASET

45.98

IMPACT FACTOR: 7.129

IMPACT FACTOR: 7.429

INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089 (24*7 Support on Whatsapp)