iJRASET
International Journal For Research in Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 14 **Issue:** IV **Month of publication:** April 2026

DOI: https://doi.org/10.22214/ijraset.2026.80601

www.ijraset.com

Call: 08813907089 | E-mail ID: ijraset@gmail.com

International Journal for Research in Applied Science & Engineering Technology (IJRASET)
ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538
Volume 14 Issue IV Apr 2026- Available at www.ijraset.com

Prototypic Hand Talk Assistive Technology for Physically Challenged

Pavana M[1], Satha S[2], Siva Sankari K[3], Gayathri R[4], P Padmaloshani[5]
[1,2,3,4] *Department of Biomedical Engineering, Selvam College of Technology, Namakkal*
[5]*Department of Electronics and Communication Engineering, Selvam College of Technology, Namakkal*

Abstract: ***The Flex Sensor–Based Hand Gesture Detection System is designed to assist deaf and dumb individuals in communicating their needs effectively with others This system provides a simple and efficient solution by converting hand gestures into meaningful commands that can be understood by nearby people or caregivers. In this system, flex sensors are used to detect the bending motion of the fingers. When a user performs a specific hand gesture, the flex sensors measure the change in resistance caused by finger movement. These signals are then sent to an Arduino microcontroller, which acts as the main processing unit of the system. The Arduino interprets the sensor data and identifies the corresponding gesture based on predefined commands Once the gesture is recognized, the system generates both text and voice outputs. The LCD display shows the message visually so that it can be read easily, while the voice module converts the detected gesture into a spoken message. For example, gestures can represent needs such as water, food, medicine, emergency help, or general assistance. The generated voice message is then played through a speaker, allowing nearby people, caregivers, or authorities to immediately understand the user's request. This helps ensure quick response and timely support. Overall, this system improves communication, enhances independence, and provides a reliable assistive technology for deaf and dumb individuals in their daily lives.***
Keywords: Assistive Technology, Gesture Recognition, Flex Sensor, Arduino, Voice Output, Communication Aid

I. INTRODUCTION

Geographical limitations, high medical costs, and income inequalities have resulted in inadequate access to quality healthcare for a large portion of the global population. These challenges often lead to improper or delayed treatment, particularly for patients suffering from severe illnesses or physical disabilities. Among them, paralyzed individuals are at greater risk due to their inability to communicate their needs effectively. Hence, there is a strong need for an efficient and continuous health monitoring system. Conventional healthcare methods, which rely on periodic patient evaluation by medical professionals, are insufficient in detecting sudden and critical changes in health conditions.

According to global health reports, a significant number of individuals require constant monitoring and assistance for their safety and well-being. To address these challenges, an IoT-based health monitoring system is proposed. The system integrates multiple sensors, including an ADXL335 accelerometer for fall detection, a MAX30100 sensor for heart rate and SpO_2 monitoring, an LM35 temperature sensor, and flex sensors embedded in gloves to facilitate patient interaction. An ESP32 (ESP-WROOM-32) microcontroller is used to process and transmit the collected data. These sensors continuously monitor vital parameters and transmit real-time data to healthcare professionals, enabling early detection of abnormalities such as irregular heart rate, temperature fluctuations, or sudden falls. Immediate alerts allow timely medical intervention, thereby reducing the risk of complications. Additionally, the system enables patients to communicate basic needs like food, water, or assistance through simple finger movements.

By leveraging Internet of Things (IoT) technology, the system ensures seamless communication between patients, caregivers, and medical personnel. It enhances healthcare efficiency by enabling continuous monitoring and prompt response to emergencies. Furthermore, it provides reassurance to families by keeping them informed about the patient's health status in real time. Overall, this system reduces emergency incidents, lowers hospital admissions, and minimizes the burden on caregivers, contributing to a more effective, reliable, and sustainable healthcare model .Communication between deaf and dumb individuals and others is often difficult due to the lack of an effective interaction system. To address this issue, a flex sensor–based hand gesture detection system is proposed. Flex sensors attached to the fingers detect bending movements and convert them into electrical signals representing specific gestures.

An Arduino microcontroller processes these signals to identify predefined gestures and interpret the user's needs accurately. The recognized commands are displayed as text on an LCD screen for visual understanding.

©IJRASET: All Rights are Reserved

Additionally, a voice module converts the text into speech, which is played through a speaker to communicate messages such as food, water, medicine, or emergency assistance .This system acts as an effective communication bridge, enabling deaf and dumb individuals to express their needs easily and receive timely help from caregivers and others.

II. LITERATURE REVIEW

Several researchers have developed hand gesture recognition systems to assist communication and human–computer interaction. A flex sensor–based hand gesture recognition system was proposed by R. Xiong et al. [1] to help deaf and dumb individuals communicate their needs effectively. In this system, flex sensors are attached to a glove to detect finger bending and hand movements. The signals from the sensors are processed using an Arduino microcontroller to identify predefined gestures. Once a gesture is detected, the corresponding message is displayed on an LCD screen and converted into speech using a voice module. This system improves communication by providing both visual and audio outputs. However, the accuracy of gesture recognition may decrease if the sensors are not properly calibrated or if the user performs inconsistent hand movements.

A real-time hand gesture recognition system for intuitive human–computer interaction was developed by Priyadarshan Dhabe et al. [2]. The system uses Media Pipe and Open CV to detect hand landmarks from webcam input and interpret gestures for applications such as virtual mouse control, magic canvas drawing, and media player control. This approach provides a contactless interface for interacting with computers. However, the system performance may decrease under poor lighting conditions or complex backgrounds.

Another study by Parth Narendra Gaikwad and Arju Mukherjee [3] focused on developing a robust real-time hand gesture recognition system for drone navigation in military applications. The system captures hand gesture images and processes them using computer vision techniques. A Residual Neural Network model (ResNet20v2) is used to classify gestures and convert them into drone navigation commands. The system achieved a high gesture recognition accuracy of **99.73%**, improving operational efficiency. However, the system requires high computational resources and may be affected by environmental factors such as lighting variations.

Similarly, Abinith N and Arun Karthick M [4] proposed a hand gesture-based vehicle control system using a two-stage Convolutional Neural Network. In this system, hand images are captured using a camera and processed to detect palm regions and finger landmarks. Based on the recognized gesture, commands such as forward, backward, left, right, and stop are generated for vehicle control. The system achieved an accuracy of **95.28%**, providing an intuitive and contactless control method. However, variations in hand gestures, camera position, and lighting conditions may affect system performance.

Another real-time hand sign and gesture recognition system was developed by Priyal Raj et al. [5] using Convolutional Neural Networks. The system captures video frames, detects hand regions, extracts gesture features such as orientation, centroid, finger state, and thumb position, and classifies gestures using a CNN model. The proposed system achieved a high recognition accuracy of approximately **99.89%** and operates without additional hardware, making it cost-effective. However, the system performance may decrease in poor lighting conditions or complex backgrounds that affect hand detection accuracy.

Overall, these studies demonstrate that hand gesture recognition systems can significantly improve human–computer interaction and assistive communication for people with hearing and speech impairments. However, challenges such as lighting conditions, gesture variations, and computational requirements still affect the reliability and efficiency of existing systems.

III. PROPOSED METHODOLOGY

The proposed system shown in \Fig. 1 is designed to assist deaf and dumb individuals in communicating their needs using hand gestures. The system detects finger movements using flex sensors and converts them into meaningful text and voice messages. The overall methodology of the system is divided into four major stages: gesture acquisition, signal processing, gesture recognition, and message output.

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538
Volume 14 Issue IV Apr 2026- Available at www.ijraset.com

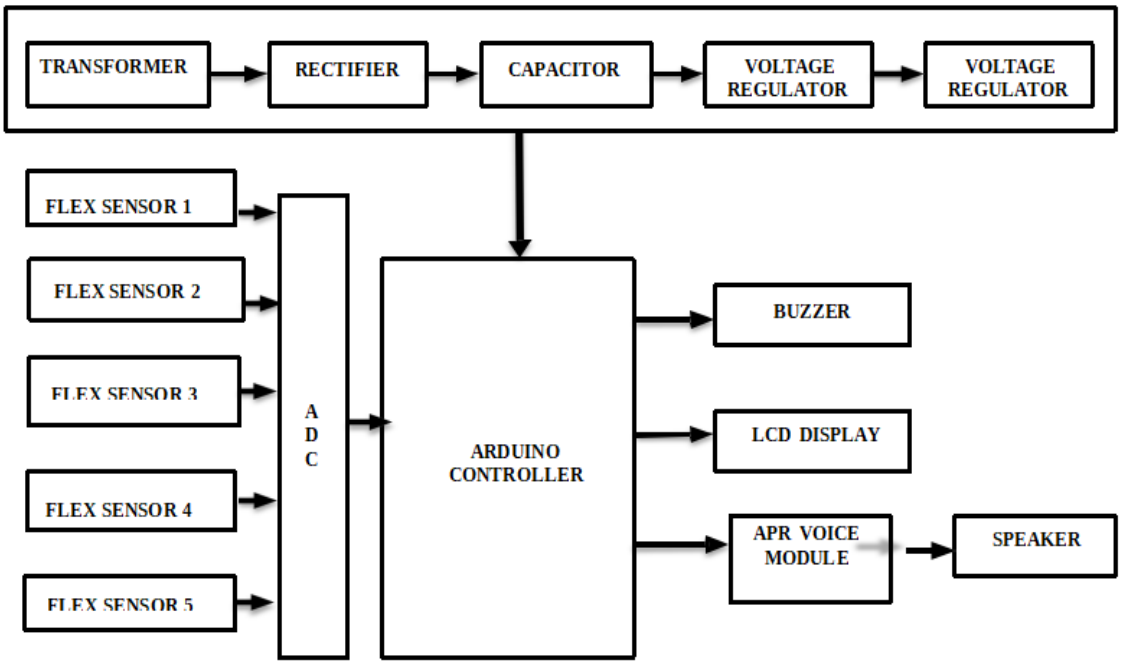


FIG. 1. PROPOSED SYSTEM BLACK DIAGRAM

A. Gesture Acquisition

In the first stage, flex sensors are attached to the fingers of a glove worn by the user. Flex sensors are resistive sensors whose resistance changes when they bend. When the user performs a hand gesture, the bending of the fingers causes a change in the resistance of the sensors. These resistance variations generate analog voltage signals that represent different finger positions and hand gestures.The flex sensors are connected to an Arduino microcontroller, which reads the analog signals produced by each sensor. The sensor values are continuously monitored to capture the bending pattern of the fingers.

B. Signal Processing

The analog signals obtained from the flex sensors are processed by the Arduino microcontroller. The Arduino converts the analog signals into digital values using its Analog-to-Digital Converter (ADC).Each gesture corresponds to a specific range of sensor values. Therefore, predefined threshold values are programmed into the Arduino to identify different finger bending patterns. The microcontroller continuously compares the incoming sensor readings with these threshold values to detect valid gestures.

C. Gesture Recognition

Once the sensor signals are processed, the system identifies the gesture based on the combination of finger bending patterns. Each recognized gesture is mapped to a specific predefined command.

- Gesture 1 → Need Water,
- Gesture 2 → Need Food,
- Gesture 3 → Need Medicine
- Gesture 4 → Need Help ,
- Gesture 5 → Emergency

The Arduino processes the sensor readings and determines which gesture pattern matches the stored command patterns. After successful recognition, the corresponding message is generated by the system.

D. Message Output

After gesture recognition, the system provides both visual and audio communication outputs. An LCD display shows the corresponding text message such as “Need Water,” “Need Food,” or “Emergency Help.”

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

This allows nearby individuals to easily understand the user's request. In addition to the visual output, a voice module and speaker are used to generate an audible message. The Arduino sends a signal to the voice module, which plays a pre-recorded voice message through the speaker. This enables caregivers or nearby people to quickly respond to the user's needs.

E. Flex sensor



Fig. 2. Flex sensor

A flex sensor is used to detect the bending motion of fingers. When a deaf or dumb person bends their fingers, the resistance of the flex sensor changes according to the angle of the bend. These variations are used to identify specific hand gestures. The sensor converts the physical movement of the hand into electrical signals, which are then sent to the microcontroller for processing.

F. Arduino Controller

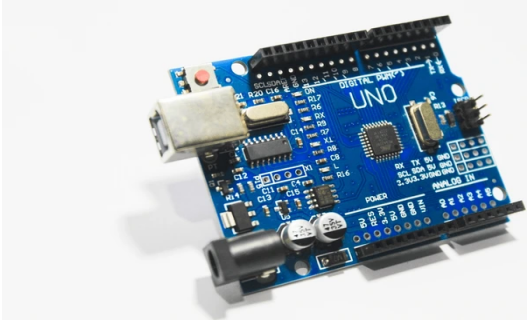


Fig. 3. Arduino Controller

The Arduino Uno microcontroller serves as the central processing unit of the system, continuously reading analogy signals from the flex sensors attached to the user's fingers. By analyzing changes in sensor resistance, the Arduino interprets different hand gestures and converts them into meaningful commands. It processes the gesture patterns using programmed logic and simultaneously controls the connected peripherals, including the LCD display and the voice module. The voice module provides real-time audio feedback by converting recognized gestures into pre-recorded messages such as "Need Water," "Need Food," "Emergency Help," or "Need Medicine," which are played through a speaker to alert nearby caregivers or family members. This combination of visual output on the LCD and audible feedback ensures that the system provides an effective, reliable, and user-friendly communication platform for deaf and dumb individuals.

G. Voice module

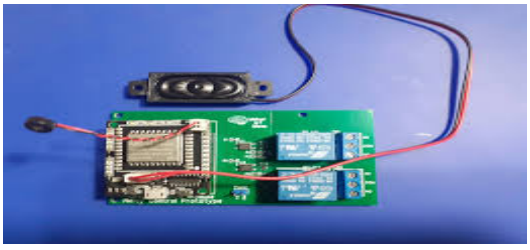


Fig . 4 . Voice module

Voice module converts recognized gesture commands from the Arduino into audible speech signals. When a gesture is identified, the Arduino sends a corresponding command to the voice module, which generates a pre-recorded voice message. This enables deaf and dumb individuals to communicate their needs effectively through audio feedback. Working in conjunction with a speaker, the module delivers clear and immediate voice messages, complementing the visual output provided by the LCD display to ensure both audio and visual communication.

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

H. LCD Display



Fig. 5. LCD Display

The 16×2 LCD display provides a visual representation of the recognized hand gestures by showing the corresponding messages as text. This allows caregivers or nearby individuals to read the user's needs even in situations where audio feedback may not be audible. The display shows gesture-based messages, indicates system status, and provides visual confirmation of the recognized commands, complementing the voice module to create an effective audio-visual communication interface for deaf and dumb individuals.

I. Speaker



Fig.6. Speaker

The **speaker** is connected to the voice module to broadcast the generated voice messages. When a gesture such as water, food, help, medicine, or emergency is detected, the speaker announces the message so that nearby caregivers or authority persons can respond quickly.

J. Gesture Interpretation Process

The gesture interpretation process begins with the detection of finger bending using flex sensors attached to the user's fingers. The flex sensors measure changes in resistance as the fingers bend, and these analog signals are converted into digital values by the Arduino controller. The system then matches the detected gesture patterns with a set of predefined commands. Once a gesture is recognized, the system generates both text and voice outputs through the LCD display and the voice module, enabling effective and real-time communication of the user's needs.

IV. RESULT AND DISCUSSION

The flex sensor–based hand gesture detection system was successfully developed and tested for assisting deaf and dumb individuals in communication. The system accurately captures finger movements using flex sensors and converts them into electrical signals, which are effectively processed by the Arduino microcontroller to recognize predefined gestures.

The results show that the system reliably identifies gestures corresponding to basic needs such as water, food, medicine, help, and emergency situations. The recognized commands are clearly displayed on a 16×2 LCD screen and simultaneously converted into voice output through a speaker, ensuring both visual and auditory communication.

The system demonstrated fast response time, high accuracy in gesture recognition, and efficient real-time performance. It effectively reduces communication barriers and enables users to express their needs independently. Overall, the results confirm that the system is a reliable, user-friendly, and practical solution for improving communication and support for deaf and dumb individuals.

Sensor	Output Request
Flex Sensor 1	Need Water
Flex Sensor 2	Need Food
Flex Sensor 3	Medicine

Flex Sensor 4	Help
Flex Sensor 5	Emergency

The hardware implementation of the proposed system is shown in Fig. 7



Fig.7. Harware Implementation of prototypic Hand Talk Assistive Technology For Physically Challenged.

V. CONCLUSTION

The proposed system employs flex sensor–based hand gesture detection to assist deaf and dumb individuals by converting their hand movements into meaningful communication. Finger bending movements are captured using flex sensors attached to a specially designed glove, which detect variations in resistance corresponding to the degree of finger flexion. These signals are then transmitted to an Arduino microcontroller, which acts as the central processing unit of the system. The microcontroller continuously monitors the sensor data and applies programmed algorithms to recognize specific hand gestures. Each detected gesture is mapped to a predefined command representing essential needs, such as requesting water, food, medicine, help, or indicating an emergency situation. This mapping allows individuals with speech and hearing impairments to communicate their requirements efficiently and intuitively with the people around them .To enhance user interaction and accessibility, the system provides both visual and auditory feedback. The recognized gesture is displayed on a 16×2 LCD screen, allowing nearby individuals to read the message even in noisy environments or when audio is not feasible. Simultaneously, the voice module converts the gesture command into a pre-recorded speech output, which is played through an integrated speaker. This ensures that caregivers, family members, or authorities can immediately understand the user's request, facilitating timely assistance. The combination of visual and audio outputs strengthens communication reliability, reduces misunderstandings, and promotes independence for the user. Overall, the system provides an effective, user-friendly, and real-time communication platform that bridges the interaction gap for deaf and dumb individuals, demonstrating the practical integration of sensor technology and embedded system design in assistive applications.

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

REFERENCES

[1] Xiao, Feiyun, Zhen Zhang, Changhai Liu, and Yong Wang. ―Human motion intention recognition method with visual, audio, and surface electromyography modalities for a mechanical hand in different environments.‖ *Biomedical Signal Processing and Control* 79 (2023): 104089.

[2] Bora, Jyotishman, Saine Dehingia, Abhijit Boruah, Anuraag Anuj Chetia, and Dikhit Gogoi. ―Real-time Assamese Sign Language Recognition using MediaPipe and Deep Learning.‖ *Procedia Computer Science* 218 (2023): 1384 - 1393.

[3] Muneeb, Muhammad, R. Hammad, and Ahmad Jalal. ―Automate appliances via gestures recognition for elderly living assistance.‖ In *IEEE Conference on Advancements in Computational Sciences*. 2023.

[4] Khalaf, Luay Ibrahim, Salma Abdullah Aswad, Saadaldeen Rashid Ahmed, Bassma Makki, and Mohammed Rashid Ahmed. ―Survey On Recognition Hand Gesture By Using Data Mining Algorithms.‖ In 2022 International Congress on Human-Computer Interaction, Optimization and Robotic Applications (HORA), pp. 1 - 4. IEEE, 2022.

[5] Saxena, Rohan, Romy Garg, Bhoomi Gupta, and Narinder Kaur. ―Deep Learning Based Hand Sign Recognition in the Context of Indian Greetings and Gestures.‖ In IoT Based Control Networks and Intelligent Systems: Proceedings of 3rd ICICNIS 2022, pp. 287 - 297. Singapore : Springer Nature Singapore, 2022.

[6] Zhang, Fan, Valentin Bazarevsky, Andrey Vakunov, Andrei Tkachenka, George Sung, Chuo-Ling Chang, and Matthias Grundmann. ―Mediapipe hands: On-device real-time hand tracking.‖ arXiv preprint arXiv :2006.10214(2020).


[7] Amit, Maricel L., Arnel C. Fajardo, and Ruji P. Medina. ―Recognition of Real-Time Hand Gestures using Mediapipe Holistic Model and LSTM with MLP Architecture.‖ In *2022 IEEE 10th Conference on Systems, Process and Control (ICSPC)*, pp. 292 - 295. IEEE, 2022.

[8] Deep, A. Litoriya, A. Ingole, V. Asare, S. M. Bhole and S. Pathak,―Realtime Sign Language Detection and Recognition,‖ 2022 2nd Asian Conference on Innovation in Technology (ASIANCON), Ravet, India, 2022,pp. 1 - 4, doi: 10.1109/ASIANCON55314.2022.9908995.

[9] Atif, Bilawal, Neil Buckley, and Emanuele Lindo Secco. ―Hand Gesture and Human-Drone Interaction.‖ In Intelligent Systemsand Applications: Proceedings of the 2022 Intelligent Systems Conference (IntelliSys) Volume 3, pp. 299 - 308. Cham : Springer International Publishing, 2022.

[10] Harris, Moh, and Ali Suryaperdana Agoes. ―Applying hand gesture recognition for user guide application using MediaPipe.‖ In 2nd International Seminar of Science and Applied Technology (ISSAT 2021), pp. 101 - 108. Atlantis Press, 2021.

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

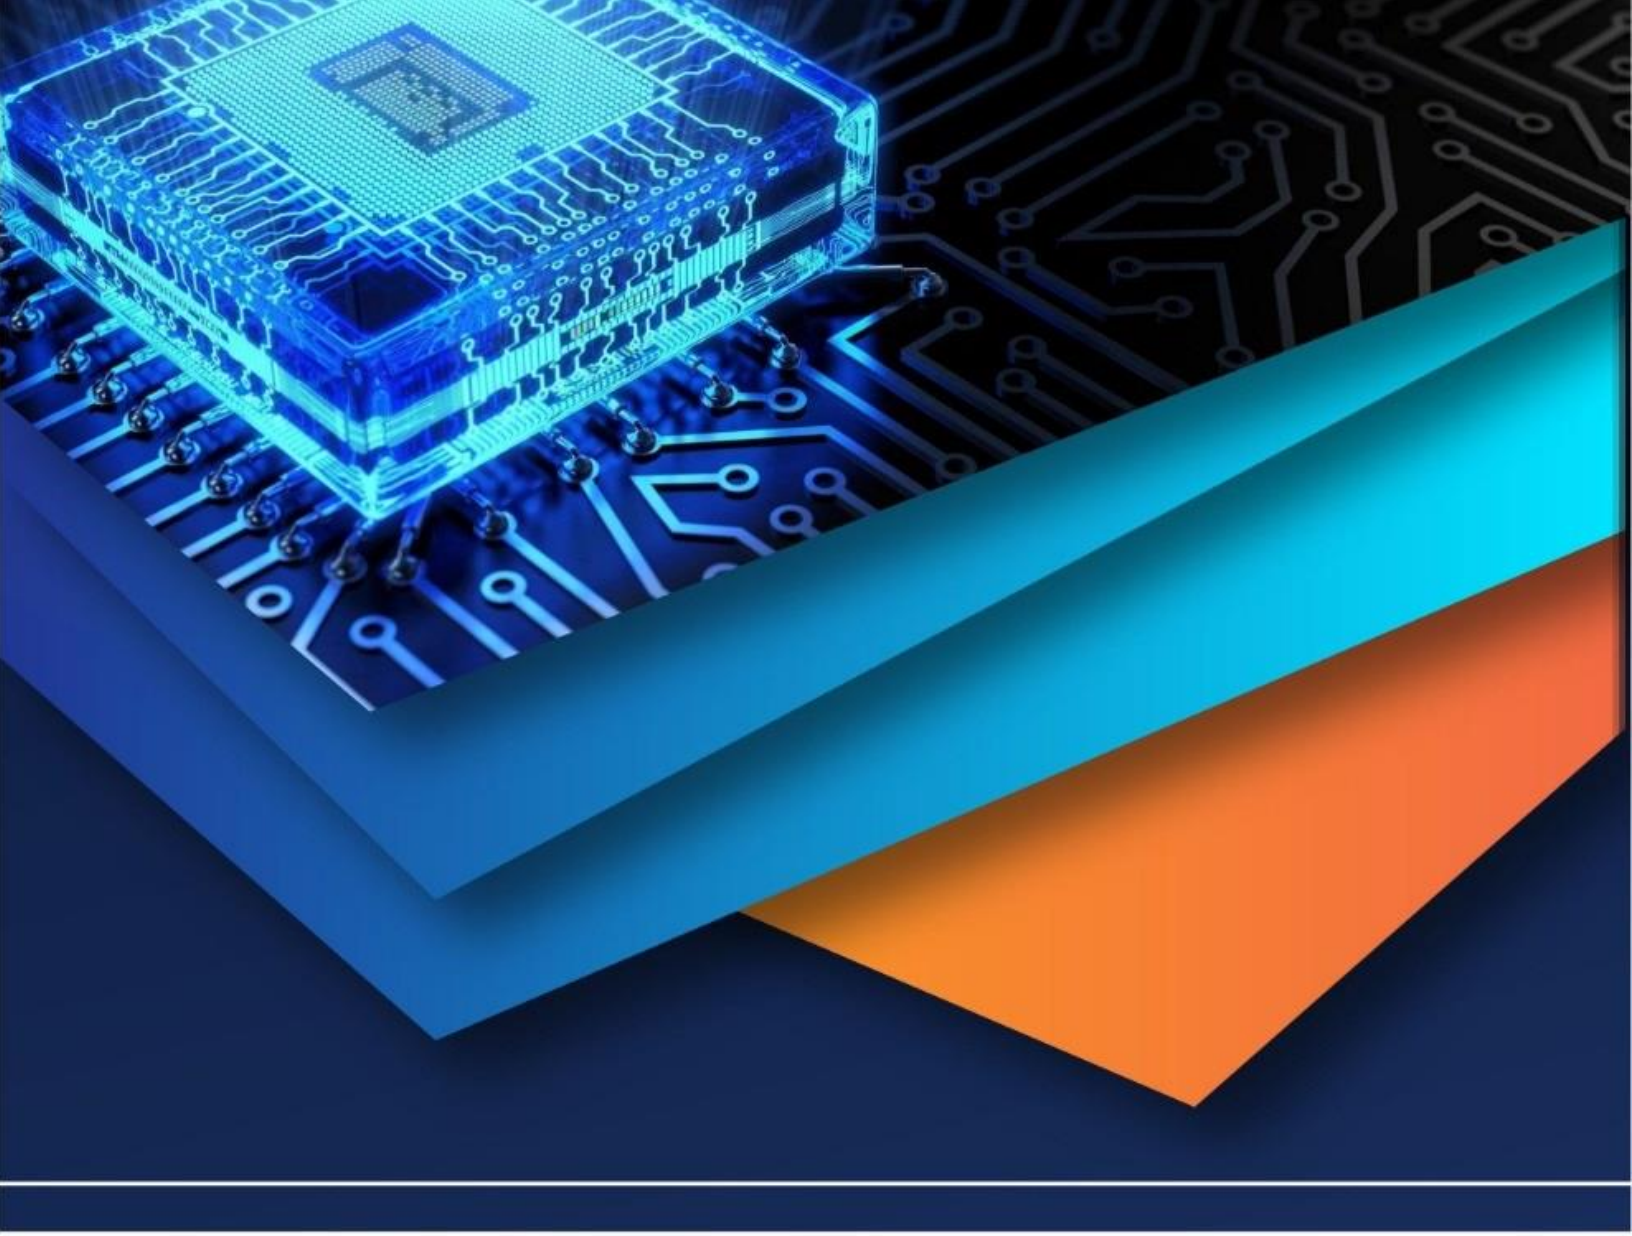

10.22214/IJRASET

45.98

IMPACT FACTOR: 7.129

IMPACT FACTOR: 7.429

INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089 (24*7 Support on Whatsapp)