



IJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 13 **Issue:** V **Month of publication:** May 2025

DOI: <https://doi.org/10.22214/ijraset.2025.71315>

www.ijraset.com

Call:  08813907089

E-mail ID: ijraset@gmail.com

Real-Time Fire and Smoke Monitoring in Vehicles through an Automated Safety System

Ramola Joy P¹, Subha P S², Aarsha Arther³, Nourin A⁴, Shenaz Fathima S⁵, Abhi Uday⁶

Dept of Electronics & Communication, Marian Engineering College, Kazhakkuttom, IndiaKazhakkuttom, India

Abstract: *The increasing prevalence of electronic systems in modern vehicles has brought significant advancements in safety, yet also introduced new risks, particularly concerning fire hazards. There have been a lot of fire incidents where passengers were unable to evacuate in time due to absence of safety measures. This project presents an innovative Automated Vehicle Safety System designed to enhance passenger safety by automatically responding to the detection of smoke or fire within the vehicle. The system integrates advanced sensors to detect smoke, fire, and potentially toxic elements, providing early warnings to drivers and passengers. Upon detecting a critical situation, the system swiftly initiates countermeasures. The vehicle's battery is automatically cut off to prevent fire propagation. Simultaneously, all car doors are unlocked, and seat belts are ejected to facilitate rapid evacuation. The system's performance is evaluated through extensive testing and simulation to optimize its effectiveness in safeguarding lives and minimizing property damage in smoke and fire emergencies.*

Keywords: *Automated Vehicle Safety System, Fire Hazard Mitigation, Smoke And Fire Detection, Door Unlocking And Seatbelt Ejection*

I. INTRODUCTION

Modern vehicles are increasingly equipped with advanced electronic systems to enhance comfort, connectivity, and performance. However, the integration of complex electrical and electronic components also brings about new safety challenges, particularly in the context of fire hazards. Vehicle fires can arise from several factors, including electrical malfunctions, engine overheating, fuel leaks, and even mechanical failures. The consequences of such incidents can be catastrophic, resulting in severe injuries, loss of life, and significant property damage. Traditional fire safety measures in vehicles are often limited to manual intervention or basic warning signals, which may not provide sufficient time for evacuation. This highlights the need for a more proactive and automated approach to vehicle safety. In this context, the Automated Vehicle Safety System proposed in this project aims to address these challenges by integrating state-of-the-art sensors and automated response mechanisms. The system is designed to detect fire and smoke within the vehicle at an early stage and initiate a series of automated safety measures to safeguard the occupants.

The proposed system combines real-time monitoring, rapid response, and robust actuation to mitigate risks associated with fire emergencies. By incorporating advanced sensors and microcontroller-based control logic, the system not only alerts the passengers but also takes immediate actions, such as cutting off the battery power, unlocking doors, and ejecting seat belts. This comprehensive safety mechanism is expected to enhance passenger safety and reduce the likelihood of fatal outcomes during vehicle fire incidents

A. Limitations of Conventional Vehicle Safety System

The Traditional vehicle safety systems primarily focus on collision detection and passenger protection during accidents, often neglecting fire-related incidents. In most cases, fire safety measures are limited to manual extinguishers or basic smoke alarms, which rely heavily on human intervention. This limitation poses a significant risk when passengers are incapacitated or unaware of the fire hazard.

Furthermore, the lack of automatic safety protocols during fire emergencies results in delayed responses, compromising evacuation efforts. For instance, in the event of an engine fire, occupants may be trapped inside due to jammed doors or malfunctioning electronic locks. Additionally, conventional systems do not offer automatic battery cutoff, leading to increased fire propagation due to short circuits or fuel ignition. The absence of real-time monitoring also prevents early detection, increasing the likelihood of catastrophic outcomes.

B. The Role of Automated Vehicle Safety System In Case Of Fire

Automated safety systems in vehicles play a crucial role in mitigating risks associated with fire and smoke incidents. Unlike traditional safety measures that rely on manual intervention, automated systems proactively monitor environmental conditions

within the vehicle, ensuring timely detection of hazardous situations. These systems integrate various sensors to detect temperature variations, smoke presence, and air quality, allowing for rapid identification of potential fire hazards.

Upon detection of smoke or elevated temperatures, the automated system initiates a series of safety protocols. These may include activating voice alerts, unlocking doors, ejecting seat belts, and cutting off the vehicle's battery power to prevent fire escalation. By minimizing human intervention, these systems ensure faster response times, which is vital in scenarios where passengers may be incapacitated or unaware of the danger. Automated safety systems thus significantly enhance the overall safety profile of modern vehicles, offering reliable protection against fire emergencies.

C. Automated Fire And Smoke Detection With Vehicle Safety Enhancement

The proposed system integrates a comprehensive array of sensors to detect fire and smoke within the vehicle accurately and efficiently. Utilizing advanced temperature sensors, smoke detectors, and air quality monitoring devices, the system continuously monitors the vehicle environment to identify potential fire hazards. Upon detecting critical conditions, it automatically triggers a series of safety measures aimed at ensuring passenger safety and preventing fire propagation.

Key safety actions include automatic battery disconnection to eliminate power sources that could fuel the fire, immediate unlocking of doors to facilitate quick evacuation, and the ejection of seat belts to free trapped passengers. Additionally, alerts are activated to inform occupants of the emergency. By integrating these automated responses, the system minimizes human intervention and significantly reduces the time taken to initiate safety protocols. The proactive nature of the system enhances the safety of passengers during fire emergencies, ultimately reducing the risk of injury or fatality.

The Automated Vehicle Safety System for fire and smoke detection integrates a combination of sensors to monitor various parameters within the vehicle. These sensors are essential in detecting potential fire hazards and ensuring timely responses. The key components used are:

- **Temperature Sensors:** Placed strategically in critical areas like the engine bay, cabin, exhaust, and trunk. These sensors monitor abnormal heat levels and help detect fire risks.
- **Smoke Detectors:** Installed within the vehicle cabin to detect the presence of smoke, indicating a potential fire outbreak.
- **Air Quality Sensors:** Monitor the presence of harmful gases that may result from combustion, signaling potential fire hazards.
- **Motion Sensors:** Detect sudden changes in vehicle movement, particularly when the vehicle comes to an unexpected stop due to fire or smoke.
- **Arduino Nano:** Serves as the central processing unit, collecting data from the sensors and triggering safety responses when abnormal conditions are detected.

The system operates by continuously collecting data from the sensors and performing real-time analysis using the Arduino Nano. When an anomaly is detected—such as a rapid rise in temperature or the presence of smoke—the Arduino Nano automatically triggers safety protocols. These actions include:

- 1) Displaying an alert message on the LCD screen to inform passengers of the hazard.
- 2) Unlocking all car doors to enable quick evacuation.
- 3) Ejecting seat belts to free passengers.
- 4) Cutting off the vehicle's battery power to reduce the risk of fire spreading.

By automating these critical safety measures, the system significantly reduces response time, minimizing human intervention and enhancing overall passenger safety during fire emergencies.

The integration of multiple sensors ensures reliable detection, while the Arduino Nano efficiently manages data processing and safety protocol execution. This comprehensive approach makes the system highly effective in reducing risks associated with vehicular fires. Furthermore, the system's ability to function autonomously without human intervention makes it ideal for modern vehicles

II. RELATED WORKS

In recent years, there has been an increased focus on integrating fire and smoke detection systems with automated vehicle safety mechanisms to enhance passenger protection. The use of temperature, smoke, and air quality sensors, along with automated responses such as engine shutdown and seatbelt ejection, has proven to be an effective approach in addressing vehicle safety during fire hazards. Several studies and projects have explored similar concepts, focusing on sensor-based detection and automated emergency responses in vehicles.

A. *Car Fire Detection and Automatic Car Door Opening Using IoT*

This work highlights the critical need for fire detection in road transport to prevent fatalities caused by locked vehicle doors during fire accidents. Traditional fire detection systems in automobiles focus primarily on identifying fire hazards but do not address occupant safety in emergency scenarios. This system integrates flame, temperature, and smoke sensors along with an automated car door unlocking mechanism, hazard light activation, and an alarm system, ensuring quick evacuation of passengers. Additionally, a modified mobile CO₂-based air-conditioning unit is used to suppress the fire. The prototype was tested on a mid-sized vehicle, demonstrating a practical and efficient approach to fire safety in automobiles.

With modern vehicles incorporating multiple ignition sources due to fuel efficiency, cost reduction, and material composition, the risk of fire outbreaks remains a persistent challenge. Research efforts in this domain focus on developing intelligent fire detection and suppression systems to mitigate risks and enhance passenger safety. The proposed IoT-based system contributes to this growing field by offering an automated, real-time response mechanism, which can be a significant addition to fire safety technologies in automobiles.

B. *Fire detection & fire alarm systems in heavy vehicles.*

Fire detection and alarm systems play a crucial role in enhancing safety in heavy vehicles, particularly in preventing catastrophic incidents caused by engine compartment fires. A significant study focused on developing an international test standard for fire detection systems in the engine compartments of heavy vehicles. This research compiled extensive background information on fire detection technologies, relevant standards and guidelines, fire causes, durability factors, and environmental conditions affecting detection efficiency. The study involved numerous experimental tests to generate data for standard development. Additionally, it explored fire detection solutions for bus and coach toilet compartments and driver sleeping areas, providing recommendations to improve fire safety in these critical sections. The findings from this research have been documented in multiple reports, contributing to the advancement of fire safety regulations and system design in heavy vehicle manufacturing.

This work aligns with ongoing efforts to improve automated fire detection and suppression systems, ensuring that vehicles are equipped with reliable and standardized safety mechanisms. The insights from this study provide a foundation for further advancements in fire detection technologies, making transportation safer for passengers and drivers alike.

C. *Vehicle fire detection and prediction system using sensor networks*

Advancements in sensor network technology have significantly improved fire detection and prediction systems in vehicles. One such study, Vehicle Fire Detection and Prediction System Using Sensor Networks, focuses on leveraging gas sensors and temperature sensors to detect and monitor fire incidents caused by electrical and electronic faults in automobiles.

The system operates by continuously monitoring environmental conditions using a sensor network, where multiple sensors collect data from different locations and transmit it to a central hub for analysis. Upon detecting abnormal temperature spikes or hazardous gas levels, the system triggers an alarm and sends emergency alerts to authorities, enabling a rapid response to prevent fire escalation. Additionally, the system incorporates fire suppression mechanisms to mitigate risks.

This research contributes to the development of real-time fire monitoring and predictive fire detection systems, which enhance vehicle safety. By integrating IoT-based sensor networks, such systems can provide early warnings and automated emergency responses, reducing the likelihood of fire-related casualties and property damage. The findings from this study align with ongoing efforts to improve fire prevention technologies in modern automotive safety systems.

D. *Challenges in Current Solutions*

Despite advancements in vehicle fire detection systems, several challenges persist. One major issue is delayed detection and response, as most systems detect fire only after ignition rather than identifying early warning signs such as overheating or electrical faults. This limits the effectiveness of suppression mechanisms and emergency response. Additionally, fire prediction capabilities are inadequate, as current solutions primarily focus on detecting flames, smoke, or high temperatures instead of proactively identifying risk factors like fuel leaks or short circuits.

Another significant challenge is sensor accuracy and reliability, as environmental factors such as dust, humidity, and vibrations can affect sensor performance, leading to false alarms or failure to detect actual fires. Furthermore, power consumption in IoT-based fire detection systems is a concern, particularly in electric vehicles where excessive energy use can drain the battery. Integrating fire detection with other vehicle safety features, such as engine shut-off and automatic braking, remains complex and underdeveloped.

In systems that incorporate automatic door unlocking during fire emergencies, security risks arise, including potential unauthorized access or accidental door opening due to system malfunctions. Additionally, fire detection in heavy vehicles presents unique challenges, as engine compartments, fuel systems, and enclosed spaces like driver sleeping areas require specialized sensor placement and monitoring. Cost is another limiting factor, as implementing advanced fire detection technology with multiple sensors and IoT connectivity increases vehicle manufacturing costs, making widespread adoption difficult. Retrofitting older vehicles with such systems is even more expensive. Moreover, alert transmission in IoT-based systems relies on network connectivity, which can be unreliable in remote areas, delaying emergency notifications.

Lastly, the lack of standardized fire safety regulations for vehicles leads to inconsistent implementations across different manufacturers and regions. The absence of a unified global standard makes compliance difficult and slows down the adoption of advanced fire detection solutions. To address these challenges, future systems should focus on AI-driven predictive analysis, more durable and self-calibrating sensors, low-power IoT designs, and seamless integration with other safety mechanisms. Establishing global fire safety standards is also essential for ensuring uniformity and effectiveness across all vehicle types.

E. Directions for Future Research and Innovation

Future research should focus on AI-driven predictive fire detection, using machine learning to analyze sensor data and distinguish real threats from false alarms. Smart sensor networks with multi-sensor fusion and IoT-based remote monitoring can enable real-time alerts to emergency services and vehicle owners. Improving emergency response mechanisms is essential. Future systems should adapt to fire severity, incorporating automated fire suppression using nano-fluids or dry chemical agents. Enhancing automatic seat belt release and door unlocking will ensure effective evacuation while preventing unauthorized access.

Developing energy-efficient, self-powered fire detection systems is another key direction. Energy harvesting techniques like thermoelectric or kinetic energy can provide backup power for critical systems. V2X communication should be integrated to send real-time fire alerts to emergency services, infrastructure, and nearby vehicles. With the rise of electric and autonomous vehicles, research should address thermal runaway detection in EV batteries and equip autonomous vehicles with intelligent fire response systems for safe stopping and evacuation. Finally, global fire safety standards must be established to ensure consistency across manufacturers, enabling wider adoption of advanced fire prevention technologies.

III. MATERIALS AND METHODS

A. System Overview

The integrated fire and smoke detection with automated vehicle safety system is designed to detect fire or smoke within a vehicle and respond with safety mechanisms. It combines temperature sensors, smoke detectors, and air quality sensors with automated vehicle control components like braking, battery shutdown, seatbelt ejection, and door unlocking.

Key Features:

- **Multi-Sensor Integration:** Combines temperature, smoke, air quality, and motion sensors for comprehensive hazard detection.
- **Real-Time Response:** Immediate activation of safety measures, such as braking and automatic braking, when danger is detected.
- **Automated Safety Mechanisms:** Includes seatbelt ejection and door unlocking to enable rapid evacuation.
- **Centralized Control:** Arduino Mega processes sensor data and coordinates the activation of safety protocols.
- **Reliable Operation:** Designed to function efficiently even in harsh vehicle environments.

B. Hardware Components and Their Roles

Component	Function
Temperature Sensor	Monitors temperature at critical points to check for over heating or fire.
Smoke Sensor	Identifies Smoke, When smoke is detected triggers warning
Air Quality Sensor	Monitors gas concentration to detect harmful fumes or fire related gas
Vehicle Motion Sensor	Constantly monitors speed variations to assess risks.
Relay Module	Acts as a switch to control seatbelt ejection.
Arduino Nano	A microcontroller that processes sensor data and manages system operations.

Servo Motor	Used for automatic car door unlocking
DC-DC Buck Converter	Steps down supplied voltage to level suitable for different components
I2C Protocol	Facilitate communication between Arduino nano and LCD display

Figure 1: Components Table

C. System Working Principle & Data Flow

Step 1. System Initialization and Monitoring

- The system powers up, and sensors are calibrated.
- The system continuously monitors environmental conditions using the DHT11 temperature sensors, smoke detectors, air quality sensors, and the vehicle motion sensor.

Step2. Data Acquisition

- Sensor detects abnormal values and sends data to Arduino Nano for processing.

Step3. Data Processing

- Arduino Nano evaluates data and determines whether emergency response is required based on preset threshold.

Step4. Warning Display

- If a critical situation is identified system displays warning message.

Step 5. Automatic Braking

- System activates automatic braking to halt the vehicle

Step 6. Door Unlocking

- Activates automatic car door unlocking for quick exit

Step 7. Seatbelt Ejection

- Activates seatbelt ejection using relay to aid quick exit

Step 8. System Shutdown

- After completing above sequence system shutdowns to prevent further hazards

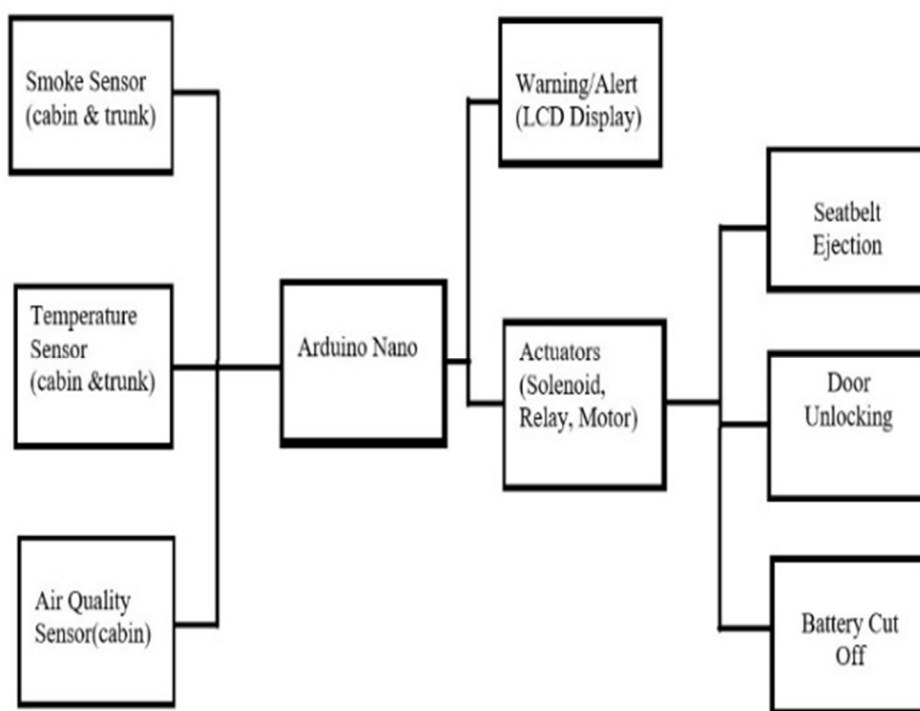


Figure 2: Block Diagram of the Proposed System

IV.RESULT AND DISCUSSION

A. Results

The experimental setup involved the development of a prototype that integrated multiple safety components within a controlled environment to simulate vehicle conditions. The system was tested for fire, smoke, air quality variations, and vehicle motion. The results demonstrated quick detection and activation of safety mechanisms. The system effectively displayed warnings on the LCD, performed automatic braking, unlocked doors, and ejected seatbelts when hazardous conditions were detected. The response times were found to be within acceptable limits, ensuring reliable operation during critical situations. The analysis indicates that the proposed system significantly improves vehicle safety by integrating efficient hazard detection and rapid safety responses.

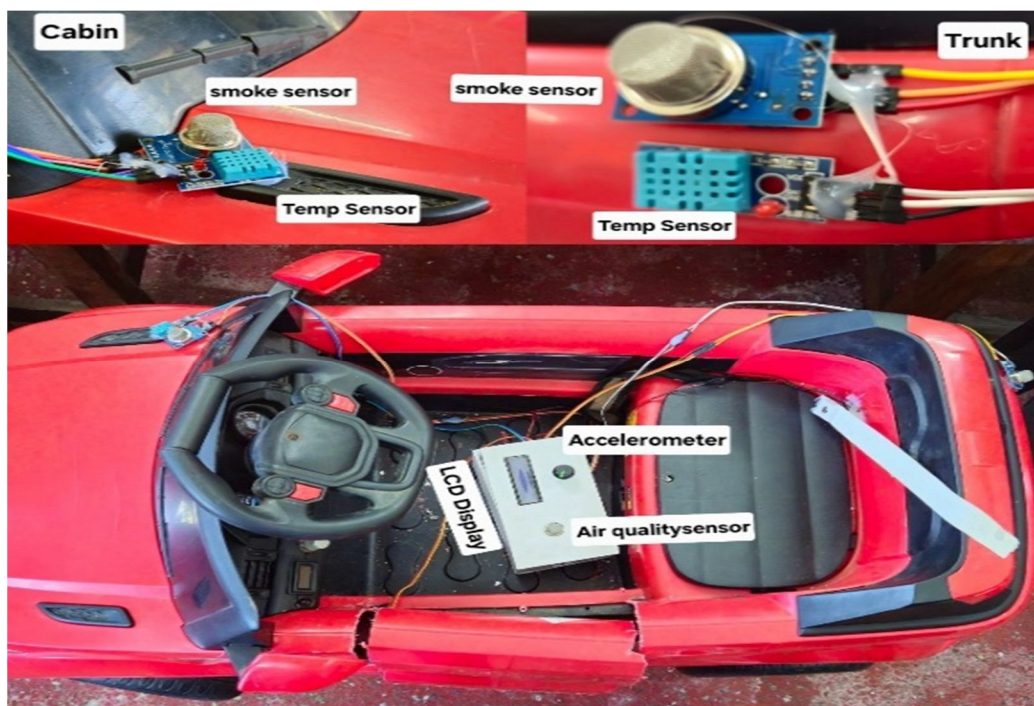


Figure 3: Working of the System

B. Discussion

The proposed integrated fire and smoke detection system with automated vehicle safety features addresses critical safety gaps present in existing vehicle fire management systems. Unlike traditional systems that primarily focus on detecting fire or smoke and merely triggering alarms, this system proactively initiates safety measures. By combining automatic braking, door unlocking, and seatbelt ejection with real-time hazard detection, the system not only alerts occupants but also facilitates rapid evacuation. This holistic approach significantly reduces the risk of injury or fatality during fire emergencies.

During experimentation, the system demonstrated consistent performance in detecting smoke, abnormal temperatures, and air quality changes. The use of the DHT11 sensor for temperature monitoring proved to be effective, while the smoke detector accurately identified hazardous conditions. Moreover, the inclusion of the vehicle motion sensor enabled the system to discern whether the vehicle was stationary or moving, allowing for context-sensitive safety responses. The LCD display effectively communicated real-time data and warnings, enhancing user awareness. The system's ability to execute automatic braking and trigger door unlocking and seatbelt ejection in sequence ensures a well-orchestrated safety protocol.

However, certain challenges were identified during the testing phase. One such issue was maintaining the accuracy of sensor readings under fluctuating environmental conditions, particularly temperature variations within the engine bay. Additionally, the time taken to trigger safety mechanisms could be further optimized for faster response. Future improvements may involve using more advanced sensors with higher precision and incorporating redundant safety checks to account for sensor failures. Despite these challenges, the system proves to be a valuable advancement in enhancing automotive safety through integrated hazard detection and automated response.

V. CONCLUSION

The Integrated Fire and Smoke Detection with Automated Vehicle Safety System presents a significant advancement in automotive safety, addressing the critical need for rapid and automated responses during fire emergencies. Unlike traditional systems that primarily focus on hazard detection alone, this proposed system seamlessly combines fire detection with proactive safety measures such as automatic braking, door unlocking, and seatbelt ejection. By integrating multi-sensor monitoring, real-time response mechanisms, and efficient communication through the I2C protocol, the system ensures comprehensive safety management within the vehicle environment.

The use of Arduino Nano as the core control unit, combined with robust hardware components like DHT11 temperature sensors, smoke detectors, and servo motors, contributes to the system's reliability and effectiveness. The integration of DC-DC buck converters ensures stable power management, while the LCD display provides continuous updates on environmental conditions and warning alerts, enhancing user awareness and preparedness. Through systematic testing, the system demonstrated the ability to promptly detect hazardous situations and respond with coordinated safety measures, significantly reducing the risk of harm to occupants. Moreover, the implementation of automatic braking in combination with door unlocking and seatbelt ejection introduces a holistic approach to vehicle safety during fire outbreaks. The stepwise execution of these actions minimizes panic and ensures an organized evacuation process.

Additionally, the fail-safe mechanism, which reverts to manual control in case of system malfunction, adds an extra layer of security, thereby making the system practical for real-world applications. While the system has proven effective in controlled experiments, further enhancements could involve integrating advanced sensor technologies to increase detection accuracy and reduce response time. Incorporating machine learning algorithms to predict fire hazards based on sensor patterns could also improve early warning capabilities. Overall, the proposed system represents a promising solution to modern vehicle safety challenges, offering a proactive and automated approach to mitigating fire-related risks.

VI. ACKNOWLEDGEMENT

The authors would like to sincerely thank the Department of Electronics and Communication Engineering at Marian Engineering College, Abdul Kalam Technological University, for their ongoing support and guidance throughout this research. We also extend our heartfelt appreciation to the Management and Principal of Marian Engineering College for providing the necessary infrastructure and resources that made this study possible.

REFERENCES

- [1] Research papers on fire detection and suppression systems in vehicles: - "Fire Detection and Suppression Systems for Vehicles" by J. Liu et al. (2019) - "Vehicle Fire Safety: A Review" by Y. Zhang et al. (2020)
- [2] Industry reports on automotive safety systems: - "Automotive Safety Systems Market" by Marketsand Markets (2022) - "Vehicle Safety Systems: Trends and Forecast" by Grand View Research (2022)
- [3] Intelligent Fire Detection and Suppression System for Automobiles (IEEE Transactions on Vehicular Technology, 2019)
- [4] Automated Fire Detection and Response System for Vehicles (IEEE International Conference on Intelligent Transportation Systems, 2018)
- [5] Integrated Fire and Smoke Detection System for Automobiles Using Sensor Fusion (IEEE Sensors Journal, 2019)
- [6] B. G. R. S. Subrahmanyam, P. K. S. V. Kiran Kumar, S. Shikha, & R. S. Jayasree (2022). "IoT-based Smart Fire Detection System." International Journal of Scientific Research in Science and Technology
- [7] S. S. Choudhary, S. K. Verma, & V. K. Bansal (2022). "Automated Vehicle Safety System Using Arduino." International Journal of Innovative Research in Science, Engineering, and Technology.
- [8] M. H. Ali, M. B. A. Rahman, & M. N. A. Hossain (2021). "An Overview of Air Quality Monitoring and IoT." International Journal of Electrical and Computer Engineering (IJECE).
- [9] "Temperature and Gas Detection System for Vehicle Safety." International Journal of Trend in Scientific Research and Development. (2020)
- [10] Muthumalathi, M., Gayathri, M., Merudulaa, D., & Fathima, J. N. (2022). Vehicle fire detection and prediction system using sensor networks. Galaxy International Interdisciplinary Research Journal, 10(6), 87-91.
- [11] Yuvaraj, T., Deenathayalan, K., Gokulraj, M., Mahendiran, S., & Mahendran, K. (2022). Design and implementation of car fire detection and automatic car door opening using IoT. International Journal of Advances in Engineering and Management (IJAEM), 4(7), 388-392.



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)