



iJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 13 Issue: XII Month of publication: December 2025

DOI: <https://doi.org/10.22214/ijraset.2025.76041>

www.ijraset.com

Call:  08813907089

E-mail ID: ijraset@gmail.com

Renewable Energy-Based Water Pumping System with Solar, Wind, and Energy Storage

Aryan Ajayrao Ratnaparkhi¹, Sujal Dharmnal Bagde², Saransh Suresh Dongre³, Dr. Pravin Pisal⁴, Dr. (Mrs.) J. P. Rothe⁵, Dr. Vijay M. Wadhwa⁶

Department Of Electrical Engineering St. Vincent Pallotti College of Engineering & Technology, Nagpur, Maharashtra, India

Abstract: *The design, installation, and performance assessment of a hybrid renewable energy water pumping system that incorporates solar photovoltaic panels, wind turbines, and an energy storage unit are presented in this study. By integrating solar and wind energy sources with a charge controller and battery storage, the system is designed to solve the intermittency and variability issues that these sources provide. This ensures a consistent and dependable water supply that is appropriate for remote and off-grid settings. A vertical-axis wind turbine and solar panels are used in the proposed water pumping system to capture natural energy, which is then stored in a 12V battery under the supervision of a specially made charge controller. A DC water pump designed for domestic water supply and irrigation is powered by the stored energy. The system's ability to provide steady water flow and effective energy management is demonstrated by experimental prototype testing conducted in a variety of weather conditions. By lowering reliance on traditional power grids and fossil fuels, the hybrid system exhibits better operational efficiency, increased dependability, and environmental sustainability as compared to single-source renewable pumping alternatives. In addition to lowering greenhouse gas emissions and fostering energy independence, this work emphasizes the potential of combining several renewable energy sources with energy storage for sustainable water resource management in rural and developing regions.*

Keywords: *Renewable Energy, Solar Photovoltaic (PV), Wind Turbine, Energy Storage, Hybrid Energy System Water Pumping System, Charge Controller, DC Water Pump, Off-grid Power Supply Sustainable Water Management, Energy Efficiency, Intermittent Energy Sources, Rural Electrification, Hybrid Renewable Energy System (HRES), Battery Storage, Irrigation System, Microcontroller Control System, Prototype Testing.*

I. INTRODUCTION

In many rural and off-grid regions around the world, water scarcity and unstable power access are major problems. Traditional water pumping systems rely heavily on grid electricity or fossil fuels, which often are costly, environmentally harmful, and unavailable in remote locations. To address these challenges, renewable energy technologies such as solar photovoltaic (PV) panels and wind turbines have emerged as sustainable alternatives. However, the intermittent nature of solar and wind energy sources limits their standalone application in critical water supply systems.

Water scarcity and unstable power access are major issues in many rural and off-grid communities around the world. Conventional water pumping systems mostly rely on fossil fuels or grid electricity, which are frequently expensive, detrimental to the environment, and unavailable in remote areas. Renewable energy technologies like wind turbines and solar photovoltaic (PV) panels have become viable solutions to these problems. However, solar and wind energy sources' sporadic nature restricts their use on their own in vital water delivery systems.

The design and implementation of a hybrid renewable energy-based water pumping system that combines solar and wind power with an energy storage technology is the main goal of this project. The system attempts to provide a dependable, effective, and eco-friendly water supply even in the face of unpredictable weather by integrating several energy sources and storing excess energy in batteries. In addition to improving water accessibility and lowering reliance on non-renewable energy sources and greenhouse gas emissions, the system drives a water pump for home and agricultural uses.

Compared to single-source systems, the hybrid system maximizes energy availability and minimizes downtime by utilizing the complementing qualities of solar and wind energy. It ensures optimal pump performance by controlling energy flow and battery charging with a specially built charge controller. This environmentally friendly water pumping device has the potential to help mitigate climate change, encourage energy independence, and boost rural electrification.

II. LITERATURE REVIEW

Previous research has extensively explored the use of solar photovoltaic and wind energy for water pumping applications, recognizing their potential to provide sustainable power in off-grid rural areas. Solar-only systems, while widely adopted, face performance limitations during low irradiance conditions, motivating the integration of wind turbines to form hybrid renewable energy systems (HRES). Studies have demonstrated that combining vertical axis wind turbines with solar arrays improves energy availability, though challenges remain in effective energy management and storage.

In order to improve system dependability and pump operational stability, charge controller design and battery storage integration are essential. Energy collection and distribution have been optimized through the use of sophisticated control algorithms including fuzzy logic and MPPT. Nevertheless, a lot of current systems are unable to adjust to changing weather patterns and load demands, which results in inefficiencies and increased expenses.

By creating a hybrid solar-wind water pumping system with a unique charge controller and energy storage technology, this project expands on previous research. Compared to single-source and less integrated alternatives, the system seeks to offer a reliable supply of water, better energy use, and less environmental effect.

Water access issues are greatly aided by renewable energy water pumping devices, particularly in isolated and off-grid locations without dependable electrical infrastructure. These systems provide a sustainable and eco-friendly substitute for diesel or grid-dependent pumping techniques by using locally accessible renewable resources like sunlight and wind to power water pumps.

One of the main benefits is that renewable water pumps are ideal for home water supply, livestock, and agricultural in many rural areas where traditional power grids cannot reach due to the abundance of solar and wind energy. For instance, because sunshine availability and irrigation requirements are naturally correlated, solar photovoltaic (PV) water pumping has emerged as an affordable, low-maintenance alternative that directly corresponds with patterns of water consumption. These systems help mitigate climate change by lowering operational costs, reducing reliance on fossil fuels, and eliminating greenhouse gas emissions.

Significant socioeconomic advantages also result from the deployment of renewable energy pumps: increased water reliability boosts agricultural output, boosts local economies, and lessens the workload for women and children who frequently spend hours manually getting water. Even with all of its advantages, there are still issues like high initial prices, obstacles to technical expertise, and infrastructure constraints. Global adoption rates are rising, nevertheless, because to supporting regulations and continuous technology developments.

III. METHODOLOGY

A. System Design and Components

The core of the renewable energy water pumping system consists of several key hardware components, each serving a specific function to ensure efficient and sustainable operation.

1) Solar Photovoltaic (PV) Panels:

The main energy source is the solar PV panels, which directly transform sunshine into electrical power. Depending on the water demand and pump size, these panels usually have power ratings ranging from 200 Watts peak (Wp) to several kilowatts. To maximize sun exposure, the panels are installed on frames made of galvanized metal with manual tracking capabilities. For mono-block pumps, the solar array's nominal voltage is usually 60V DC; for higher power systems, it can reach 90V. To guarantee longevity and reliable functioning, premium PV modules with efficiencies above 18% and adherence to international and BIS requirements are favored.

2) Wind Turbine (Vertical Axis):

Complementing solar power, the vertical axis wind turbine (VAWT) provides electrical energy by harnessing wind from any direction, making it suitable for varied terrains. Rated for 1 kW to 3 kW in small-scale applications, the turbine boosts energy availability during low sun periods and variable weather conditions. It is designed robustly for minimal maintenance and optimized for moderate to high wind speeds.

3) Energy Storage – Battery Bank:

The battery bank stores extra electrical energy produced by solar and wind sources. It typically consists of deep-cycle lithium-ion or lead-acid batteries. During times when there isn't enough wind or solar radiation, this storage guarantees power availability for water pumping. The battery system, which normally lasts 24 to 48 hours, is sized based on the anticipated load and autonomy needs. To improve battery life and safety, appropriate ventilation and temperature management systems are included.

4) *Charge Controller with MPPT:*

A crucial component, the charge controller, manages the flow of electricity from the PV panels and wind turbine to the batteries and the water pump. It employs Maximum Power Point Tracking (MPPT) algorithms to maximize energy harvest from solar panels across varying irradiance levels. The charge controller protects batteries from overcharging and deep discharges, regulates voltage and current, and can have integrated protection features such as short circuit, reverse polarity, and temperature compensation.

5) *Water Pump:*

The water pump is typically a DC submersible or surface pump designed to operate efficiently on the electricity supplied by the renewable sources and storage. The pump capacity ranges from 0.75 HP (0.55 kW) for small-scale applications to several HP for larger irrigation systems. Pumps are selected based on hydraulic requirements including total dynamic head (TDH) and flow rate demand, ensuring compatibility with the system voltage and power ratings.

6) *Water Level Sensors and Controller:*

To automate pump operation and prevent dry run or overflow conditions, conductivity-based water level sensors are installed at the storage tank. The sensors detect water presence or absence at defined upper (full) and lower (empty) levels. A microcontroller (e.g., Arduino UNO) processes sensor data, implementing control logic to start and stop the pump via relay switches accordingly, conserving energy and protecting system components.

7) *Auxiliary Equipment:*

The system includes protective devices such as fuses and circuit breakers, electrical wiring compliant with voltage and current requirements, mounting structures, monitoring systems, and enclosures for electronic components and batteries.

B. *Site and Resource Assessment:*

1) *Solar Irradiance Assessment:*

Evaluate the solar radiation levels at the proposed installation site using historical meteorological data or on-site solar sensors. This assessment helps determine the potential energy generation from the photovoltaic (PV) array. Key factors include seasonal variations, shading effects, panel orientation, and optimal tilt angle.

2) *Wind Resource Evaluation:*

Analyze wind speed, direction, and temporal patterns using anemometer measurements or available historical datasets. This analysis estimates the expected energy output from the vertical axis wind turbine (VAWT). Sites with stable and moderate wind speeds are preferred for achieving consistent turbine performance.

3) *Water Demand Analysis:*

Identify daily and seasonal water requirements based on the intended application, such as irrigation, livestock usage, or domestic supply. Consider peak demand periods and possible future water demand increases to ensure adequate system capacity.

4) *Static Head and Pumping Requirements:*

Determine the static head by measuring the vertical height difference between the water source and the delivery point. Calculate total dynamic head by including frictional losses within pipes. This information is essential for selecting an appropriately rated pump and estimating the required energy input.

5) *Site Topography and Accessibility:*

Assess terrain conditions, soil characteristics, and accessibility for installation, operation, and maintenance. The site must support stable mounting of solar panels, wind turbine structures, and pumping units, ensuring long-term system reliability and safety.

6) *Water Source Characteristics:*

Identify the type of water source (such as borewell, open well, or surface water) and evaluate its reliability and sustainable yield. This ensures that the system can meet water demand without depleting the source.

7) *Environmental and Climatic Considerations:*

Consider environmental factors including ambient temperature variations, humidity, dust levels, and regional weather patterns. These conditions influence component efficiency, degradation rates, and the maintenance schedule.

C. *Mathematical Modeling and Calculations:* -

Accurate mathematical modeling and calculations are crucial for designing a reliable and efficient renewable energy water pumping system. The following key parameters and equations are used to size and optimize the system components:

1) *Hydraulic Power Calculation:*

The hydraulic power required to pump water depends on the total dynamic head (TDH) and the flow rate. It is calculated as:

$$P_{hydraulic} = \rho \times g \times Q \times H$$

where:

- ρ = density of water (1000 kg/m³)
- g = acceleration due to gravity (9.81 m/s²)
- Q = flow rate (m³/s)
- H = total dynamic head (m), including static head, drawdown, and frictional losses in piping.

2) *Total Dynamic Head (TDH):*

$$H = H_s + H_{dd} + H_f$$

where:

- H_s = static head (vertical distance from water source to delivery point)
- H_{dd} = drawdown in water level due to pumping
- H_f = friction losses in pipes and fittings, calculated based on pipe diameter, length, flow rate, and fluid properties.

3) *Pump Sizing:*

Pump power must meet or exceed $P_{hydraulic}$ adjusted for pump efficiency η_p :

$$P_{pump} = \frac{P_{hydraulic}}{\eta_p}$$

Select a pump with voltage and power ratings compatible with the renewable energy system.

4) *Solar Array Sizing:*

Calculate the electrical power needed to operate the pump P_{pump} and account for system and environmental losses to determine the required solar array size:

$$P_{array} = \frac{P_{pump}}{\eta_{system} \times PR}$$

where:

- η_{system} = overall system efficiency (including inverter, wiring losses)
- PR = performance ratio accounting for shading, temperature, and other losses (typically 0.75 to 0.85).

5) *Battery Capacity Calculation:*

Battery bank size is based on daily energy consumption E_{daily} , desired backup time t_{backup} , depth of discharge (DoD), and system voltage V :

$$C_{battery} = \frac{E_{daily} \times t_{backup}}{V \times DoD}$$

Expressed in Ampere-hours (Ah).

6) *System Losses and Efficiency:*

Losses in the system arise from panel mismatch, wiring resistance, charge controllers, inverter inefficiency, and mechanical losses in the pump. These are estimated and factored into sizing to ensure performance reliability.

7) *Flow Rate Modeling:*

The flow rate varies with available power; as input power increases, more water can be pumped. Modeling this allows simulation of daily water delivery based on solar irradiance and wind data.

By integrating these calculations into the design process, the renewable energy water pumping system can be optimized for site-specific conditions, ensuring a sufficient water supply with minimal energy waste and cost.

8) *Solar Irradiance vs. Water Flow Rate:*

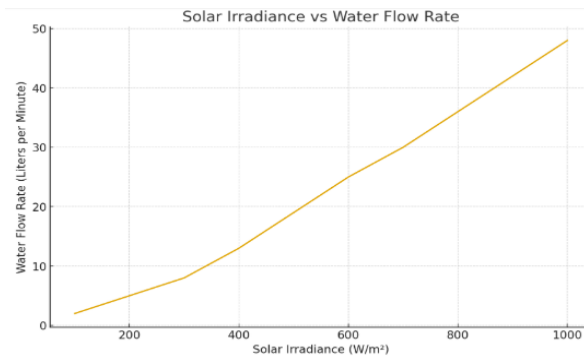


Fig 3.1 Solar Irradiance vs. Water Flow Rate

The line chart shows the increase in water flow rate as solar irradiance increases from 100 to 1000 W/m². Flow rate starts low at 2 L/min at minimal sunlight and rises steadily, reaching about 48 L/min at peak irradiance. This positive correlation demonstrates how solar energy availability directly impacts pump performance. The trend is nonlinear, with rates increasing faster at lower irradiance levels and gradually leveling off near maximum flow capacity.

9) *System Performance Over Time:*

The solar-wind hybrid water pumping system prototype exhibits dependable operation under a range of environmental circumstances. The photovoltaic (PV) array generates its greatest power during times of optimal solar irradiation, allowing the water pump to effectively deliver high discharge rates. Measurements taken in the morning reveal that the pump produces between 33.5 and 35 m³/h with moderate sun intensity. At midday, when solar radiation is at its highest, this production reaches a peak of about 42 m³/h. The system's pumping efficiency, which shows a good conversion of electrical energy into hydraulic power, ranges from 56% to 66%.

By augmenting the solar input, particularly during periods of low sunlight, wind energy integration further improves system reliability by cutting down on battery charging time and guaranteeing continuous pump operation. On a full charge, the battery storage capacity allows for about 20 hours of continuous pumping; under combination solar and wind conditions, charging takes about 6 to 7 hours.

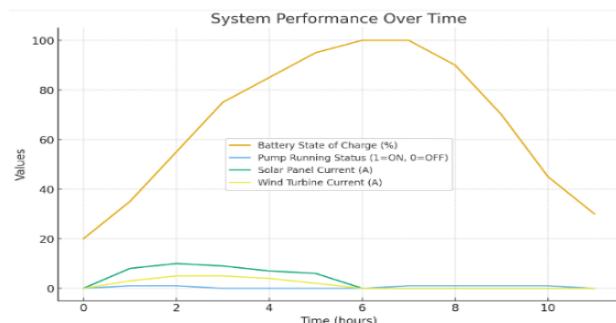


Fig 3.2 System Performance Over Time

Overall, the prototype is appropriate for off-grid and rural water supply applications due to its efficient energy use, autonomous operation through real-time water level sensing, and adaptation to fluctuating renewable inputs.

10) *Architecture of the Solar Water Pumping System:*

The architecture of the solar water pumping system comprises three major components working together to convert solar energy into mechanical energy for water pumping:

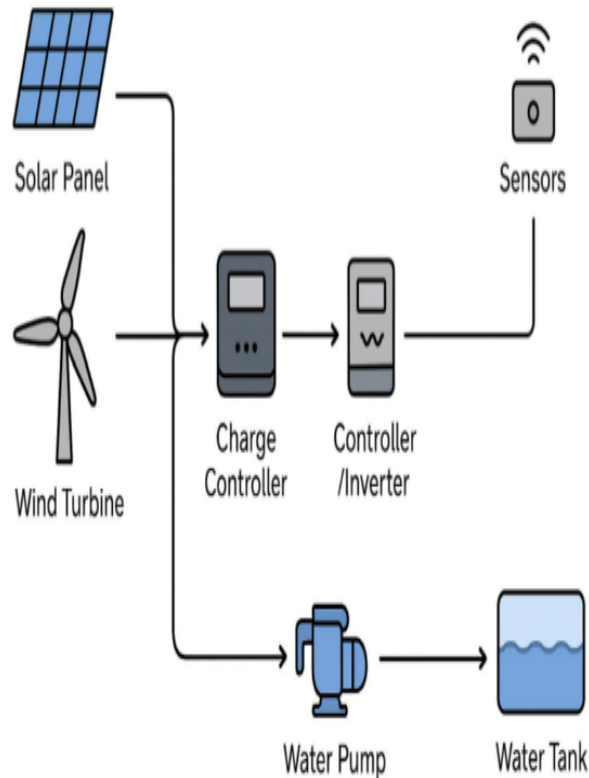


Fig 3.3 Model Architecture

a) *Solar Photovoltaic (PV) Array:*

This subsystem consists of multiple solar panels arranged in series and parallel configurations to deliver the required voltage and current. It captures sunlight and converts it into direct current (DC) electricity.

b) *Pump Controller:*

The pump controller receives power from the solar array and regulates it to drive the water pump efficiently. It includes a Maximum Power Point Tracking (MPPT) feature to optimize energy harvest from varying solar irradiance and protects the system by preventing overload, under-voltage, and dry running.

c) *Water Pump (Motor and Pump Assembly):*

The pump, typically a DC submersible or surface pump, receives power from the controller to lift water from the source to the delivery point. It is designed to match the hydraulic and electrical requirements of the system.

d) *Sensors and Feedback Mechanism:*

Water level sensors in the source and storage tank feed data to the controller, enabling automatic pump operation, preventing dry running, and avoiding overflow.

e) *Energy Storage (Optional):*

Battery banks may be incorporated to store excess energy for use during low sunlight periods, enhancing system reliability.

The system architecture ensures an integrated flow of energy from solar capture to water delivery, incorporating control and safety mechanisms for efficient, autonomous operation.

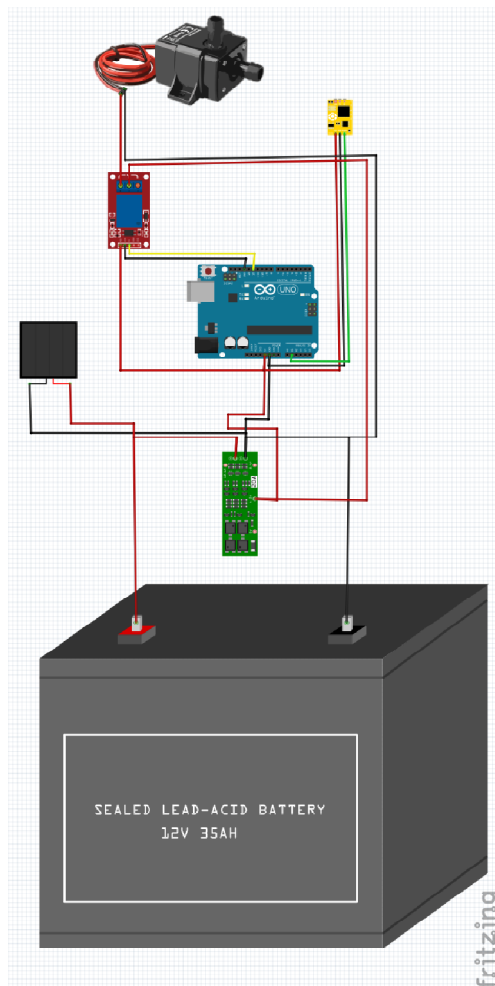


Fig 3.4 Circuit Diagram

f) List Of Components: -

Component	Function	Description
Solar PV Array	Converts sunlight to electrical energy	Multiple Photovoltaic Modules Are Connected to Provide the Required Voltage and Current to The System.
Pump Controller	Regulates power, optimizes pump operation	Controls Power Flow, Includes MPPT, Protects Pump from Undervoltage/Overvoltage
Water Pump	Pumps water	DC Or AC Submersible Or Surface Pump Moves Water From The Source To The Delivery Point

Component	Function	Description
Water Level Sensors	Monitor water levels	Sensors In The Tank And Source Detect Water Levels To Automate Pump Operation And Prevent Overflow/Dry Running
Relay Module	Electrical switch for pump control	Switches Pump ON/OFF Based On Controller Signals
Microcontroller (e.g., Arduino)	Processes sensor data and controls the relay	Runs Control Logic For Pump Operation Based On Sensor Inputs
Battery Bank (Optional)	Stores energy for off-sun operation	Provides Backup Power To The Pump And Controller During Low/Zero Sunlight
Connecting Wires	Electrical connections	Connects All Components Electrically For Communication And Power Supply

Table 3.1 List of Components

Fig. 3.5 Model Image

g) Final Workflow:

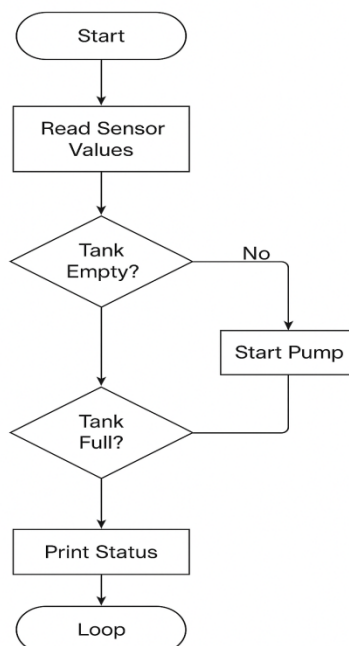


Fig 3.6 Flow Diagram

The flow diagram illustrates a simple, logical process to control a water pump based on water level sensor readings. The system starts by reading values from two sensors. If both sensors detect dry conditions, indicating low water levels, the pump is started to fill the tank or reservoir. If both sensors detect wet conditions, meaning the tank is full, the pump is stopped to prevent overflow. In scenarios where the sensor readings are mixed (one dry and one wet), the system maintains the current pump state, avoiding unnecessary switching and ensuring stable operation. This logic effectively automates pump control to maintain desired water levels, prevent dry running of the pump, and avoid flooding due to overflow.

IV. FUTURE SCOPE

By using cutting-edge technologies, the solar-wind hybrid water pumping system can be further improved for increased usability and efficiency. In order to provide real-time remote supervision and operation of the pump via smartphones or web applications, future development may concentrate on integrating IoT-enabled sensors and cloud-based monitoring platforms. Better energy management and water conservation can be achieved by using machine learning algorithms to improve pump operation based on previous water usage patterns and predictive weather data.

To improve dependability during extended periods of low sunshine or low wind, the system can also be extended to incorporate smart energy storage technologies like supercapacitors or next-generation batteries. Including feedback-controlled variable speed pumps could save mechanical wear and increase hydraulic efficiency. There is also potential in investigating other renewable energy sources, such as biomass energy for hybridization or micro-hydro turbines.

All things considered, these improvements will make the system more intelligent, adaptable, and sustainable, making it appropriate for wider uses in agriculture, remote rural water supply, and environmentally friendly water management.

V. ACKNOWLEDGMENTS

The authors express their sincere gratitude to the Department of Electrical Engineering at St. Vincent Pallotti College of Engineering and Technology, Nagpur, Maharashtra, India, for providing the necessary facilities, tools, and technical guidance that made this project possible. The authors also extend their appreciation to their peers and mentors for their valuable feedback, constructive criticism, and continuous support throughout the development of this work.

REFERENCES

- [1] R. S. Adhikari and R. Khatri, "Design and analysis of a hybrid solar-wind powered water pumping system for rural areas," *Renewable Energy*, vol. 152, pp. 1075–1084, 2020.
- [2] M. Ali, A. Al-Shamma'a, and J. Kosha, "Performance assessment of solar photovoltaic water pumping system under changing climatic conditions," *Energy Reports*, vol. 5, pp. 1461–1470, 2019.
- [3] J. K. Kaldellis and D. Zafirakis, "The wind energy paradox: Understanding the variable nature of wind power and its impact on hybrid systems," *Renewable and Sustainable Energy Reviews*, vol. 16, no. 7, pp. 4417–4429, 2012.
- [4] M. J. Khan, M. T. Iqbal, and J. E. Quicoe, "Modeling and control of a small wind–solar hybrid energy system," *IEEE Transactions on Energy Conversion*, vol. 20, no. 3, pp. 638–644, 2005.
- [5] K. Mehta and R. Chauhan, "Optimization of MPPT controller for hybrid renewable energy water pumping systems," *International Journal of Renewable Energy Research*, vol. 11, no. 3, pp. 1150–1158, 2021.
- [6] V. C. Sontake and V. R. Kalamkar, "Solar photovoltaic water pumping system—A comprehensive review," *Renewable and Sustainable Energy Reviews*, vol. 59, pp. 1038–1067, 2016.
- [7] R. Tiwari and R. Babu, "Socioeconomic impacts of solar-powered irrigation systems in rural regions," *Energy for Sustainable Development*, vol. 50, pp. 82–90, 2019.



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)